

RF Test Report

For

Applicant name: Shenzhen LC Co., Ltd
Address: Room 201, Building 4, Gonglianfuji Innovation Park, No. 58, Ping'an Road, Dafu Community, Guanlan Street, Longhua District, Shenzhen, China
EUT name: X221 V Mount Battery
Brand name: SmallRig
Model number: X221
Series model number: N/A
FCC ID: 2BC2U-4985

Issued By

Company name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Report number: BTF251021R00101
Test standards: FCC CFR Title 47 Part 15 Subpart C (§ 15.247)
Test conclusion: Pass
Date of sample receipt: 2025-9-28
Test date: 2025-9-29 to 2025-10-15
Date of issue: 2025-11-21

Prepared by:



Chris Liu /Project engineer

Approved by:



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue date	Revisions content
R_V0	2025-11-21	Original

Table of Contents

1 Introduction	4
1.1 Laboratory Location	4
1.2 Laboratory Facility	4
1.3 Announcement	4
2 Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Technical Information	5
2.6 Channel List	6
3 Test Information	7
3.1 Test Standards	7
3.2 Summary of Test	7
3.3 Uncertainty of Test	7
3.4 Additions to, deviations, or exclusions from the method	8
3.5 Test Auxiliary Equipment	8
3.6 Test Equipment List	8
4 Test Configuration	10
4.1 Environment Condition	10
4.2 Test mode	10
4.3 Test Channel of EUT	10
4.4 Test software	10
4.5 Test procedure	11
4.6 Test Setup Block	12
5 Technical requirements specification	14
5.1 Antenna Requirement	14
5.2 AC Power Line Conducted Emission	14
5.2.1 Test Data:	14
5.3 Emissions in Restricted Frequency Bands	17
5.3.1 Test Data:	18
5.4 Emissions in Non-restricted Frequency Bands(below 1GHz)	22
5.4.1 Test Data:	22
5.5 Emissions in Non-restricted Frequency Bands(above 1GHz)	25
5.5.1 Test Data:	26
5.6 Duty Cycle	32
5.6.1 Test Data:	32
5.7 Occupied Bandwidth	33
5.7.1 Test Data:	33
5.8 Maximum Conducted Output Power	34
5.8.1 Test Data:	34
5.9 Power Spectral Density	35
5.9.1 Test Data:	35
5.10 Emissions in non-restricted frequency bands	36
5.10.1 Test Data:	36
6 Test Setup Photos	37
7 EUT Constructional Details (EUT Photos)	37

1 Introduction

1.1 Laboratory Location

Test location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Description:	All measurement facilities used to collect the measurement data are located at Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Phone number:	+86-0755-23146130
Fax number:	+86-0755-23146130

1.2 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1409**
BTF Testing Lab (Shenzhen) Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 695374.
- **CNAS - Registration No.: CNAS L17568**
BTF Testing Lab (Shenzhen) Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L17568.
- **A2LA - Registration No.: 6660.01**
BTF Testing Lab (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.
- (7) All entrusted information in this report is provided by the client and has been confirmed through consultation with the client; The testing items for this report have been discussed and confirmed with the client, and our company is only responsible for the content reflected in the report.

2 Product Information

2.1 Application Information

Company name:	Shenzhen LC Co., Ltd
Address:	Room 201, Building 4, Gonglianfuji Innovation Park, No. 58, Ping'an Road, Dafu Community, Guanlan Street, Longhua District, Shenzhen, China

2.2 Manufacturer Information

Company name:	Shenzhen Leqi Innovation Co., Ltd.
Address:	Rooms 101, 701, 901, Building 4, Gonglianfuji Innovation Park, No. 58, Ping'an Road, Dafu Community, Guanlan Street, Longhua District, Shenzhen, China

2.3 Factory Information

Company name:	Shenzhen Leqi Innovation Co., Ltd.
Address:	Rooms 101, 701, 901, Building 4, Gonglianfuji Innovation Park, No. 58, Ping'an Road, Dafu Community, Guanlan Street, Longhua District, Shenzhen, China

2.4 General Description of Equipment under Test (EUT)

EUT name	X221 V Mount Battery
Under test model name	X221
Series model name	N/A
Description of model name differentiation	N/A
Hardware Version	V1.00.00
Software Version	V1.00.00
Rating:	Input: USB-C1 / USB-C2: DC 5V-3A, 9V-3A, 12V-3A, 15V=3A, 20V=5A, 28V=5A; 140W(Max) BP / D-Tap1 / D-Tap2: DC 16.8V-12A (Max) Output: USB-C1 / USB-C2: DC 5V-3A, 9V-3A, 12V-3A, 15V=3A, 20V=5A, 28V=5A; 140W(Max) USB-A:DC 5V-3A, 9V-3A, 12V--2.5A 30W (Max) BP:DC 11.2-16.8V-15A D-Tap1 / D-Tap2: DC 11.2-16.8V, 10A 8V-OUT: DC 8V-3A (Max) 12V-OUT: DC 12V-3A (Max) Battery Rated: DC 14.76V, 14910mAh, 220.0716Wh

2.5 Technical Information

Operation frequency:	2402MHz ~ 2480MHz
Channel number:	40
Equipment type:	Adaptive equipment

Modulation technology:	GFSK
Max. Conducted Power:	-3.44 dBm
Antenna type:	PCB Antenna
Antenna gain:	-6.02 dBi (declare by Applicant)
Antenna transmit mode:	SISO (1TX, 1RX)

2.6 Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
...	...	...	...	...	...	...	...
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Remark: Channel 0, 19 & 39 have been tested.

3 Test Information

3.1 Test Standards

Identity	Document Title
FCC CFR Title 47 Part 15 Subpart C (§15.247)	Intentional Radiators - Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10-2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of The FCC Rules

3.2 Summary of Test

Clauses	Test Items	Result
Part 15.203	Antenna requirement	PASS
47 CFR 15.207(a)	Conducted Emission at AC power line	PASS
47 CFR 15.247(b)(3)	Duty Cycle	PASS
47 CFR 15.247(a)(2)	Occupied Bandwidth	PASS
47 CFR 15.247(b)(3)	Maximum Conducted Output Power	PASS
47 CFR 15.247(e)	Power Spectral Density	PASS
47 CFR 15.247(d)	Emissions in non-restricted frequency bands	PASS
47 CFR 15.247(d)	Band edge emissions (Radiated)	PASS
47 CFR 15.247(d)	Emissions in restricted frequency bands (below 1GHz)	PASS
47 CFR 15.247(d)	Emissions in restricted frequency bands (above 1GHz)	PASS
Remark: 1. Pass: met the requirements. 2. N/A: not applicable.		

3.3 Uncertainty of Test

Measurement	Value
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Supply voltages	±3 %
Time	±5 %
Conducted Emission for LISN (9kHz ~ 150kHz)	±2.97 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.45 dB
Radiated Emission (30MHz ~ 1000MHz)	±4.80 dB
Radiated Emission (1GHz ~ 18GHz)	±4.82 dB

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3.4 Additions to, deviations, or exclusions from the method

None

3.5 Test Auxiliary Equipment

No.	Description	Manufacturer	Model	Serial Number	Certification
1	PC	HP	Zhan 66P	N/A	N/A
2	UART	Tengfei	USB TO TTL	N/A	N/A
3	USB-C Power Adapter	Apple Inc.	A2166	N/A	N/A

3.6 Test Equipment List

Radiated test method					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI7	101032	2024/10/25	2025/10/24
Signal Analyzer	Rohde & Schwarz	FSQ40	100010	2024/10/25	2025/10/24
Log periodic antenna	Schwarzbeck	VULB 9168	01328	2024/10/28	2025/10/27
Preamplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9744	00246	2025/09/22	2026/09/21
Horn Antenna (1GHz ~ 18GHz)	Schwarzbeck	BBHA9120D	2597	2024/10/30	2025/10/29
Horn Antenna (15GHz ~ 40GHz)	SCHWARZBECK	BBHA9170	1157	2024/10/24	2025/10/23
Preamplifier (1GHz ~ 40GHz)	TST Pass	LNA10180G45	246	2025/09/22	2026/09/21
Test Software	Frad	EZ EMC	Version: FA-03A2 RE+		

Conducted Emission Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI3	101422	2024/10/25	2025/10/24
V-LISN	Schwarzbeck	NSLK 8127	01073	2024/10/25	2025/10/24
Coaxial Switcher	Schwarzbeck	CX210	CX210	2024/10/25	2025/10/24
Pulse Limiter	Schwarzbeck	VTSD 9561-F	00953	2024/10/25	2025/10/24
Test Software	Frad	EZ EMC	Version: EMC-CON 3A1.1+		

Conducted test method					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020A	MY50410020	2024/10/25	2025/10/24
ESG Vector Signal Generator	Agilent	E4438C	MY45094854	2024/10/25	2025/10/24

MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2024/10/25	2025/10/24
Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	161997	2024/10/25	2025/10/24
Temperature Humidity Chamber	ZZCKONG	ZZ-K02A	20210928007	2024/10/25	2025/10/24
DC Power Supply	Tongmen	etm-6050c	20211026123	2024/10/25	2025/10/24
RF Control Unit	Techy	TR1029-1	/	2024/10/25	2025/10/24
RF Sensor Unit	Techy	TR1029-2	/	2024/10/25	2025/10/24
Test Software	TST Pass	/	Version: 2.0		

4 Test Configuration

4.1 Environment Condition

Selected Values During Tests		
Temperature	Relative Humidity	Ambient Pressure
Normal: +15°C to +35°C Extreme: -30°C to +50°C	20% to 75%	86 kPa to 106 kPa

4.2 Test mode

(TM1)Transmitting mode:	Keep the EUT in continuously transmitting mode with modulation	
We have verified the construction and function in typical operation. All the test items were carried out with the EUT in above test modes.		
Clauses	Test Items	Test mode
Part 15.203	Antenna requirement	TM1
47 CFR 15.207(a)	Conducted Emission at AC power line	TM1
47 CFR 15.247(b)(3)	Duty Cycle	TM1
47 CFR 15.247(a)(2)	Occupied Bandwidth	TM1
47 CFR 15.247(b)(3)	Maximum Conducted Output Power	TM1
47 CFR 15.247(e)	Power Spectral Density	TM1
47 CFR 15.247(d)	Emissions in non-restricted frequency bands	TM1
47 CFR 15.247(d)	Band edge emissions (Radiated)	TM1
47 CFR 15.247(d)	Emissions in restricted frequency bands (below 1GHz)	TM1

4.3 Test Channel of EUT

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	19	2440	39	2480

4.4 Test software

Test software:	Version:	Power Class:
RFTTest_0901_boxed	0901	0x1F

4.5 Test procedure

AC Power Line Conducted Emission

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

1. Level= Read Level+ Cable Loss+ LISN Factor
2. Margin=Level-Limit=Reading+factor-Limit

Radiated test method

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, recorded the test results.
4. The substitution antenna shall be used to replace the equipment under test.
5. The reference point of the substitution antenna shall coincide with the volume centre of the UUT when its antenna is internal.
6. Set the required test frequency for the signal generator, adjust the emission level, until the spectrum analyzer reading on the receiving link is consistent with the recorded value in step 3, and the recorded signal generator emission level.
7. Final results = S.G. output (dBm) + Antenna Gain(dB/dBi) – Cable Loss (dB). This report only reflects the final results.


1. Level=Read Level + Antenna Factor + Cable Loss - Preamplifier Factor
2. Margin=Level-Limit=Reading+factor-Limit

Conducted test method


1. The Bluetooth LE antenna port of EUT was connected to the test port of the test system through an RF cable.
2. The EUT is keeping in continuous transmission mode and tested in all modulation modes.
3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.


4.6 Test Setup Block

1) Conducted emission measurement:

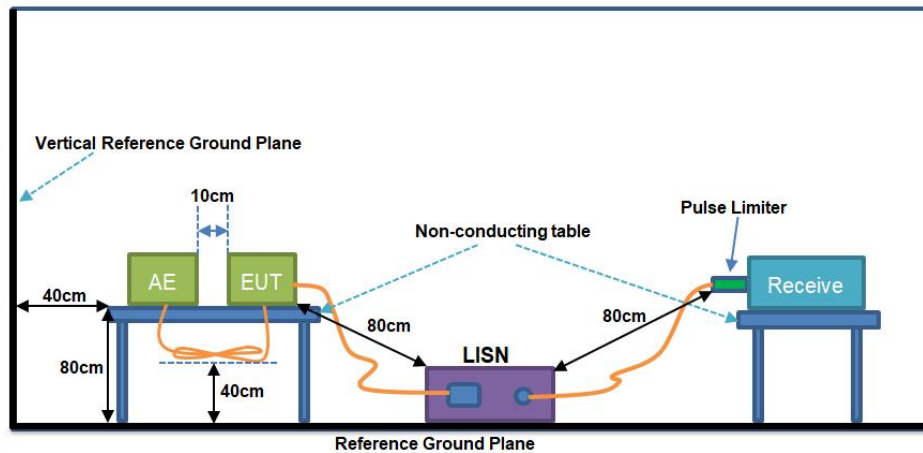

2) Conducted test method:

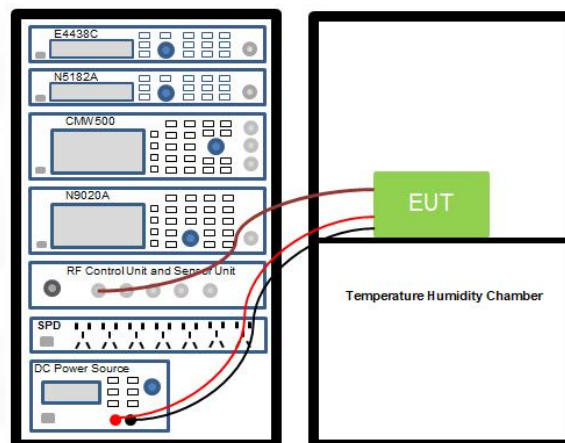

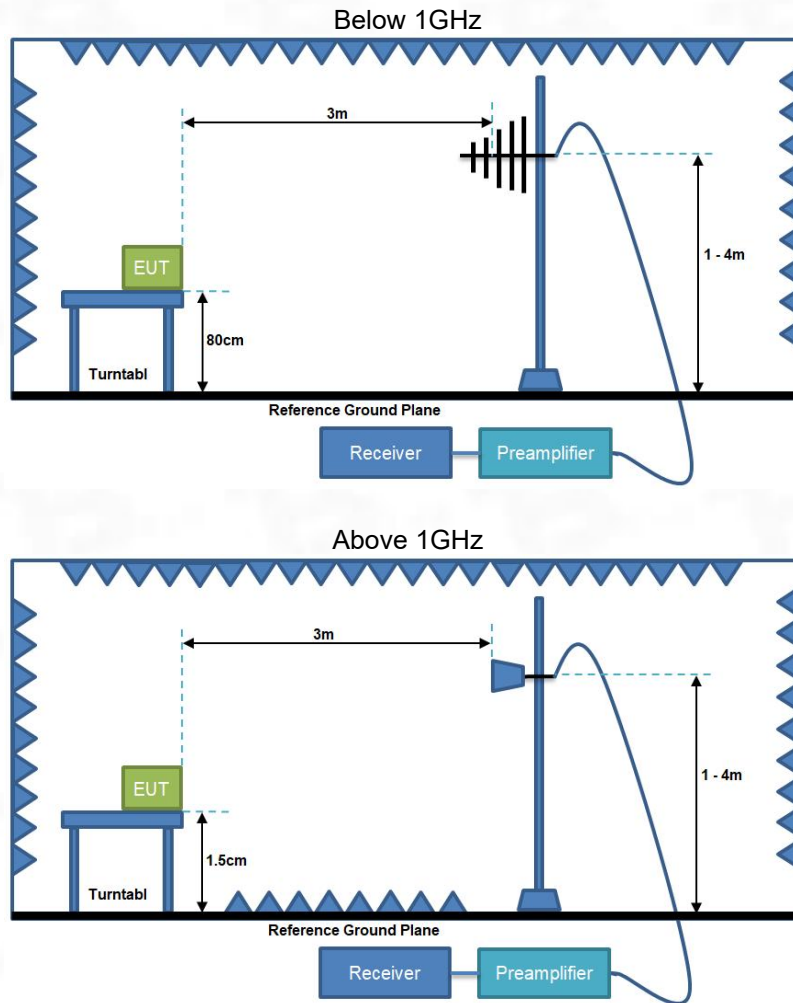3) Radiated test method:

5 Technical requirements specification

5.1 Antenna Requirement

§15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

§15.247(b) (4) requirement:

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

E.U.T Antenna:	The Bluetooth antenna is a PCB antenna which permanently attached, and the best case gain of the antenna is -6.02 dBi. See product internal photos for details.
-----------------------	---


5.2 AC Power Line Conducted Emission

Test Requirement:	Except as shown in paragraphs (b)and (c)of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).		
Test Method:	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dBμV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos		
Operating Environment:			
Temperature:	22.5℃		
Humidity:	46%RH		
Atmospheric Pressure:	1010 hpa		
Test voltage:	AC 120V 60Hz		

5.2.1 Test Data:

Remark: The report only reflects the test data of worst mode(BLE_2M).


Test phase: L phase

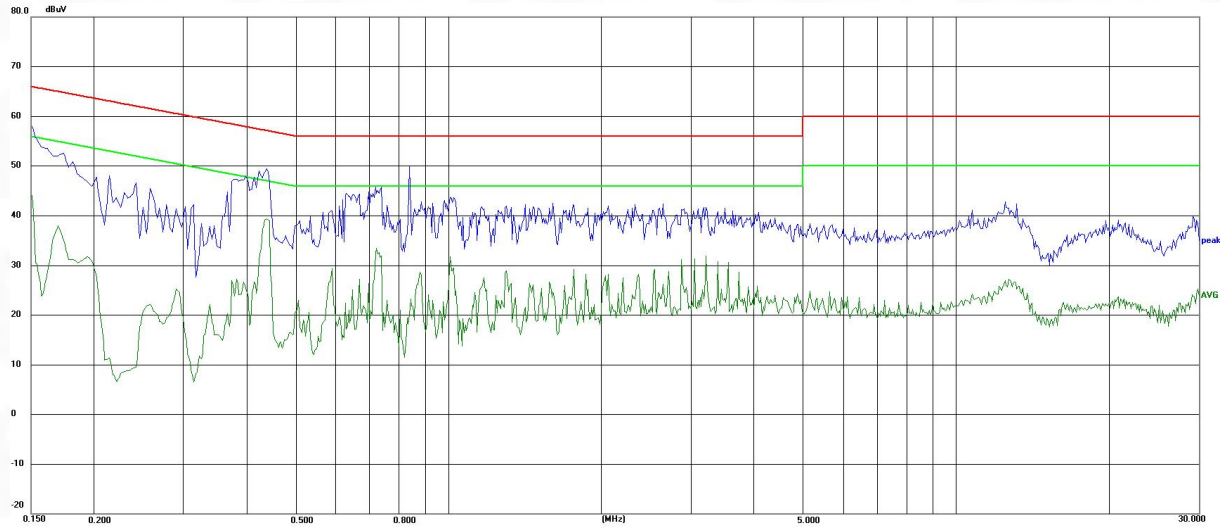

No.	Frequency (MHz)	QP Value (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Value (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Result	Line
1	0.150	58.63	66.00	-7.37	47.48	56.00	-8.52	Pass	Line 1
2	0.170	52.25	64.96	-12.71	38.00	54.96	-16.96	Pass	Line 1
3	0.438	49.54	57.10	-7.56	39.48	47.10	-7.62	Pass	Line 1
4	0.590	40.97	56.00	-15.03	29.37	46.00	-16.63	Pass	Line 1
5	0.722	45.75	56.00	-10.25	33.45	46.00	-12.55	Pass	Line 1
6	1.006	43.73	56.00	-12.27	31.82	46.00	-14.18	Pass	Line 1

Note: Margin = Level - Limit = Reading + factor - Limit

Test phase: N phase

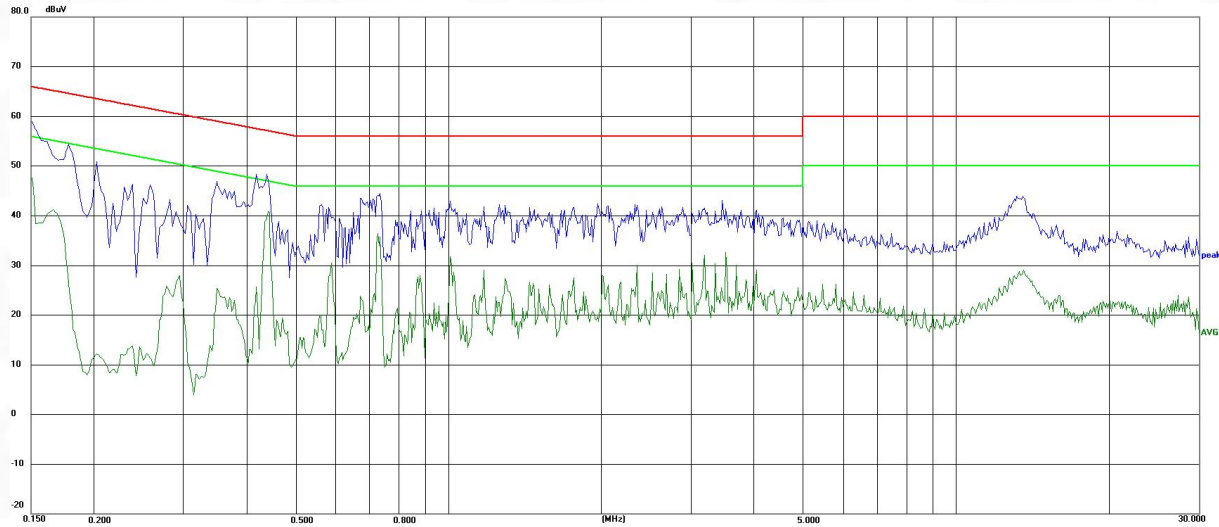

No.	Frequency (MHz)	QP Value (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Value (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Result	Line
1	0.150	59.45	66.00	-6.55	49.89	56.00	-6.11	Pass	Neutral
2	0.163	53.76	65.31	-11.55	41.21	55.31	-14.10	Pass	Neutral
3	0.294	40.21	60.41	-20.20	27.95	50.41	-22.46	Pass	Neutral
4	0.350	46.90	58.96	-12.06	25.35	48.96	-23.61	Pass	Neutral
5	0.442	48.39	57.02	-8.63	40.88	47.02	-6.14	Pass	Neutral
6	0.726	44.12	56.00	-11.88	36.46	46.00	-9.54	Pass	Neutral


Note:Margin=Level-Limit=Reading+factor-Limit

5.3 Emissions in Restricted Frequency Bands

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2020 section 6.10.5.2		
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos		
Operating Environment:			
Temperature:	22.5°C		
Humidity:	46%RH		
Atmospheric Pressure:	1010 hpa		
Test voltage:	DC 14.76V From Battery		

5.3.1 Test Data:

Remark: The report only reflects the test data of worst mode(BLE_2M).

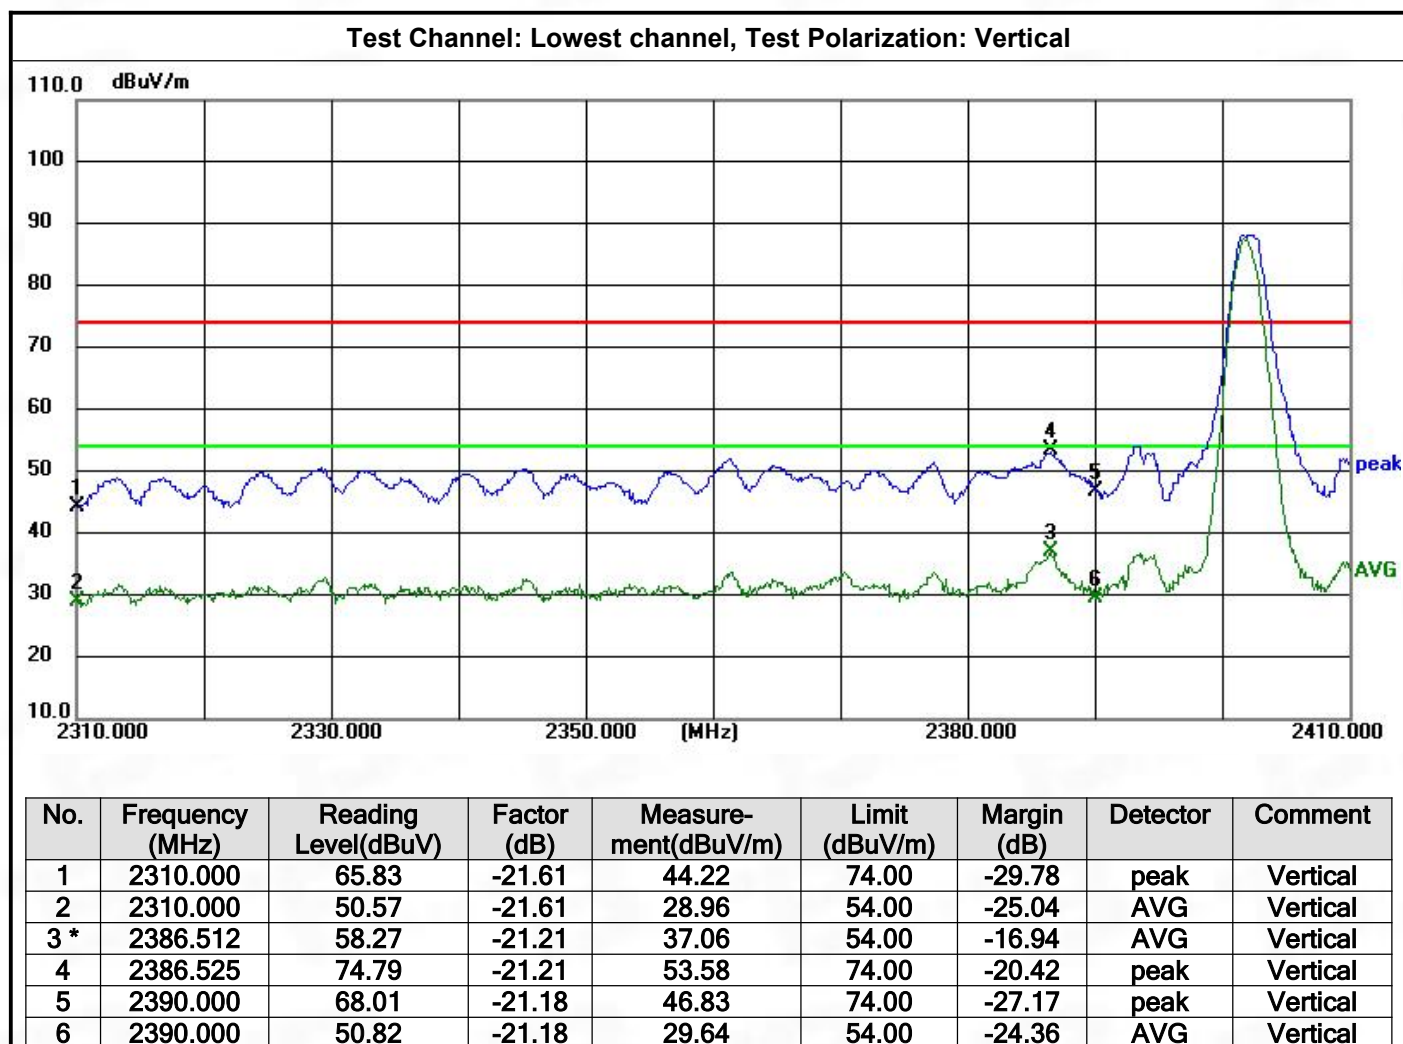


Test Channel: Lowest channel, Test Polarization: Horizontal




No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	2310.000	63.32	-21.61	41.71	74.00	-32.29	peak	Horizontal
2	2310.000	49.45	-21.61	27.84	54.00	-26.16	AVG	Horizontal
3	2386.438	71.86	-21.21	50.65	74.00	-23.35	peak	Horizontal
4 *	2386.438	55.92	-21.21	34.71	54.00	-19.29	AVG	Horizontal
5	2390.000	65.78	-21.18	44.60	74.00	-29.40	peak	Horizontal
6	2390.000	51.03	-21.18	29.85	54.00	-24.15	AVG	Horizontal

Test Channel: Highest channel, Test Polarization: Vertical

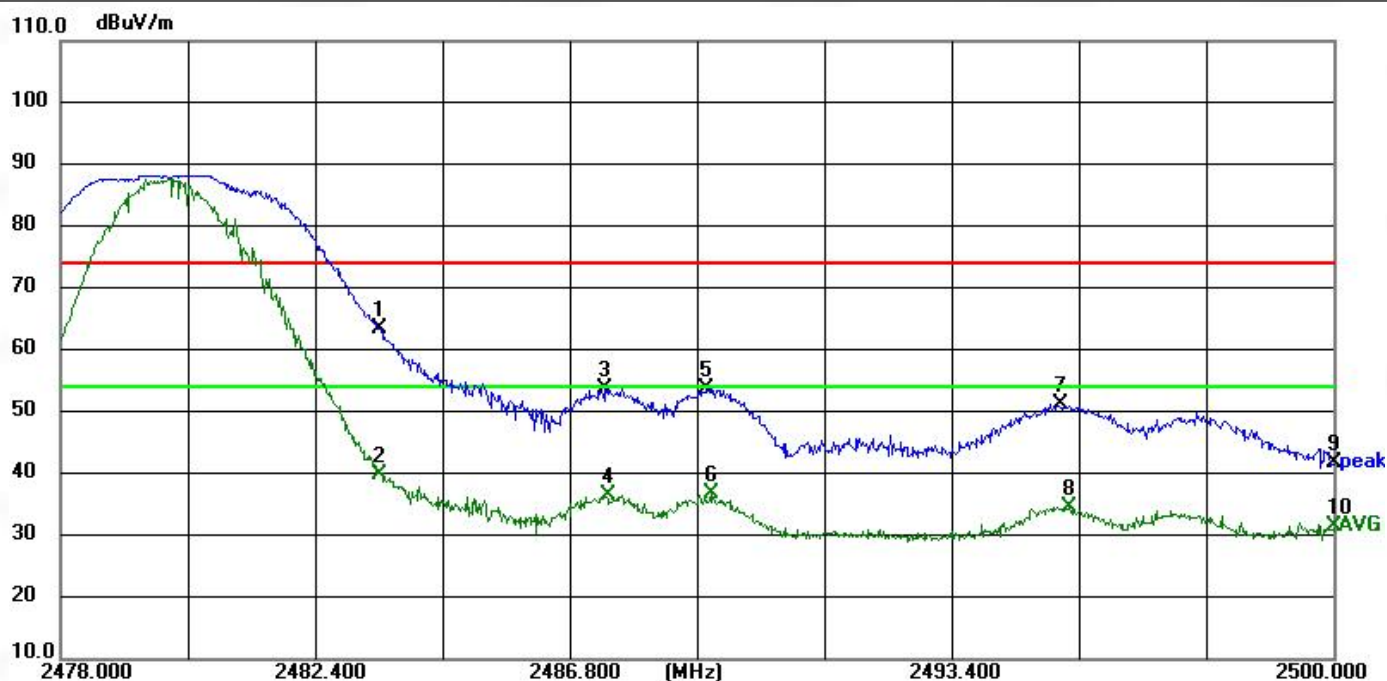

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	2483.500	84.07	-20.68	63.39	74.00	-10.61	peak	Vertical
2	2483.500	60.57	-20.68	39.89	54.00	-14.11	AVG	Vertical
3	2487.430	74.47	-20.67	53.80	74.00	-20.20	peak	Vertical
4	2487.465	57.20	-20.67	36.53	54.00	-17.47	AVG	Vertical
5	2489.176	74.43	-20.65	53.78	74.00	-20.22	peak	Vertical
6	2489.250	57.49	-20.65	36.84	54.00	-17.16	AVG	Vertical
7	2495.303	71.98	-20.62	51.36	74.00	-22.64	peak	Vertical
8	2495.430	55.29	-20.62	34.67	54.00	-19.33	AVG	Vertical
9	2500.000	62.38	-20.60	41.78	74.00	-32.22	peak	Vertical
10	2500.000	52.12	-20.60	31.52	54.00	-22.48	AVG	Vertical

Test Channel: Highest channel, Test Polarization: Horizontal

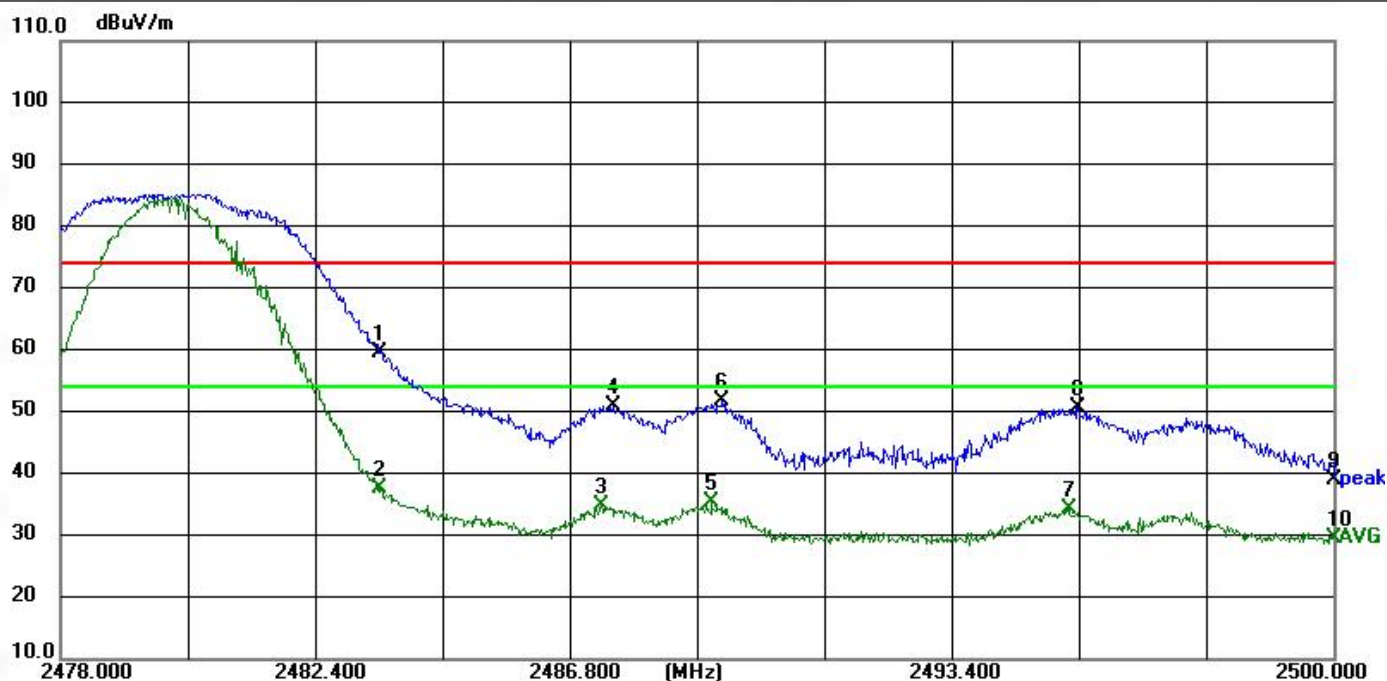

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	2483.500	80.14	-20.68	59.46	74.00	-14.54	peak	Horizontal
2	2483.500	58.28	-20.68	37.60	54.00	-16.40	AVG	Horizontal
3	2487.364	55.54	-20.67	34.87	54.00	-19.13	AVG	Horizontal
4	2487.567	71.66	-20.66	51.00	74.00	-23.00	peak	Horizontal
5	2489.242	55.98	-20.65	35.33	54.00	-18.67	AVG	Horizontal
6	2489.421	72.35	-20.65	51.70	74.00	-22.30	peak	Horizontal
7	2495.424	54.99	-20.62	34.37	54.00	-19.63	AVG	Horizontal
8	2495.595	71.35	-20.62	50.73	74.00	-23.27	peak	Horizontal
9	2500.000	59.71	-20.60	39.11	74.00	-34.89	peak	Horizontal
10	2500.000	50.11	-20.60	29.51	54.00	-24.49	AVG	Horizontal

Note:Margin=Level-Limit=Reading+factor-Limit


5.4 Emissions in Non-restricted Frequency Bands(below 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2020 section 6.6.4		
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos		
Operating Environment:			
Temperature:	22.5°C		
Humidity:	46%RH		
Atmospheric Pressure:	1010 hpa		
Test voltage:	DC 14.76V From Battery		

5.4.1 Test Data:

Remark: The report only reflects the test data of worst mode(BLE_2M).


Test antenna polarization: Horizontal(30 MHz to 1 GHz)

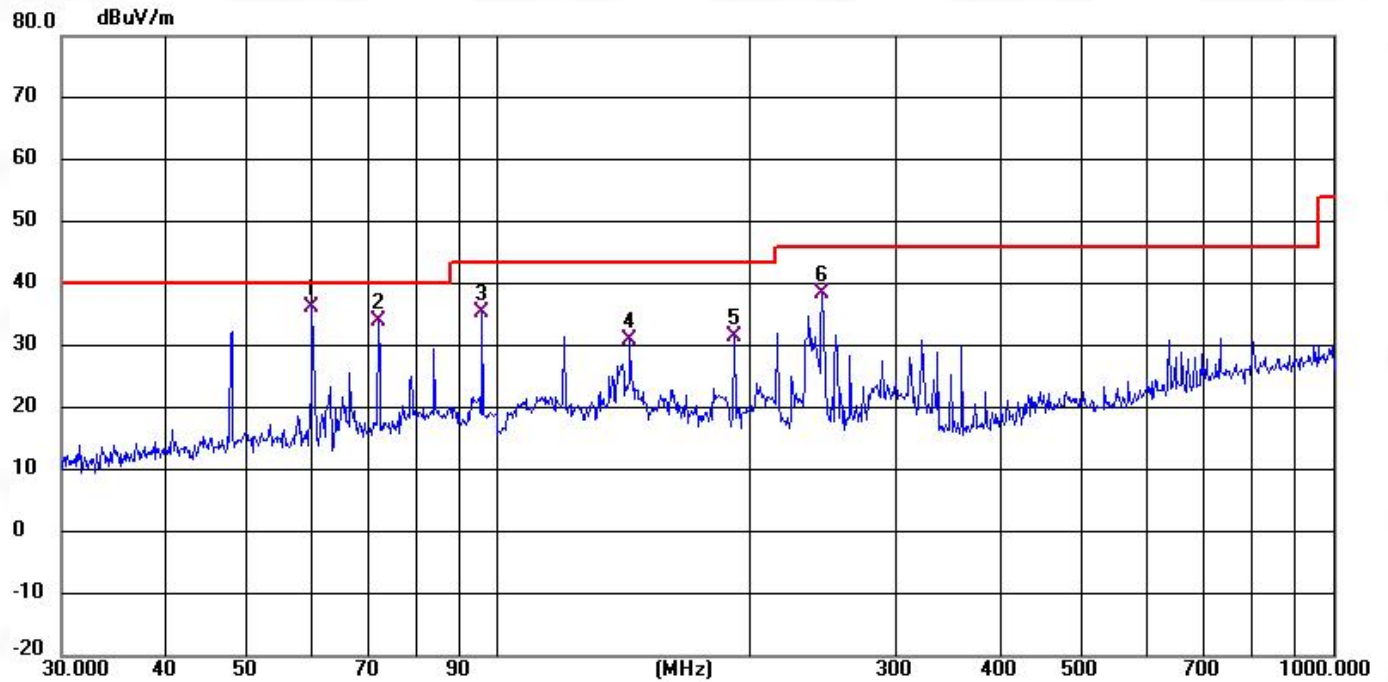

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1 *	59.990	22.43	13.83	36.26	40.00	-3.74	QP	Horizontal
2	71.990	23.82	10.31	34.13	40.00	-5.87	QP	Horizontal
3	96.014	23.65	11.86	35.51	43.50	-7.99	QP	Horizontal
4	144.019	21.73	9.27	31.00	43.50	-12.50	QP	Horizontal
5	192.082	19.89	11.54	31.43	43.50	-12.07	QP	Horizontal
6	244.446	24.76	13.58	38.34	46.00	-7.66	QP	Horizontal

Note:Margin=Level-Limit=Reading+factor-Limit

Test antenna polarization: Vertical (30 MHz to 1 GHz)

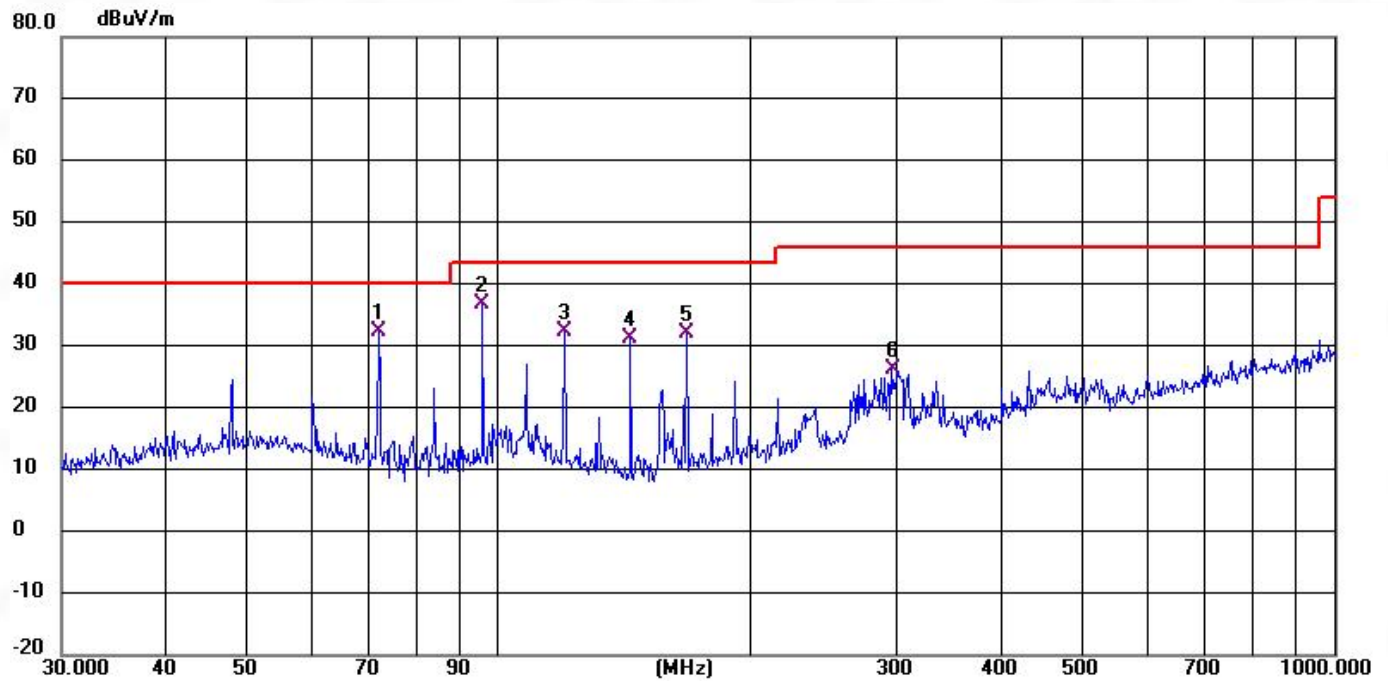

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	71.990	22.09	10.31	32.40	40.00	-7.60	QP	Vertical
2 *	96.014	25.02	11.86	36.88	43.50	-6.62	QP	Vertical
3	120.013	21.46	10.87	32.33	43.50	-11.17	QP	Vertical
4	144.019	21.92	9.27	31.19	43.50	-12.31	QP	Vertical
5	168.045	21.82	10.18	32.00	43.50	-11.50	QP	Vertical
6	296.184	11.56	14.60	26.16	46.00	-19.84	QP	Vertical

Note:Margin=Level-Limit=Reading+factor-Limit

5.5 Emissions in Non-restricted Frequency Bands(above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.		
Procedure:	ANSI C63.10-2020 section 6.6.4		
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos		
Operating Environment:			
Temperature:	22.5℃		
Humidity:	46%RH		
Atmospheric Pressure:	1010 hpa		
Test voltage:	DC 14.76V From Battery		


5.5.1 Test Data:

Remark:

The report only reflects the test data of worst mode. (BLE_2M)


For emissions from 18GHz to 25GHz were cabinet noise, which more than 20db below the spurious emission limit, so not report

Test Channel: Lowest channel, Test Polarization: Vertical

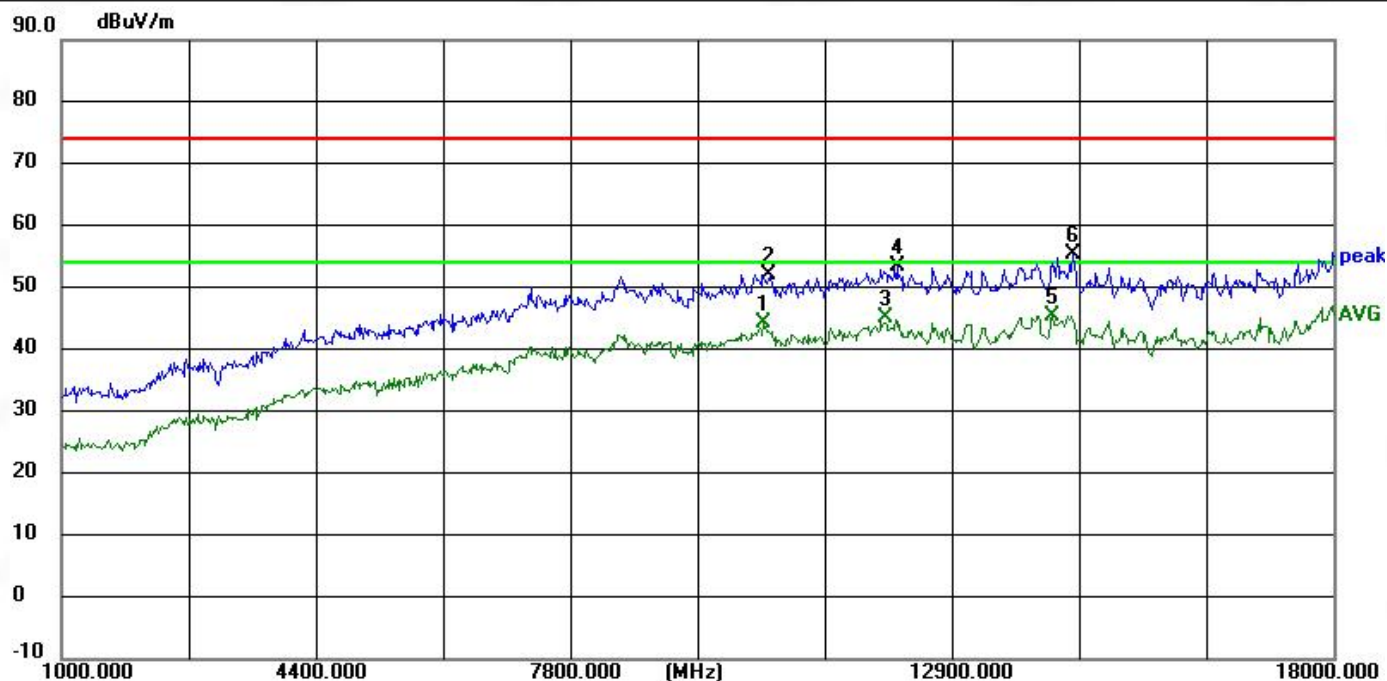


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	10396.750	46.05	-1.83	44.22	54.00	-9.78	AVG	Vertical
2	10469.000	53.86	-1.64	52.22	74.00	-21.78	peak	Vertical
3	12024.500	46.77	-1.58	45.19	54.00	-8.81	AVG	Vertical
4	12177.500	55.04	-1.56	53.48	74.00	-20.52	peak	Vertical
5 *	14253.625	44.89	0.62	45.51	54.00	-8.49	AVG	Vertical
6	14519.250	54.92	0.51	55.43	74.00	-18.57	peak	Vertical

Test Channel: Lowest channel, Test Polarization: Horizontal

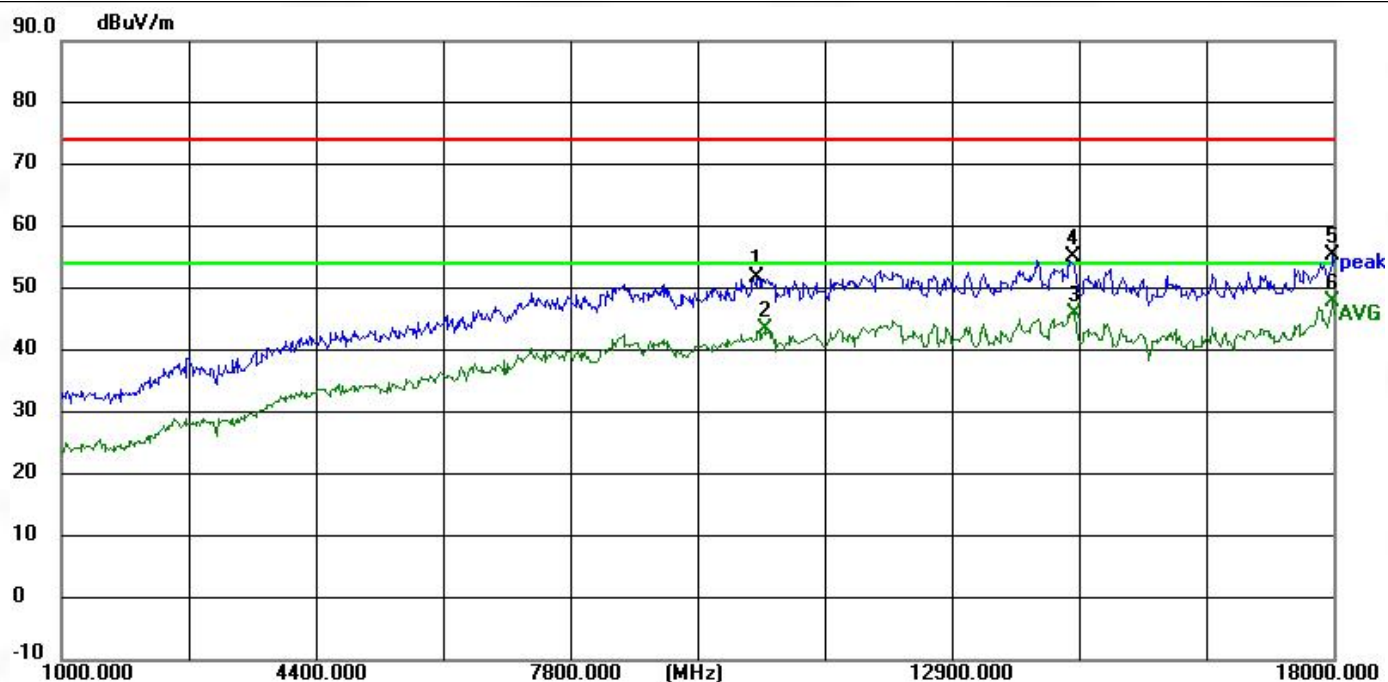


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	10284.125	53.86	-2.17	51.69	74.00	-22.31	peak	Horizontal
2	10435.000	45.20	-1.74	43.46	54.00	-10.54	AVG	Horizontal
3	14517.125	45.36	0.52	45.88	54.00	-8.12	AVG	Horizontal
4	14525.625	54.59	0.51	55.10	74.00	-18.90	peak	Horizontal
5	17985.125	48.17	7.24	55.41	74.00	-18.59	peak	Horizontal
6 *	17985.125	40.64	7.24	47.88	54.00	-6.12	AVG	Horizontal

Test Channel: Middle channel, Test Polarization: Vertical

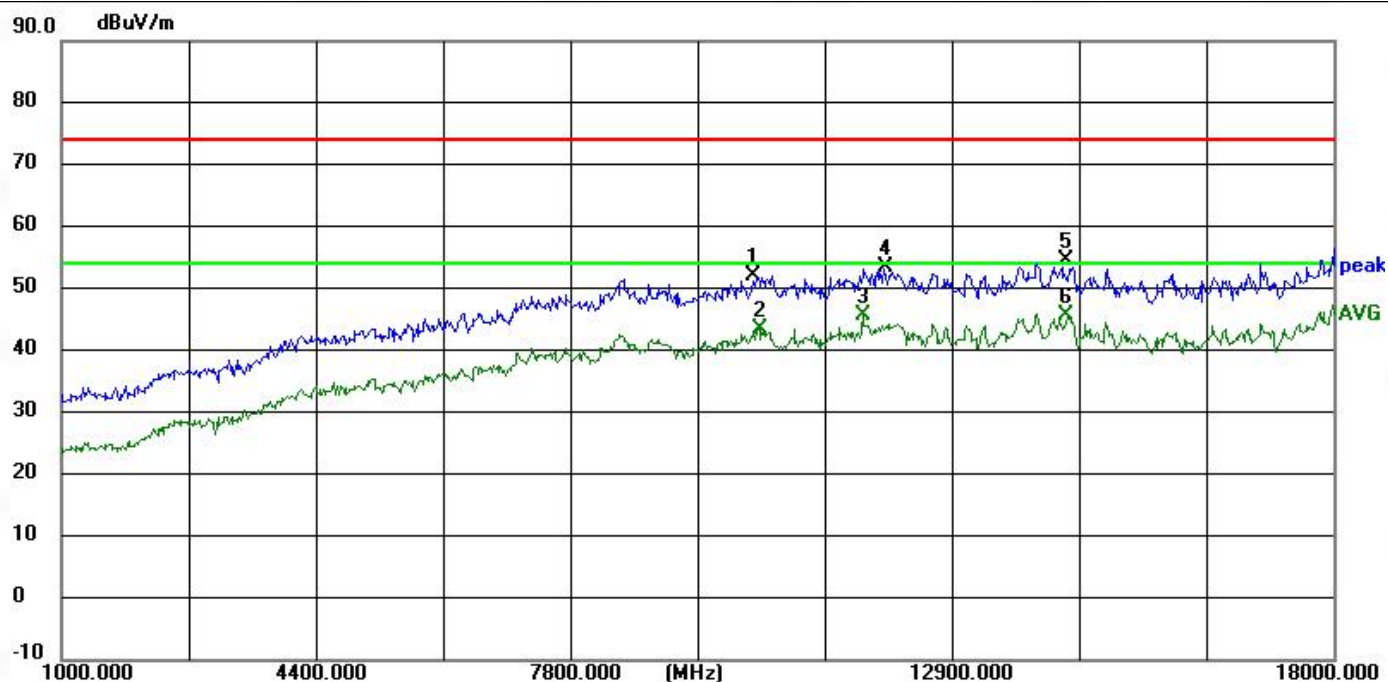


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	10258.625	54.22	-2.23	51.99	74.00	-22.01	peak	Vertical
2	10318.125	45.54	-2.06	43.48	54.00	-10.52	AVG	Vertical
3	11718.500	47.24	-1.62	45.62	54.00	-8.38	AVG	Vertical
4	12028.750	54.95	-1.57	53.38	74.00	-20.62	peak	Vertical
5	14447.000	53.93	0.55	54.48	74.00	-19.52	peak	Vertical
6 *	14447.000	45.08	0.55	45.63	54.00	-8.37	AVG	Vertical

Test Channel: Middle channel, Test Polarization: Horizontal

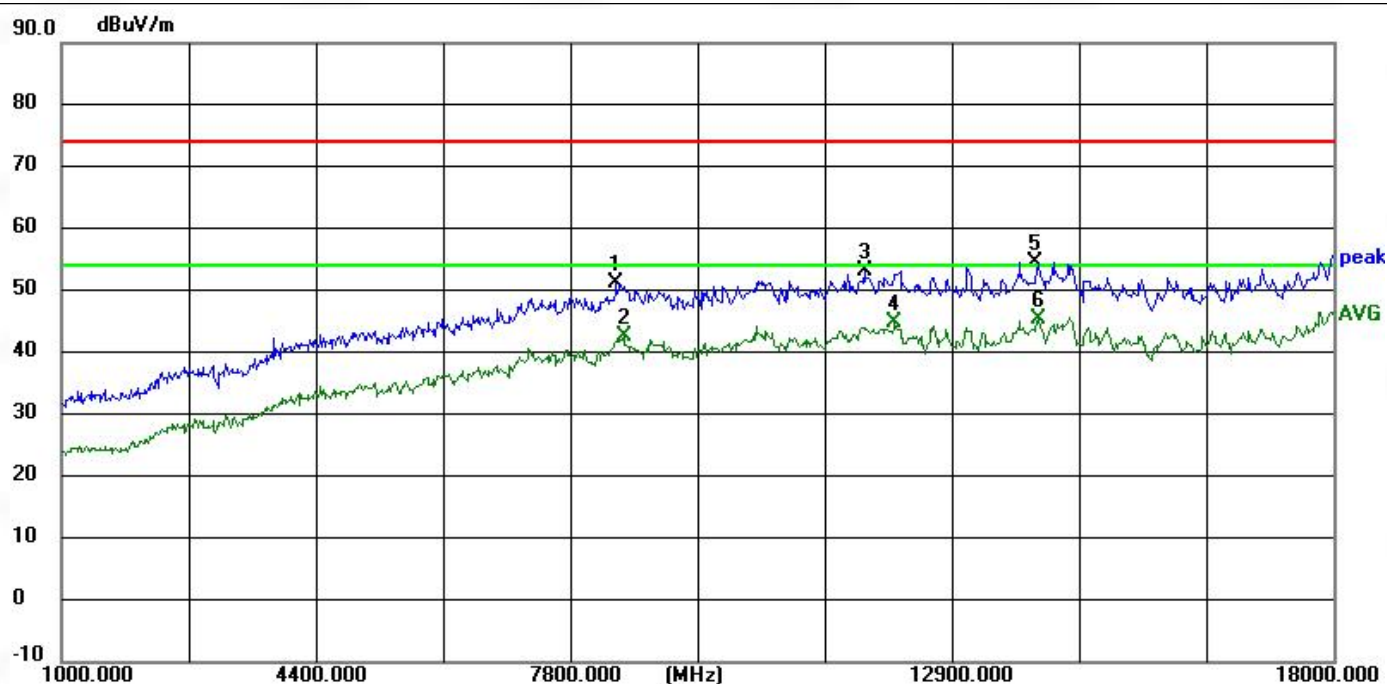


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	8429.000	56.65	-5.37	51.28	74.00	-22.72	peak	Horizontal
2	8531.000	47.72	-5.15	42.57	54.00	-11.43	AVG	Horizontal
3	11729.125	54.68	-1.62	53.06	74.00	-20.94	peak	Horizontal
4	12137.125	46.41	-1.57	44.84	54.00	-9.16	AVG	Horizontal
5	14032.625	53.89	0.69	54.58	74.00	-19.42	peak	Horizontal
6 *	14062.375	44.82	0.69	45.51	54.00	-8.49	AVG	Horizontal

Test Channel: Highest channel, Test Polarization: Vertical

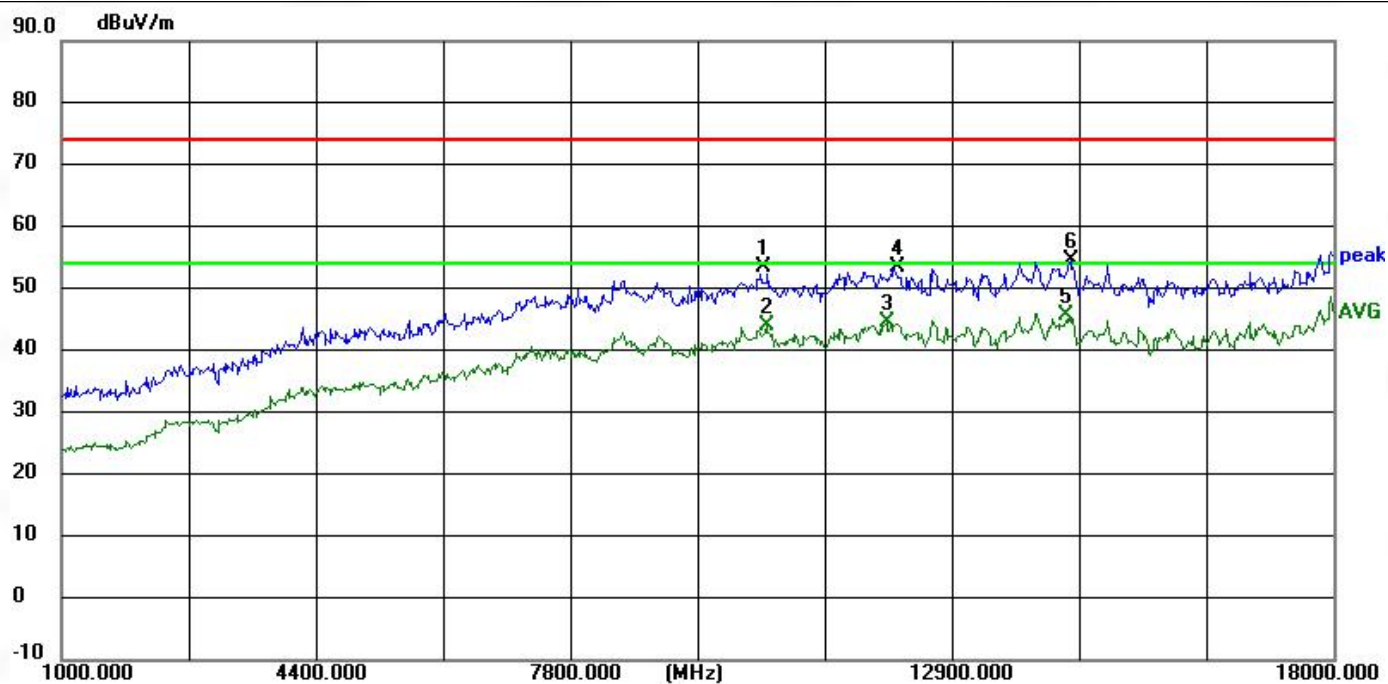

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	10398.875	55.36	-1.83	53.53	74.00	-20.47	peak	Vertical
2	10424.375	45.72	-1.76	43.96	54.00	-10.04	AVG	Vertical
3	12018.125	46.22	-1.58	44.64	54.00	-9.36	AVG	Vertical
4	12177.500	55.15	-1.56	53.59	74.00	-20.41	peak	Vertical
5 *	14447.000	45.16	0.55	45.71	54.00	-8.29	AVG	Vertical
6	14483.125	53.94	0.54	54.48	74.00	-19.52	peak	Vertical

Test Channel: Highest channel, Test Polarization: Horizontal

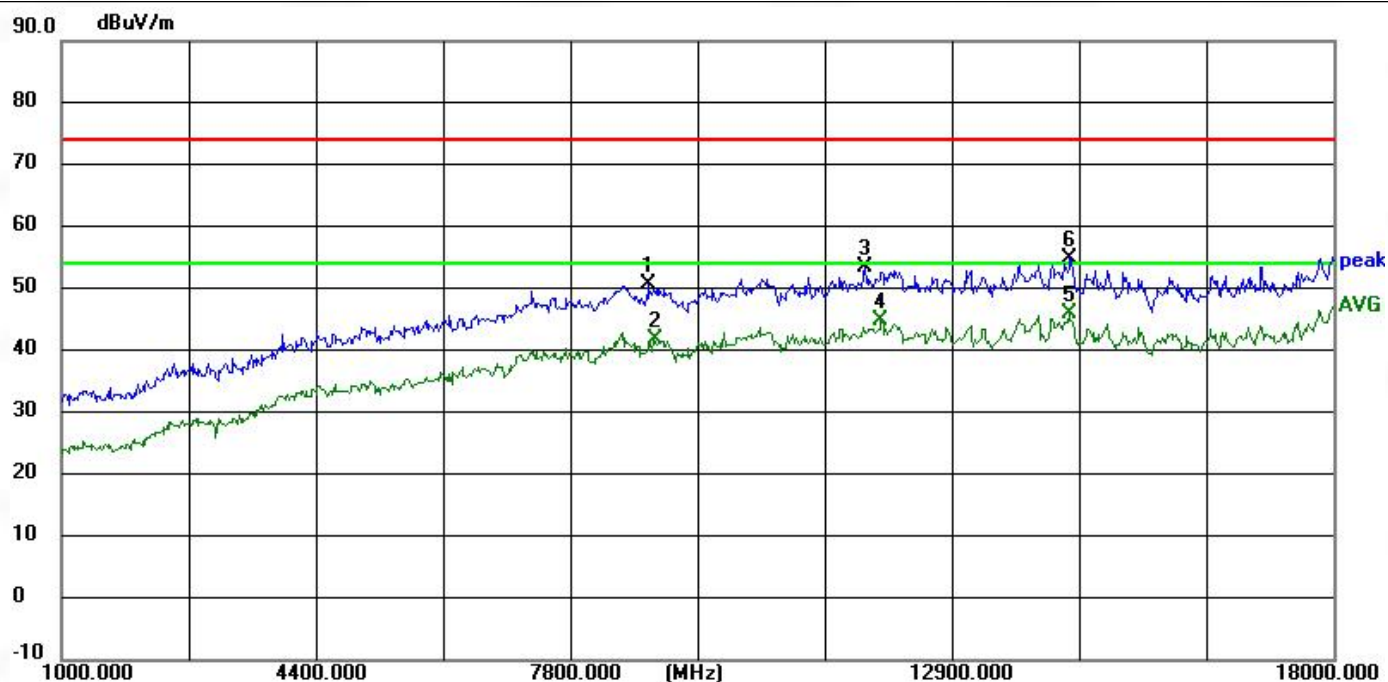

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	8839.125	55.52	-4.86	50.66	74.00	-23.34	peak	Horizontal
2	8949.625	46.69	-4.75	41.94	54.00	-12.06	AVG	Horizontal
3	11750.375	54.97	-1.61	53.36	74.00	-20.64	peak	Horizontal
4	11952.250	46.36	-1.59	44.77	54.00	-9.23	AVG	Horizontal
5 *	14472.500	45.48	0.54	46.02	54.00	-7.98	AVG	Horizontal
6	14483.125	54.46	0.54	55.00	74.00	-19.00	peak	Horizontal

Note:Margin=Level-Limit=Reading+factor-Limit

5.6 Duty Cycle

Test Requirement:	All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.
Test Method:	ANSI C63.10-2020
Test Limit:	No limits, only for report use.
Procedure:	The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal: 1) Set the center frequency of the instrument to the center frequency of the transmission. 2) Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value. 3) Set VBW $\geq$ RBW. Set detector = peak or average. 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7\mu s$.)
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5°C
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	DC 14.76V From Battery

5.6.1 Test Data:

Please Refer to Appendix-BLE for Details

5.7 Occupied Bandwidth

Test Requirement:	Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	DTS bandwidth
Test Limit:	Section (a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5°C
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	DC 14.76V From Battery

5.7.1 Test Data:

Please Refer to Appendix-BLE for Details

5.8 Maximum Conducted Output Power

Test Requirement:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	Maximum peak conducted output power
Test Limit:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Procedure:	ANSI C63.10-2020, section 11.9.1 Maximum peak conducted output power
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5℃
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	DC 14.76V From Battery

5.8.1 Test Data:

Please Refer to Appendix-BLE for Details

5.9 Power Spectral Density

Test Requirement:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	Maximum power spectral density level in the fundamental emission
Test Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5°C
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	DC 14.76V From Battery

5.9.1 Test Data:

Please Refer to Appendix-BLE for Details

5.10 Emissions in non-restricted frequency bands

Test Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	Emissions in nonrestricted frequency bands
Test Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5°C
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	DC 14.76V From Battery

5.10.1 Test Data:

Please Refer to Appendix-BLE for Details

6 Test Setup Photos

Please refer to the Appendix I Test Setup Photos

7 EUT Constructional Details (EUT Photos)

Please refer to the Appendix II External Photos & Appendix III External Photos



BTF Testing Lab (Shenzhen) Co., Ltd.

Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, Guangdong, China

www.btf-lab.com

--END OF REPORT--