

样品承认书

Confirmation of products

客户名称 Customer	深圳好麦创新技术有限公司				
项目名称 Project Name	M002	版本 Version	A. 1	日期 Date	2025-09-01
项目料号 Project NO.	30.02.10.001	客户料号 Customer NO.			
频段 Frequency Range	2400~2500MHz	备注 Notes	TX		
设计 Designed By	田秋奎 王宇 陈正伟				
审核 Approved By	唐春艳				
客户确认 Clients' Approval					

公司名称：深圳市林荣科技有限公司

Designer: SHENZHEN LINRONG TECHNOLOGY CO.,LTD

地址：深圳市龙华区大浪街道华荣路联建工业园 1 栋 3 楼


ADD: Floor 3, building 1, LianJian Industrial Park, Huarong Road, Dalang street, Longhua District, Shenzhen

Index

1. Specifications	3
2. VSWR Testing	3
2-1 Testing connection	3
2-2 VSWR	4
2-3 Testing data	4
3.Power、 Sensitivity Testing	4
3-1 Testing field	4
3-2 Testing results	5
3.3 Active testing	5
4、 Environmental treatment	5
5. Mechanical Dimension Drawing	6
6. Mechanical Dimension Testing report	7
7、 Packaging standard	8

1、Specification

This report mainly provides the testing conditions of various electric and structural performance parameters for cell phone antenna ----M002 Picture 1 shows the antenna designed by LR.

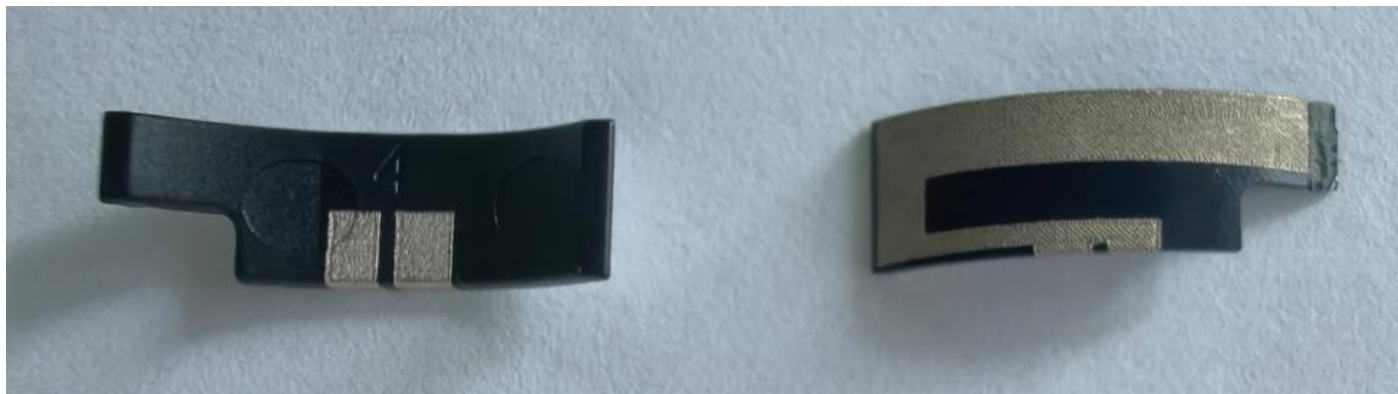

2、 VSWR Testing

2.1 Testing connection


The **Return Loss** testing devices are connected in sequence: Agilent5071C Network Analyzer →Testing Cable → Customer-providing Devices.

2.2 VSWR


The following table expresses the vswr value of antenna's two edges of its frequency range. With regard to the relevant diagram of VSWR

M002 TX VSWR			
Frequency (MHz)	2400	2450	2500
VSWR	1.98	2.12	4.72


2.3 Testing data

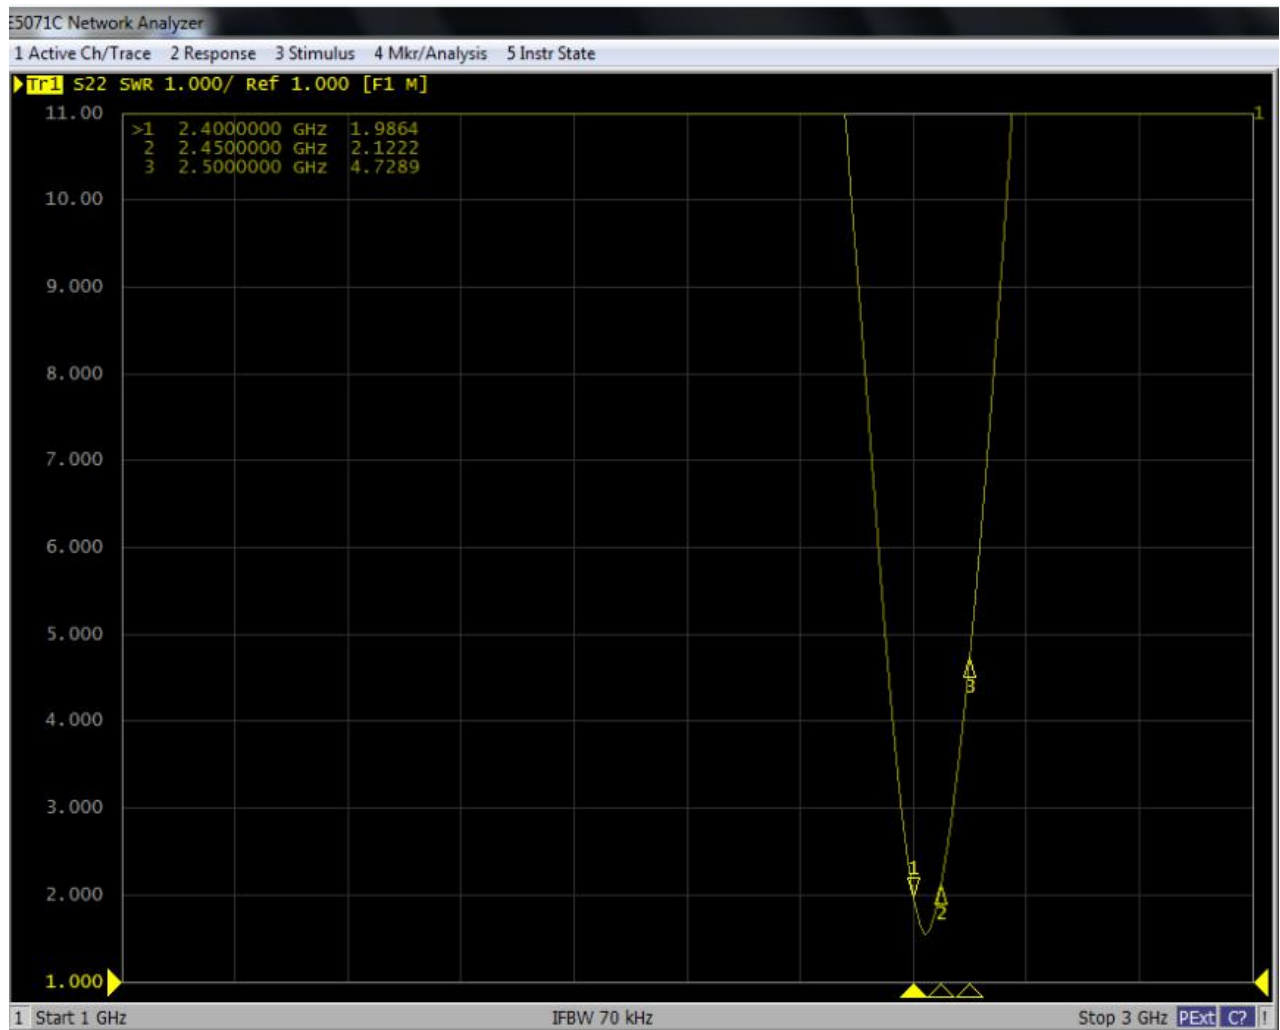


2.4G BT antenna VSWR

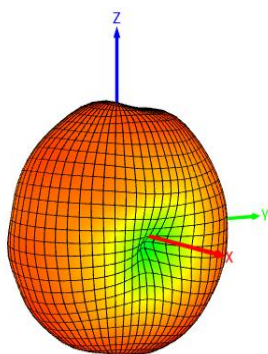

2400MHz

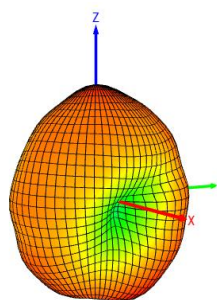

2450MHz



2500MHz

3、 Power、 Sensitivity Testing

3.1 Testing field

LR Microwave Anechoic Chamber : testing frequency ranges from 400MHz to 6GHz and the 40cm diameter spherical quiet zone, the chamber provides less than -90dB reflectivity from 400MHz—6GHz.

3.2 Testing results

The following table indicates the testing results related to Power and Sensitivity in Microwave Anechoic Chamber, concerning the relative diagram.

3.3 Active testing.

M002 Antenna efficiency

Freq(MHz)	Gain(dBi)	Efficiency(%)
2300	-2.13	28.47
2310	-2.19	28.78
2320	-2.00	29.57
2330	-1.82	30.28
2340	-1.72	30.89
2350	-1.42	31.57
2360	-1.13	32.24
2370	-0.98	32.55
2380	-0.91	32.64
2390	-0.83	33.66
2400	-0.85	34.67
2410	-0.95	34.93
2420	-1.03	35.34
2430	-1.02	35.47
2440	-0.95	35.44
2450	-0.86	35.25
2460	-0.67	35.38
2470	-0.52	35.92
2480	-0.38	36.27
2490	-0.22	36.80
2500	-0.13	37.35
2510	-0.11	36.96
2520	-0.17	36.25
2530	-0.24	35.91
2540	-0.39	35.86
2550	-0.51	36.16
2560	-0.56	36.48
2570	-0.48	36.81
2580	-0.43	36.72
2590	-0.38	36.22
2600	-0.35	35.82

M002 Active data

发射#1			发射#2		
	TRP	TIS		TRP	TIS
0	8.99	-93.81	0	9.11	-93.68
39	7.78	-92.68	39	8.73	-93.24
78	5.21	-90.79	78	6.16	-91.50

4、Environmental treatment

Original assembly of the entire machine

5、Mechanical Dimension Drawing

1	2	3	4	5	6																		
技术要求: 1. 材料: 支架+LDS, 天线镀镍; 2. 电路部分不能易开路、短路等不良现象,要求能过48小时盐雾试验。 3. 高低温实验条件: -40° C~+80° C 2个周期 (一周期为24小时) 4. 标*号为重点管控尺寸, 未注公差按图框中自由公差管控; 5. 表面不可有污染物、擦伤、黑点; 6. 产品符合ROHS标准。 7. PE袋包装出货。			<table border="1"> <tr> <th>第三视角</th> <th>项目</th> <th>公差</th> </tr> <tr> <td>0~3</td> <td>±0.05</td> <td>0.03</td> </tr> <tr> <td>3~30</td> <td>±0.08</td> <td>0.03</td> </tr> <tr> <td>30~50</td> <td>±0.10</td> <td>0.02</td> </tr> <tr> <td>50~80</td> <td>±0.12</td> <td>0.02</td> </tr> <tr> <td>角度</td> <td>±1°</td> <td>0.05</td> </tr> </table>			第三视角	项目	公差	0~3	±0.05	0.03	3~30	±0.08	0.03	30~50	±0.10	0.02	50~80	±0.12	0.02	角度	±1°	0.05
第三视角	项目	公差																					
0~3	±0.05	0.03																					
3~30	±0.08	0.03																					
30~50	±0.10	0.02																					
50~80	±0.12	0.02																					
角度	±1°	0.05																					
深圳市林荣科技有限公司			直接出货成品料号																				
材料			LDS																				
产品名称			M002																				
产品料号			即天线																				
日期			2025-09-01																				
设计			MD																				
审核			陈正伟																				
批准			田秋奎																				
单位			mm																				
比例			1:1																				
版本			A.1																				

6. Mechanical Dimension Testing report

全尺寸测量报告

Vendor(供应商)		材质名称		LDS		Part NO(料号)		30.02.10.001		Tool Number (模号)		Cav. Number(穴数)		Unit(单位)		Quality(品质签字)																																	
林荣科技		材质 牌号		/		Part Name (零件名称)		BT 天线		/		Rev(版本)		A.1		万江华																																	
日期		2025/9/1		MEASURED DIMENSION(实测尺寸)						% TOLERANCE USED (公差使用百分比)				DISPOSITION				ACCEPTABLE VARIANCE																															
DIM. #		DIMENSION		DRAWING ZONE		+ TOL.		- TOL.		NOTE		SAMPLE 1		SAMPLE 2		SAMPLE 3		SAMPLE 4		SAMPLE 5		UPPER		LOWER		0%-25%		25%-50%		50%-75%		75%-100%		100%+		Re-Measure		Accept		Fix Tool		Accept With Variance		DIMENSION		+ TOL.		- TOL.	
1		2.22				0.10		(0.10)				2.25		2.24		2.22		2.23		2.25		15%		0%		x														2.22		2.25		2.23					
2		1.51				0.10		(0.10)				1.52		1.50		1.53		1.52		1.50		20%		-10%		x														1.51		1.53		1.50					
3		1.69				0.10		(0.10)				1.70		1.68		1.70		1.69		1.68		10%		-10%		x														1.69		1.70		1.68					
4		13.25				0.10		(0.10)				13.23		13.20		13.27		13.26		13.30		50%		-50%		x		x												13.25		13.30		13.20					
5		8.85				0.10		(0.10)				8.82		8.86		8.88		8.82		8.80		30%		-50%		x		x												8.85		8.88		8.80					
6		0.82				0.10		(0.10)				0.81		0.82		0.83		0.81		0.82		10%		-10%		x														0.82		0.83		0.81					
7		以下空白																																															
8																																																	
9																																																	
10																																																	
11																																																	
12																																																	
13																																																	

备注：除了上述标注的填写内容外，须输入的内容：
1. DIMENSION, +TOL, -TOL, SAMPLE1, SAMPLE2, SAMPLE3
2. 注意1中描述的内容输入时，请：
a. 在%TOLERANCEUSED(公差使用百分比)中无论是UPPER还是LOWER 100% 须：
(1) 检查输入数据是否输入错误；(2) 测量数据是否操作有误差或是仪器测量不准确；(3) 测量时间是否不宜宜；(4) 排除了 (1) (2) (3) 外，仍然 100%，请设计师对每个尺寸的后面作出选择即从“Re-measure, Accept, Re Tool, Accept Variance”中选一，若是选Accept with variance, 必须完成后面的Dimension, +TOL, -TOL;
b. DIMENSION栏中的即尺寸前一栏中的DIM.#必须与图面上的一致，同时注意，在作Cpk的尺寸的编号与FAI全尺寸测量报告中的尺寸的编号必须是相同的，且Cpk尺寸必须被用符号标注，此标注号必须表示的意思是该尺寸为重点管控尺寸，要做Cpk！
c. 测量工具代号Measure No.: A=callipers (0.00) B=micrometer (0.000) C=Pin Gauge (0.000) D=High Gauge (0.000) E=CMM (0.000) F=Plug Gauge (0.00) G=R Gauge (0.0) I=Deep Gauge (0.000)

7. Packaging standard

包装说明：具体包装数量以实物为准，图片只显示包装的方式，并非此项目实物。

Packaging Description: the specific packaging quantity is subject to the physical object. The picture only shows the way of packaging, not the physical object of the project



天线用 PE 袋包装

The top cover board, with PE film packaging



防潮防水 PET 袋封装，放于纸箱或胶筐内

Moistureproof waterproof PET bag packaging,
Put in the cartons



纸箱用胶带封口

Carton sealing with duct tape



包装箱整箱外观 ()

Cases appearance