



Radio Test Report

Report No.: STS2604326W04

Issued for

Radxa Computer (Shenzhen) Co., Ltd.

1602, Block B, FengHuang Zhigu Building, No.50 Tiezai
Road, Xixiang, Baoan, Shenzhen, 518102, China

Product Name: Radxa ROCK 5T

Brand Name: **radxa**[®]

Model Name: Radxa ROCK 5T D32E256

Series Model(s): More models Ref. the 2.1

FCC ID: 2BC6T-D16E128

Test Standards: FCC Part15.407

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name: Radxa Computer (Shenzhen) Co., Ltd.
Address: 1602, Block B, FengHuang Zhigu Building, No.50 Tiezai Road,
Xixiang, Baoan, Shenzhen, 518102, China
Manufacturer's Name: Radxa Computer (Shenzhen) Co., Ltd.
Address: 1602, Block B, FengHuang Zhigu Building, No.50 Tiezai Road,
Xixiang, Baoan, Shenzhen, 518102, China

Product Description

Product Name: Radxa ROCK 5T
Brand Name: **radxa**[®]
Model Name: Radxa ROCK 5T D32E256
Series Model(s): More models Ref. the 2.1

Test Standards: FCC Part15.407

Test Procedure ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test:

Date of receipt of test item: 8 Apr. 2026
Date (s) of performance of tests: 8 Apr. 2026 ~ 21 May. 2026
Date of Issue: 21 May. 2026
Test Result: **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Skylar Li

(Skylar Li)

Authorized Signatory :

Bovey Yang

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	12
2.3 TEST SOFTWARE AND POWER LEVEL	13
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	15
2.6 EQUIPMENTS LIST	16
3. EMC EMISSION TEST	17
3.1 CONDUCTED EMISSION MEASUREMENT	17
3.2 RADIATED EMISSION AND MEASUREMENT	25
4. POWER SPECTRAL DENSITY TEST	62
4.1 LIMIT	62
4.2 TEST PROCEDURE	62
4.3 DEVIATION FROM STANDARD	63
4.4 TEST SETUP	63
4.5 EUT OPERATION CONDITIONS	63
4.6 TEST RESULTS	64
5. DUTY CYCLE	65
5.1 TEST STANDARD	65
5.2 TEST PROCEDURE	65
5.3 DEVIATION FROM STANDARD	65
5.4 TEST SETUP	65
5.5 EUT OPERATION CONDITIONS	65
5.6 TEST RESULTS	65
6. BANDWIDTH MEASUREMENT	66
6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	66
6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	67
6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	68
7. MAXIMUM OUTPUT POWER	69
7.1 LIMIT	69
7.2 TEST PROCEDURE	69
7.3 DEVIATION FROM STANDARD	69



Table of Contents	Page
7.4 TEST SETUP	69
7.5 EUT OPERATION CONDITIONS	69
7.6 TEST RESULTS	69
8. AUTOMATICALLY DISCONTINUE TRANSMISSION	70
8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	70
8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	70
9. ANTENNA REQUIREMENT	71
9.1 STANDARD REQUIREMENT	71
9.2 EUT ANTENNA	71
APPENDIX - PHOTOS OF TEST SETUP	72

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	21 May. 2026	STS2604326W04	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
15.407 (a) /15.407 (e)	26dB/6dB &99% Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(b)/15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(a)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

Note:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add.: 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.751\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.888\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.48\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 2.52\text{dB}$
5	All emissions, radiated 1G-18GHz	$\pm 3.48\text{dB}$
6	All emissions, radiated >18GHz	$\pm 4.18\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.48\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.52\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.6\%$
10	Power Spectral Density, conducted	$\pm 1.214\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Radxa ROCK 5T	
Brand Name		
Model Name	Radxa ROCK 5T D32E256	
Series Model(s)	Radxa ROCK 5T D4E0, Radxa ROCK 5T D4E16, Radxa ROCK 5T D4E32, Radxa ROCK 5T D4E64, Radxa ROCK 5T D4E128, Radxa ROCK 5T D4E256, Radxa ROCK 5T D8E0, Radxa ROCK 5T D8E16, Radxa ROCK 5T D8E32, Radxa ROCK 5T D8E64, Radxa ROCK 5T D8E128, Radxa ROCK 5T D8E256, Radxa ROCK 5T D16E0, Radxa ROCK 5T D16E16, Radxa ROCK 5T D16E32, Radxa ROCK 5T D16E64, Radxa ROCK 5T D16E128, Radxa ROCK 5T D16E256, Radxa ROCK 5T D24E0, Radxa ROCK 5T D24E16, Radxa ROCK 5T D24E32, Radxa ROCK 5T D24E64, Radxa ROCK 5T D24E128, Radxa ROCK 5T D24E256, Radxa ROCK 5T D32E0, Radxa ROCK 5T D32E16, Radxa ROCK 5T D32E32, Radxa ROCK 5T D32E64, Radxa ROCK 5T D32E128	
Model Difference	All the model are the same circuit and RF module, except model names, RAM and eMMC capacity.	
Product Description	The EUT is a Radxa ROCK 5T	
	Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20)/ax(HE20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40)/ax(HE40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80) /ax(HE80): 5.210GHz IEEE 802.11a/ n(HT20)/ac(VHT20)/ax(HE20): 5.745GHz-5.825GHz IEEE 802.11a/ n(HT40)/ac(VHT40)/ax(HE40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80)/ax(HE80): 5.775GHz
	Modulation Type:	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM 802.11ax(OFDM, OFDMA): BPSK,QPSK,16-QAM,64-QAM,256-QAM, 1024QAM 802.11a Support SISO 802.11n/ac/ax Support MIMO
	Antenna Type:	FPC antenna*2
	Antenna Gain:	Antenna A&B: WLAN 5.1GHz: 1.93 dBi WLAN 5.8GHz: 1.88 dBi
	More details of EUT technical specification, please refer to the User Manual.	
Test Channel	Please refer to the Note 3.	
Power Rating	DC 12V	
Adapter	N/A	
Battery	N/A	



Hardware version number	N/A
Software version number	N/A
Connecting I/O Port(s)	Please refer to the Note 1.



Note

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna details in this report are based on the manufacturer provided antenna specification documents and apply only to the tested sample identified herein.
Any discrepancies in the antenna information may affect the accuracy of the test results, and the customer assumes responsibility for any related issues.

3.

Operation Frequency of channel			
5.180GHz-5.240GHz		5.745GHz-5.825GHz	
Channel	Frequency	Channel	Frequency
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	157	5785
44	5220	159	5795
46	5230	161	5805
48	5240	165	5825

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel



5GHz:

For 802.11a/n(HT20)/ac(VHT20)/ax(HE20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11 n(HT40)/ac(VHT40)/ax(HE40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
38	5190	151	5755
46	5230	159	5795

For 802.11ac (VHT80)/ax(HE80)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
42	5210	155	5775

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 3	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 4	TX IEEE 802.11ac VHT20 CH36&CH40&CH48	NSS1 MCS0
Mode 5	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 6	TX IEEE 802.11ac VHT20 CH149&CH157&CH165	NSS1 MCS0
Mode 7	TX IEEE 802.11ax HE20 CH36&CH40&CH48	NSS1 MCS0
Mode 8	TX IEEE 802.11ax HE20 CH149&CH157&CH165	NSS1 MCS0
Mode 9	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 10	TX IEEE 802.11ac VHT40 CH38&CH46	NSS1 MCS0
Mode 11	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 12	TX IEEE 802.11ac VHT40 CH151&CH159	NSS1 MCS0
Mode 13	TX IEEE 802.11ax HE40 CH38&CH46	NSS1 MCS0
Mode 14	TX IEEE 802.11ax HE40 CH151&CH159	NSS1 MCS0
Mode 15	TX IEEE 802.11ac VHT80 CH42	NSS1 MCS0
Mode 16	TX IEEE 802.11ac VHT80 CH155	NSS1 MCS0
Mode 17	TX IEEE 802.11ax HE80 CH42	NSS1 MCS0
Mode 18	TX IEEE 802.11ax HE80 CH155	NSS1 MCS0

Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
(3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.
(4) The 802.11ax mode is investigated among different tones (26/52/106/242-tone RU channel), full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.



(5) KDB 662911 D01 Multiple Transmitter Output v02r01

Directional Gain Calculations for In-Band Measurements

a) Basic methodology with NANT transmit antennas, each with the same directional gain GANT dBi, being driven by NANT transmitter outputs of equal power. Directional gain is to be computed as follows:

☒ (i) If any transmit signals are correlated with each other,

Directional gain = GANT + 10 log(NANT) dBi = 0.9 + 10 log(2) = 3.91 dBi

☐ (ii) If all transmit signals are completely uncorrelated with each other,

Directional gain = GANT

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 19: WIFI Link

2.3 TEST SOFTWARE AND POWER LEVEL


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	ANT Power Class	Software For Testing
WIFI(5G)	U-NII-1 (5150MHz-5250MHz)	802.11a	Antenna A&B: 1.93 dBi	Default	SecureCRT
		802.11n(HT20)		Default	
		802.11n(HT40)		Default	
		802.11ac(VHT20)		Default	
		802.11ac(VHT40)		Default	
		802.11ac(VHT80)		Default	
		802.11ax(HE20)		Default	
		802.11ax(HE40)		Default	
		802.11ax(HE80)		Default	


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	ANT Power Class	Software For Testing
WIFI(5G)	U-NII-3 (5745MHz-5825MHz)	802.11a	Antenna A&B: 1.88 dBi	Default	SecureCRT
		802.11n(HT20)		Default	
		802.11n(HT40)		Default	
		802.11ac(VHT20)		Default	
		802.11ac(VHT40)		Default	
		802.11ac(VHT80)		Default	
		802.11ax(HE20)		Default	
		802.11ax(HE40)		Default	
		802.11ax(HE80)		Default	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

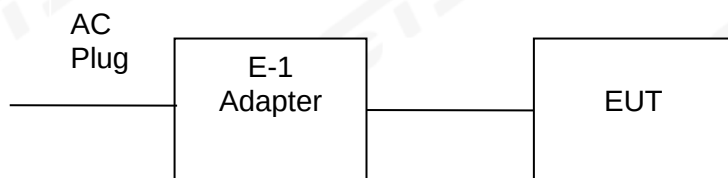

AC Conducted Emission Test

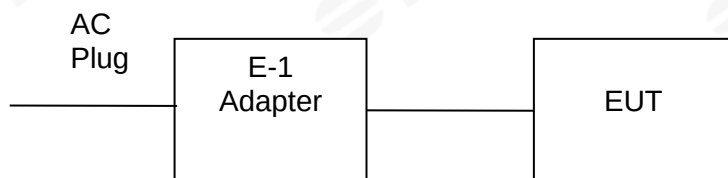



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Device Type	Brand	Model	Series No.	Note
1.	Adapter	---	XSG-1203000DEX	---	E-1

Note:

(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 EQUIPMENTS LIST

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2026.02.04	2027.02.03
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2026.02.04	2027.02.03
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2025.09.25	2026.09.24
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2026.02.04	2027.02.03
Active loop Antenna	ZHINAN	ZN30900C	16035	2025.02.25	2027.02.24
Bilog Antenna	TESEQ	CBL6111D	34678	2025.09.27	2027.09.26
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2025.09.27	2027.09.26
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2025.09.27	2027.09.26
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2025.09.26	2026.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Band 5.1G-5.8G Filter	HX MICROWAVE	HXLBQ-DZA62	N/A	2025.09.23	2026.09.22
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFENG	DPS-305AF	17064939	2025.09.22	2026.09.21
RF Coaxial Cable	LEITAI M-WAVE	CA360	DC-18G	N/A	N/A
RF Coaxial Cable	LEITAI M-WAVE	CA360	DC-18G	N/A	N/A
RF Coaxial Cable	LEITAI M-WAVE	CA3507	DC-40G	N/A	N/A
RF Coaxial Cable	LEITAI M-WAVE	CA3507	DC-40G	N/A	N/A
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2025.09.25	2026.09.24
Limiter	CYBERTEK	EM5010	N/A	2025.09.25	2026.09.24
LISN	R&S	ENV216	101242	2025.09.25	2026.09.24
LISN	EMCO	3810/2NM	23625	2025.09.25	2026.09.24
Temperature & Humidity	SW-108	SuWei	N/A	2026.02.04	2027.02.03
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2026.02.04	2027.02.03
Signal Analyzer	R&S	FSV 40-N	101823	2025.09.26	2026.09.25
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2026.02.04	2027.02.03
Temperature & Humidity	SW-108	SuWei	N/A	2026.02.04	2027.02.03
RF Coaxial Cable	XINQY	CT26PE	DC-26.5G	N/A	N/A
Test SW	MW	MTS 8310_2.0.0.0			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

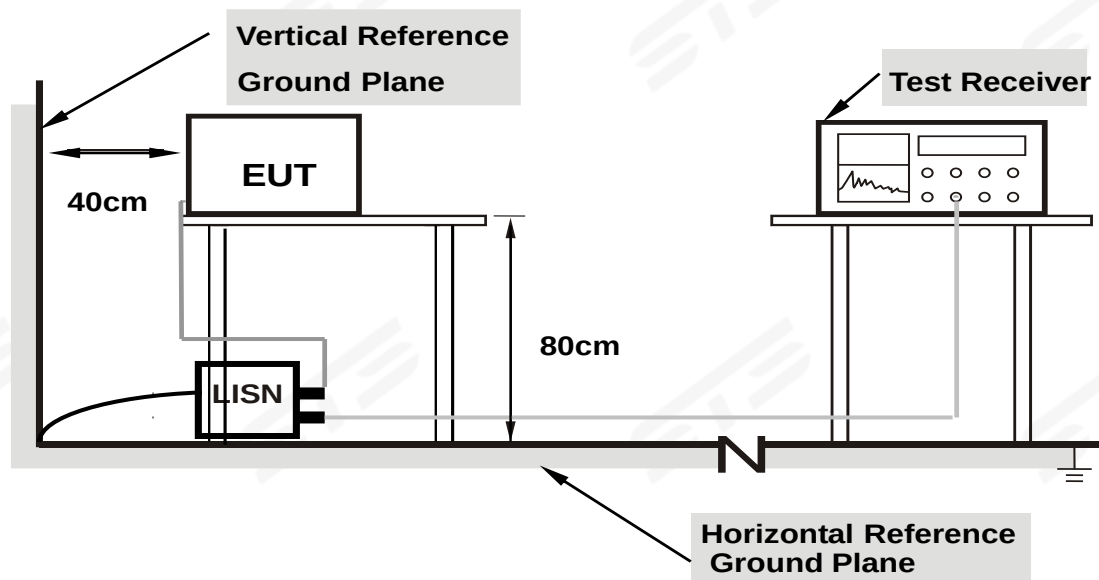

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.


3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS

Model: Radxa ROCK 5T D32E256

Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode :	Mode 19		

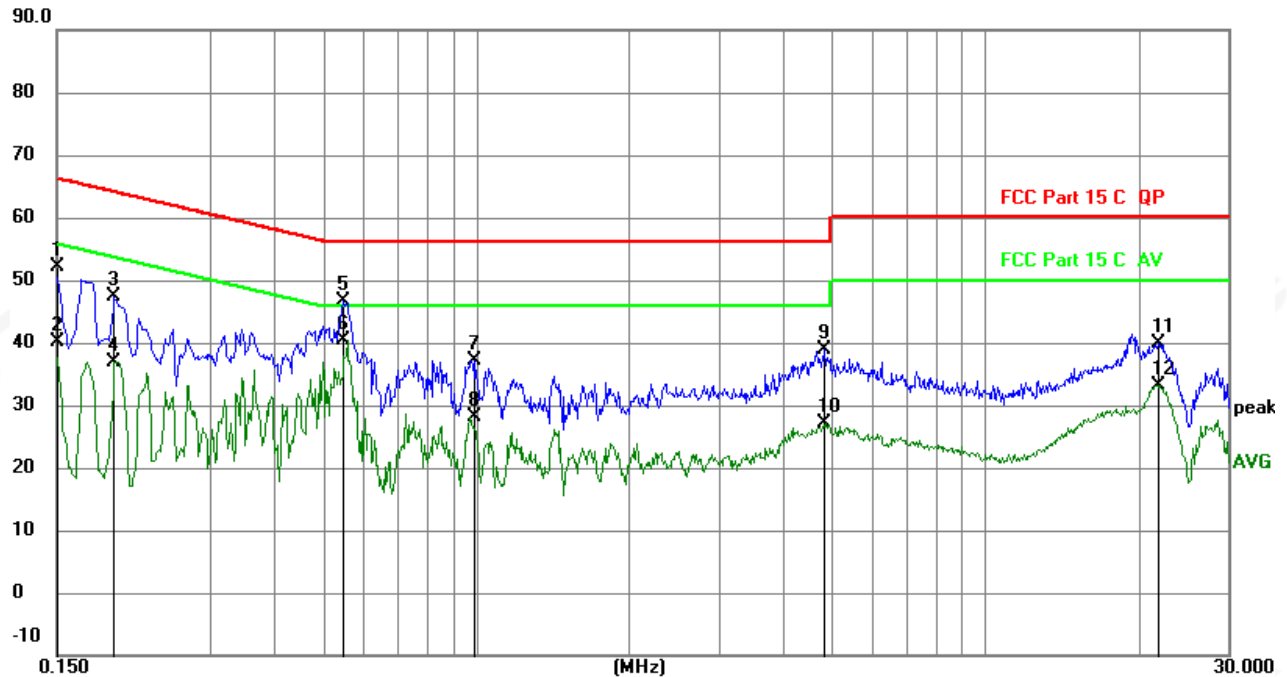


Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result =Reading + Factor)–Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	32.04	20.04	52.08	66.00	-13.92	QP
2		0.1500	20.14	20.04	40.18	56.00	-15.82	AVG
3		0.1943	27.31	20.04	47.35	63.85	-16.50	QP
4		0.1943	16.94	20.04	36.98	53.85	-16.87	AVG
5		0.5493	26.52	20.11	46.63	56.00	-9.37	QP
6	*	0.5493	20.23	20.11	40.34	46.00	-5.66	AVG
7		0.9940	16.98	20.27	37.25	56.00	-18.75	QP
8		0.9940	7.86	20.27	28.13	46.00	-17.87	AVG
9		4.8224	18.13	20.70	38.83	56.00	-17.17	QP
10		4.8224	6.40	20.70	27.10	46.00	-18.90	AVG
11		21.9462	15.97	23.83	39.80	60.00	-20.20	QP
12		21.9462	9.30	23.83	33.13	50.00	-16.87	AVG



Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode :	Mode 19		

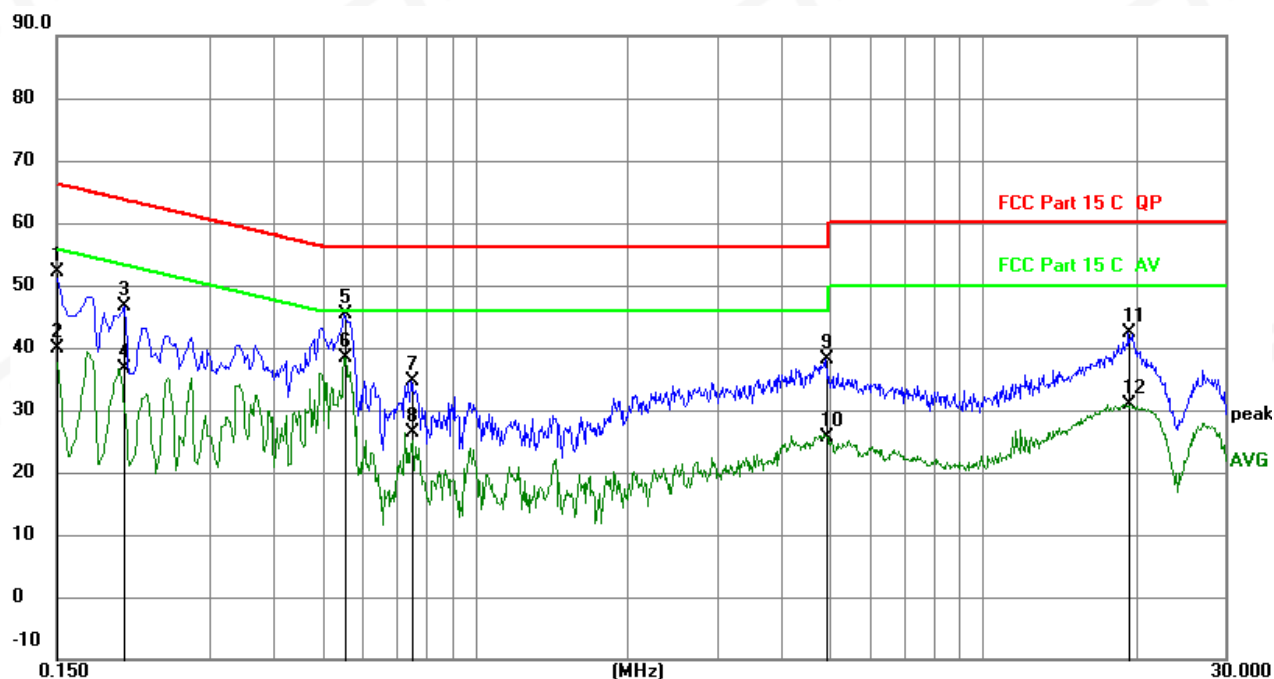


Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
				dB	dBuV	dBuV	dB	
1		0.1500	32.18	20.04	52.22	66.00	-13.78	QP
2		0.1500	19.77	20.04	39.81	56.00	-16.19	AVG
3		0.2038	26.50	20.04	46.54	63.45	-16.91	QP
4		0.2038	16.60	20.04	36.64	53.45	-16.81	AVG
5		0.5544	25.29	20.11	45.40	56.00	-10.60	QP
6	*	0.5544	18.23	20.11	38.34	46.00	-7.66	AVG
7		0.7479	14.44	20.26	34.70	56.00	-21.30	QP
8		0.7479	6.16	20.26	26.42	46.00	-19.58	AVG
9		4.9107	17.54	20.71	38.25	56.00	-17.75	QP
10		4.9107	5.00	20.71	25.71	46.00	-20.29	AVG
11		19.3335	18.98	23.44	42.42	60.00	-17.58	QP
12		19.3335	7.45	23.44	30.89	50.00	-19.11	AVG

Model: Radxa ROCK5T D16E64

Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 19		

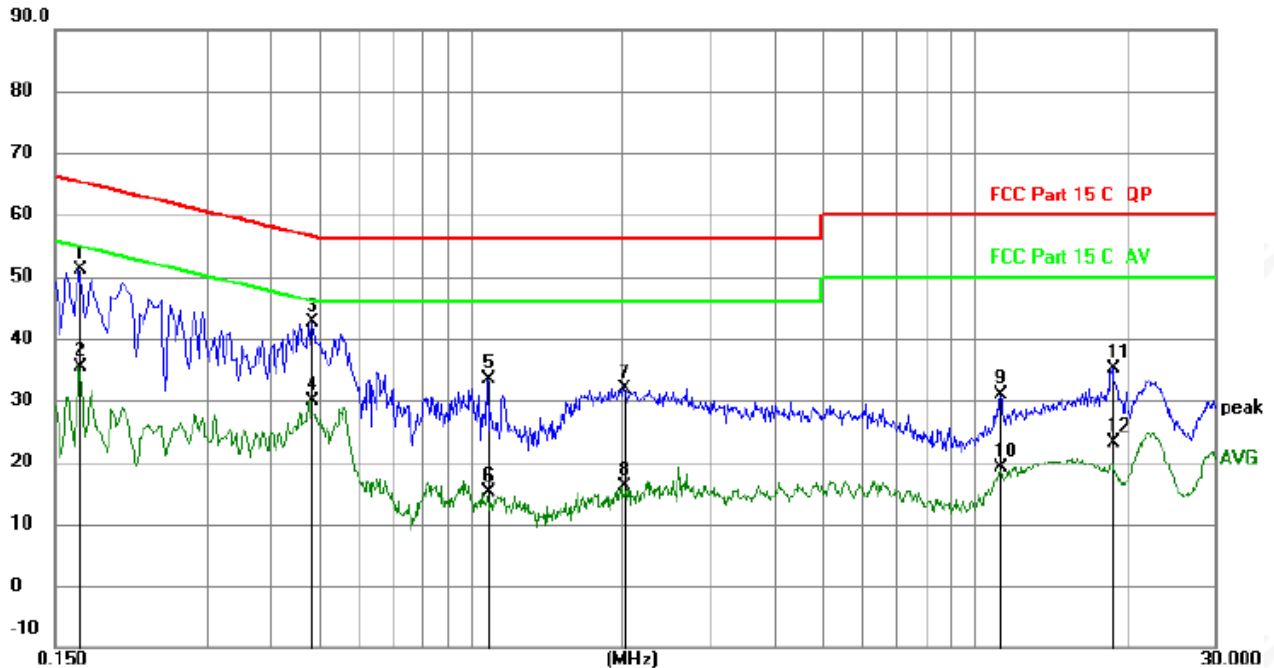


Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1677	30.99	20.24	51.23	65.07	-13.84	QP
2		0.1677	15.23	20.24	35.47	55.07	-19.60	AVG
3	*	0.4863	22.70	19.94	42.64	56.23	-13.59	QP
4		0.4863	9.92	19.94	29.86	46.23	-16.37	AVG
5		1.0824	12.65	20.61	33.26	56.00	-22.74	QP
6		1.0824	-5.43	20.61	15.18	46.00	-30.82	AVG
7		2.0119	11.45	20.55	32.00	56.00	-24.00	QP
8		2.0119	-4.50	20.55	16.05	46.00	-29.95	AVG
9		11.2572	8.83	22.17	31.00	60.00	-29.00	QP
10		11.2572	-2.97	22.17	19.20	50.00	-30.80	AVG
11		18.8205	11.44	23.80	35.24	60.00	-24.76	QP
12		18.8205	-0.60	23.80	23.20	50.00	-26.80	AVG



Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 19		

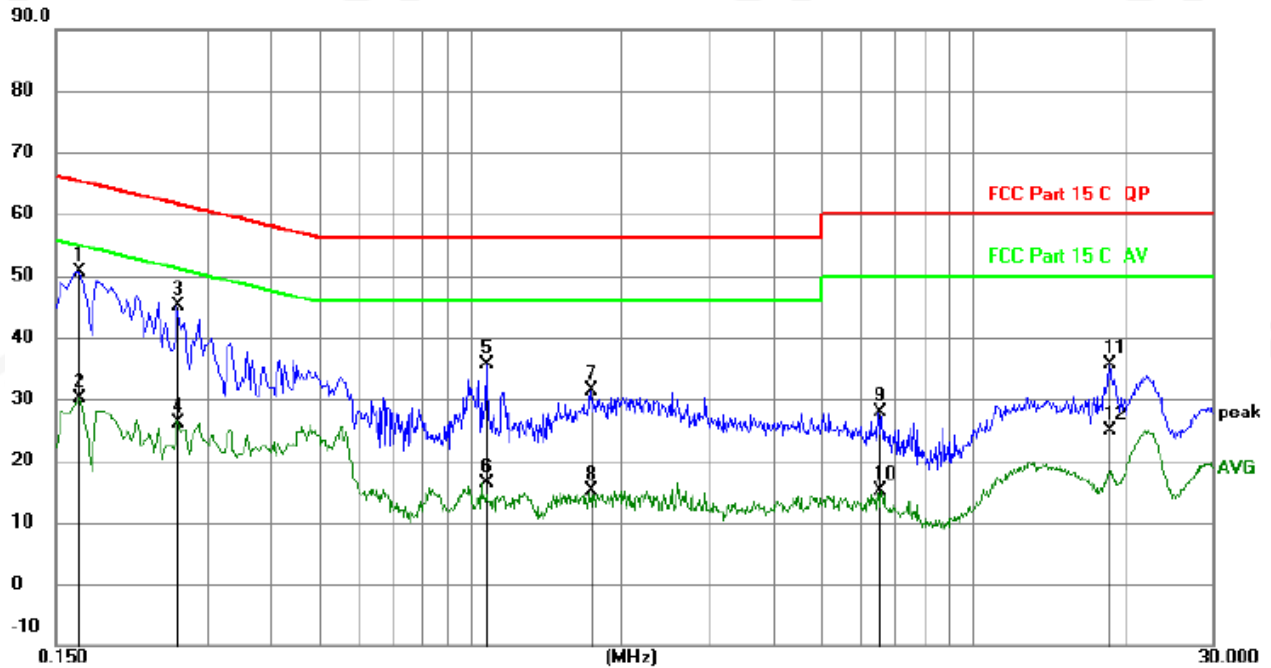

Remark:


1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1667	30.42	20.23	50.65	65.12	-14.47	QP
2		0.1667	9.86	20.23	30.09	55.12	-25.03	AVG
3		0.2625	24.82	20.23	45.05	61.35	-16.30	QP
4		0.2625	5.82	20.23	26.05	51.35	-25.30	AVG
5		1.0769	15.01	20.61	35.62	56.00	-20.38	QP
6		1.0769	-4.29	20.61	16.32	46.00	-29.68	AVG
7		1.7429	10.89	20.57	31.46	56.00	-24.54	QP
8		1.7429	-5.36	20.57	15.21	46.00	-30.79	AVG
9		6.5220	6.77	21.05	27.82	60.00	-32.18	QP
10		6.5220	-5.94	21.05	15.11	50.00	-34.89	AVG
11		18.6990	11.83	23.76	35.59	60.00	-24.41	QP
12		18.6990	1.08	23.76	24.84	50.00	-25.16	AVG



Model: Radxa ROCK5T D4E16

Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 19		

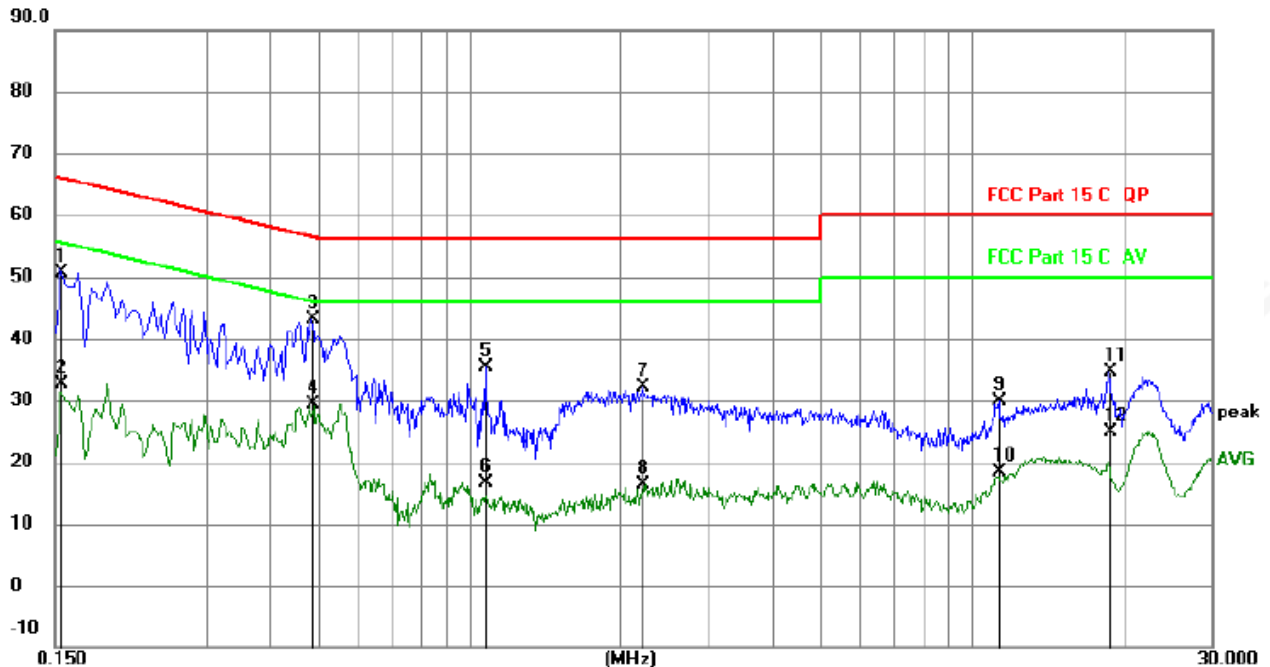


Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) - Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1548	30.52	20.20	50.72	65.74	-15.02	QP
2		0.1548	12.42	20.20	32.62	55.74	-23.12	AVG
3	*	0.4875	23.22	19.94	43.16	56.21	-13.05	QP
4		0.4875	9.38	19.94	29.32	46.21	-16.89	AVG
5		1.0769	14.78	20.61	35.39	56.00	-20.61	QP
6		1.0769	-4.03	20.61	16.58	46.00	-29.42	AVG
7		2.2154	11.46	20.59	32.05	56.00	-23.95	QP
8		2.2154	-4.28	20.59	16.31	46.00	-29.69	AVG
9		11.3235	7.66	22.18	29.84	60.00	-30.16	QP
10		11.3235	-3.72	22.18	18.46	50.00	-31.54	AVG
11		18.8115	10.88	23.79	34.67	60.00	-25.33	QP
12		18.8115	1.01	23.79	24.80	50.00	-25.20	AVG



Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 19		

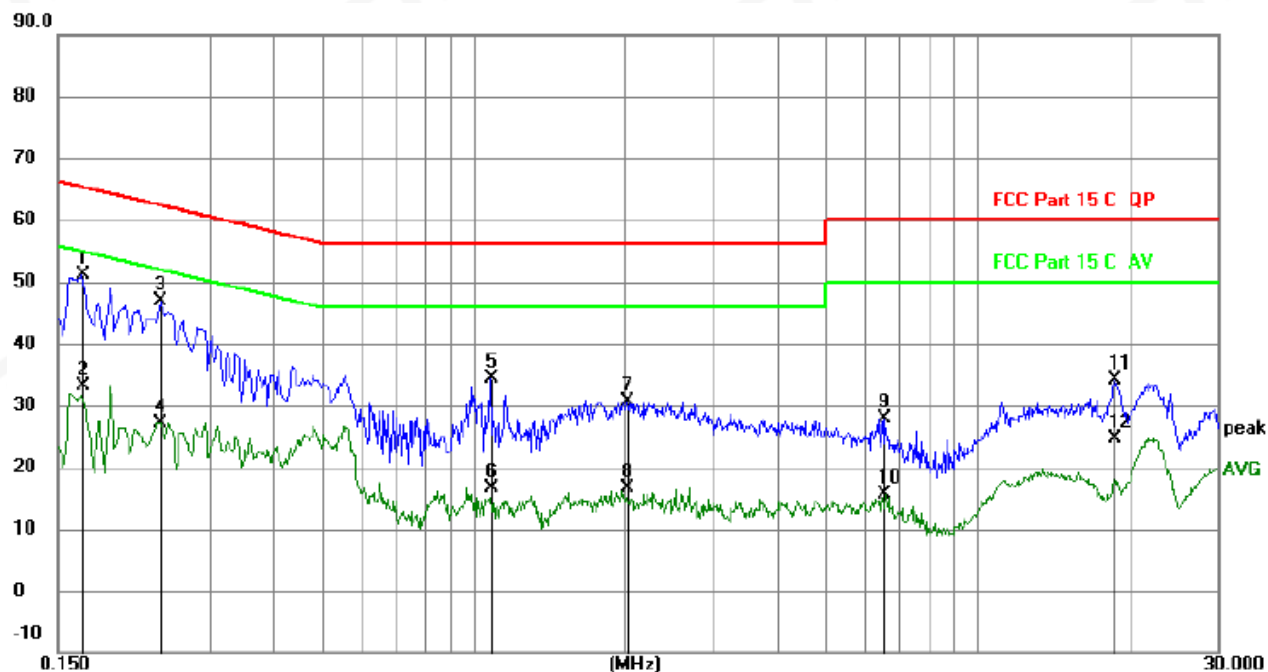

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) - Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1677	30.79	20.24	51.03	65.07	-14.04	QP
2		0.1677	12.84	20.24	33.08	55.07	-21.99	AVG
3		0.2391	26.58	20.26	46.84	62.13	-15.29	QP
4		0.2391	6.89	20.26	27.15	52.13	-24.98	AVG
5		1.0824	13.68	20.61	34.29	56.00	-21.71	QP
6		1.0824	-3.98	20.61	16.63	46.00	-29.37	AVG
7		2.0119	10.19	20.55	30.74	56.00	-25.26	QP
8		2.0119	-4.02	20.55	16.53	46.00	-29.47	AVG
9		6.5227	6.80	21.05	27.85	60.00	-32.15	QP
10		6.5227	-5.52	21.05	15.53	50.00	-34.47	AVG
11		18.6221	10.42	23.74	34.16	60.00	-25.84	QP
12		18.6221	0.86	23.74	24.60	50.00	-25.40	AVG



3.2 RADIATED EMISSION AND MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7&209(a), then the limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

LIMITS OF EMISSIONS OUTSIDE OF THE FREQUENCY BANDS

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note: dBuV/m(at 3M) = EIRP(dBm) + 95.2.

Peak Limit = -27dBm/MHz + 95.2 = 68.2 dBuV/m.

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge



Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

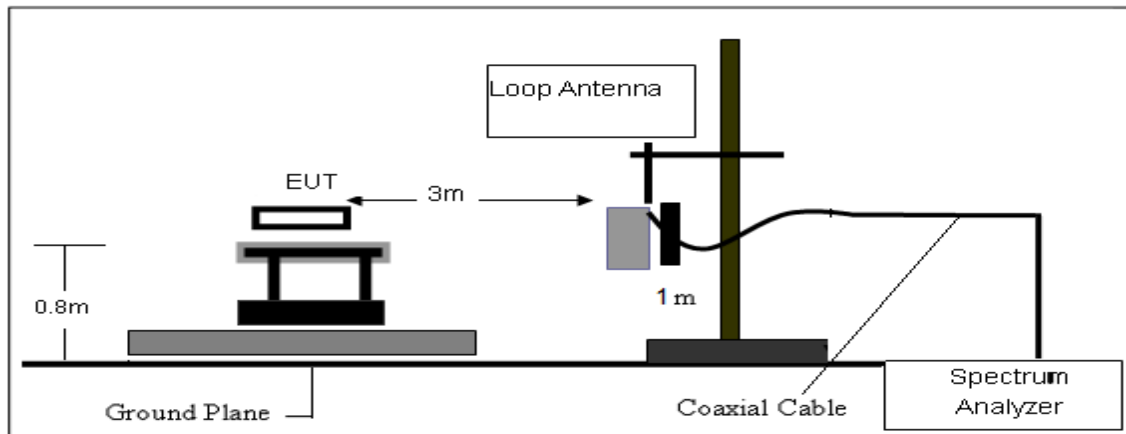

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

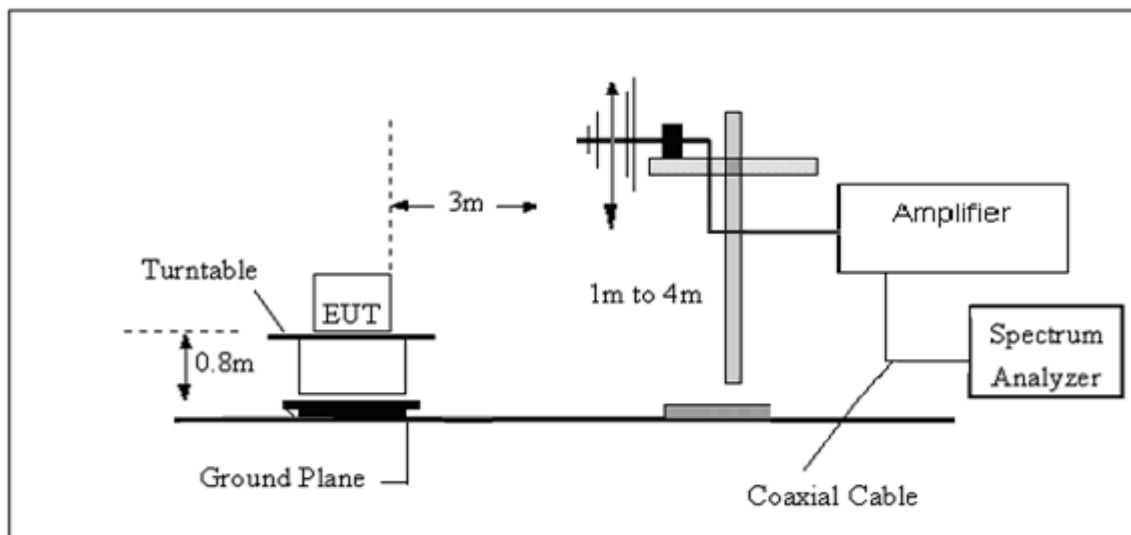

(C) Radiated Emission Test-Up Frequency Above 1GHz

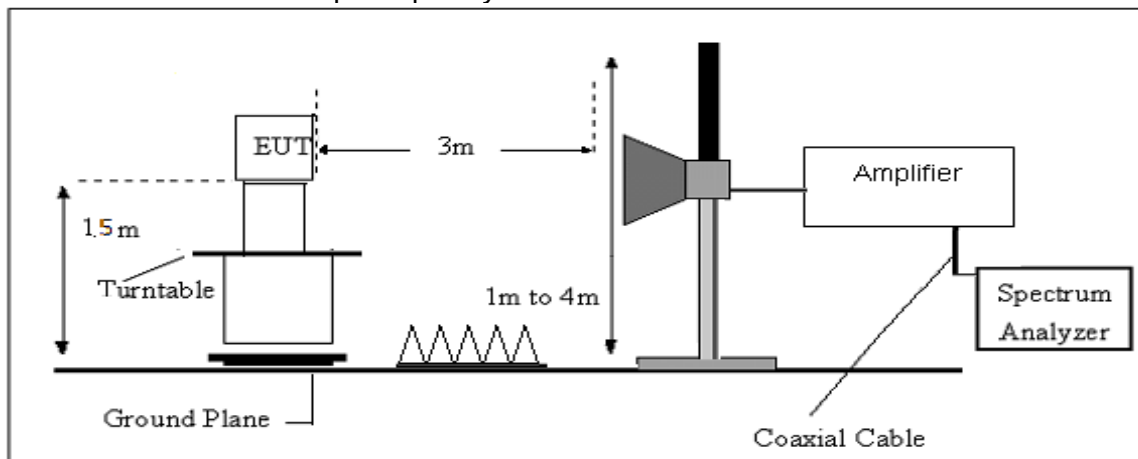

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

3.2.7 TEST RESULTS (Between 9KHz – 30 MHz)

Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Polarization :	--
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance/test distance)(dB);


Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.8 TEST RESULTS (Between 30MHz – 1GHz)

Model: Radxa ROCK 5T D32E256

Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Polarization:	Horizontal
Test Mode:	Mode 1-18(worst Mode 3)		

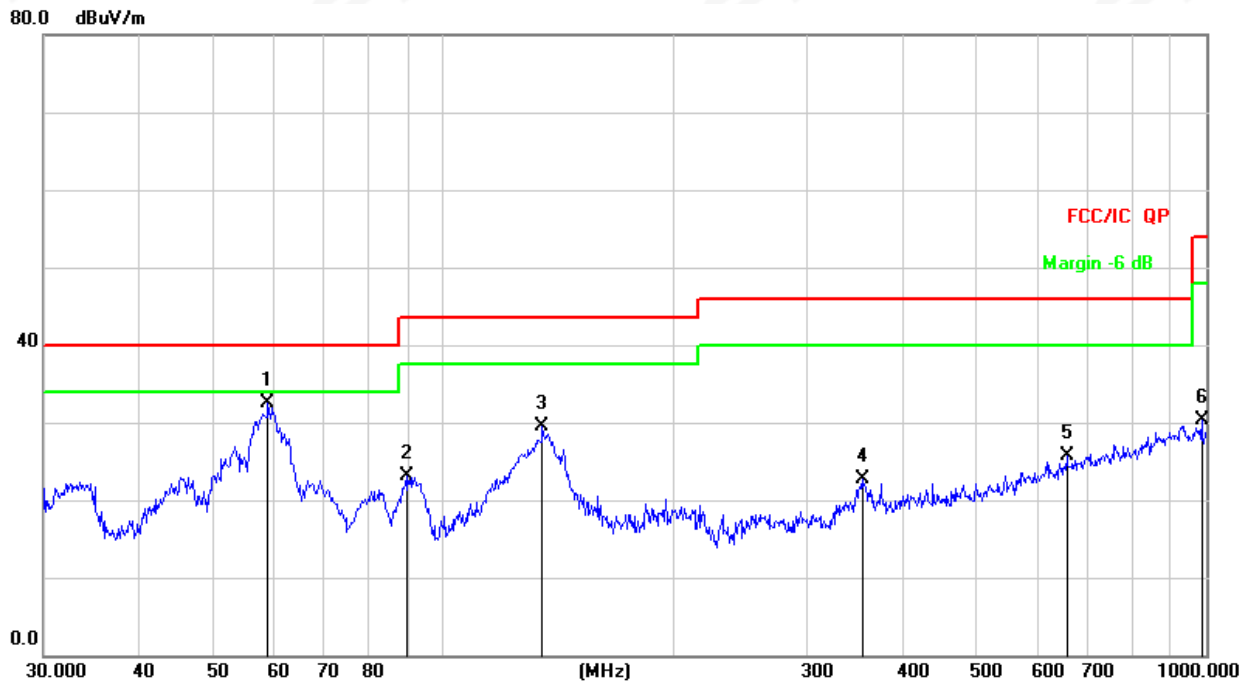


Remark:

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) – Amplifier gain

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	59.0251	40.99	-8.47	32.52	40.00	-7.48	QP
2		89.5899	35.08	-11.96	23.12	43.50	-20.38	QP
3		135.0319	37.46	-7.89	29.57	43.50	-13.93	QP
4		354.1831	29.30	-6.63	22.67	46.00	-23.33	QP
5		656.5300	26.78	-1.13	25.65	46.00	-20.35	QP
6		986.0717	27.44	2.88	30.32	54.00	-23.68	QP



Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Polarization:	Vertical
Test Mode:	Mode 1-18(worst Mode 3)		

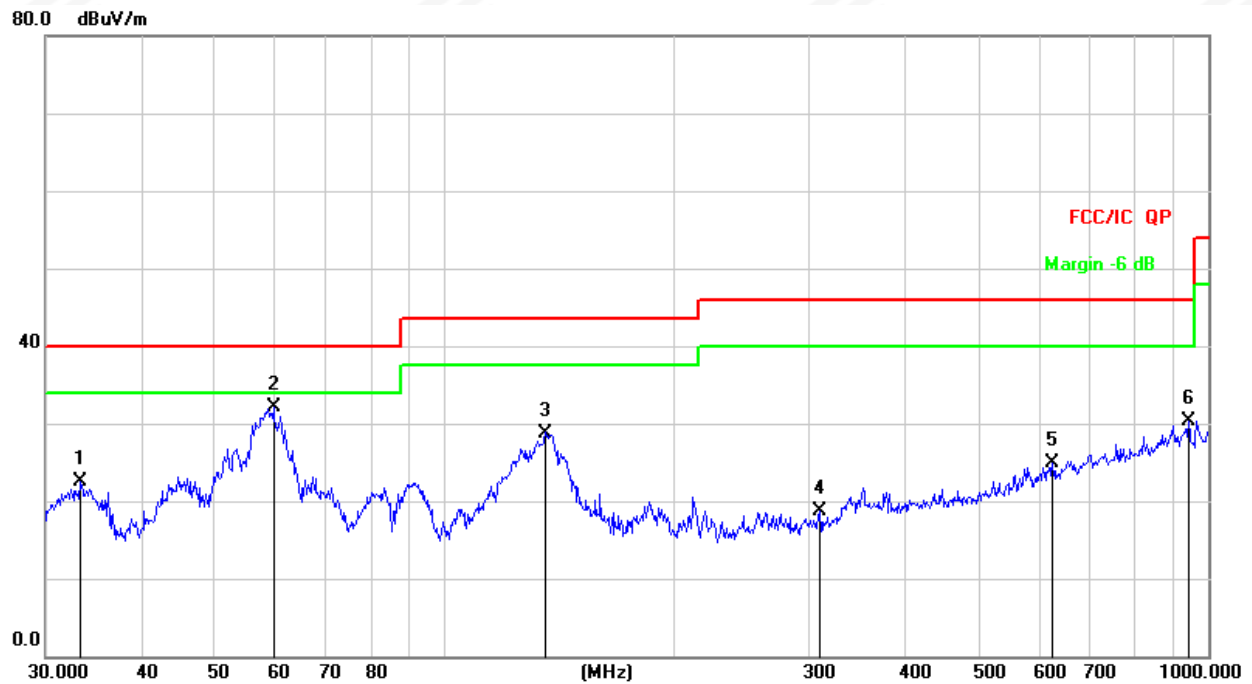


Remark:

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) – Amplifier gain

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		33.3279	30.85	-8.33	22.52	40.00	-17.48	QP
2	*	59.6493	40.57	-8.53	32.04	40.00	-7.96	QP
3		135.5062	36.66	-7.86	28.80	43.50	-14.70	QP
4		309.9977	26.29	-7.60	18.69	46.00	-27.31	QP
5		625.0780	26.61	-1.73	24.88	46.00	-21.12	QP
6		942.1305	27.66	2.70	30.36	46.00	-15.64	QP

Model: Radxa ROCK5T D16E64

Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	Mode 1-18(worst Mode 3)		

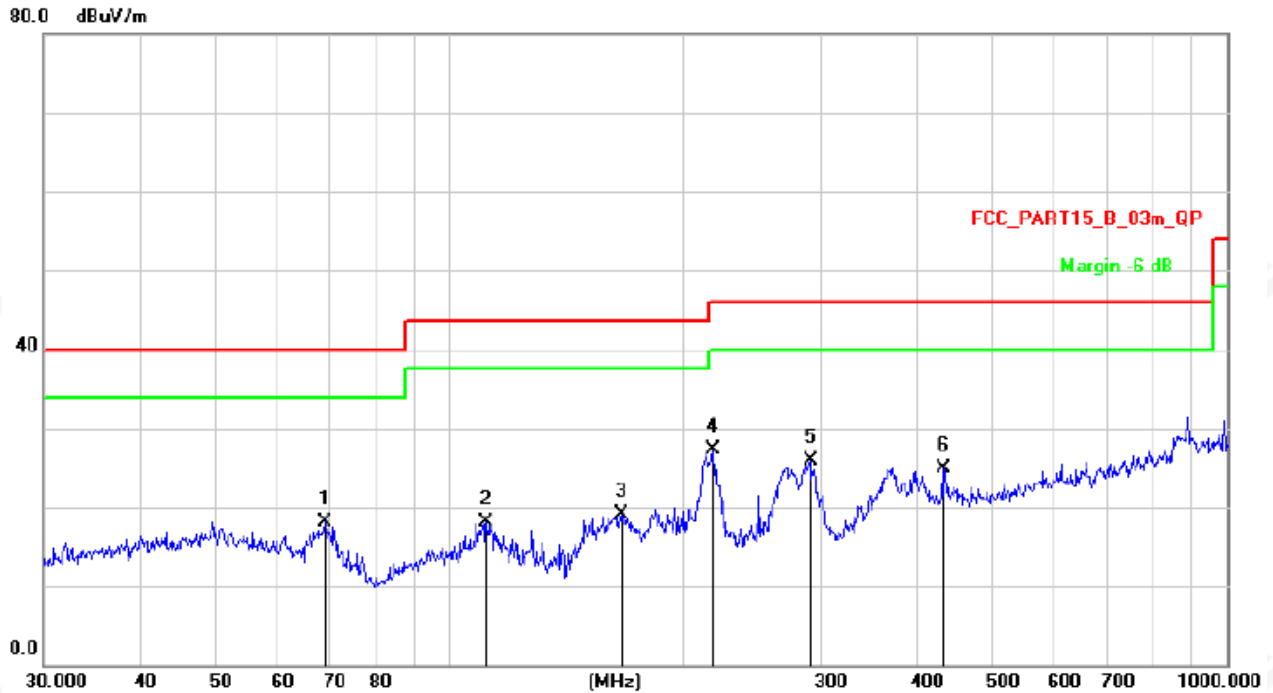

Remark:


1. Margin = Result (Result = Reading + Factor) - Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
3. All modes have been tested, only show the worst case.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		69.1141	29.13	-11.06	18.07	40.00	-21.93	QP
2		111.3468	26.01	-7.91	18.10	43.50	-25.40	QP
3		166.0680	31.18	-12.02	19.16	43.50	-24.34	QP
4	*	218.3085	36.67	-9.43	27.24	46.00	-18.76	QP
5		291.0360	33.77	-7.85	25.92	46.00	-20.08	QP
6		431.0316	29.27	-4.38	24.89	46.00	-21.11	QP



Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	Mode 1-18(worst Mode 3)		

90.0 dBuV/m

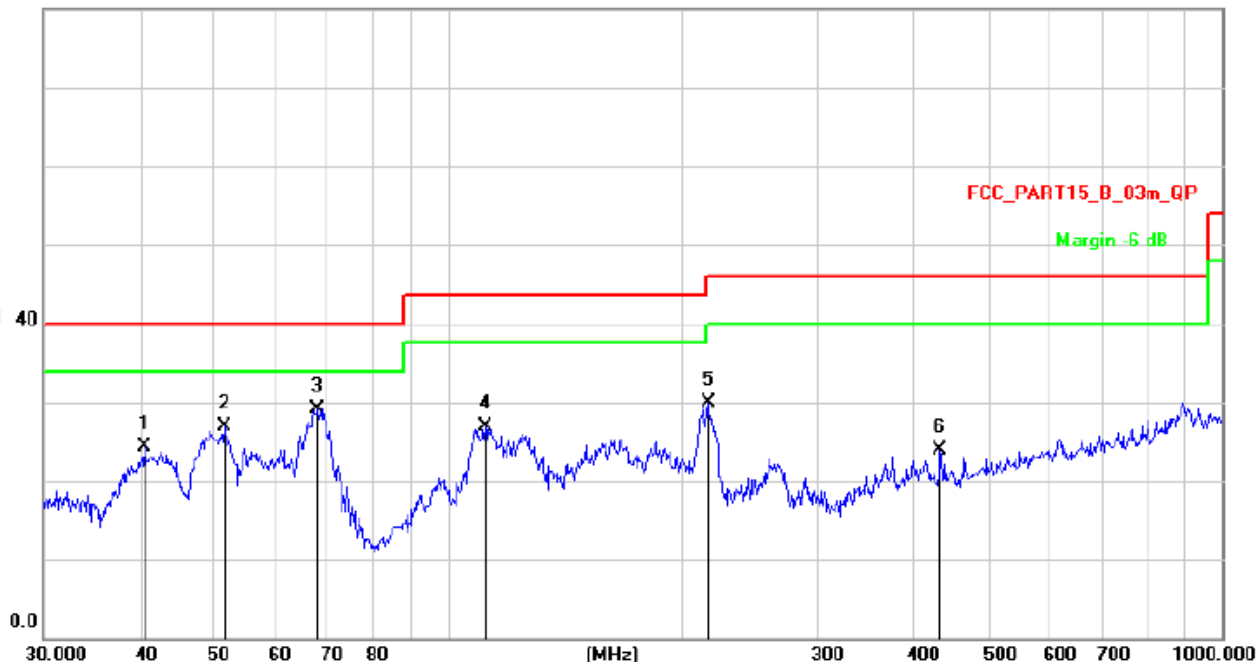


Remark:

1. Margin = Result (Result = Reading + Factor) - Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
3. All modes have been tested, only show the worst case.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		40.5591	32.67	-8.43	24.24	40.00	-15.76	QP
2		51.4807	34.89	-8.02	26.87	40.00	-13.13	QP
3	*	67.9129	39.86	-10.78	29.08	40.00	-10.92	QP
4		111.7380	34.95	-8.04	26.91	43.50	-16.59	QP
5		216.7828	39.36	-9.43	29.93	46.00	-16.07	QP
6		432.5457	28.36	-4.36	24.00	46.00	-22.00	QP

Model: Radxa ROCK5T D4E16

Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	Mode 1-18(worst Mode 3)		

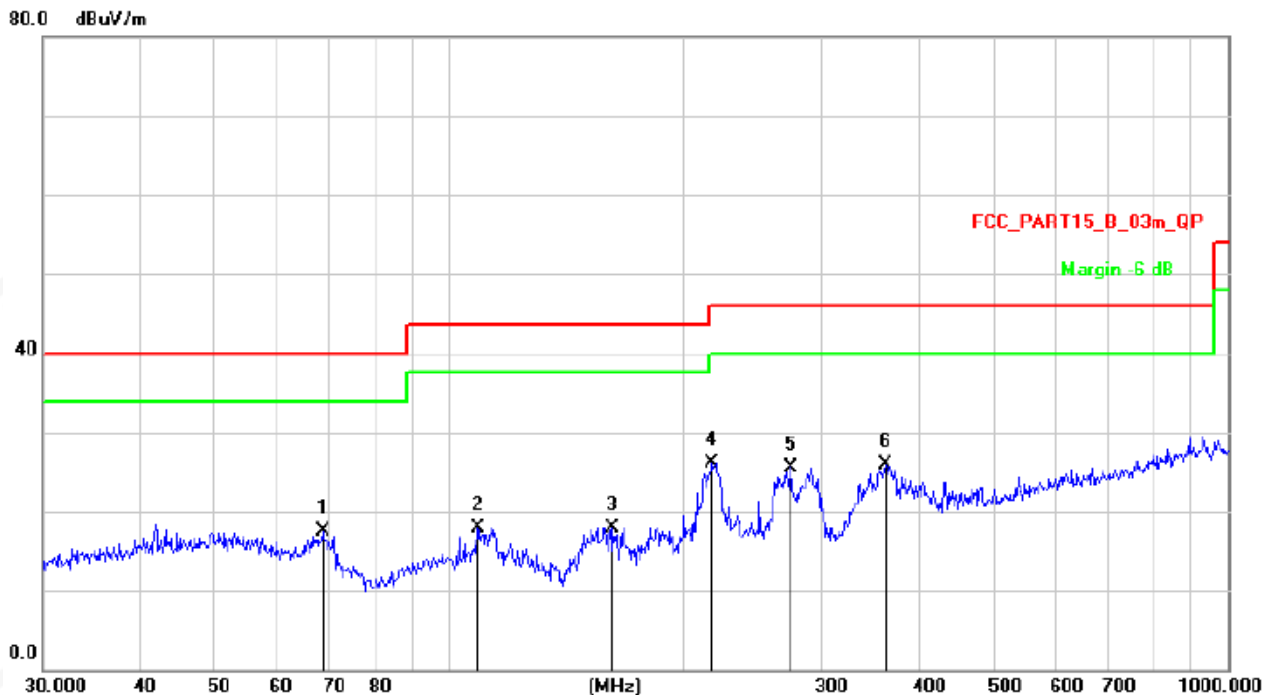


Remark:

4. Margin = Result (Result = Reading + Factor) - Limit
5. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
6. All modes have been tested, only show the worst case.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		68.6310	28.49	-10.95	17.54	40.00	-22.46	QP
2		108.6470	25.75	-7.76	17.99	43.50	-25.51	QP
3		162.0414	30.10	-12.10	18.00	43.50	-25.50	QP
4	*	217.5442	35.54	-9.43	26.11	46.00	-19.89	QP
5		274.1938	33.69	-8.09	25.60	46.00	-20.40	QP
6		362.9844	31.68	-5.83	25.85	46.00	-20.15	QP



Temperature:	26 °C	Relative Humidity:	54 %
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	Mode 1-18(worst Mode 3)		

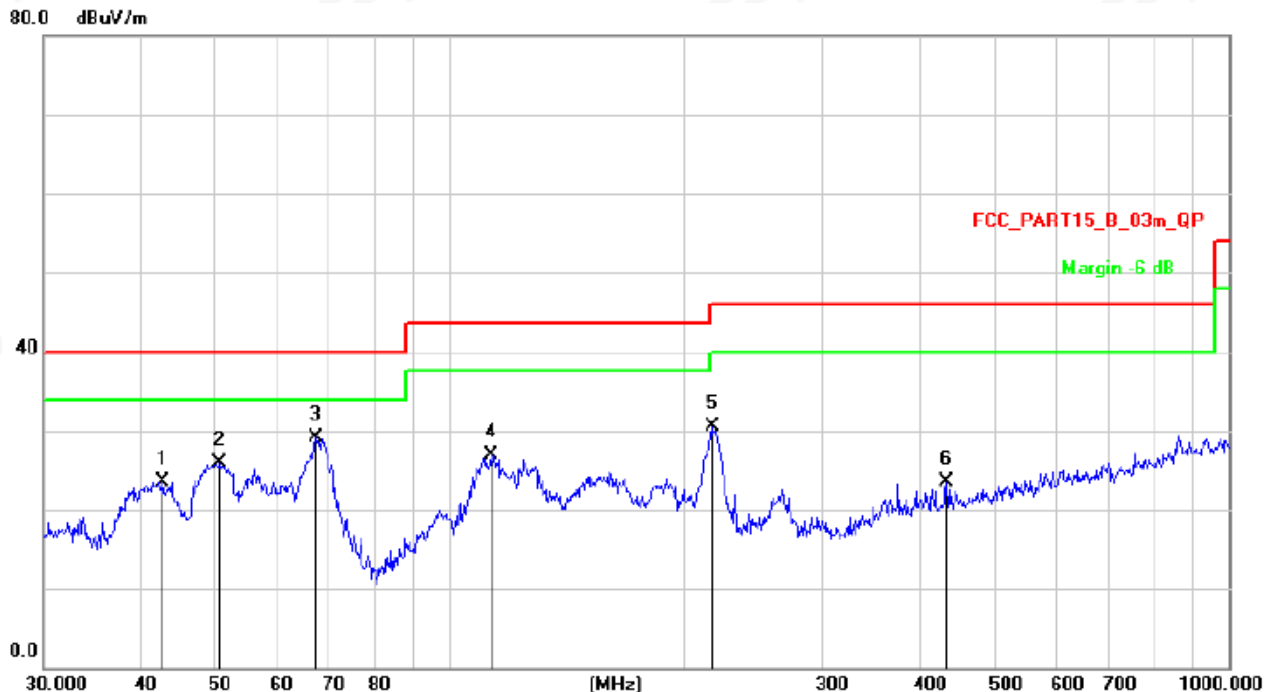

Remark:

- Margin = Result (Result = Reading + Factor) - Limit
- Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
- All modes have been tested, only show the worst case.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		42.7496	31.81	-8.30	23.51	40.00	-16.49	QP
2		50.5860	33.75	-7.92	25.83	40.00	-14.17	QP
3	*	67.2022	39.65	-10.62	29.03	40.00	-10.97	QP
4		112.9196	35.26	-8.44	26.82	43.50	-16.68	QP
5		216.7828	39.97	-9.43	30.54	46.00	-15.46	QP
6		434.0651	27.79	-4.35	23.44	46.00	-22.56	QP



Antenna B

U-NII 1(5.15-5.25) GHz										
Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBμV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11a/ 5180 MHz)										
3254.24	44.88	44.70	6.70	28.20	-9.80	35.08	68.20	-33.12	Pk	Vertical
3254.24	42.23	44.70	6.70	28.20	-9.80	32.43	54.00	-21.57	AV	Vertical
3250.24	45.10	44.70	6.70	28.20	-9.80	35.30	68.20	-32.90	Pk	Horizontal
3250.24	41.21	44.70	6.70	28.20	-9.80	31.41	54.00	-22.59	AV	Horizontal
3984.03	39.59	44.20	7.90	29.70	-6.60	32.99	74.00	-41.01	Pk	Vertical
3984.03	36.40	44.20	7.90	29.70	-6.60	29.80	54.00	-24.20	AV	Vertical
3992.37	39.67	44.20	7.90	29.70	-6.60	33.07	74.00	-40.93	Pk	Horizontal
3992.37	36.79	44.20	7.90	29.70	-6.60	30.19	54.00	-23.81	AV	Horizontal
7222.15	37.71	43.50	11.40	35.50	3.40	41.11	68.20	-27.09	Pk	Vertical
7222.15	34.45	43.50	11.40	35.50	3.40	37.85	54.00	-16.15	AV	Vertical
7222.56	37.32	43.50	11.40	35.50	3.40	40.72	68.20	-27.48	Pk	Horizontal
7222.56	34.26	43.50	11.40	35.50	3.40	37.66	54.00	-16.34	AV	Horizontal
10360.12	40.08	44.50	13.80	38.80	8.10	48.18	68.20	-20.02	Pk	Vertical
10360.12	37.14	44.50	13.80	38.80	8.10	45.24	54.00	-8.76	AV	Vertical
10359.97	39.74	44.50	13.80	38.80	8.10	47.84	68.20	-20.36	Pk	Horizontal
10359.97	36.60	44.50	13.80	38.80	8.10	44.70	54.00	-9.30	AV	Horizontal
11035.89	34.03	43.60	14.30	39.50	10.20	44.23	74.00	-29.77	Pk	Vertical
11035.89	29.83	43.60	14.30	39.50	10.20	40.03	54.00	-13.97	AV	Vertical
11020.99	33.19	43.60	14.30	39.50	10.20	43.39	74.00	-30.61	Pk	Horizontal
11020.99	30.31	43.60	14.30	39.50	10.20	40.51	54.00	-13.49	AV	Horizontal
13285.34	32.65	42.60	15.90	38.90	12.20	44.85	74.00	-29.15	Pk	Vertical
13285.34	30.00	42.60	15.90	38.90	12.20	42.20	54.00	-11.80	AV	Vertical
13288.42	32.18	42.60	15.90	38.90	12.20	44.38	74.00	-29.62	Pk	Horizontal
13288.42	29.31	42.60	15.90	38.90	12.20	41.51	54.00	-12.49	AV	Horizontal
Mid Channel (802.11a/ 5200 MHz)										
3255.67	44.39	44.70	6.70	28.20	-9.80	34.59	68.20	-33.61	Pk	Vertical
3255.67	41.44	44.70	6.70	28.20	-9.80	31.64	54.00	-22.36	AV	Vertical
3253.12	44.88	44.70	6.70	28.20	-9.80	35.08	68.20	-33.12	Pk	Horizontal
3253.12	40.94	44.70	6.70	28.20	-9.80	31.14	54.00	-22.86	AV	Horizontal
3990.25	40.05	44.20	7.90	29.70	-6.60	33.45	74.00	-40.55	Pk	Vertical
3990.25	36.72	44.20	7.90	29.70	-6.60	30.12	54.00	-23.88	AV	Vertical
3988.75	39.21	44.20	7.90	29.70	-6.60	32.61	74.00	-41.39	Pk	Horizontal
3988.75	35.92	44.20	7.90	29.70	-6.60	29.32	54.00	-24.68	AV	Horizontal
7231.44	36.64	43.50	11.40	35.50	3.40	40.04	68.20	-28.16	Pk	Vertical
7231.44	34.33	43.50	11.40	35.50	3.40	37.73	54.00	-16.27	AV	Vertical
7222.22	37.17	43.50	11.40	35.50	3.40	40.57	68.20	-27.63	Pk	Horizontal
7222.22	34.91	43.50	11.40	35.50	3.40	38.31	54.00	-15.69	AV	Horizontal
10400.02	38.88	44.50	13.80	38.80	8.10	46.98	68.20	-21.22	Pk	Vertical
10400.02	36.71	44.50	13.80	38.80	8.10	44.81	54.00	-9.19	AV	Vertical
10400.43	39.95	44.50	13.80	38.80	8.10	48.05	68.20	-20.15	Pk	Horizontal
10400.43	35.72	44.50	13.80	38.80	8.10	43.82	54.00	-10.18	AV	Horizontal
11025.46	34.08	43.60	14.30	39.50	10.20	44.28	74.00	-29.72	Pk	Vertical
11025.46	30.68	43.60	14.30	39.50	10.20	40.88	54.00	-13.12	AV	Vertical
11024.17	33.97	43.60	14.30	39.50	10.20	44.17	74.00	-29.83	Pk	Horizontal
11024.17	30.96	43.60	14.30	39.50	10.20	41.16	54.00	-12.84	AV	Horizontal
13293.22	31.90	42.60	15.90	38.90	12.20	44.10	74.00	-29.90	Pk	Vertical
13293.22	29.85	42.60	15.90	38.90	12.20	42.05	54.00	-11.95	AV	Vertical
13292.69	31.69	42.60	15.90	38.90	12.20	43.89	74.00	-30.11	Pk	Horizontal
13292.69	29.63	42.60	15.90	38.90	12.20	41.83	54.00	-12.17	AV	Horizontal



High Channel (802.11a/ 5240 MHz)										
3259.49	43.93	44.70	6.70	28.20	-9.80	34.13	68.20	-34.07	Pk	Vertical
3259.49	42.14	44.70	6.70	28.20	-9.80	32.34	54.00	-21.66	AV	Vertical
3249.64	43.80	44.70	6.70	28.20	-9.80	34.00	68.20	-34.20	Pk	Horizontal
3249.64	41.70	44.70	6.70	28.20	-9.80	31.90	54.00	-22.10	AV	Horizontal
3986.80	39.62	44.20	7.90	29.70	-6.60	33.02	74.00	-40.98	Pk	Vertical
3986.80	35.76	44.20	7.90	29.70	-6.60	29.16	54.00	-24.84	AV	Vertical
3998.07	39.66	44.20	7.90	29.70	-6.60	33.06	74.00	-40.94	Pk	Horizontal
3998.07	36.80	44.20	7.90	29.70	-6.60	30.20	54.00	-23.80	AV	Horizontal
7233.63	36.91	43.50	11.40	35.50	3.40	40.31	68.20	-27.89	Pk	Vertical
7233.63	34.51	43.50	11.40	35.50	3.40	37.91	54.00	-16.09	AV	Vertical
7226.78	37.63	43.50	11.40	35.50	3.40	41.03	68.20	-27.17	Pk	Horizontal
7226.78	33.67	43.50	11.40	35.50	3.40	37.07	54.00	-16.93	AV	Horizontal
10480.31	39.77	44.50	13.80	38.80	8.10	47.87	68.20	-20.33	Pk	Vertical
10480.31	35.82	44.50	13.80	38.80	8.10	43.92	54.00	-10.08	AV	Vertical
10480.08	39.47	44.50	13.80	38.80	8.10	47.57	68.20	-20.63	Pk	Horizontal
10480.08	36.51	44.50	13.80	38.80	8.10	44.61	54.00	-9.39	AV	Horizontal
11027.90	32.82	43.60	14.30	39.50	10.20	43.02	74.00	-30.98	Pk	Vertical
11027.90	30.08	43.60	14.30	39.50	10.20	40.28	54.00	-13.72	AV	Vertical
11022.63	32.98	43.60	14.30	39.50	10.20	43.18	74.00	-30.82	Pk	Horizontal
11022.63	30.44	43.60	14.30	39.50	10.20	40.64	54.00	-13.36	AV	Horizontal
13282.65	33.01	42.60	15.90	38.90	12.20	45.21	74.00	-28.79	Pk	Vertical
13282.65	28.56	42.60	15.90	38.90	12.20	40.76	54.00	-13.24	AV	Vertical
13287.91	32.86	42.60	15.90	38.90	12.20	45.06	74.00	-28.94	Pk	Horizontal
13287.91	28.63	42.60	15.90	38.90	12.20	40.83	54.00	-13.17	AV	Horizontal



Antenna B

U-NII 3(5.725-5.85) GHz										
Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBμV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11a/ 5745 MHz)										
3260.06	44.73	44.70	6.70	28.20	-9.80	34.93	74.00	-39.07	Pk	Vertical
3260.06	41.84	44.70	6.70	28.20	-9.80	32.04	54.00	-21.96	AV	Vertical
3264.67	44.00	44.70	6.70	28.20	-9.80	34.20	74.00	-39.80	Pk	Horizontal
3264.67	41.71	44.70	6.70	28.20	-9.80	31.91	54.00	-22.09	AV	Horizontal
3986.52	39.99	44.20	7.90	29.70	-6.60	33.39	74.00	-40.61	Pk	Vertical
3986.52	36.68	44.20	7.90	29.70	-6.60	30.08	54.00	-23.92	AV	Vertical
3988.83	39.58	44.20	7.90	29.70	-6.60	32.98	74.00	-41.02	Pk	Horizontal
3988.83	36.71	44.20	7.90	29.70	-6.60	30.11	54.00	-23.89	AV	Horizontal
7229.68	36.61	43.50	11.40	35.50	3.40	40.01	68.20	-28.19	Pk	Vertical
7229.68	34.37	43.50	11.40	35.50	3.40	37.77	54.00	-16.23	AV	Vertical
7234.63	36.95	43.50	11.40	35.50	3.40	40.35	68.20	-27.85	Pk	Horizontal
7234.63	34.32	43.50	11.40	35.50	3.40	37.72	54.00	-16.28	AV	Horizontal
10517.49	39.11	44.50	13.90	38.80	8.20	47.31	68.20	-20.89	Pk	Vertical
10517.49	37.12	44.50	13.90	38.80	8.20	45.32	54.00	-8.68	AV	Vertical
10500.47	39.72	44.50	13.90	38.80	8.20	47.92	68.20	-20.28	Pk	Horizontal
10500.47	36.22	44.50	13.90	38.80	8.20	44.42	54.00	-9.58	AV	Horizontal
11490.38	32.90	43.60	14.30	39.50	10.20	43.10	74.00	-30.90	Pk	Vertical
11490.38	31.06	43.60	14.30	39.50	10.20	41.26	54.00	-12.74	AV	Vertical
11490.11	32.80	43.60	14.30	39.50	10.20	43.00	74.00	-31.00	Pk	Horizontal
11490.11	31.11	43.60	14.30	39.50	10.20	41.31	54.00	-12.69	AV	Horizontal
13297.19	32.62	42.60	15.90	38.90	12.20	44.82	74.00	-29.18	Pk	Vertical
13297.19	29.08	42.60	15.90	38.90	12.20	41.28	54.00	-12.72	AV	Vertical
13292.20	32.98	42.60	15.90	38.90	12.20	45.18	74.00	-28.82	Pk	Horizontal
13292.20	28.88	42.60	15.90	38.90	12.20	41.08	54.00	-12.92	AV	Horizontal
Mid Channel (802.11a/ 5785 MHz)										
3264.20	44.58	44.70	6.70	28.20	-9.80	34.78	74.00	-39.22	Pk	Vertical
3264.20	41.04	44.70	6.70	28.20	-9.80	31.24	54.00	-22.76	AV	Vertical
3254.43	44.17	44.70	6.70	28.20	-9.80	34.37	68.20	-33.83	Pk	Horizontal
3254.43	41.59	44.70	6.70	28.20	-9.80	31.79	54.00	-22.21	AV	Horizontal
3995.94	39.16	44.20	7.90	29.70	-6.60	32.56	74.00	-41.44	Pk	Vertical
3995.94	36.60	44.20	7.90	29.70	-6.60	30.00	54.00	-24.00	AV	Vertical
3988.35	39.39	44.20	7.90	29.70	-6.60	32.79	74.00	-41.21	Pk	Horizontal
3988.35	36.78	44.20	7.90	29.70	-6.60	30.18	54.00	-23.82	AV	Horizontal
7217.54	37.45	43.50	11.40	35.50	3.40	40.85	68.20	-27.35	Pk	Vertical
7217.54	33.81	43.50	11.40	35.50	3.40	37.21	54.00	-16.79	AV	Vertical
7233.55	36.46	43.50	11.40	35.50	3.40	39.86	68.20	-28.34	Pk	Horizontal
7233.55	34.12	43.50	11.40	35.50	3.40	37.52	54.00	-16.48	AV	Horizontal
10585.49	39.20	44.50	13.80	38.80	8.10	47.30	68.20	-20.90	Pk	Vertical
10585.49	37.03	44.50	13.80	38.80	8.10	45.13	54.00	-8.87	AV	Vertical
10598.69	39.93	44.50	13.80	38.80	8.10	48.03	68.20	-20.17	Pk	Horizontal
10598.69	35.67	44.50	13.80	38.80	8.10	43.77	54.00	-10.23	AV	Horizontal
11570.03	34.08	43.60	14.30	39.50	10.20	44.28	74.00	-29.72	Pk	Vertical
11570.03	30.69	43.60	14.30	39.50	10.20	40.89	54.00	-13.11	AV	Vertical
11570.18	34.14	43.60	14.30	39.50	10.20	44.34	74.00	-29.66	Pk	Horizontal
11570.18	30.44	43.60	14.30	39.50	10.20	40.64	54.00	-13.36	AV	Horizontal
13299.67	32.67	42.60	15.90	38.90	12.20	44.87	74.00	-29.13	Pk	Vertical
13299.67	28.61	42.60	15.90	38.90	12.20	40.81	54.00	-13.19	AV	Vertical
13289.01	31.66	42.60	15.90	38.90	12.20	43.86	74.00	-30.14	Pk	Horizontal
13289.01	29.56	42.60	15.90	38.90	12.20	41.76	54.00	-12.24	AV	Horizontal



High Channel (802.11a/ 5825 MHz)										
3263.78	45.15	44.70	6.70	28.20	-9.80	35.35	74.00	-38.65	Pk	Vertical
3263.78	41.64	44.70	6.70	28.20	-9.80	31.84	54.00	-22.16	AV	Vertical
3253.41	44.43	44.70	6.70	28.20	-9.80	34.63	68.20	-33.57	Pk	Horizontal
3253.41	41.33	44.70	6.70	28.20	-9.80	31.53	54.00	-22.47	AV	Horizontal
3982.27	40.08	44.20	7.90	29.70	-6.60	33.48	74.00	-40.52	Pk	Vertical
3982.27	36.87	44.20	7.90	29.70	-6.60	30.27	54.00	-23.73	AV	Vertical
3986.73	38.98	44.20	7.90	29.70	-6.60	32.38	74.00	-41.62	Pk	Horizontal
3986.73	36.15	44.20	7.90	29.70	-6.60	29.55	54.00	-24.45	AV	Horizontal
7223.80	37.55	43.50	11.40	35.50	3.40	40.95	68.20	-27.25	Pk	Vertical
7223.80	33.56	43.50	11.40	35.50	3.40	36.96	54.00	-17.04	AV	Vertical
7235.87	37.59	43.50	11.40	35.50	3.40	40.99	68.20	-27.21	Pk	Horizontal
7235.87	34.05	43.50	11.40	35.50	3.40	37.45	54.00	-16.55	AV	Horizontal
10625.34	39.12	44.50	13.80	38.80	8.10	47.22	74.00	-26.78	Pk	Vertical
10625.34	36.05	44.50	13.80	38.80	8.10	44.15	54.00	-9.85	AV	Vertical
10640.01	39.46	44.50	13.80	38.80	8.10	47.56	74.00	-26.44	Pk	Horizontal
10640.01	36.31	44.50	13.80	38.80	8.10	44.41	54.00	-9.59	AV	Horizontal
11650.30	33.82	43.60	14.30	39.50	10.20	44.02	74.00	-29.98	Pk	Vertical
11650.30	29.80	43.60	14.30	39.50	10.20	40.00	54.00	-14.00	AV	Vertical
11650.41	33.82	43.60	14.30	39.50	10.20	44.02	74.00	-29.98	Pk	Horizontal
11650.41	30.49	43.60	14.30	39.50	10.20	40.69	54.00	-13.31	AV	Horizontal
13297.70	32.88	42.70	18.00	37.10	12.40	45.28	74.00	-28.72	Pk	Vertical
13297.70	29.99	42.70	18.00	37.10	12.40	42.39	54.00	-11.61	AV	Vertical
13295.19	32.82	42.70	18.00	37.10	12.40	45.22	74.00	-28.78	Pk	Horizontal
13295.19	29.17	42.70	18.00	37.10	12.40	41.57	54.00	-12.43	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. All modes have been measurement, only worst mode was reported.
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.




3.2.9 TEST RESULTS(Band edge Requirements)

U-NII-1 (5.150-5.2500) GHz

AC20(MIMO)-Low

Horizontal

120.0 dBuV/m

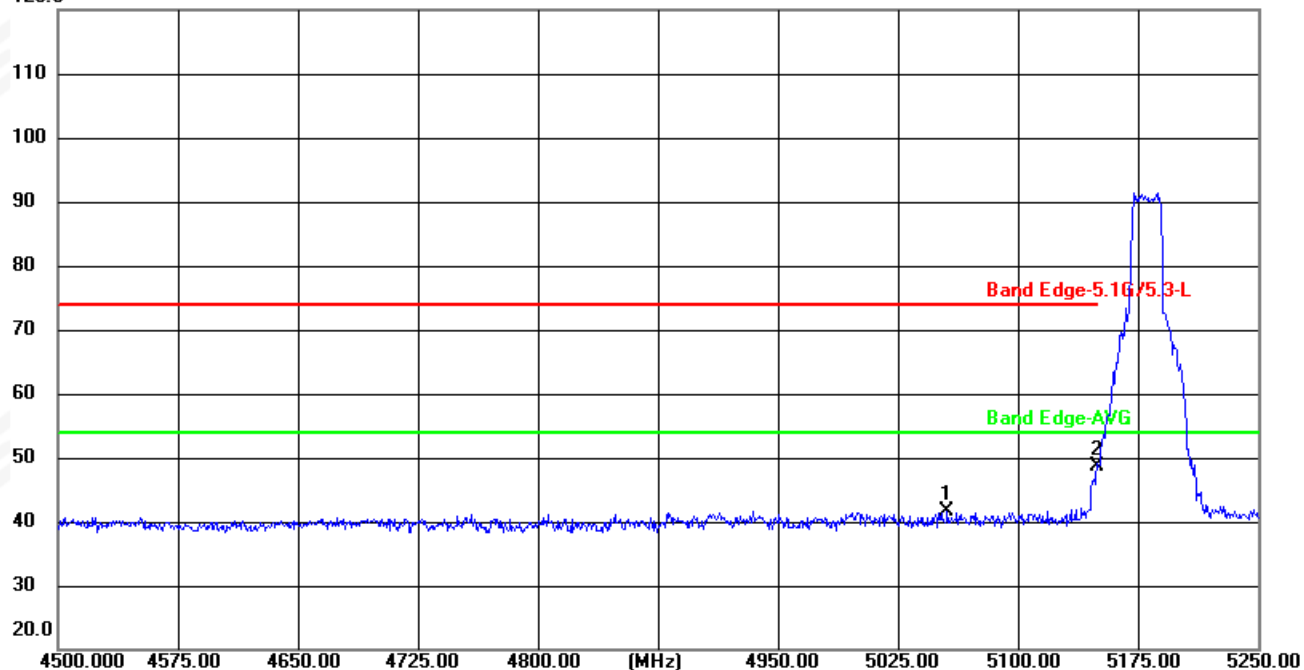


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5055.750	44.72	-3.00	41.72	74.00	-32.28	peak
2 *	5150.000	51.33	-2.79	48.54	74.00	-25.46	peak



AC20(MIMO)-Low

Vertical

120.0 dBuV/m

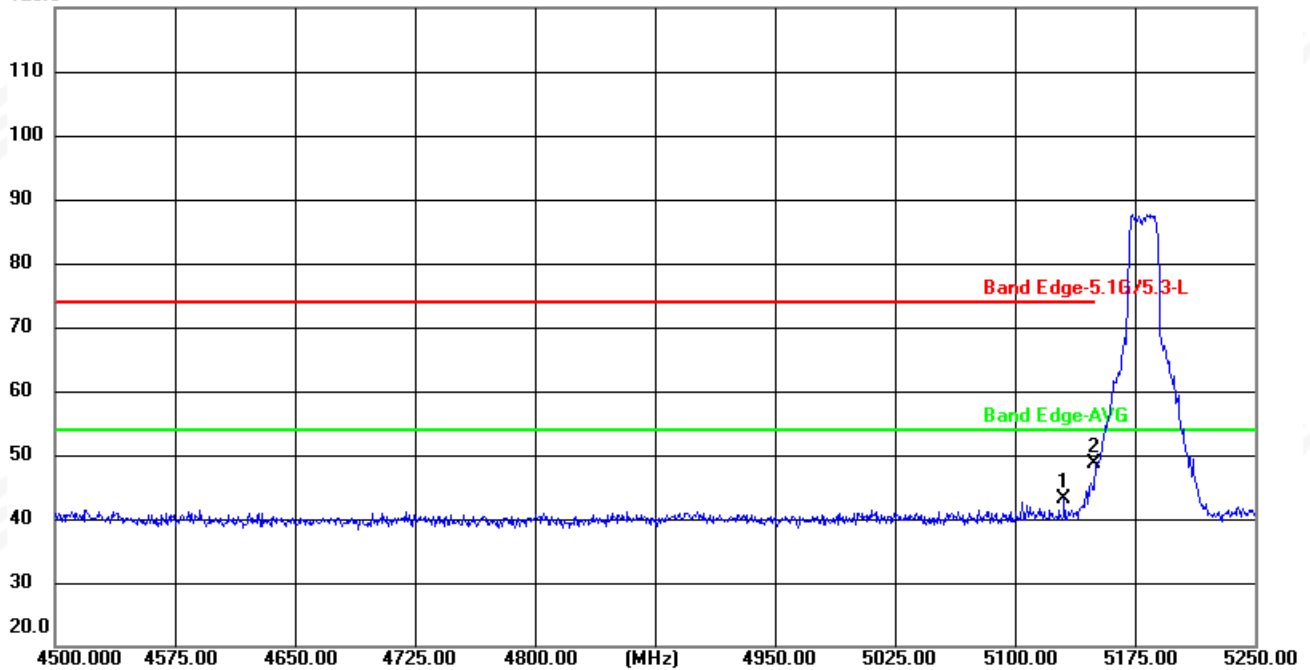


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5130.750	45.97	-2.83	43.14	74.00	-30.86	peak
2 *	5150.000	51.41	-2.79	48.62	74.00	-25.38	peak



AC20(MIMO)-High

Horizontal

120.0 dBuV/m

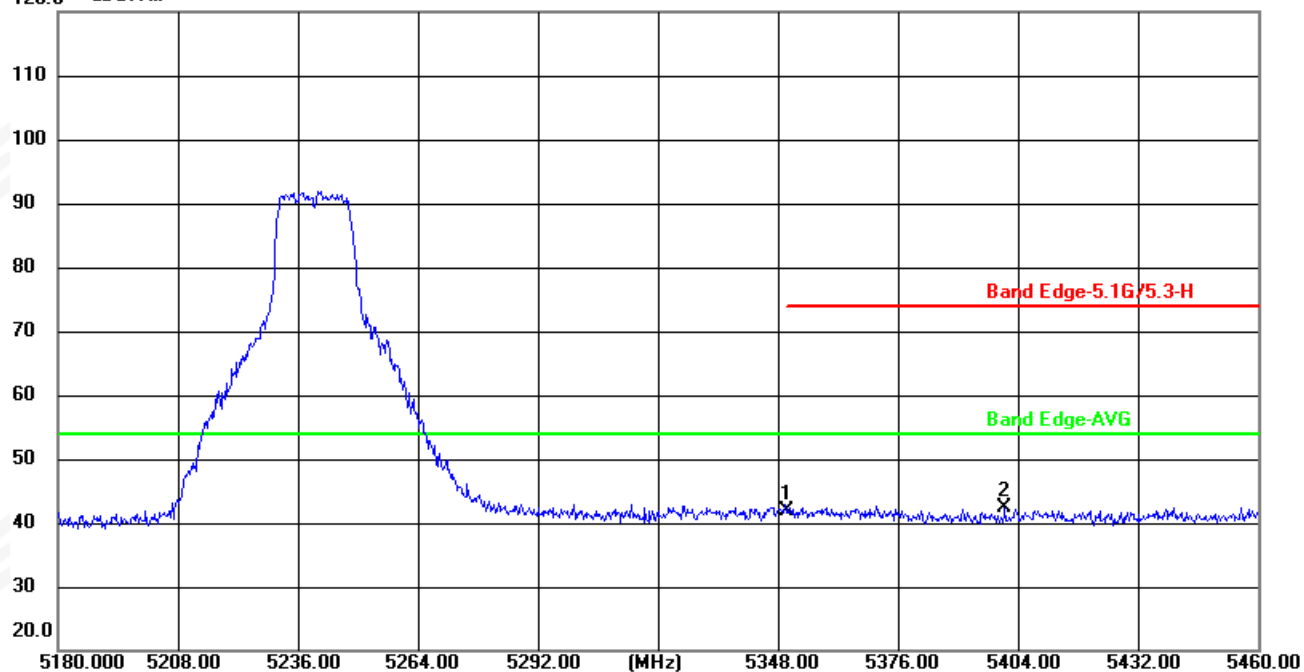


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	44.32	-2.34	41.98	74.00	-32.02	peak
2 *	5400.920	44.57	-2.18	42.39	74.00	-31.61	peak



AC20(MIMO)-High

Vertical

120.0 dBuV/m

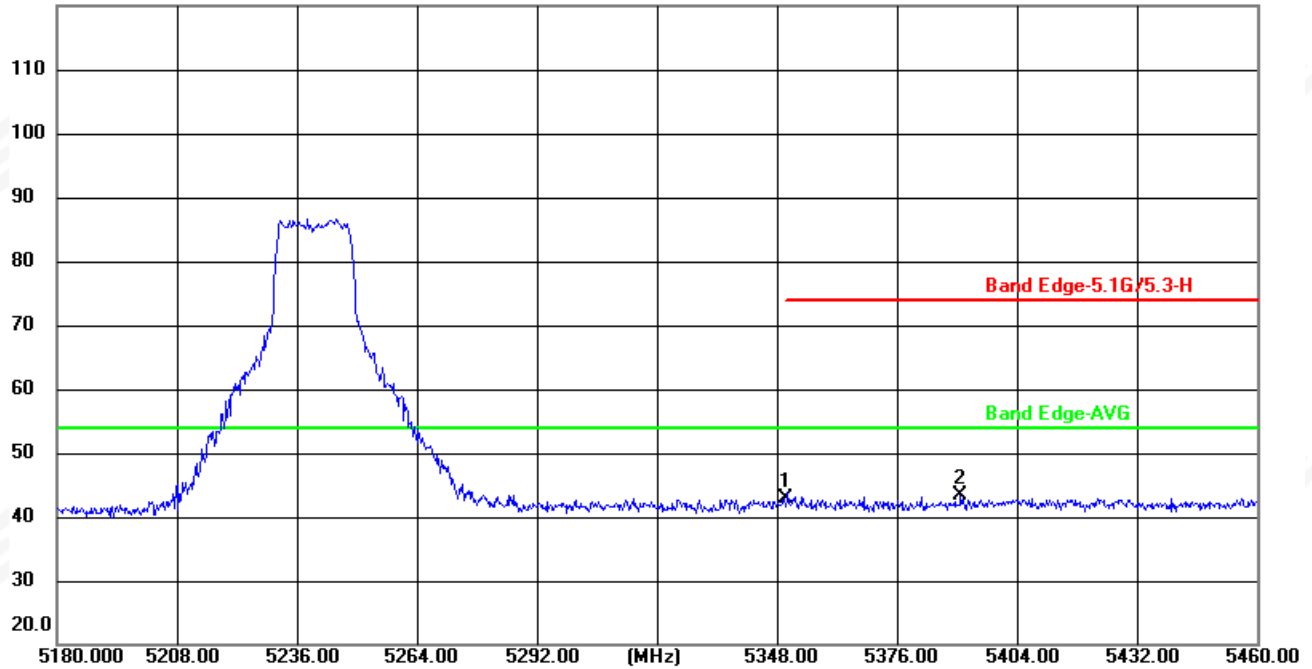

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	45.31	-2.34	42.97	74.00	-31.03	peak
2 *	5390.840	45.64	-2.21	43.43	74.00	-30.57	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.


2. All modes have been measurement, only worst mode was reported.



AC40(MIMO)-Low

Horizontal

120.0 dBuV/m

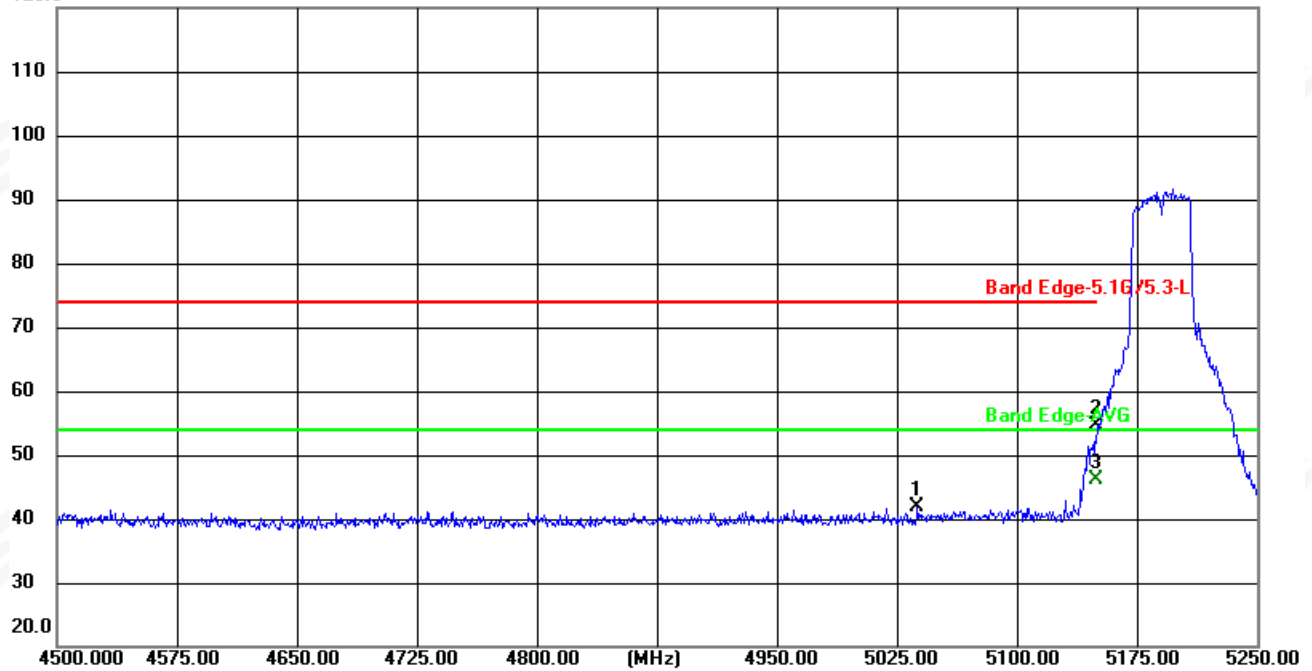


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5037.750	44.90	-3.04	41.86	74.00	-32.14	peak
2	5150.000	57.37	-2.79	54.58	74.00	-19.42	peak
3 *	5150.000	48.96	-2.79	46.17	54.00	-7.83	AVG



AC40(MIMO)-Low

Vertical

120.0 dBuV/m

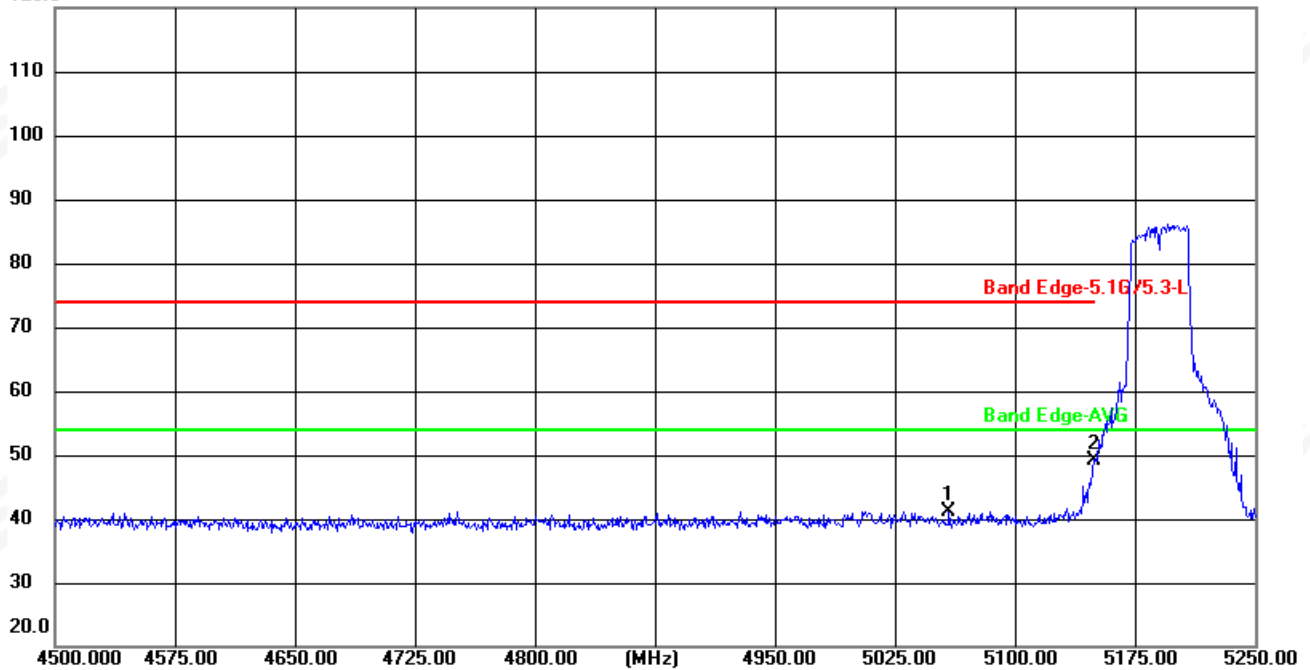


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5058.750	44.07	-2.99	41.08	74.00	-32.92	peak
2 *	5150.000	51.92	-2.79	49.13	74.00	-24.87	peak



AC40(MIMO)-High

Horizontal

120.0 dBuV/m

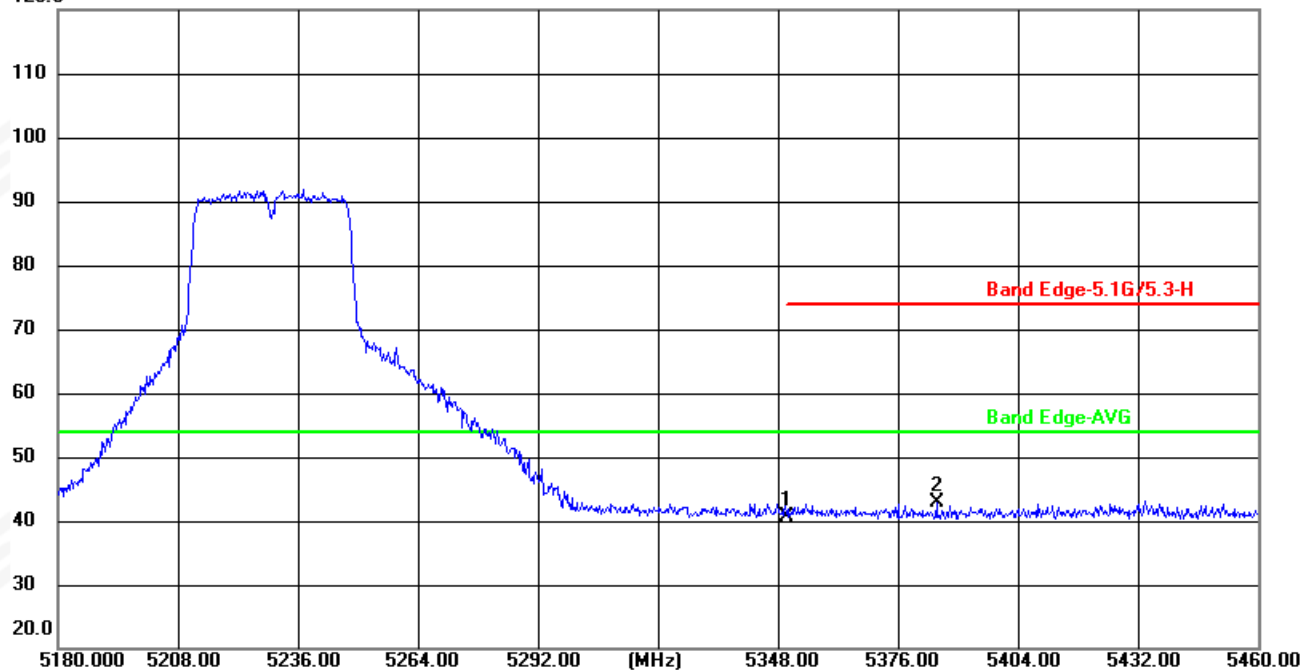


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	42.99	-2.34	40.65	74.00	-33.35	peak
2 *	5384.960	45.01	-2.23	42.78	74.00	-31.22	peak



AC40(MIMO)-High

Vertical

120.0 dBuV/m

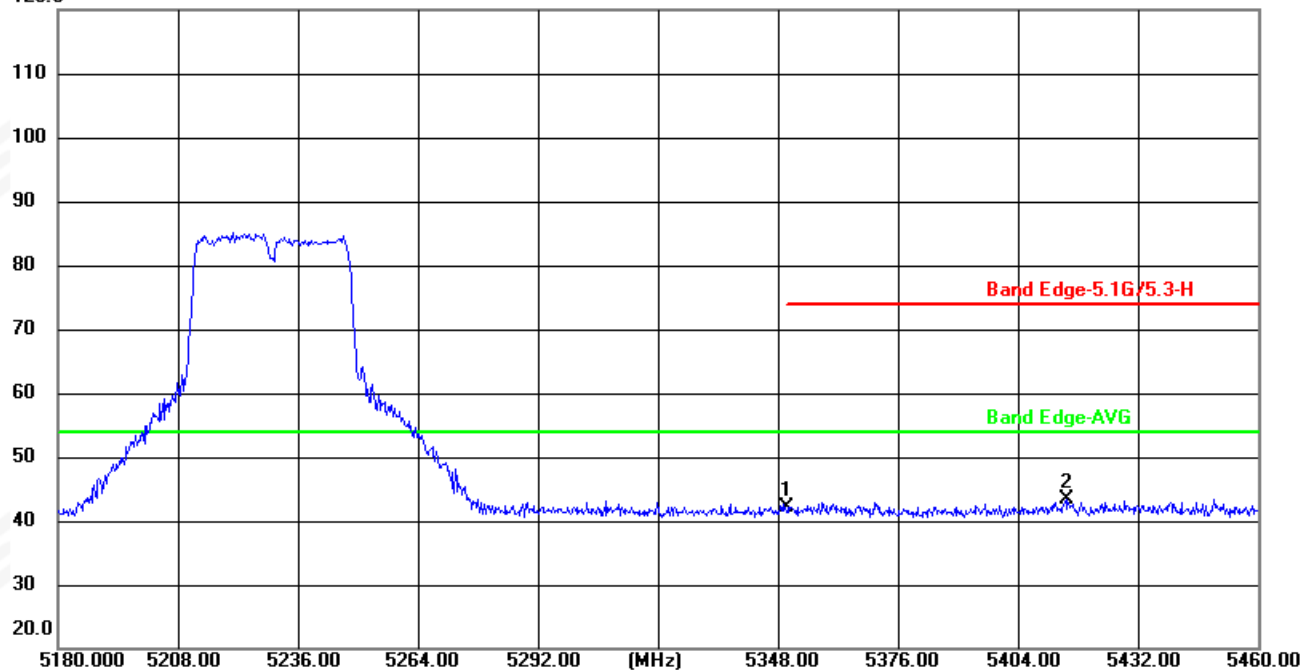

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	44.38	-2.34	42.04	74.00	-31.96	peak
2 *	5415.200	45.51	-2.14	43.37	74.00	-30.63	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.


2. All modes have been measurement, only worst mode was reported.



AC80(MIMO)-Low

Horizontal

120.0 dBuV/m

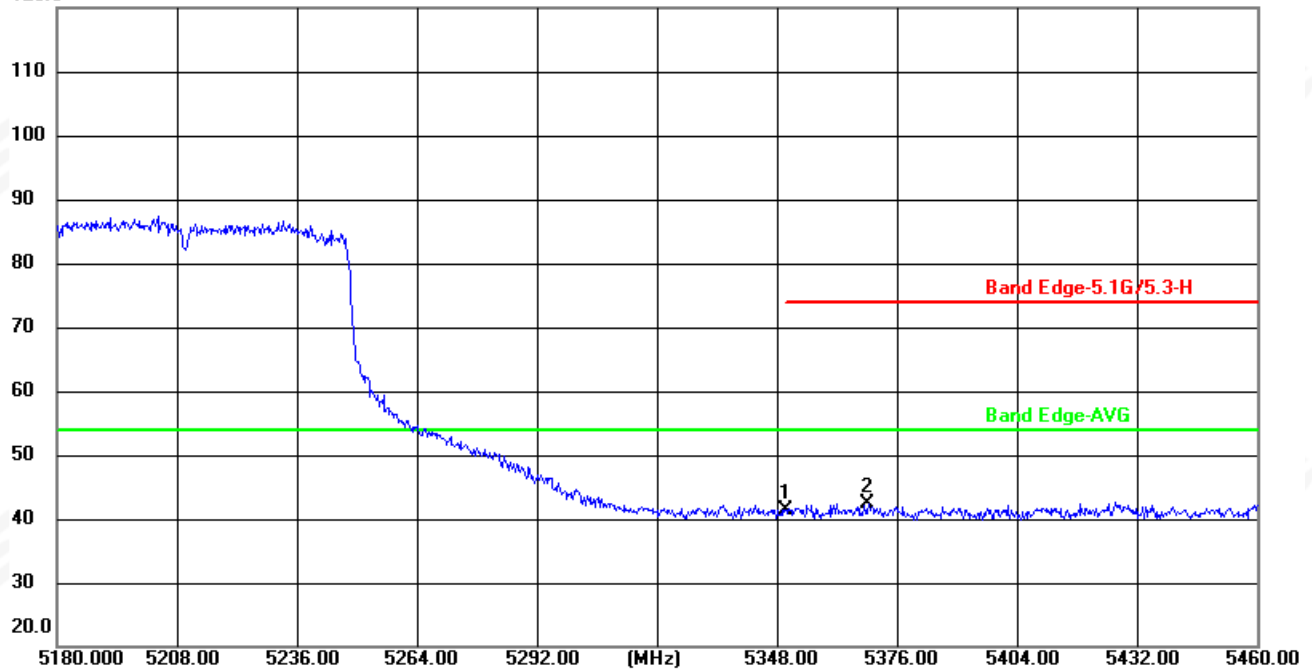


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	43.66	-2.34	41.32	74.00	-32.68	peak
2 *	5369.280	44.59	-2.28	42.31	74.00	-31.69	peak



AC80(MIMO)-Low

Vertical

120.0 dBuV/m

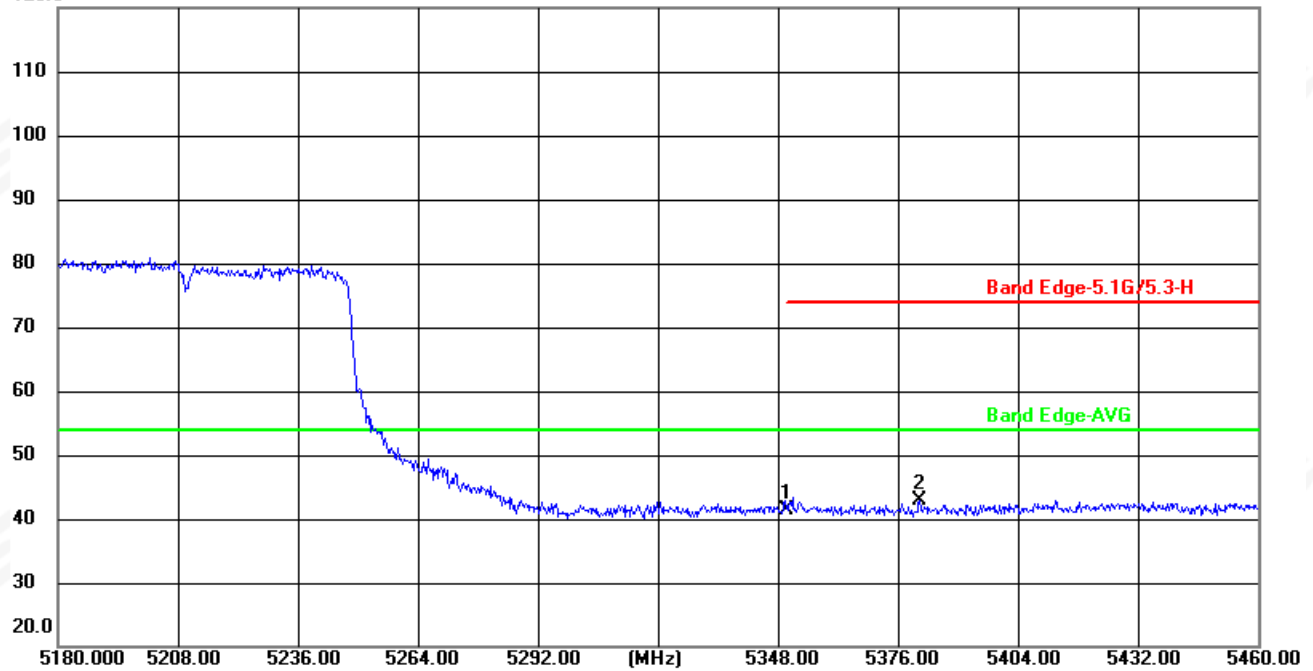


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	43.71	-2.34	41.37	74.00	-32.63	peak
2 *	5381.040	45.13	-2.24	42.89	74.00	-31.11	peak



AC80(MIMO)-High

Horizontal

120.0 dBuV/m

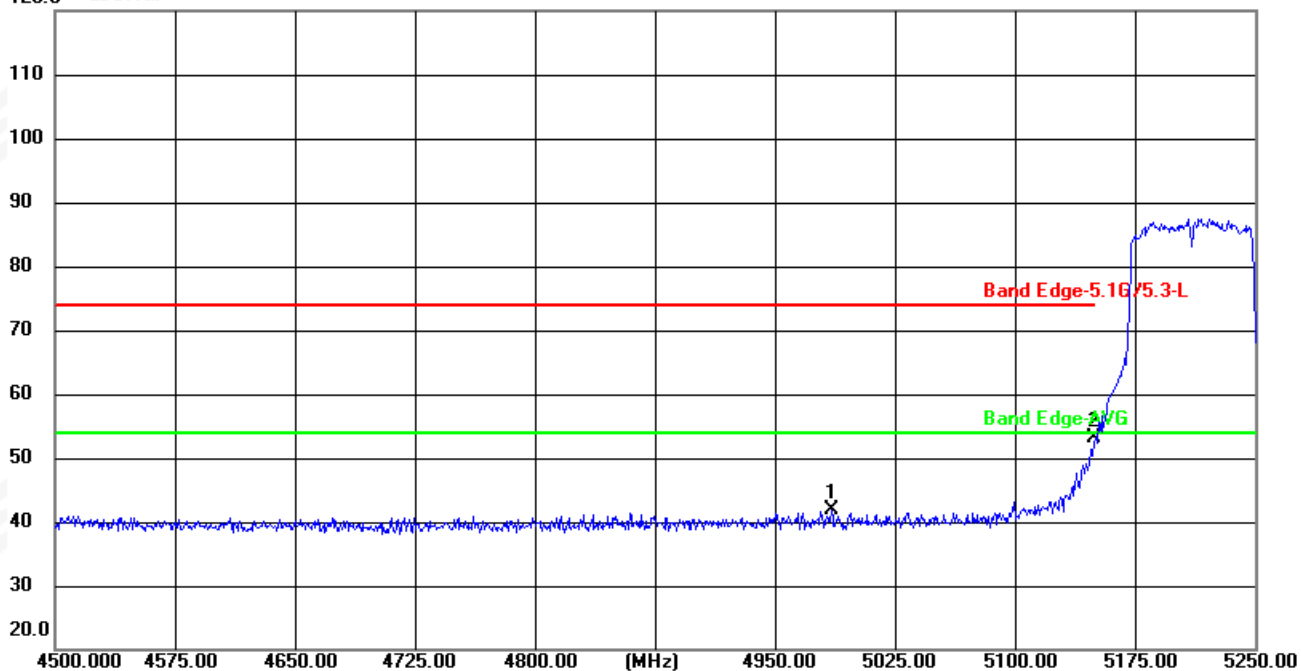


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4985.250	45.15	-3.16	41.99	74.00	-32.01	peak
2 *	5150.000	55.88	-2.79	53.09	74.00	-20.91	peak



AC80(MIMO)-High

Vertical

120.0 dBuV/m

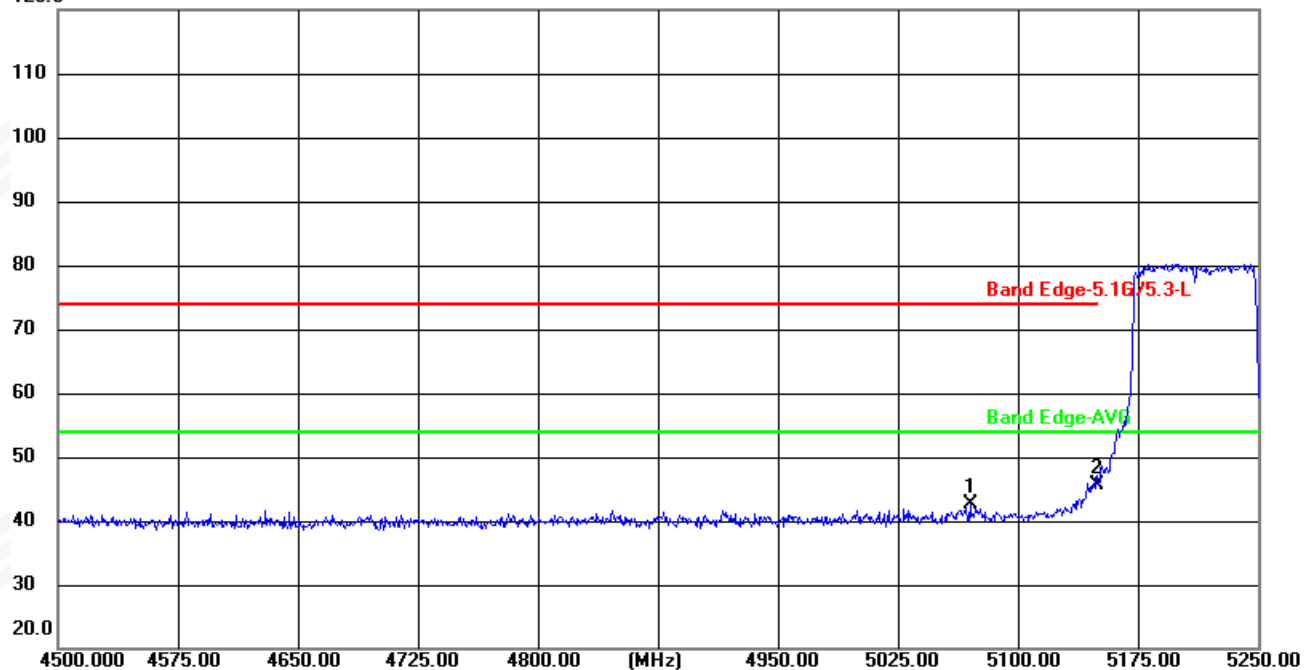

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5070.000	45.54	-2.97	42.57	74.00	-31.43	peak
2 *	5150.000	48.47	-2.79	45.68	74.00	-28.32	peak

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

2. All modes have been measurement, only worst mode was reported.




U-NII-3 (5.745-5.825) GHz

AC20(MIMO)-Low

Horizontal

120.0 dBuV/m

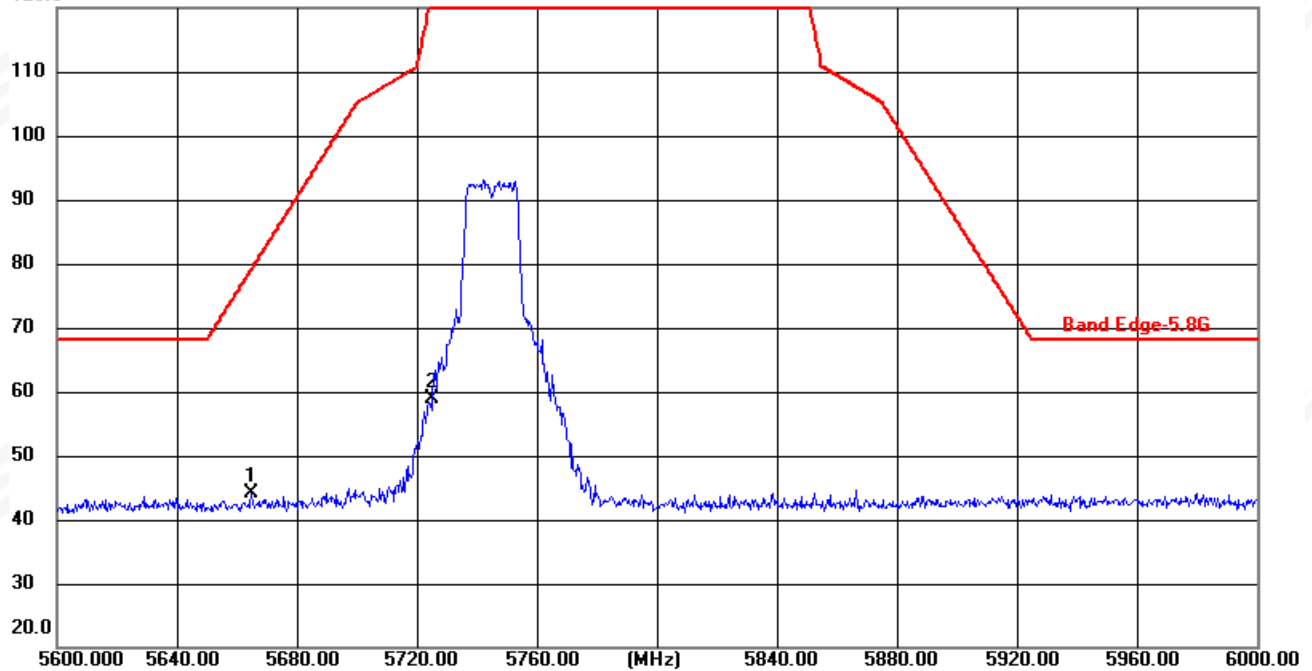


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5664.800	45.45	-1.36	44.09	79.19	-35.10	peak
2	5725.000	60.00	-1.18	58.82	122.20	-63.38	peak

AC20(MIMO)-Low

Vertical

120.0 dBuV/m

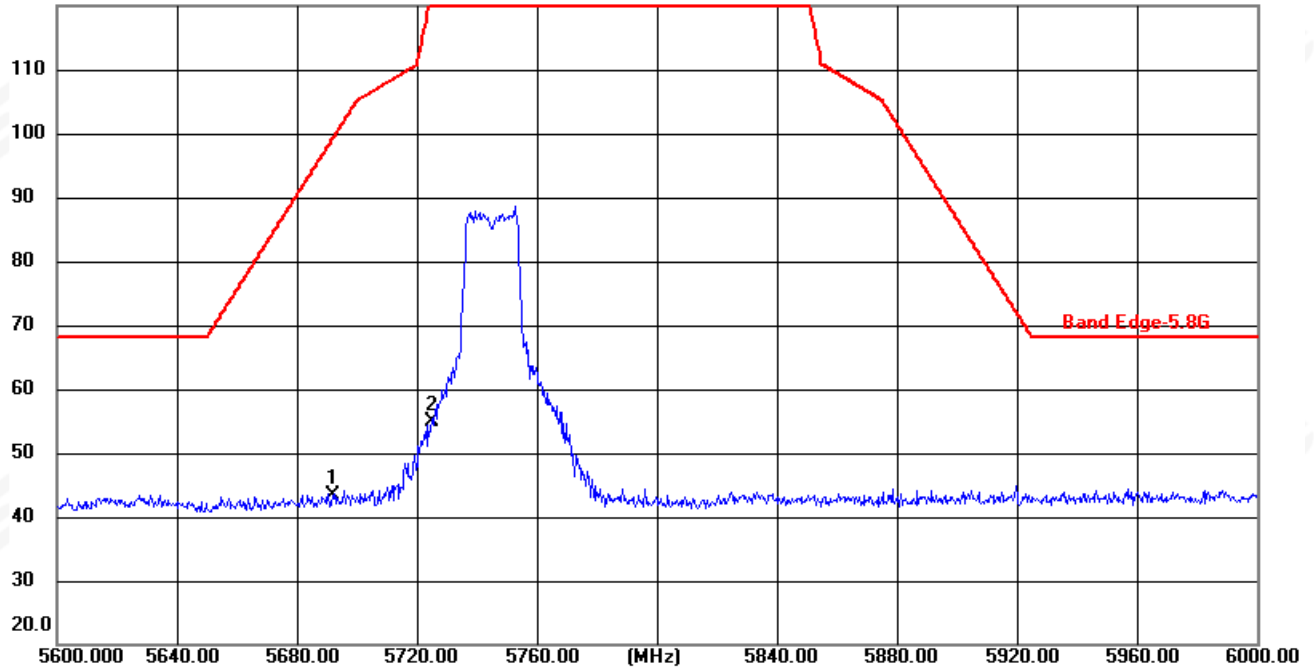


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5692.000	44.56	-1.28	43.28	99.30	-56.02	peak
2	5725.000	56.12	-1.18	54.94	122.20	-67.26	peak



AC20(MIMO)-High

Horizontal

120.0 dBuV/m

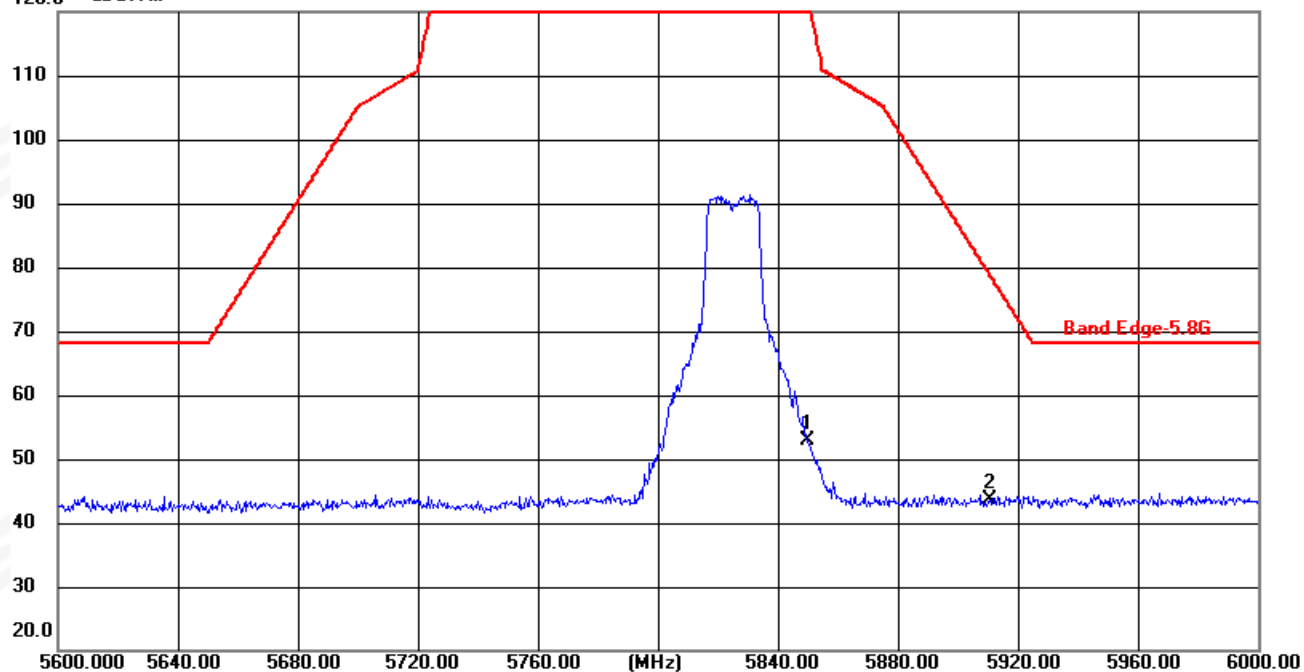


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	53.60	-0.79	52.81	122.20	-69.39	peak
2 *	5910.400	44.15	-0.60	43.55	78.97	-35.42	peak



AC20(MIMO)-High

Vertical

120.0 dBuV/m

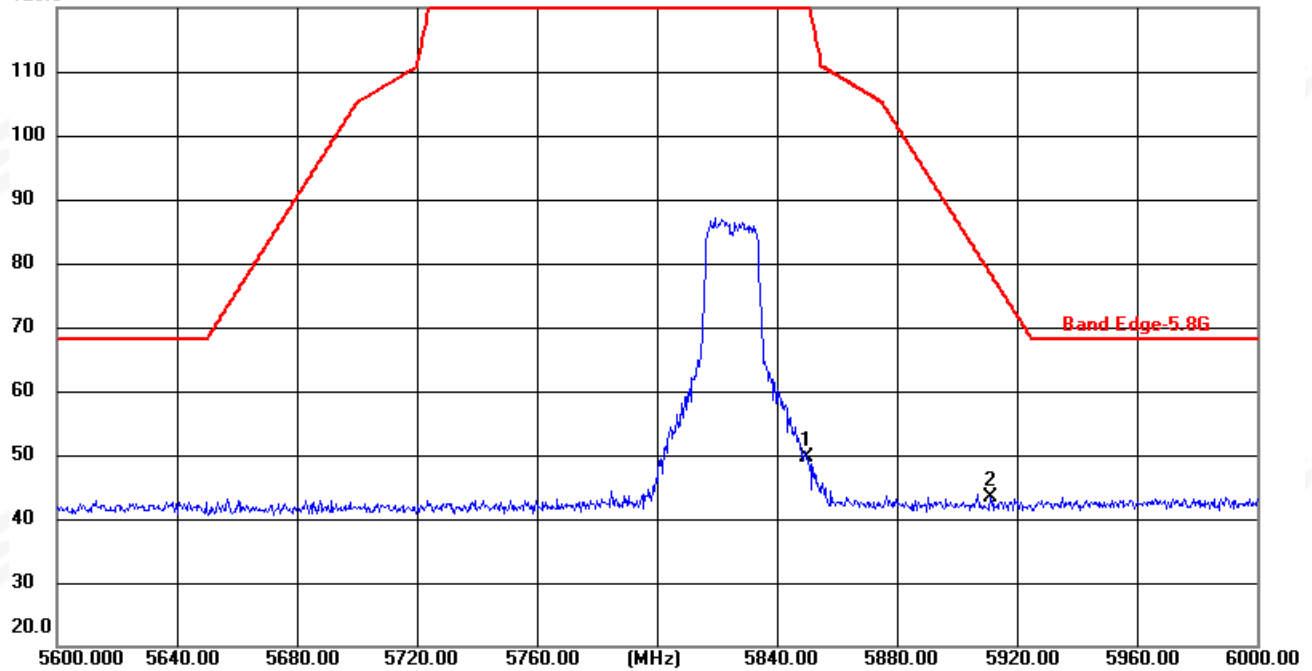

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	50.53	-0.79	49.74	122.20	-72.46	peak
2 *	5911.200	44.03	-0.60	43.43	78.38	-34.95	peak

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. All modes have been measurement, only worst mode was reported.



AC40(MIMO)-Low

Horizontal

120.0 dBuV/m

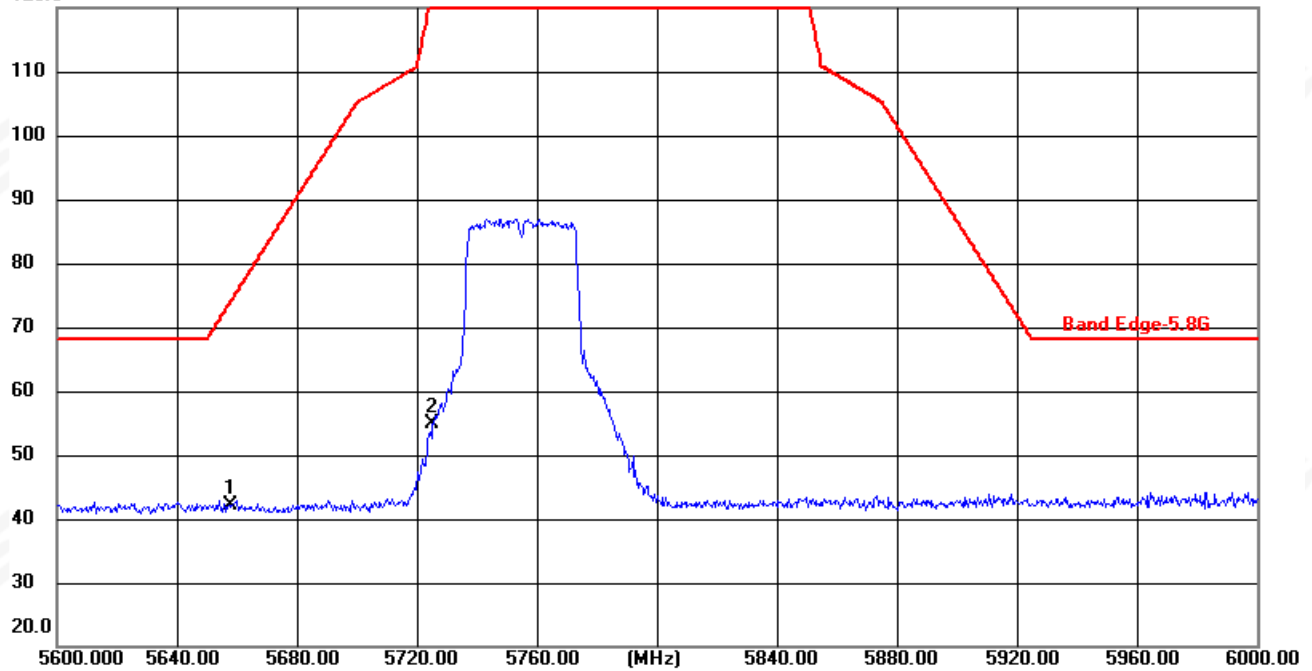


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5657.600	43.43	-1.39	42.04	73.85	-31.81	peak
2	5725.000	56.03	-1.18	54.85	122.20	-67.35	peak

AC40(MIMO)-Low

Vertical

120.0 dBuV/m

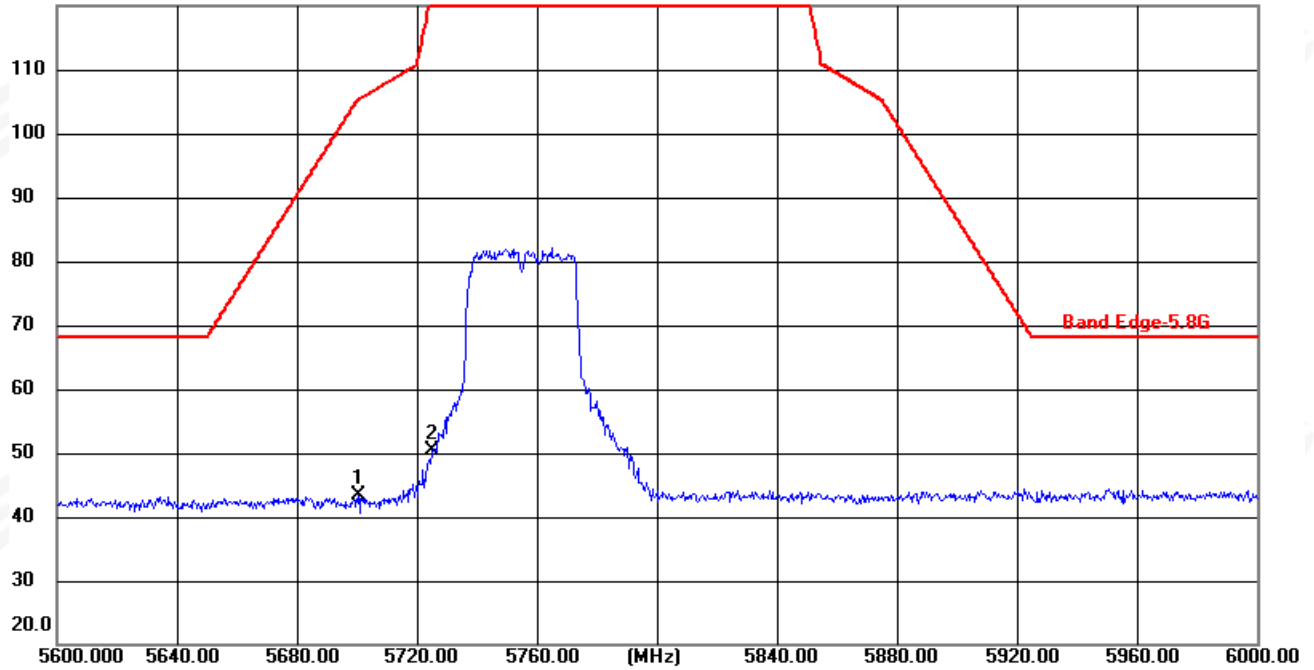


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5700.400	44.69	-1.25	43.44	105.31	-61.87	peak
2	5725.000	51.58	-1.18	50.40	122.20	-71.80	peak



AC40(MIMO)-High

Horizontal

120.0 dBuV/m

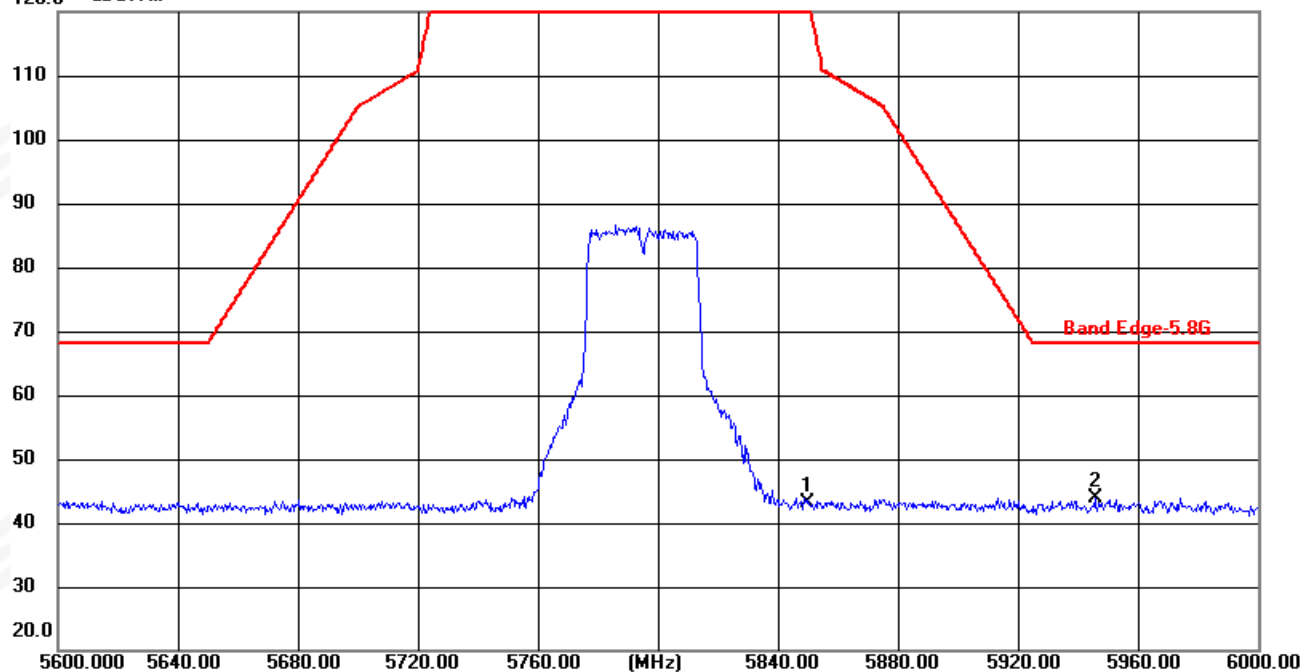


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	44.00	-0.79	43.21	122.20	-78.99	peak
2 *	5945.600	44.26	-0.49	43.77	68.20	-24.43	peak



AC40(MIMO)-High

Vertical

120.0 dBuV/m

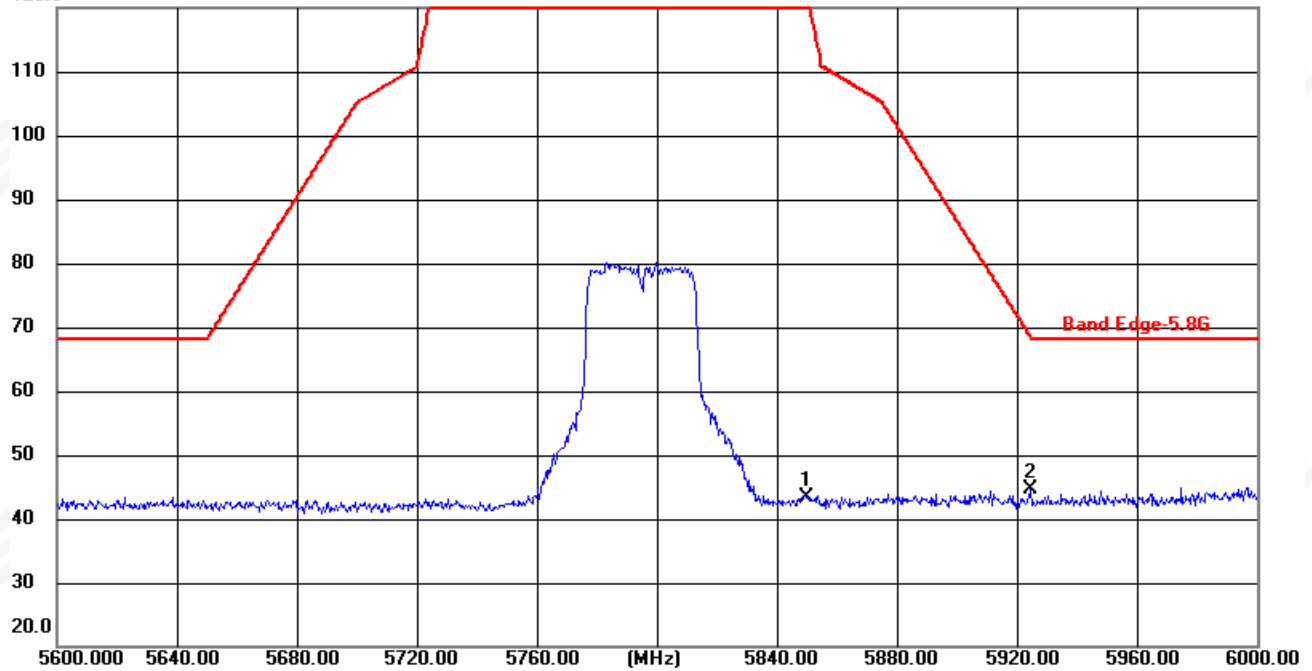

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.000	44.22	-0.79	43.43	122.20	-78.77	peak
2 *	5924.400	45.12	-0.56	44.56	68.64	-24.08	peak

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. All modes have been measurement, only worst mode was reported.



AC80(MIMO)-Low

Horizontal

120.0 dBuV/m

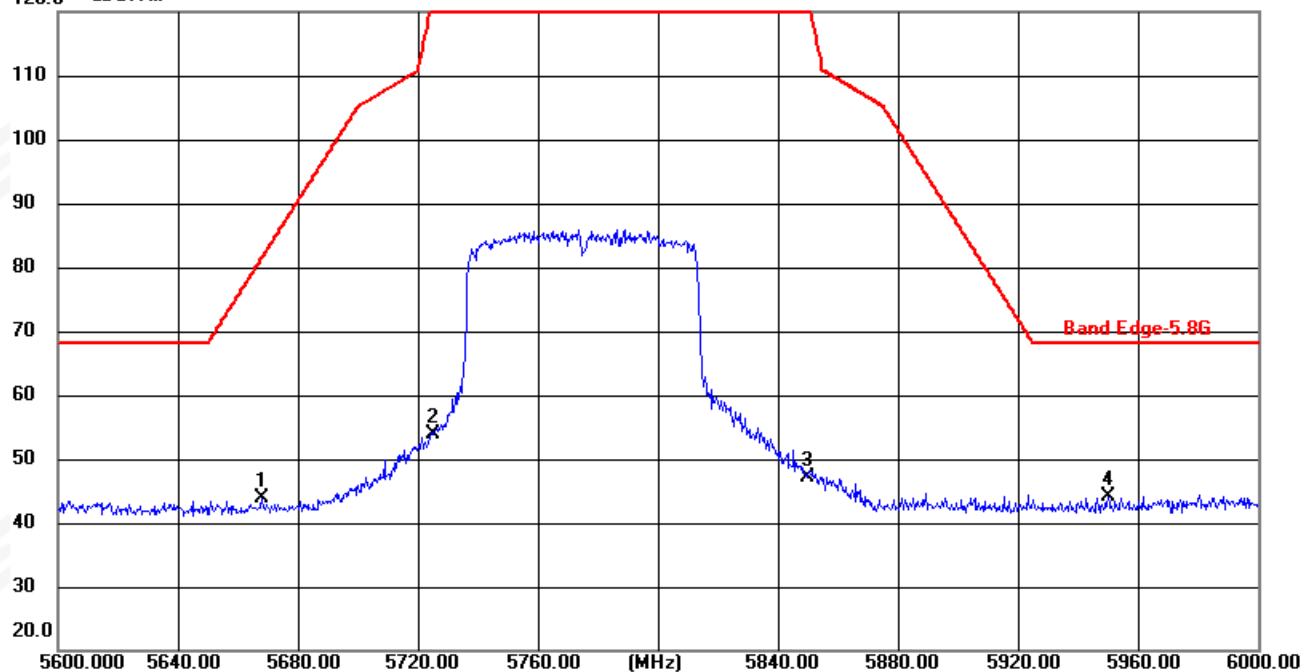


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5668.000	45.23	-1.35	43.88	81.56	-37.68	peak
2	5725.000	55.04	-1.18	53.86	122.20	-68.34	peak
3	5850.000	47.99	-0.79	47.20	122.20	-75.00	peak
4 *	5950.000	44.53	-0.48	44.05	68.20	-24.15	peak



AC80(MIMO)-Low

Vertical

120.0 dBuV/m

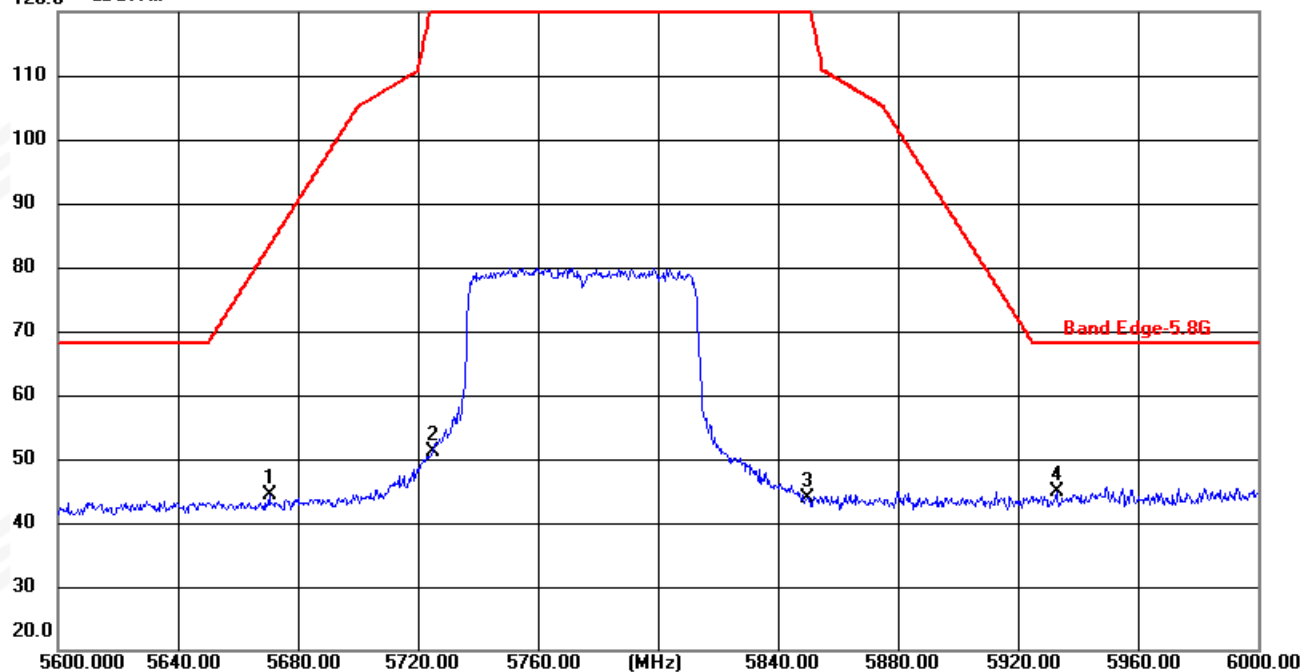

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5670.400	45.69	-1.35	44.34	83.34	-39.00	peak
2	5725.000	52.23	-1.18	51.05	122.20	-71.15	peak
3	5850.000	44.75	-0.79	43.96	122.20	-78.24	peak
4 *	5932.800	45.43	-0.53	44.90	68.20	-23.30	peak



4. POWER SPECTRAL DENSITY TEST

4.1 LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.
- f) Please refer to ANSI C63.10-2020 Section 12.6 Method SA-2.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



4.6 TEST RESULTS

Note: The test data please reference to attachment "STS2604326W04_Appendix 5G WIFI".

For U-NII 3:

1. Total PSD(dBm/500KHz) = Total PSD(dBm/510KHz) + RBW Factor
2. RBW Factor = $10 * \log(500/510)$

5. DUTY CYCLE

5.1 TEST STANDARD

Please refer to ANSI C63.10-2020 Section 12.2


5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Zero
RB	set RBW to the largest available value
VB	$VBW \geq RBW$.
Detector	Peak
Trace	Clear Write
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Note: The test data please reference to attachment “STS2604326W04_Appendix 5G WIFI”.

6. BANDWIDTH MEASUREMENT

6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

The following procedure shall be used for measuring 26 bandwidth

6.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW $\geq$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

Note: The test data please reference to attachment "STS2604326W04_Appendix 5G WIFI".

6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth.

6.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.2.2 DEVIATION FROM STANDARD

No deviation.

6.2.3 TEST SETUP



6.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.2.5 TEST RESULTS

Note: The test data please reference to attachment “STS2604326W04_Appendix 5G WIFI”.

6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth.

6.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.2 DEVIATION FROM STANDARD

No deviation.

6.3.3 TEST SETUP



6.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.3.5 TEST RESULTS

Note: The test data please reference to attachment "STS2604326W04_Appendix 5G WIFI".

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Max Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or 11 dBm + 10 log (26 dB emission bandwidth)	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5895	


7.2 TEST PROCEDURE

Please refer to ANSI C63.10-2020 Section 12.4.2 Method SA-2

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

Note: The test data please reference to attachment "STS2604326W04_Appendix 5G WIFI".



8. AUTOMATICALLY DISCONTINUE TRANSMISSION

8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is FPC Antenna. It comply with the standard requirement.



APPENDIX - PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****