



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 n20 (5240MHz)

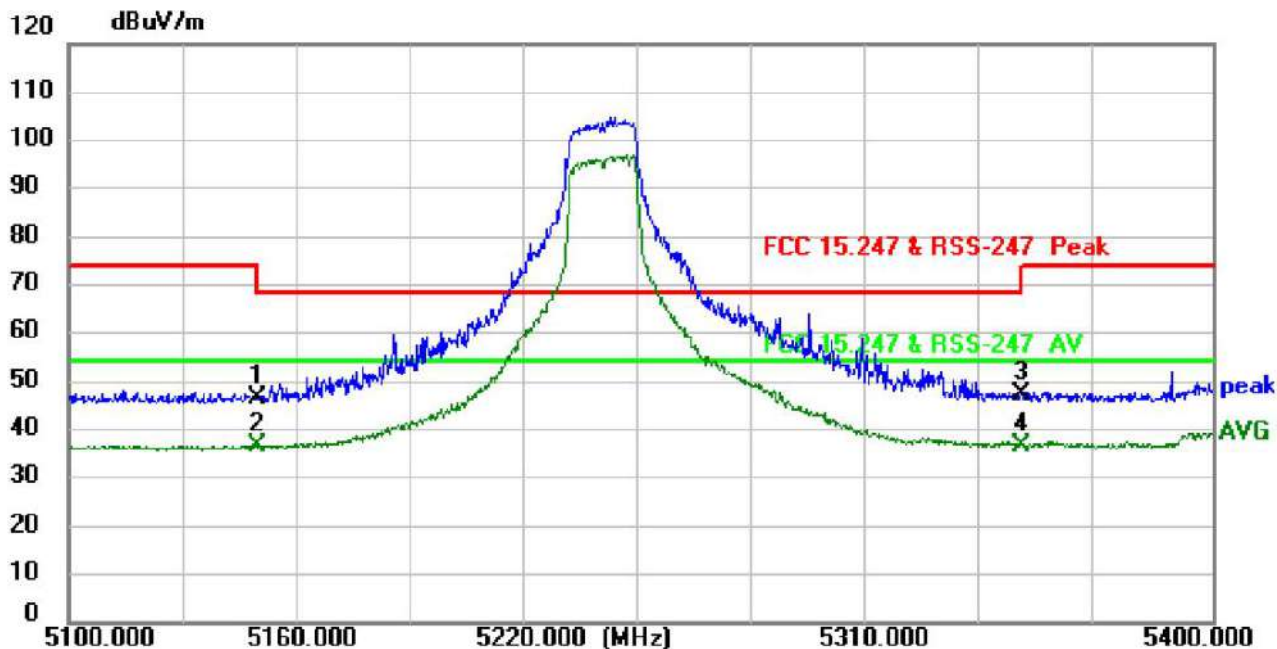


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.0000	40.59	5.77	46.36	68.20	-21.84	peak
2	5150.0000	30.86	5.77	36.63	54.00	-17.37	AVG
3	5350.0000	41.11	6.28	47.39	68.20	-20.81	peak
4 *	5350.0000	30.52	6.28	36.80	54.00	-17.20	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ac20 (5180MHz)

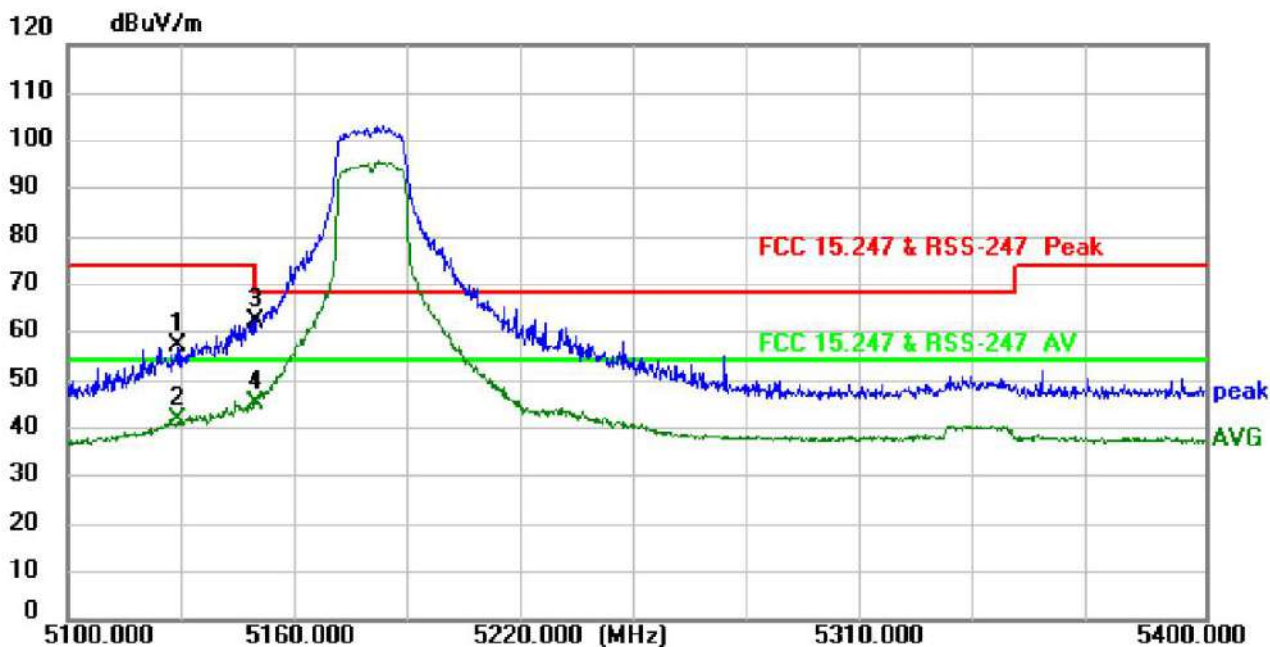


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5128.8000	51.46	5.66	57.12	74.00	-16.88	peak
2	5129.1000	35.95	5.66	41.61	54.00	-12.39	AVG
3 *	5150.0000	56.48	5.77	62.25	68.20	-5.95	peak
4	5150.0000	39.35	5.77	45.12	54.00	-8.88	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ac20 (5180MHz)

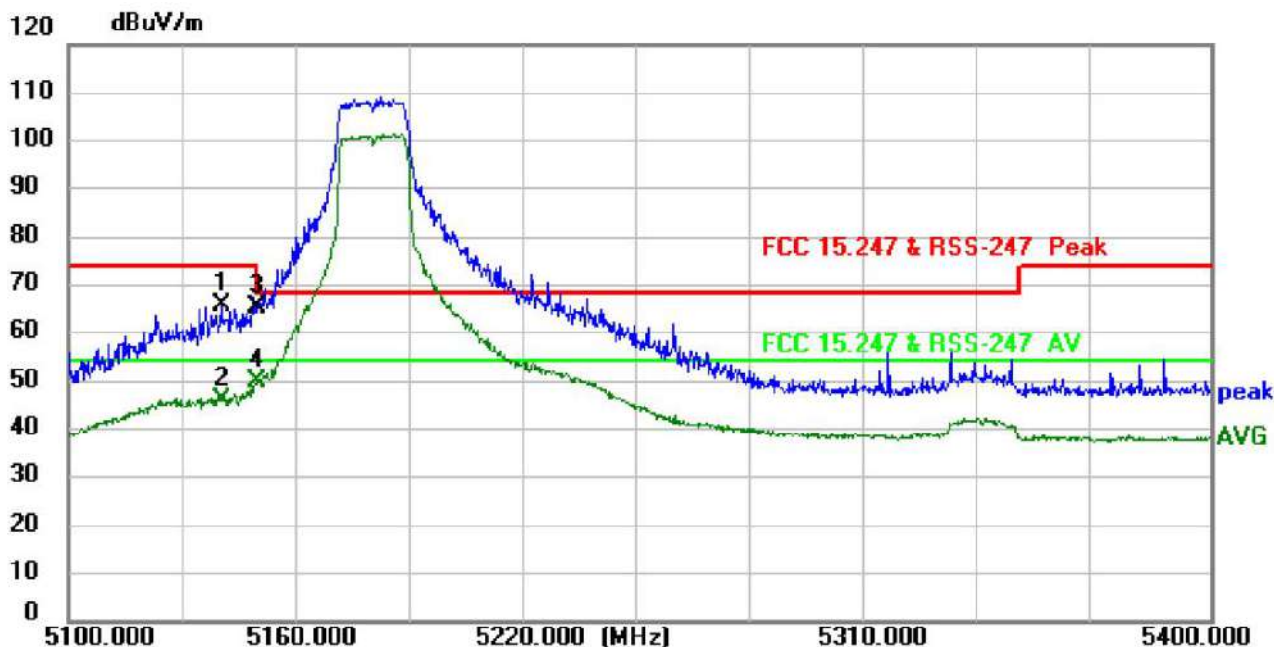


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5140.2000	59.91	5.71	65.62	74.00	-8.38	peak
2	5140.2000	40.41	5.71	46.12	54.00	-7.88	AVG
3 *	5150.0000	59.40	5.77	65.17	68.20	-3.03	peak
4	5150.0000	44.36	5.77	50.13	54.00	-3.87	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ac20 (5240MHz)

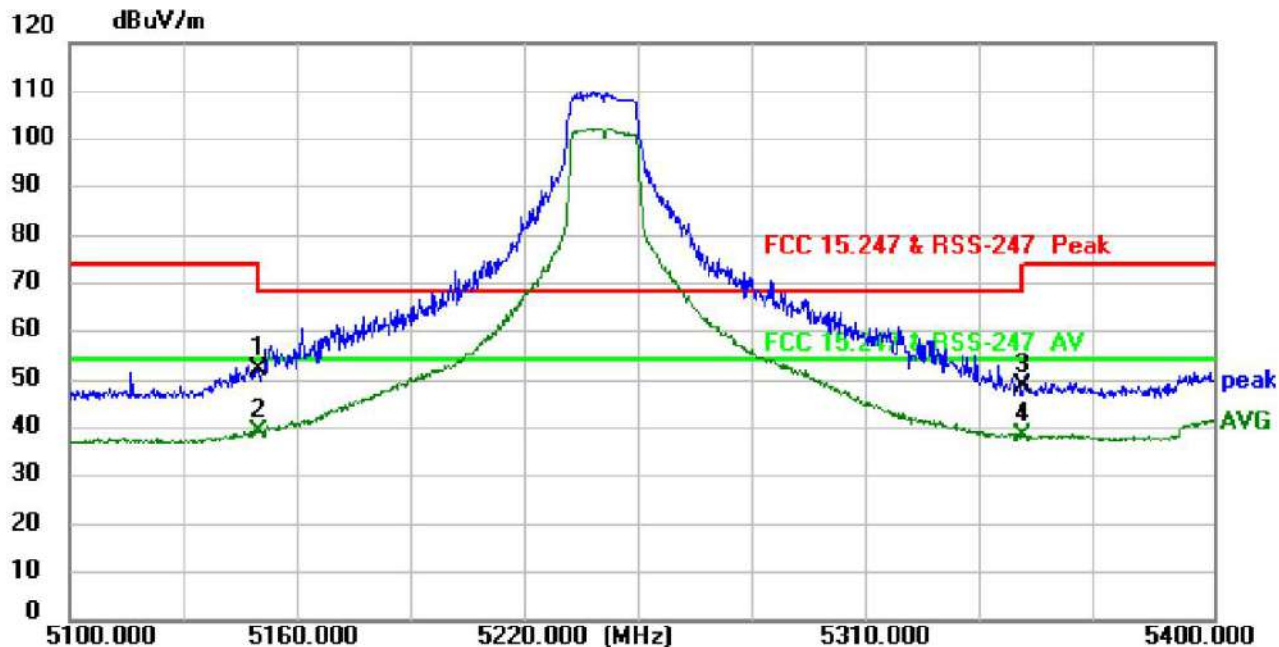


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.0000	46.12	5.77	51.89	68.20	-16.31	peak
2 *	5150.0000	33.54	5.77	39.31	54.00	-14.69	AVG
3	5350.0000	42.55	6.28	48.83	68.20	-19.37	peak
4	5350.0000	31.96	6.28	38.24	54.00	-15.76	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ac20 (5240MHz)

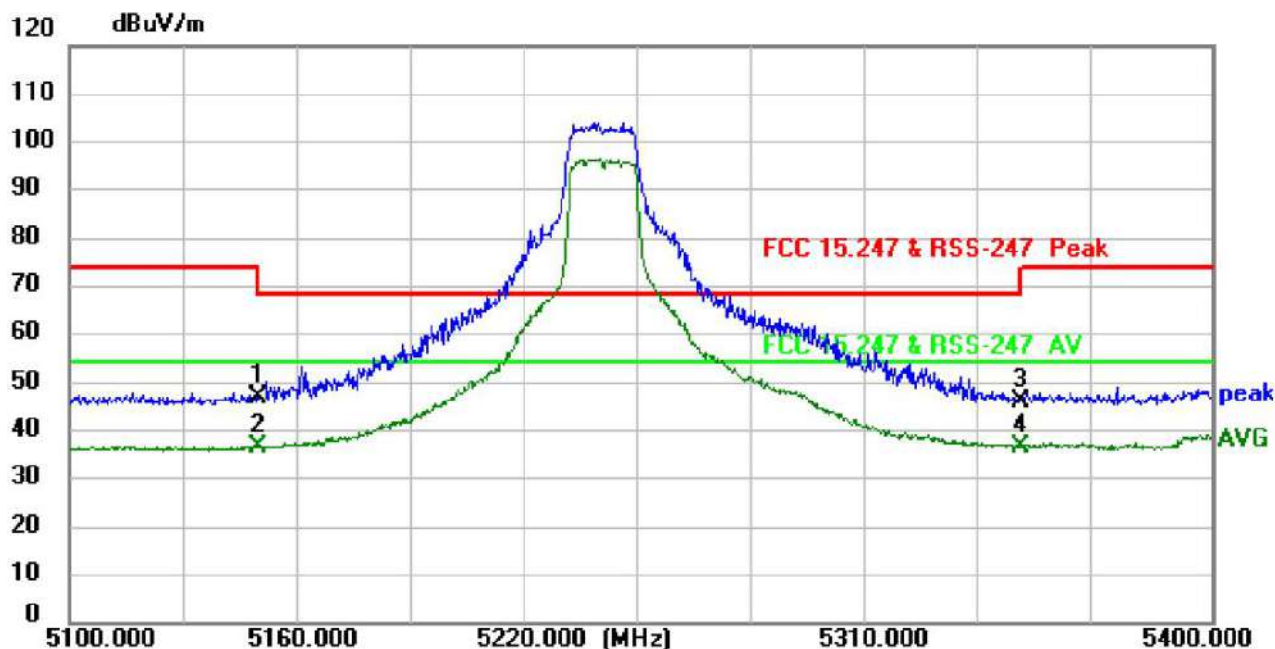


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.0000	41.31	5.77	47.08	68.20	-21.12	peak
2	5150.0000	30.86	5.77	36.63	54.00	-17.37	AVG
3	5350.0000	39.94	6.28	46.22	68.20	-21.98	peak
4 *	5350.0000	30.57	6.28	36.85	54.00	-17.15	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ax20 (5180MHz)

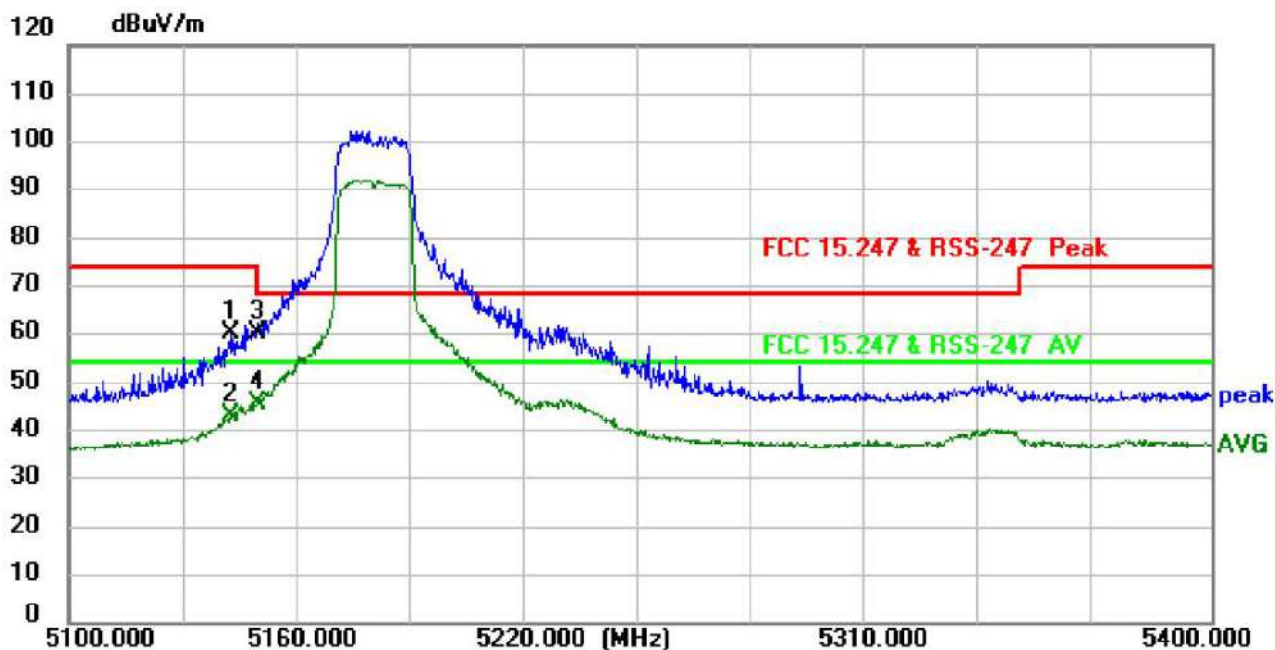


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5142.6000	54.41	5.73	60.14	74.00	-13.86	peak
2	5142.6000	37.38	5.73	43.11	54.00	-10.89	AVG
3 *	5150.0000	54.43	5.77	60.20	68.20	-8.00	peak
4	5150.0000	39.82	5.77	45.59	54.00	-8.41	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ax20 (5180MHz)

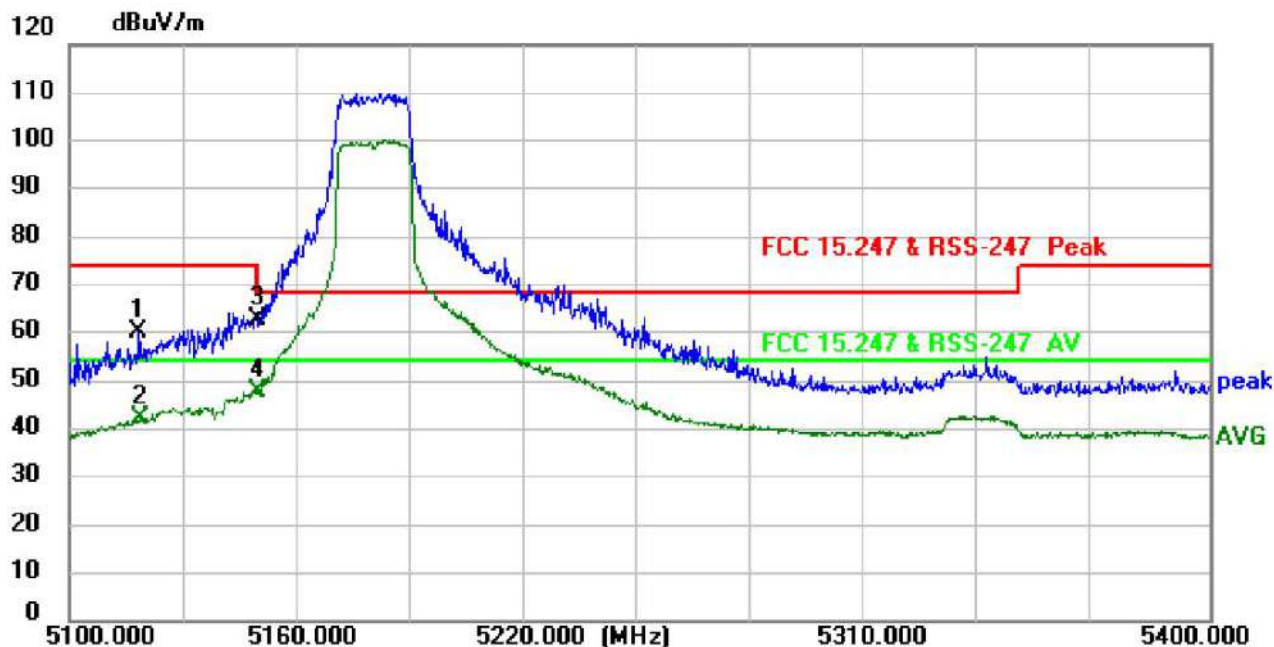


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5118.3000	54.44	5.59	60.03	74.00	-13.97	peak
2	5118.6000	36.46	5.59	42.05	54.00	-11.95	AVG
3 *	5150.0000	56.87	5.77	62.64	68.20	-5.56	peak
4	5150.0000	41.85	5.77	47.62	54.00	-6.38	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ax20 (5240MHz)

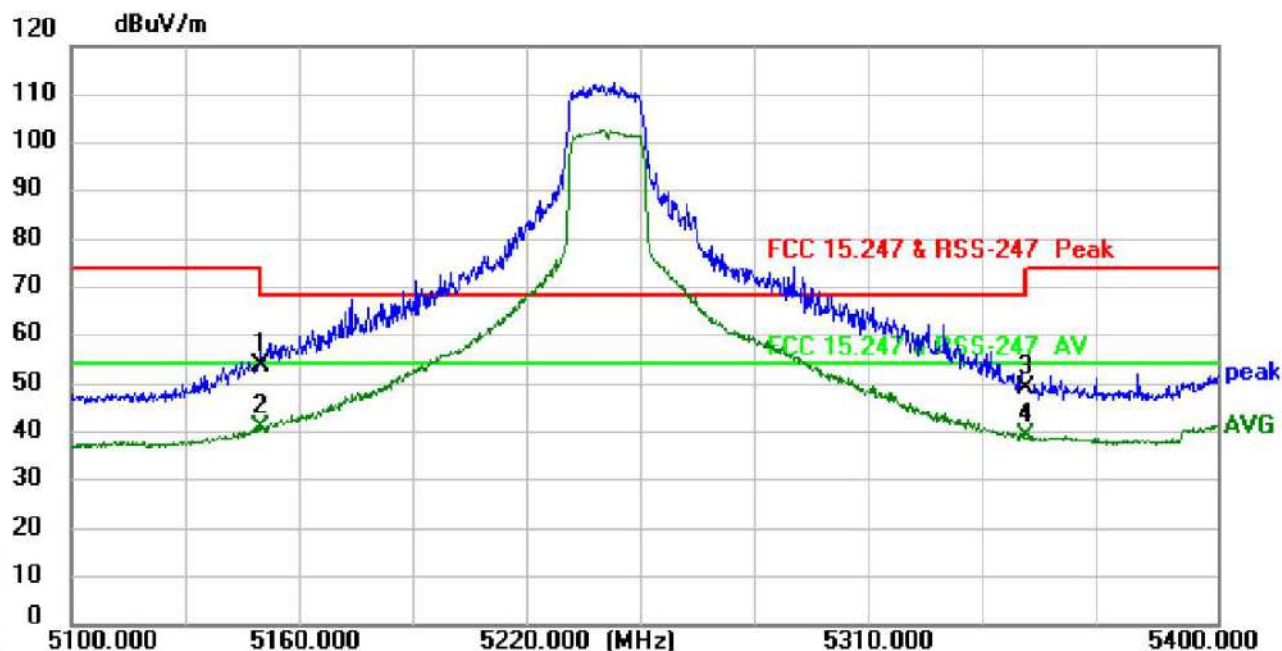


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.0000	47.91	5.77	53.68	68.20	-14.52	peak
2 *	5150.0000	35.17	5.77	40.94	54.00	-13.06	AVG
3	5350.0000	42.73	6.28	49.01	68.20	-19.19	peak
4	5350.0000	32.88	6.28	39.16	54.00	-14.84	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ax20 (5240MHz)

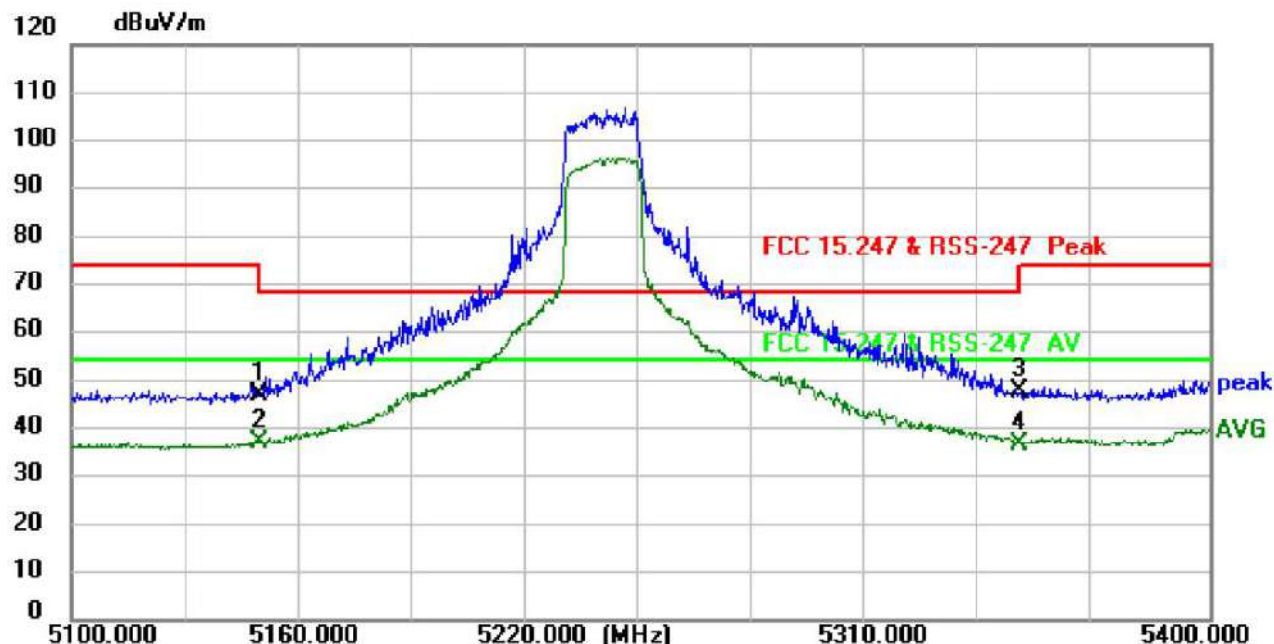


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.0000	41.05	5.77	46.82	68.20	-21.38	peak
2 *	5150.0000	31.26	5.77	37.03	54.00	-16.97	AVG
3	5350.0000	41.31	6.28	47.59	68.20	-20.61	peak
4	5350.0000	30.48	6.28	36.76	54.00	-17.24	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 n40 (5190MHz)

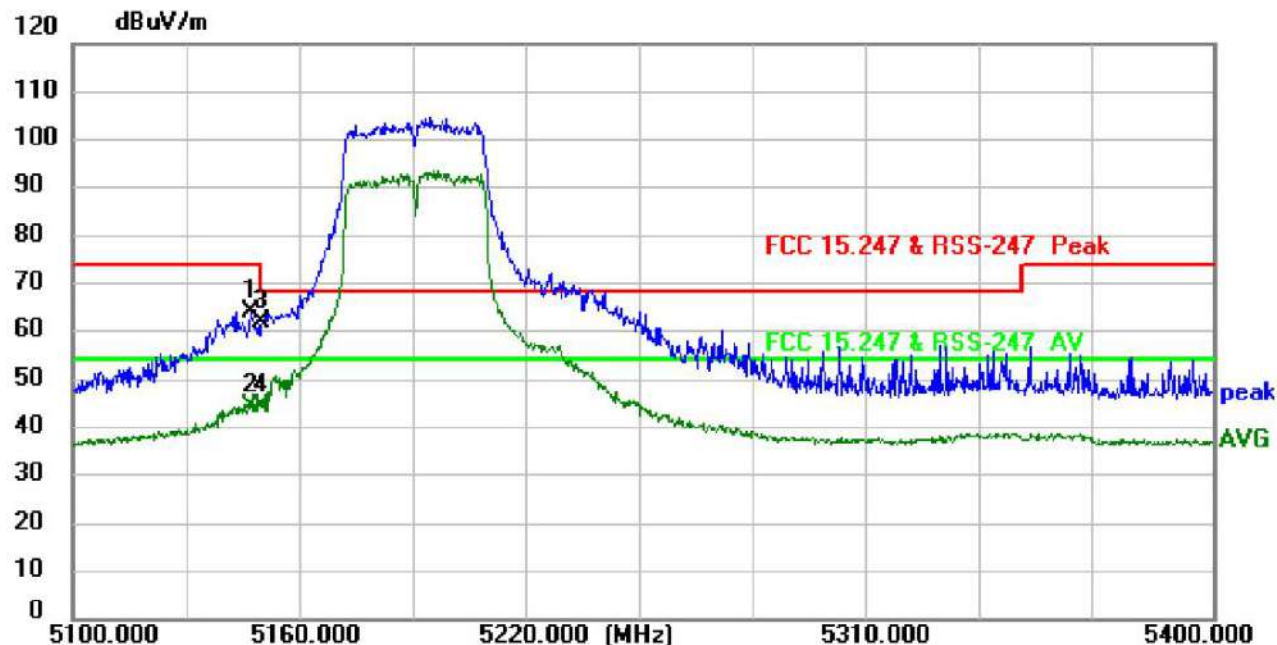


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5146.8000	58.50	5.75	64.25	74.00	-9.75	peak
2	5146.8000	38.52	5.75	44.27	54.00	-9.73	AVG
3 *	5150.0000	55.96	5.77	61.73	68.20	-6.47	peak
4	5150.0000	38.51	5.77	44.28	54.00	-9.72	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 n40 (5190MHz)

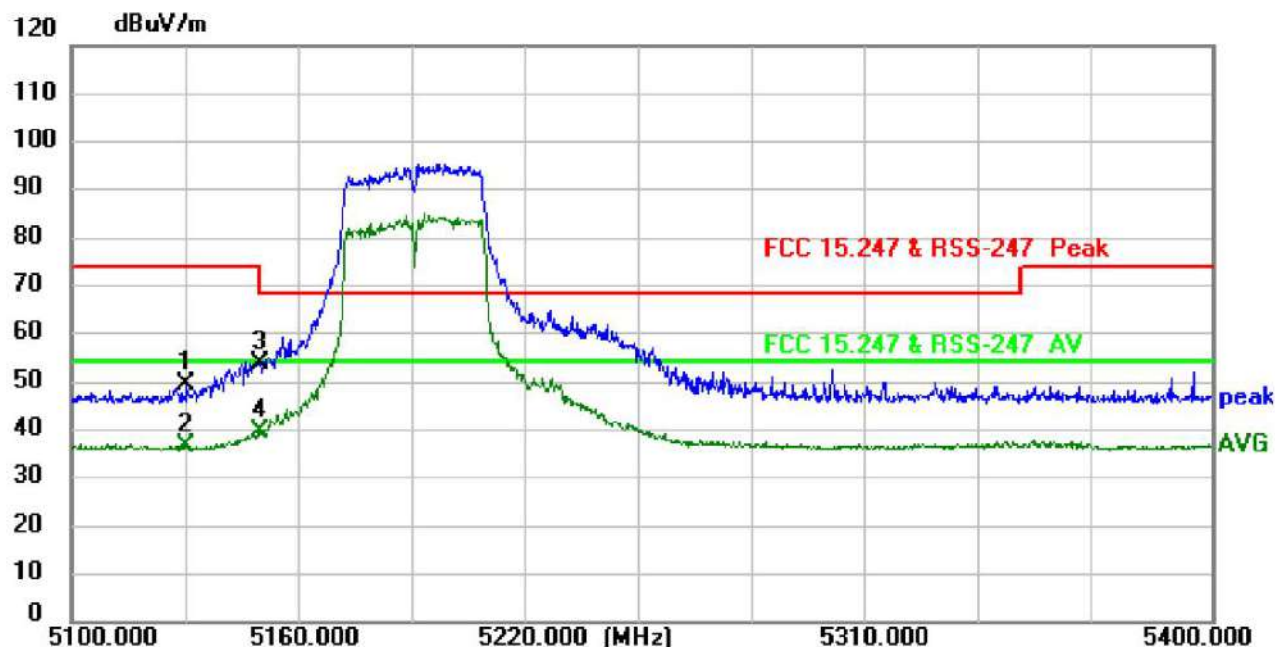


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5130.3000	43.95	5.66	49.61	74.00	-24.39	peak
2	5130.3000	30.78	5.66	36.44	54.00	-17.56	AVG
3 *	5150.0000	48.02	5.77	53.79	68.20	-14.41	peak
4	5150.0000	33.78	5.77	39.55	54.00	-14.45	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 n40 (5230MHz)

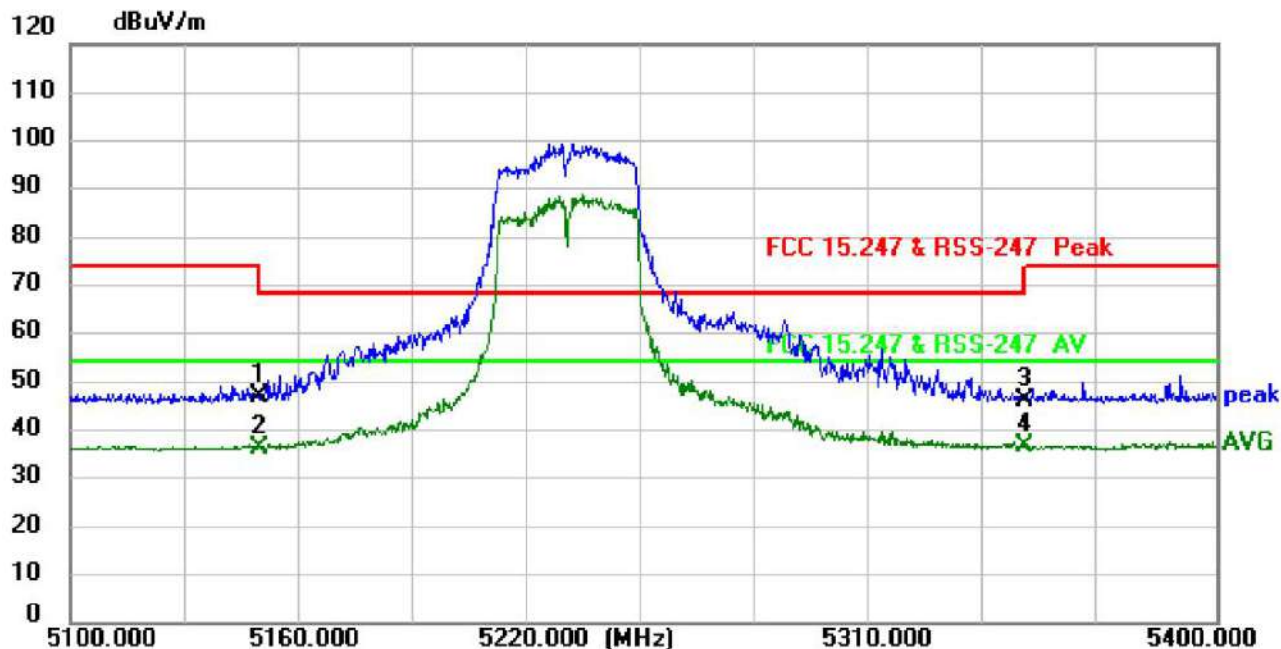


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.0000	41.32	5.77	47.09	68.20	-21.11	peak
2	5150.0000	30.64	5.77	36.41	54.00	-17.59	AVG
3	5350.0000	39.82	6.28	46.10	68.20	-22.10	peak
4 *	5350.0000	30.21	6.28	36.49	54.00	-17.51	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 n40 (5230MHz)

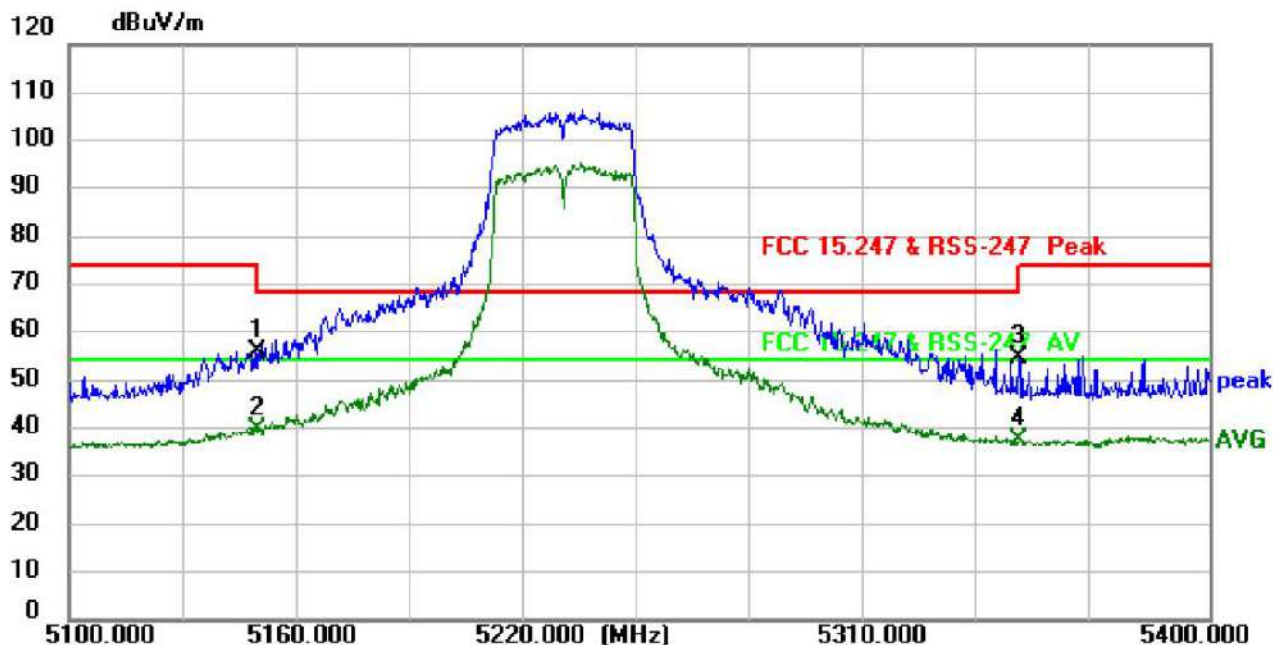


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5150.0000	50.03	5.77	55.80	68.20	-12.40	peak
2	5150.0000	33.71	5.77	39.48	54.00	-14.52	AVG
3	5350.0000	48.38	6.28	54.66	68.20	-13.54	peak
4	5350.0000	31.06	6.28	37.34	54.00	-16.66	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ac40 (5190MHz)

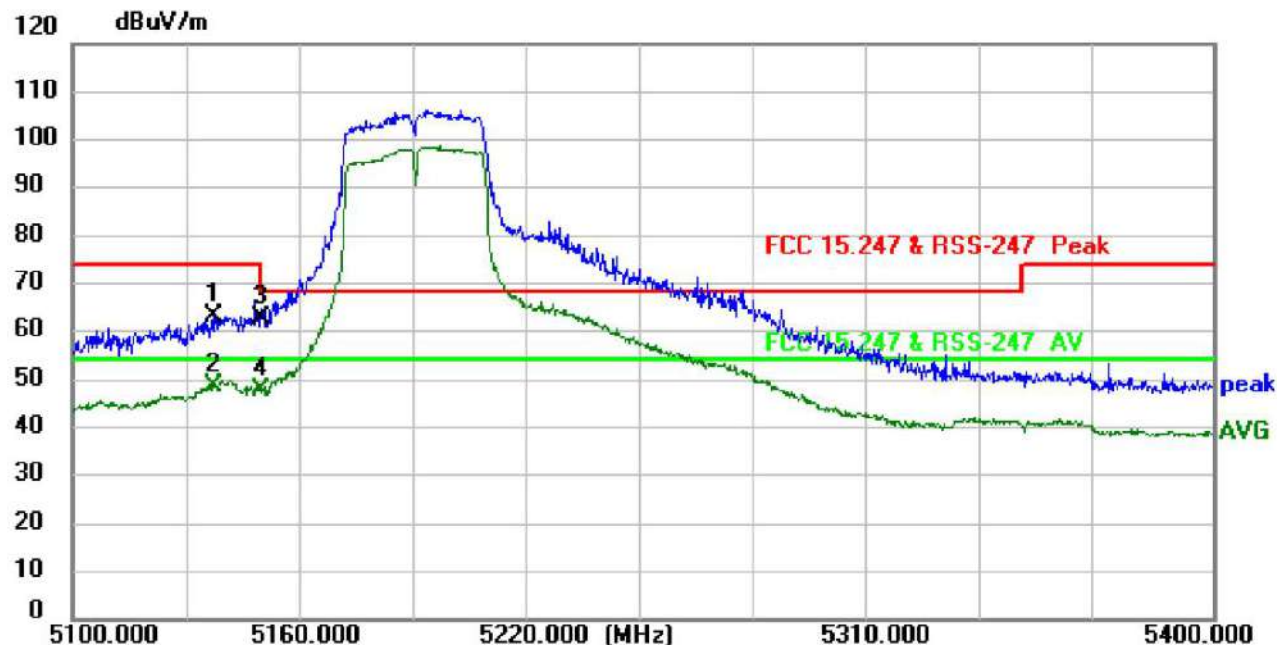


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5137.2000	57.32	5.69	63.01	74.00	-10.99	peak
2 *	5137.2000	43.01	5.69	48.70	54.00	-5.30	AVG
3	5150.0000	57.07	5.77	62.84	68.20	-5.36	peak
4	5150.0000	42.01	5.77	47.78	54.00	-6.22	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ac40 (5190MHz)

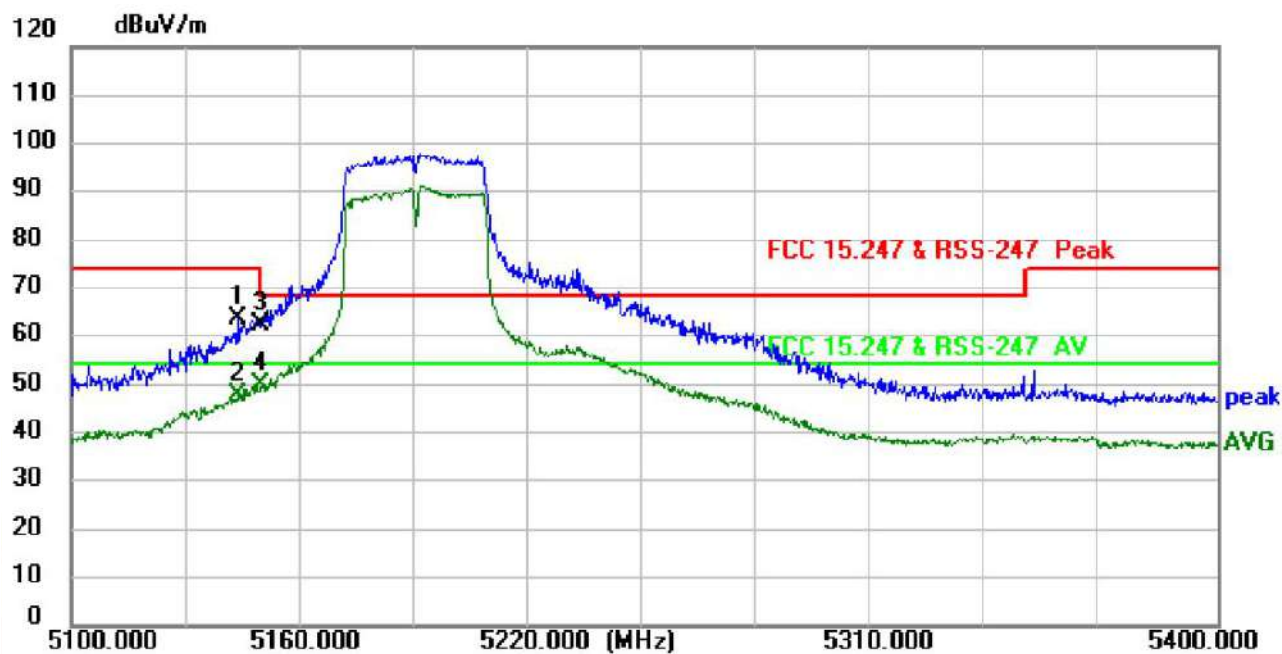


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5143.8000	57.98	5.74	63.72	74.00	-10.28	peak
2	5143.8000	41.90	5.74	47.64	54.00	-6.36	AVG
3	5150.0000	56.58	5.77	62.35	68.20	-5.85	peak
4 *	5150.0000	44.07	5.77	49.84	54.00	-4.16	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ac40 (5230MHz)

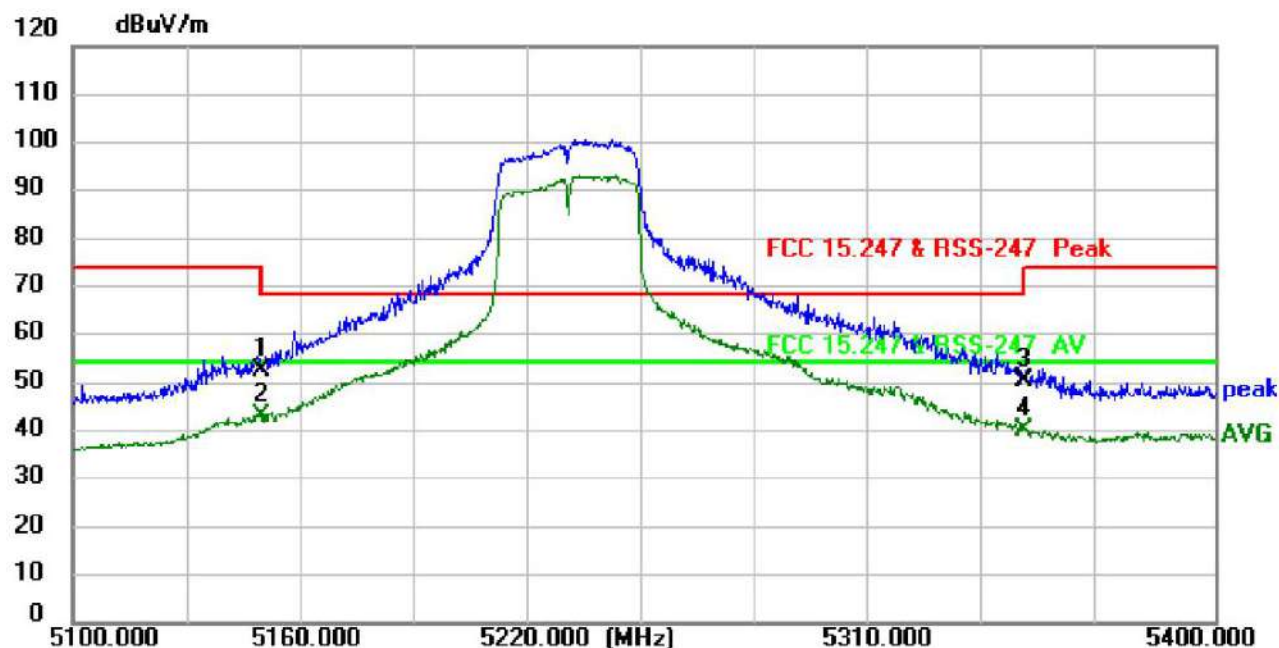


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.0000	46.64	5.77	52.41	68.20	-15.79	peak
2 *	5150.0000	37.51	5.77	43.28	54.00	-10.72	AVG
3	5350.0000	44.16	6.28	50.44	68.20	-17.76	peak
4	5350.0000	33.98	6.28	40.26	54.00	-13.74	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ac40 (5230MHz)

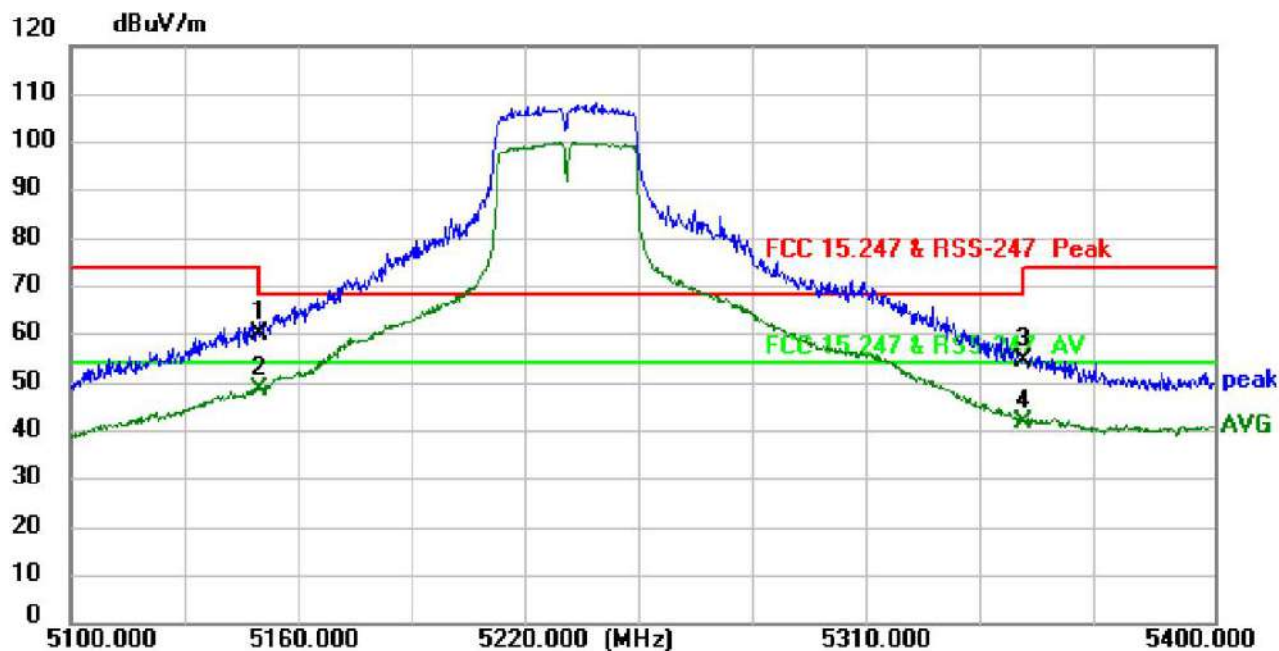


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.0000	54.62	5.77	60.39	68.20	-7.81	peak
2 *	5150.0000	43.01	5.77	48.78	54.00	-5.22	AVG
3	5350.0000	48.27	6.28	54.55	68.20	-13.65	peak
4	5350.0000	35.66	6.28	41.94	54.00	-12.06	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ax40 (5190MHz)

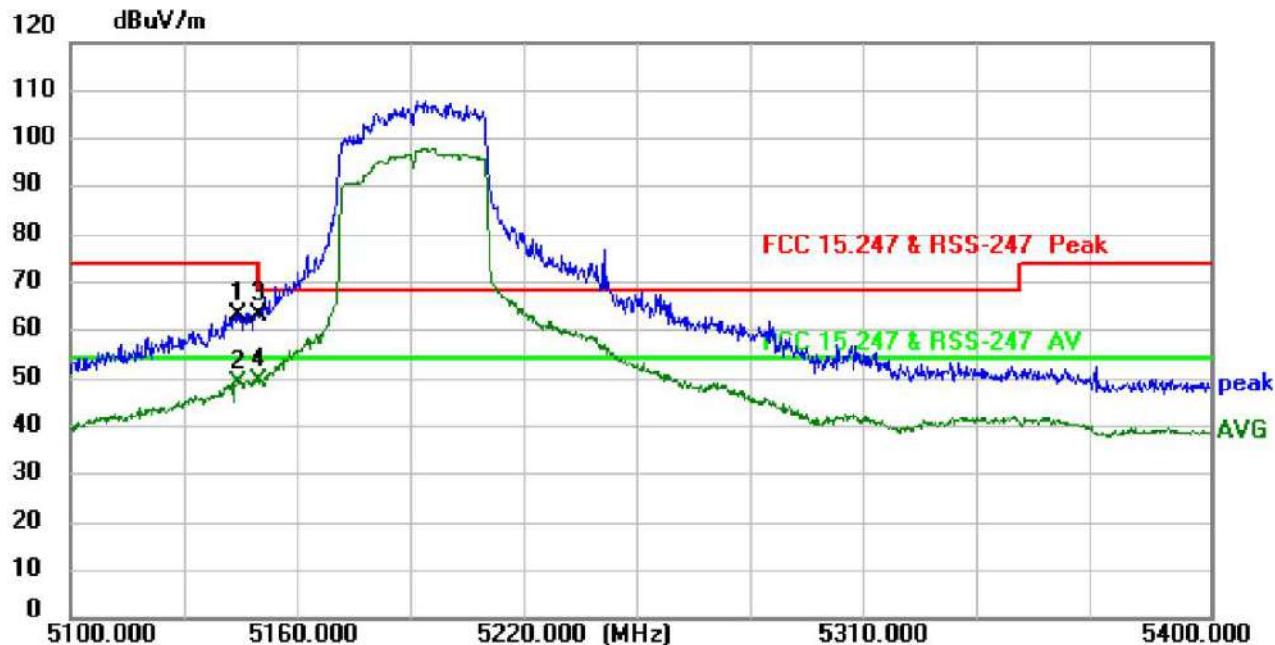


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	5144.1000	57.39	5.74	63.13	74.00	-10.87	peak
2	5144.1000	43.43	5.74	49.17	54.00	-4.83	AVG
3	5150.0000	57.51	5.77	63.28	68.20	-4.92	peak
4 *	5150.0000	43.58	5.77	49.35	54.00	-4.65	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ax40 (5190MHz)

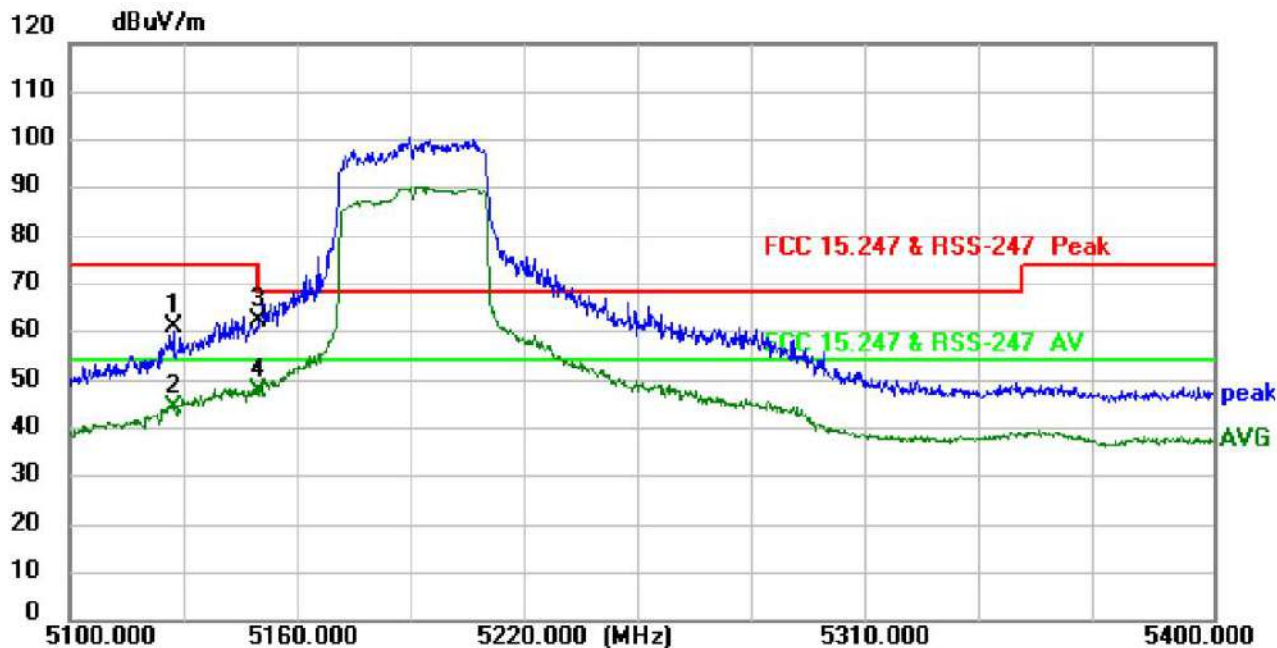


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5127.3000	55.24	5.64	60.88	74.00	-13.12	peak
2	5127.3000	38.90	5.64	44.54	54.00	-9.46	AVG
3 *	5150.0000	56.47	5.77	62.24	68.20	-5.96	peak
4	5150.0000	42.08	5.77	47.85	54.00	-6.15	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ax40 (5230MHz)

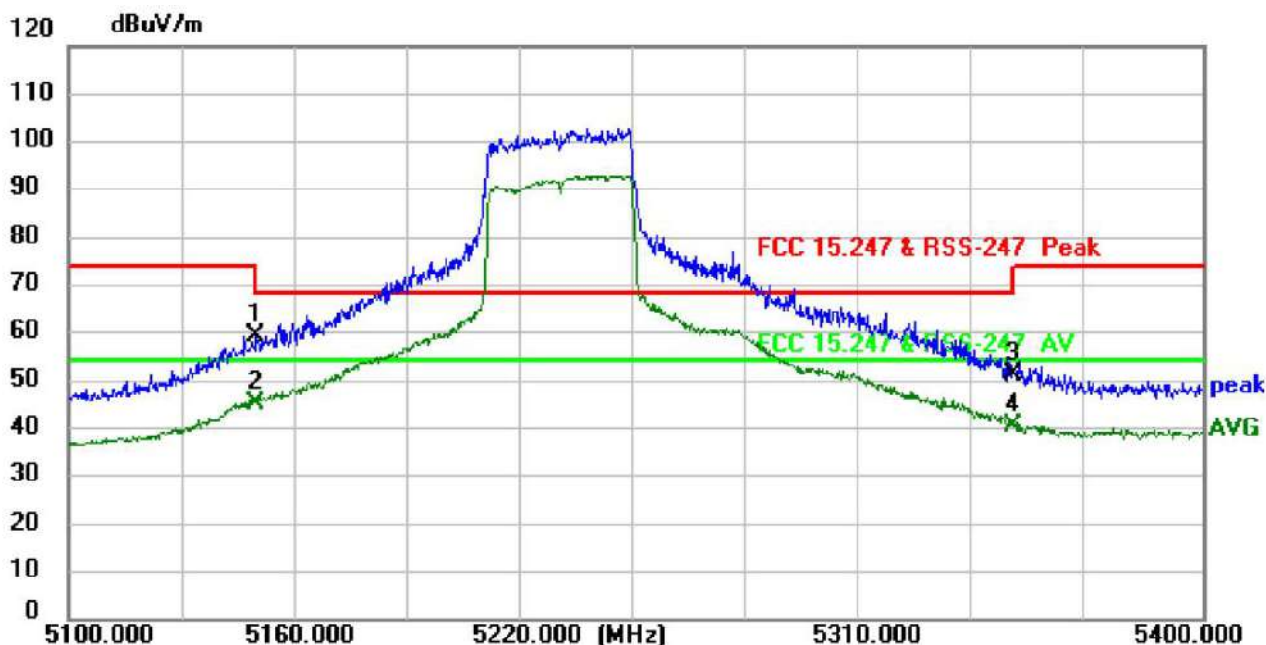


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.0000	53.61	5.77	59.38	68.20	-8.82	peak
2 *	5150.0000	39.48	5.77	45.25	54.00	-8.75	AVG
3	5350.0000	44.73	6.28	51.01	68.20	-17.19	peak
4	5350.0000	34.17	6.28	40.45	54.00	-13.55	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ax40 (5230MHz)

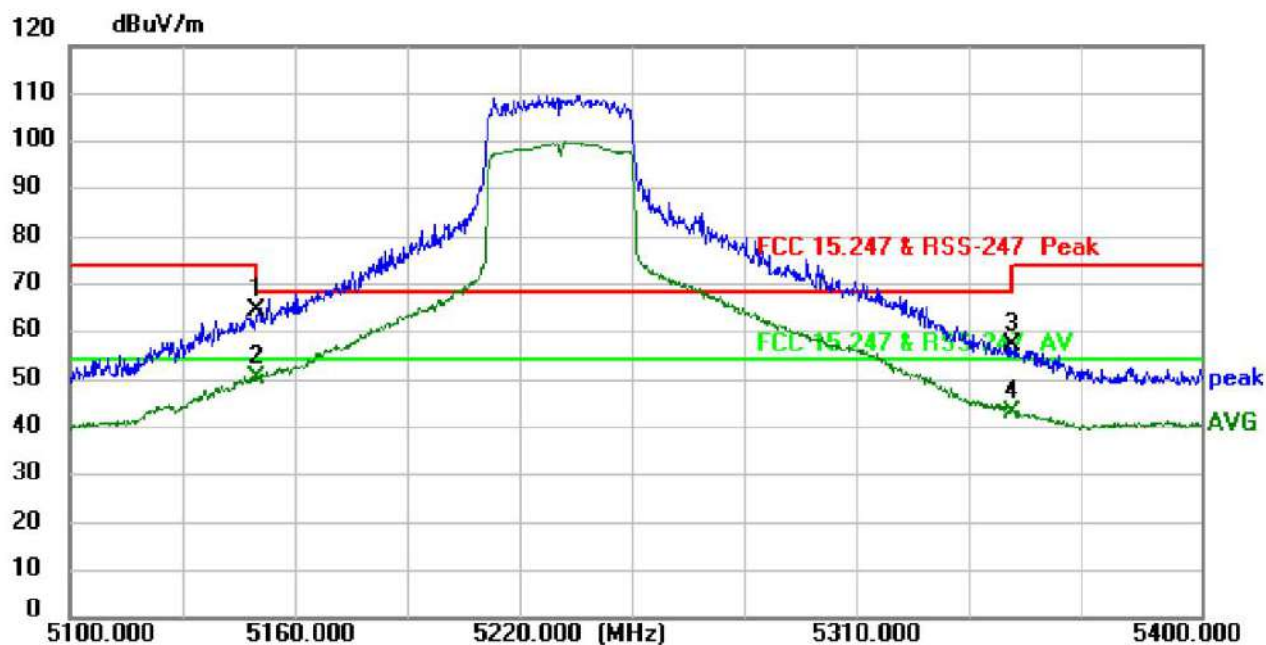


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.0000	58.52	5.77	64.29	68.20	-3.91	peak
2 *	5150.0000	44.51	5.77	50.28	54.00	-3.72	AVG
3	5350.0000	50.81	6.28	57.09	68.20	-11.11	peak
4	5350.0000	36.62	6.28	42.90	54.00	-11.10	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 a (5745MHz)

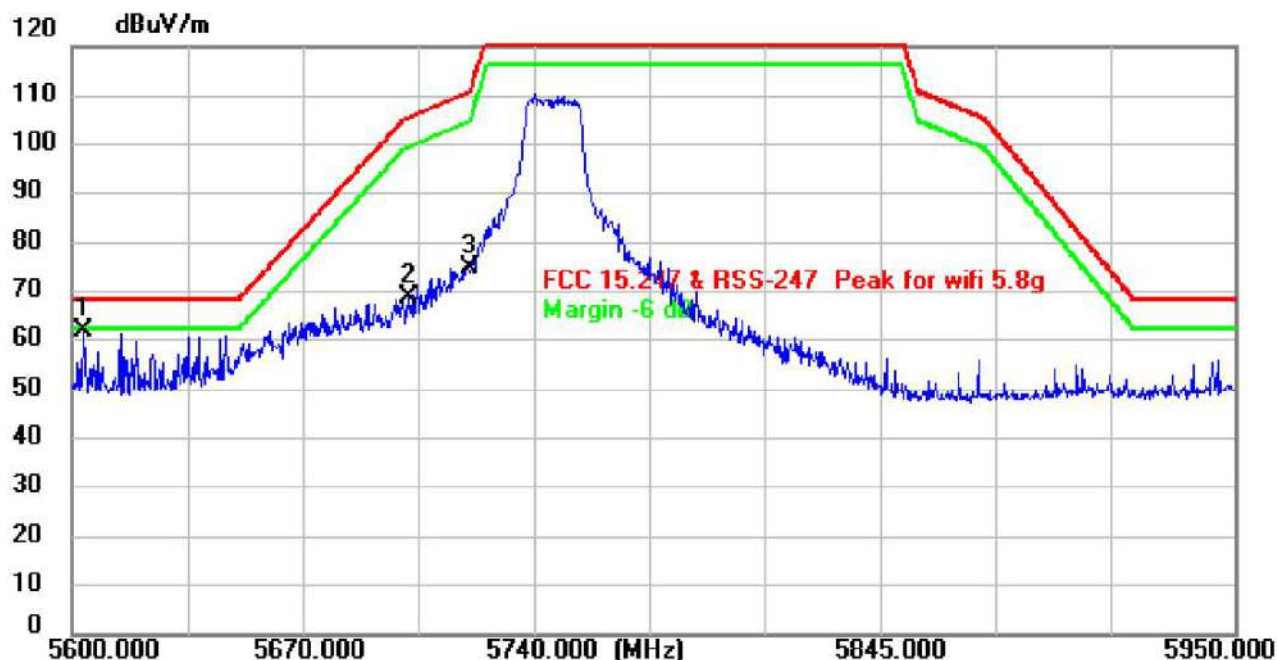


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5603.5000	54.93	6.98	61.91	68.20	-6.29	peak
2	5701.1500	61.53	7.23	68.76	105.52	-36.76	peak
3	5720.0000	67.32	7.26	74.58	110.80	-36.22	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 a (5745MHz)

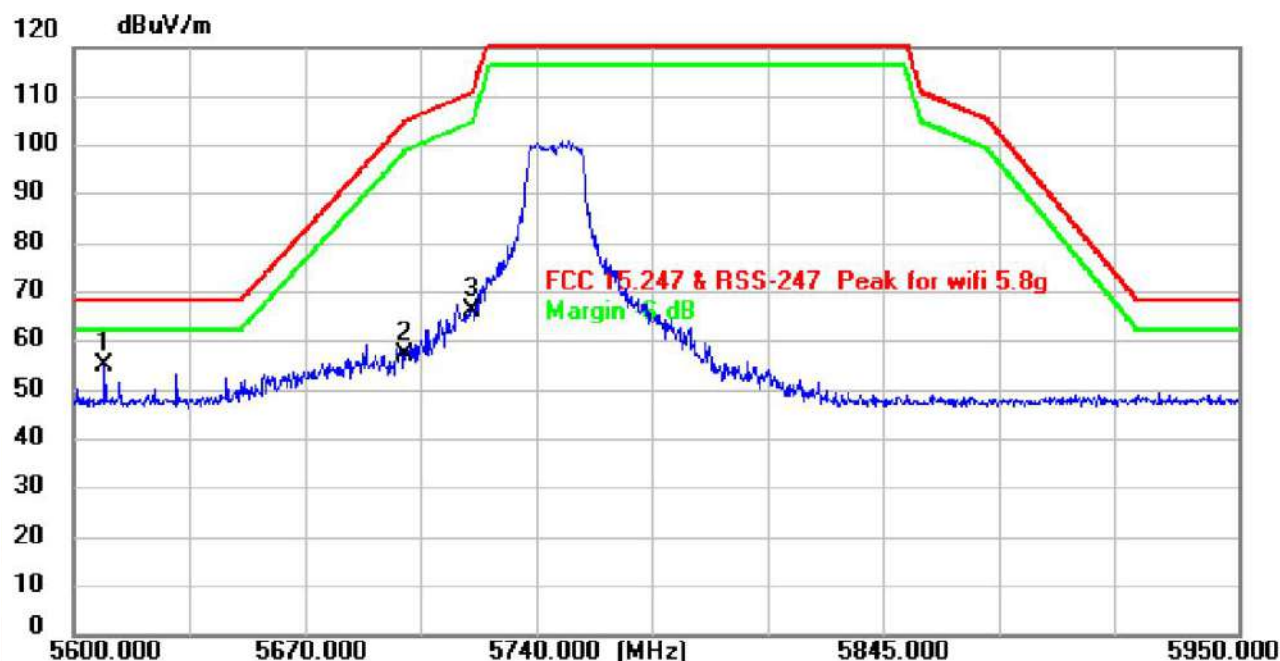


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5609.4500	48.06	7.03	55.09	68.20	-13.11	peak
2	5700.0000	49.87	7.23	57.10	105.20	-48.10	peak
3	5720.0000	59.08	7.26	66.34	110.80	-44.46	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 a (5825MHz)

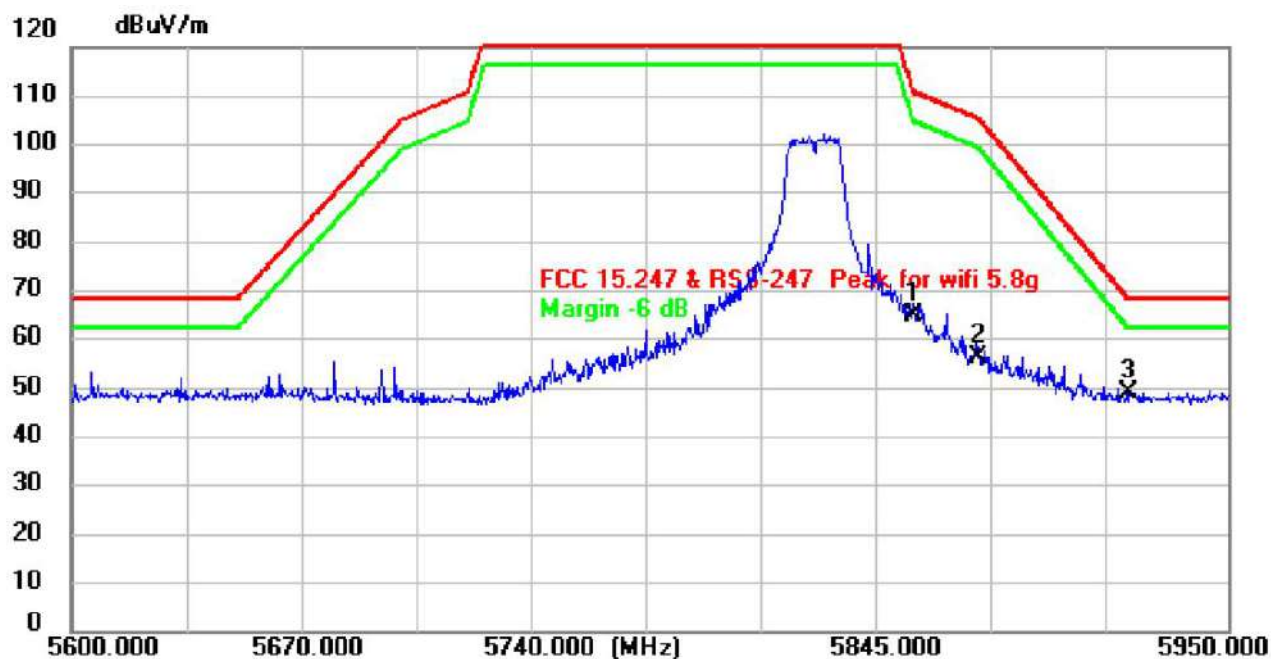


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5855.0000	57.01	7.77	64.78	110.80	-46.02	peak
2	5875.0000	48.55	7.81	56.36	105.20	-48.84	peak
3 *	5920.0000	41.03	7.92	48.95	68.20	-19.25	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 a (5825MHz)

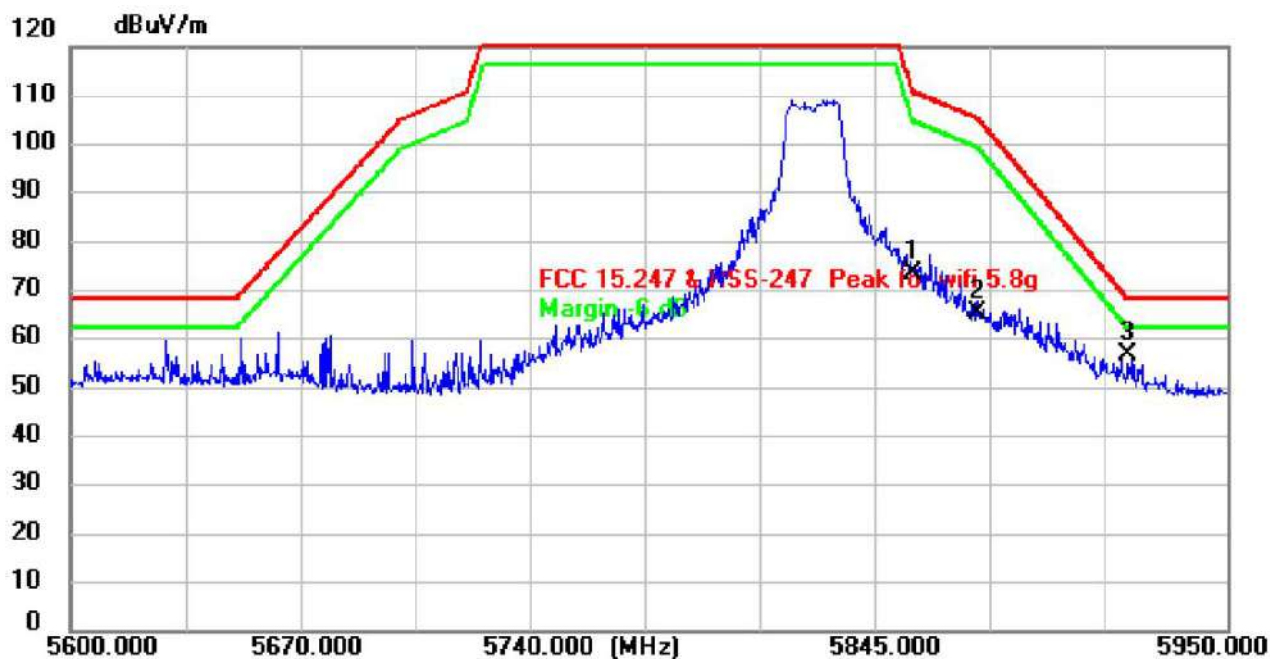


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5855.0000	65.80	7.77	73.57	110.80	-37.23	peak
2	5875.0000	57.60	7.81	65.41	105.20	-39.79	peak
3 *	5920.0000	48.88	7.92	56.80	68.20	-11.40	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 n20 (5745MHz)

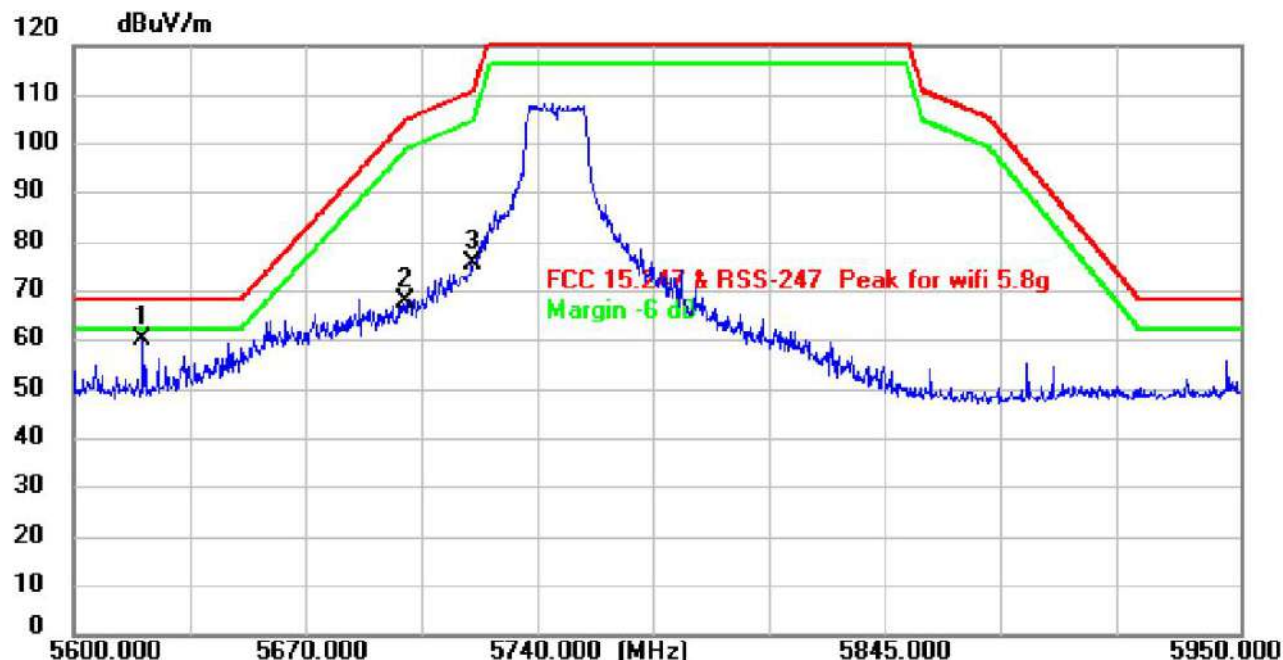


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5620.6500	53.24	7.09	60.33	68.20	-7.87	peak
2	5700.0000	60.71	7.23	67.94	105.20	-37.26	peak
3	5720.0000	68.53	7.26	75.79	110.80	-35.01	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 n20 (5745MHz)

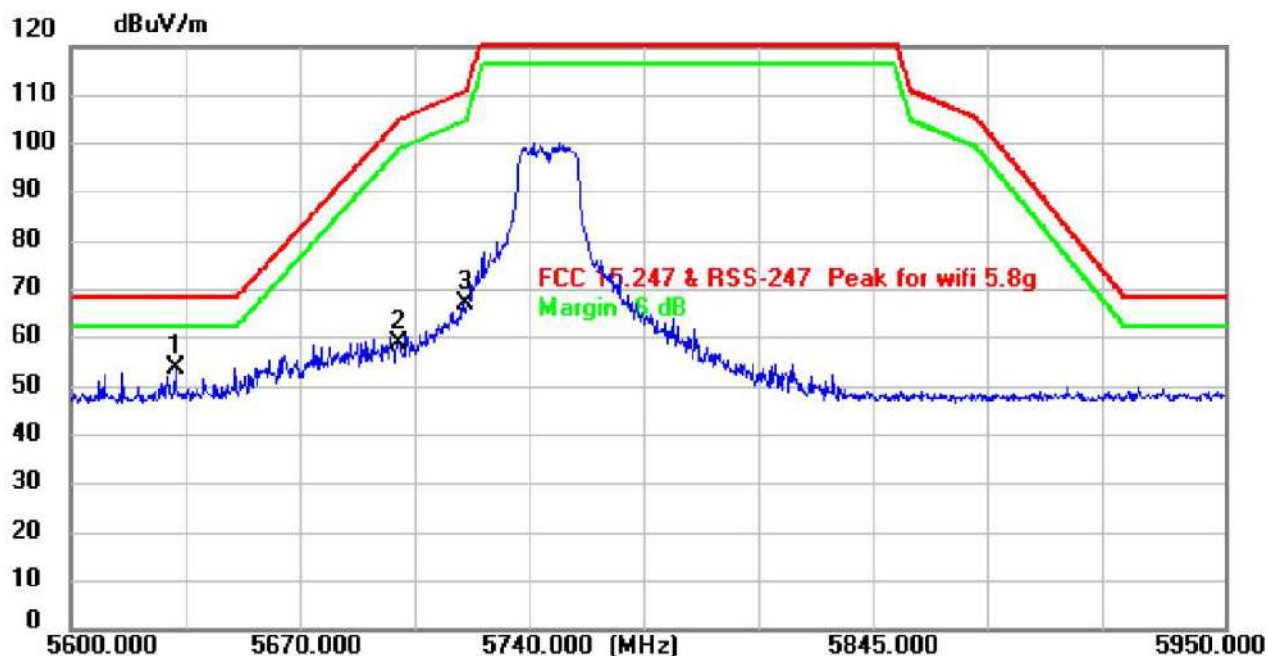


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5631.8500	46.63	7.15	53.78	68.20	-14.42	peak
2	5700.0000	51.64	7.23	58.87	105.20	-46.33	peak
3	5720.0000	59.70	7.26	66.96	110.80	-43.84	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 n20 (5825MHz)

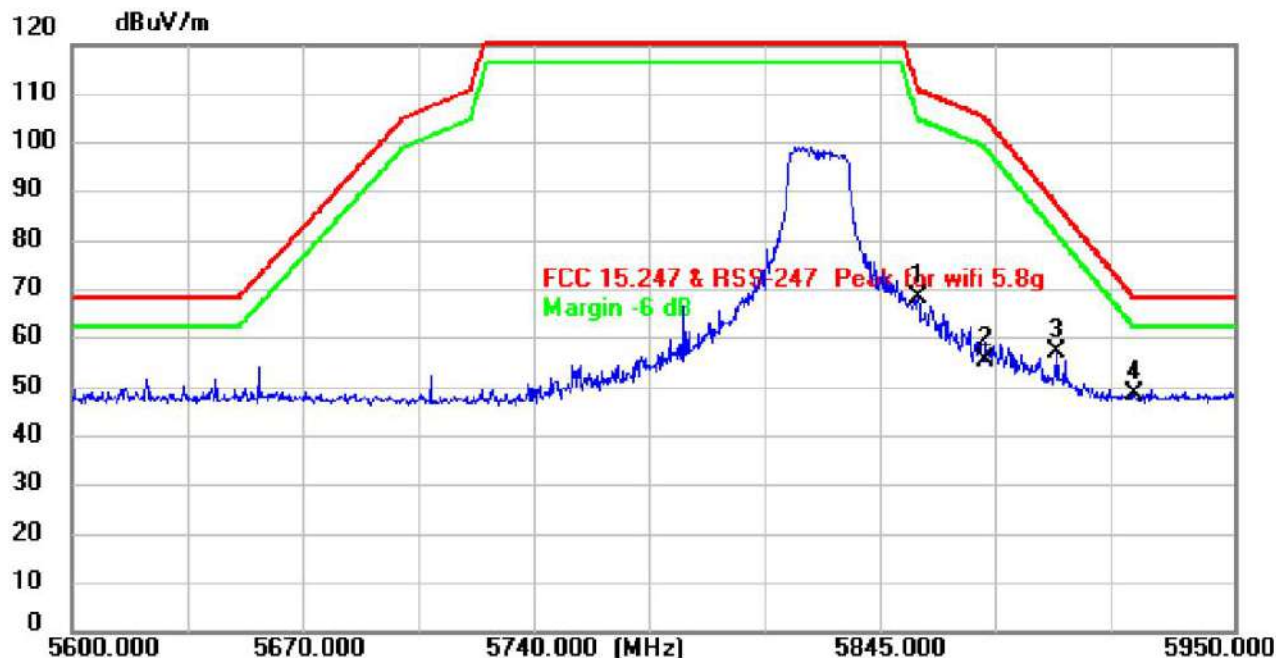


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5854.8000	60.49	7.77	68.26	111.26	-43.00	peak
2	5875.1000	47.80	7.81	55.61	105.12	-49.51	peak
3	5896.4500	49.40	7.84	57.24	87.56	-30.32	peak
4 *	5919.9000	40.60	7.92	48.52	68.28	-19.76	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 n20 (5825MHz)

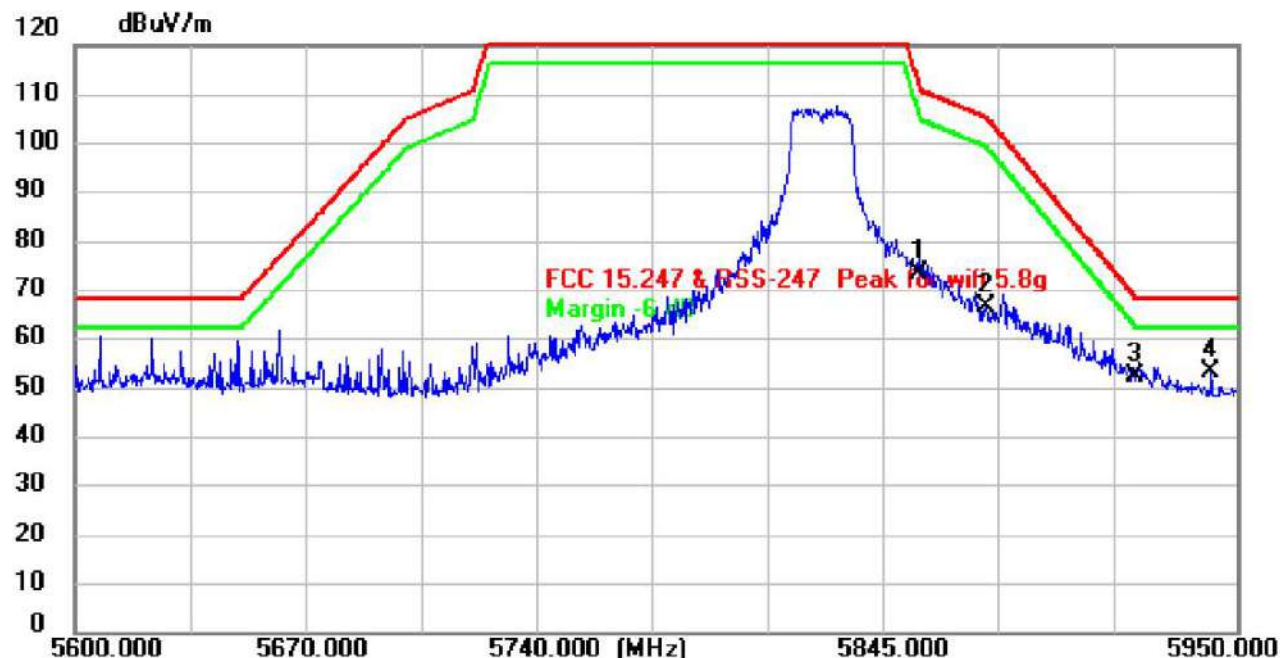


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5854.1000	65.90	7.77	73.67	112.85	-39.18	peak
2	5874.7500	58.81	7.81	66.62	105.27	-38.65	peak
3	5919.5500	44.63	7.92	52.55	68.57	-16.02	peak
4 *	5942.3000	45.52	7.99	53.51	68.20	-14.69	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ac20 (5745MHz)

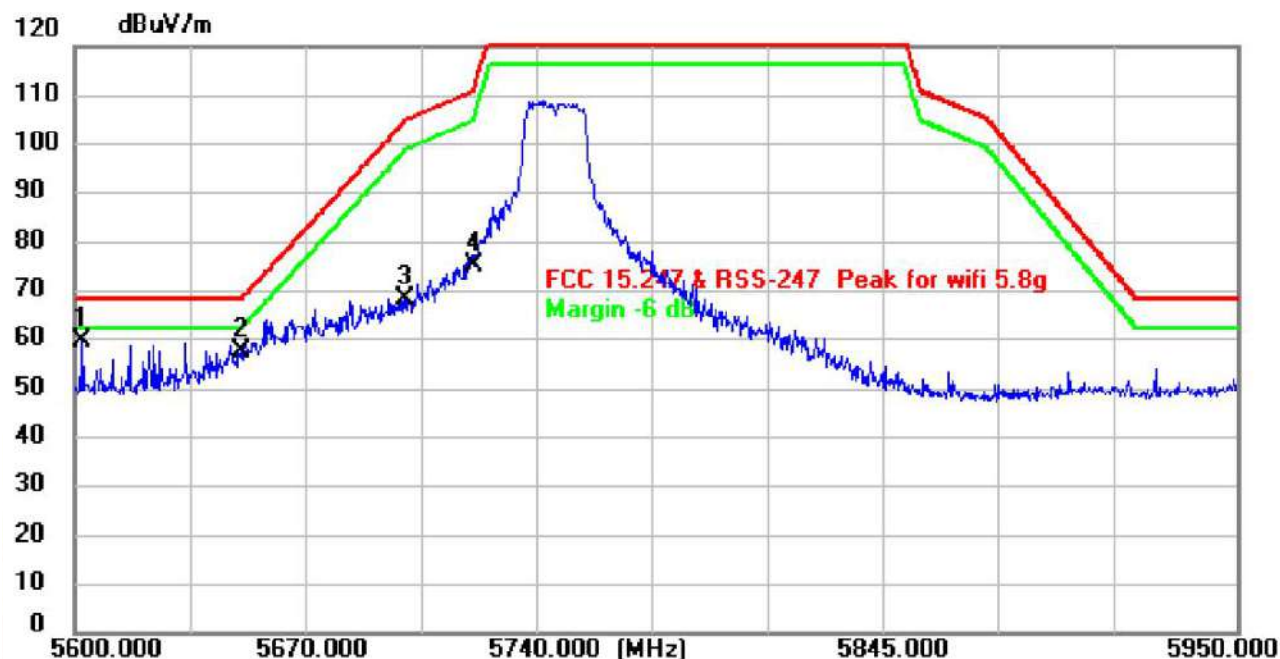


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5602.4500	52.82	6.98	59.80	68.20	-8.40	peak
2	5650.4000	50.46	7.26	57.72	68.50	-10.78	peak
3	5699.4000	61.25	7.23	68.48	104.76	-36.28	peak
4	5720.0500	68.09	7.26	75.35	110.91	-35.56	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ac20 (5745MHz)

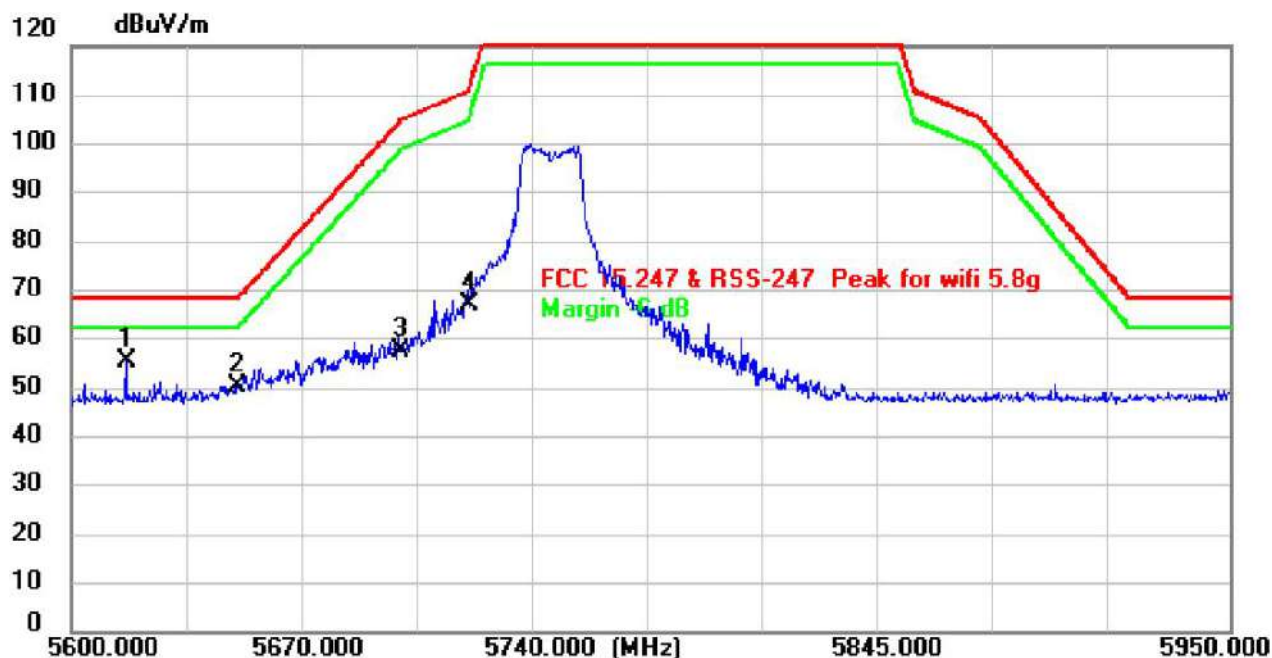


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5616.4500	48.41	7.06	55.47	68.20	-12.73	peak
2	5650.4000	42.91	7.26	50.17	68.50	-18.33	peak
3	5699.4000	50.52	7.23	57.75	104.76	-47.01	peak
4	5720.0500	59.67	7.26	66.93	110.91	-43.98	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ac20 (5825MHz)

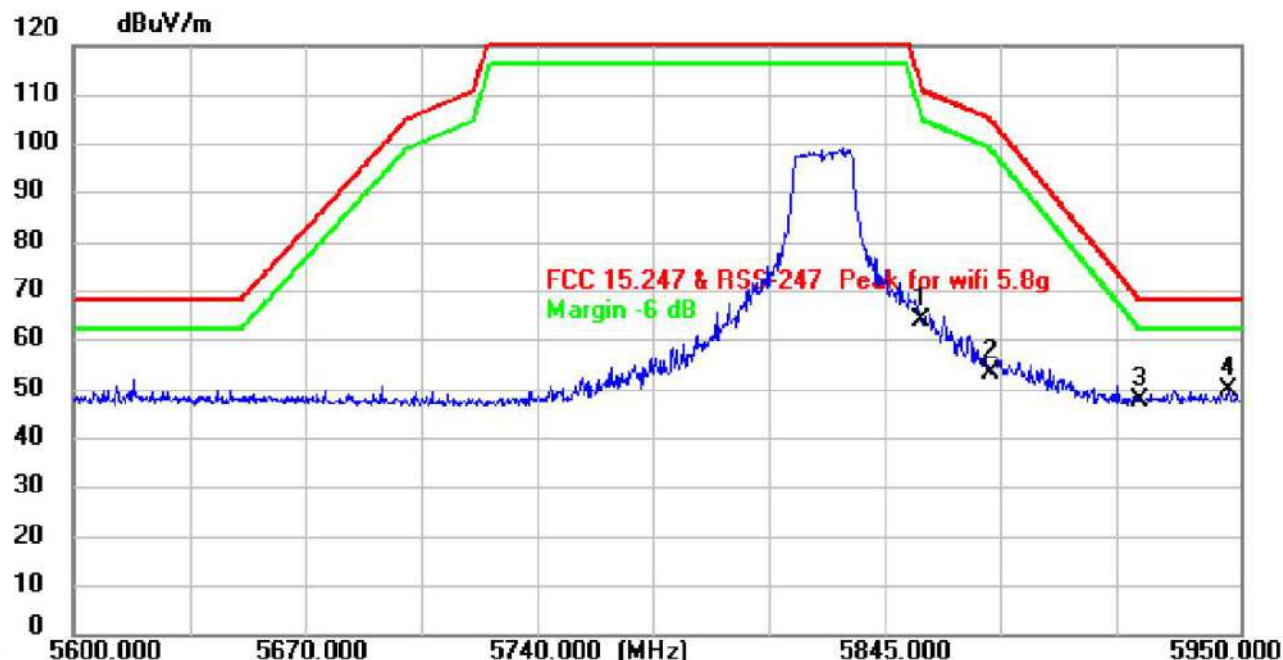


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5854.4500	56.35	7.77	64.12	112.05	-47.93	peak
2	5875.1000	45.75	7.81	53.56	105.12	-51.56	peak
3	5919.9000	40.07	7.92	47.99	68.28	-20.29	peak
4 *	5946.5000	42.10	8.00	50.10	68.20	-18.10	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ac20 (5825MHz)

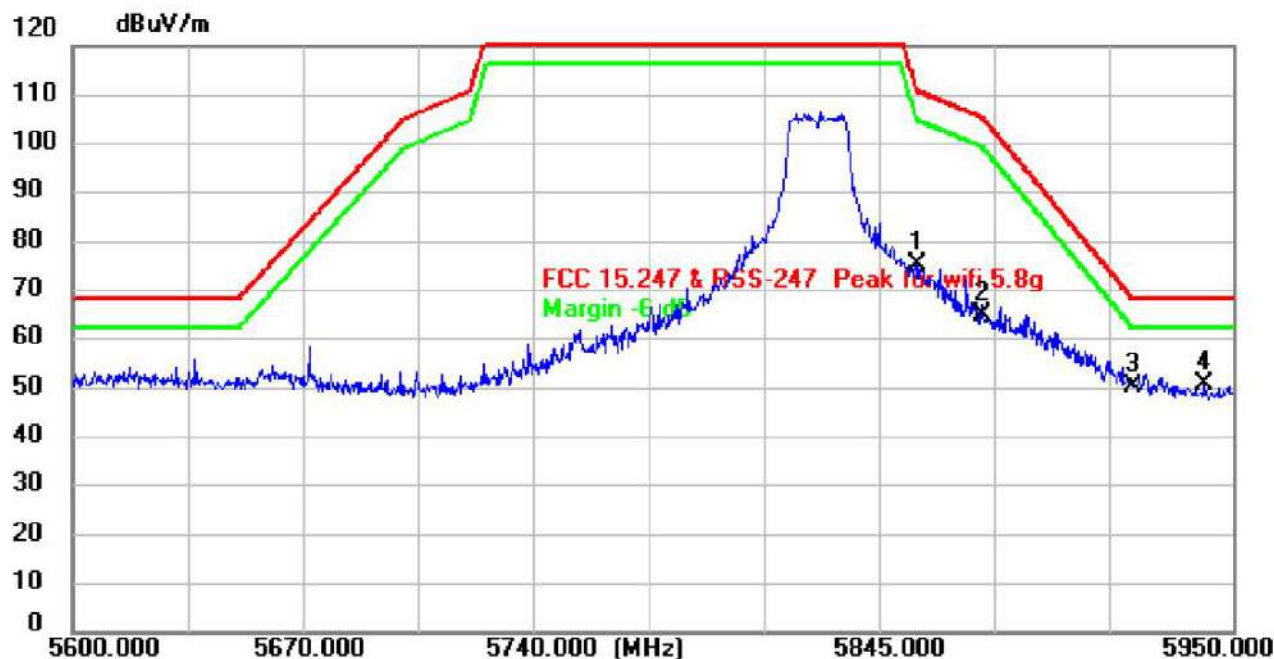


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5854.8000	67.36	7.77	75.13	111.26	-36.13	peak
2	5874.7500	57.12	7.81	64.93	105.27	-40.34	peak
3	5919.9000	42.28	7.92	50.20	68.28	-18.08	peak
4 *	5941.6000	42.82	7.99	50.81	68.20	-17.39	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ax20 (5745MHz)

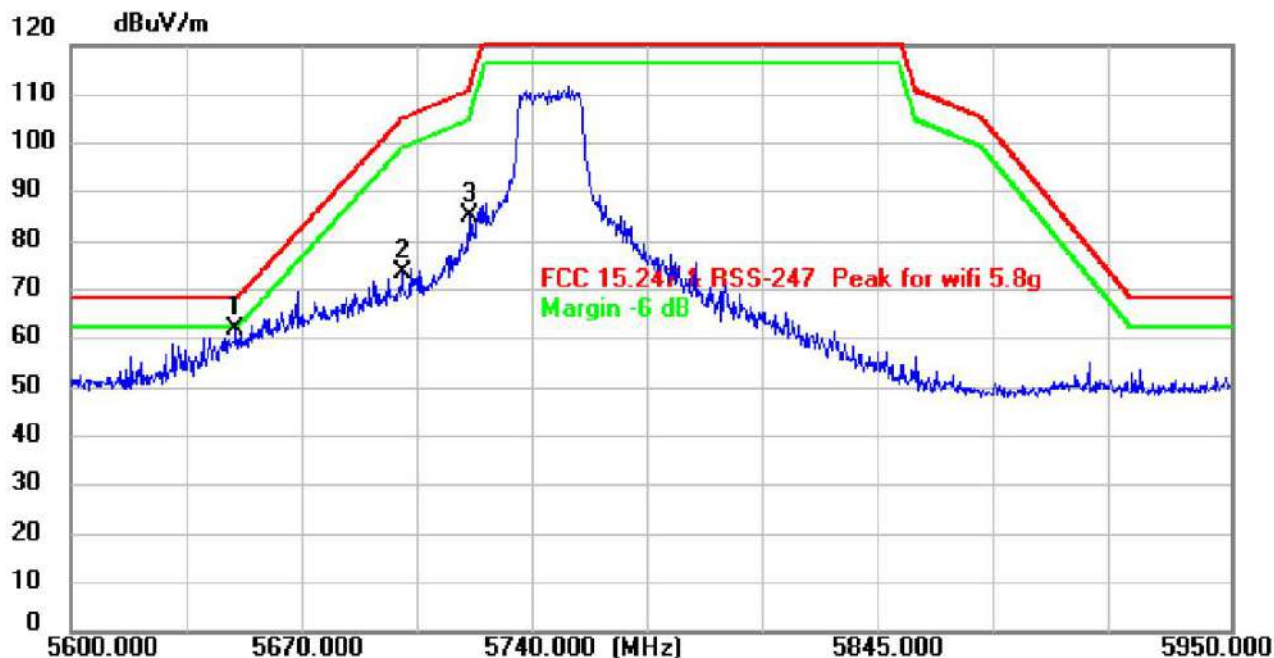


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5649.7000	54.51	7.25	61.76	68.20	-6.44	peak
2	5700.1000	66.32	7.23	73.55	105.23	-31.68	peak
3	5720.0500	77.96	7.26	85.22	110.91	-25.69	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ax20 (5745MHz)

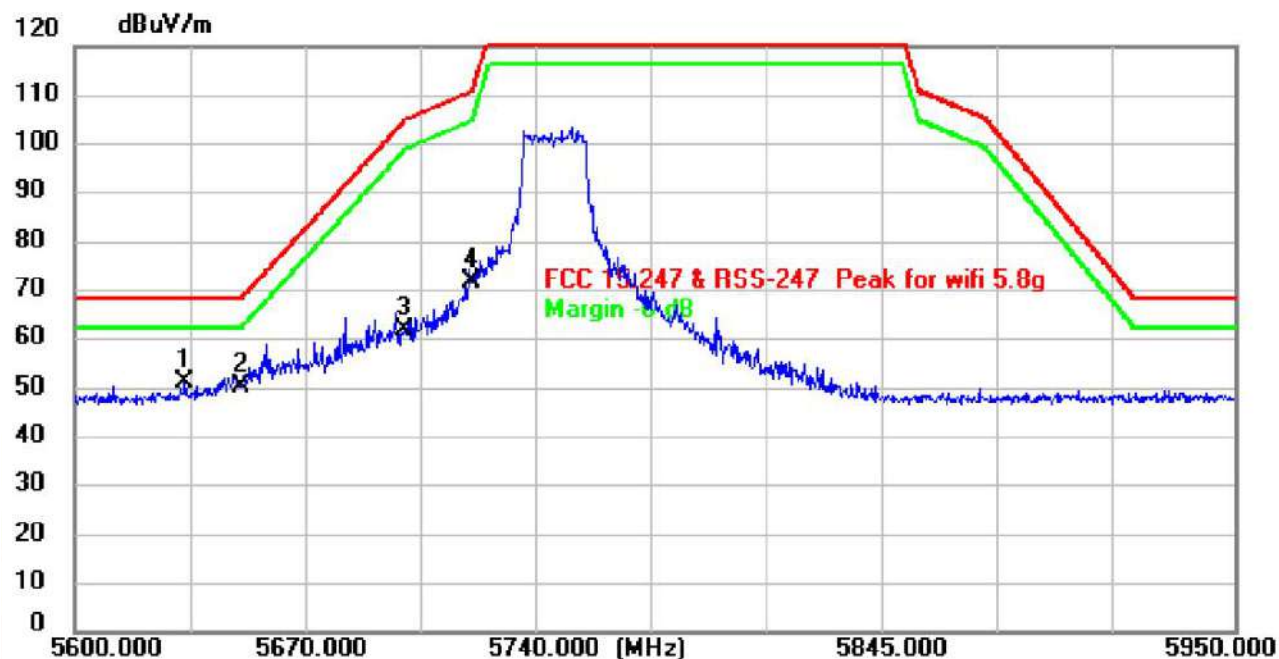


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5633.2500	44.00	7.15	51.15	68.20	-17.05	peak
2	5650.0500	43.16	7.26	50.42	68.24	-17.82	peak
3	5699.4000	54.73	7.23	61.96	104.76	-42.80	peak
4	5719.7000	64.44	7.26	71.70	110.72	-39.02	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ax20 (5825MHz)

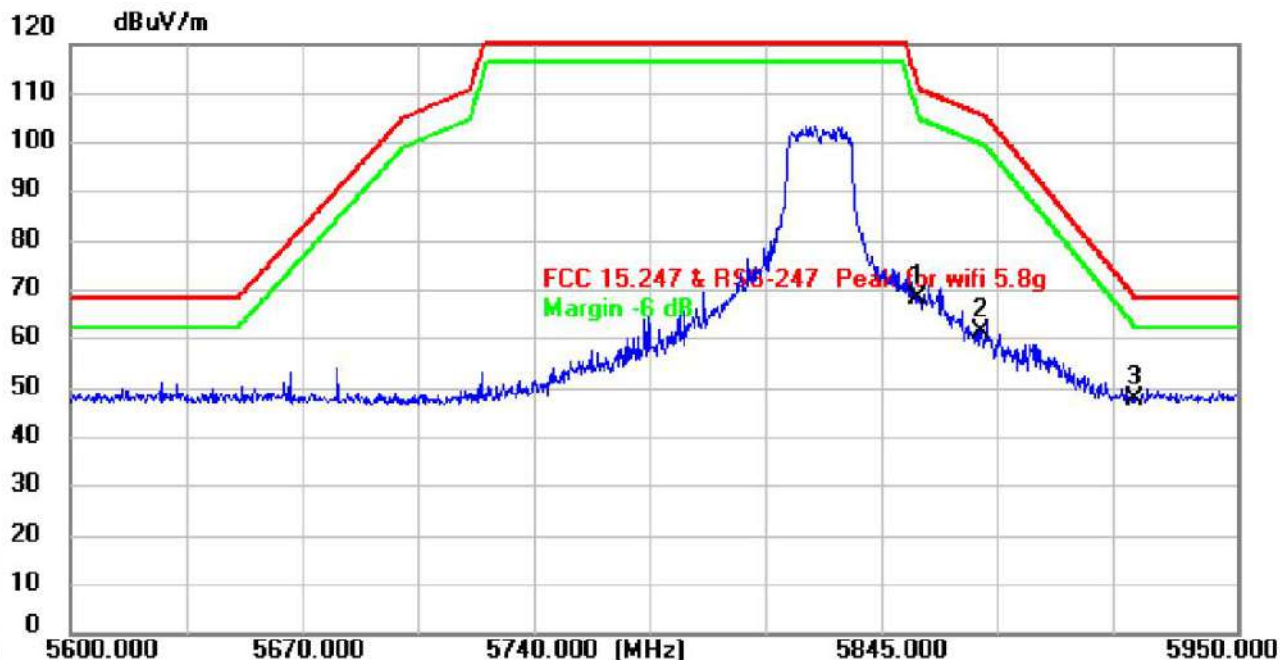


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5854.1000	60.77	7.77	68.54	112.85	-44.31	peak
2	5873.3500	53.54	7.81	61.35	105.66	-44.31	peak
3 *	5919.5500	39.67	7.92	47.59	68.57	-20.98	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ax20 (5825MHz)

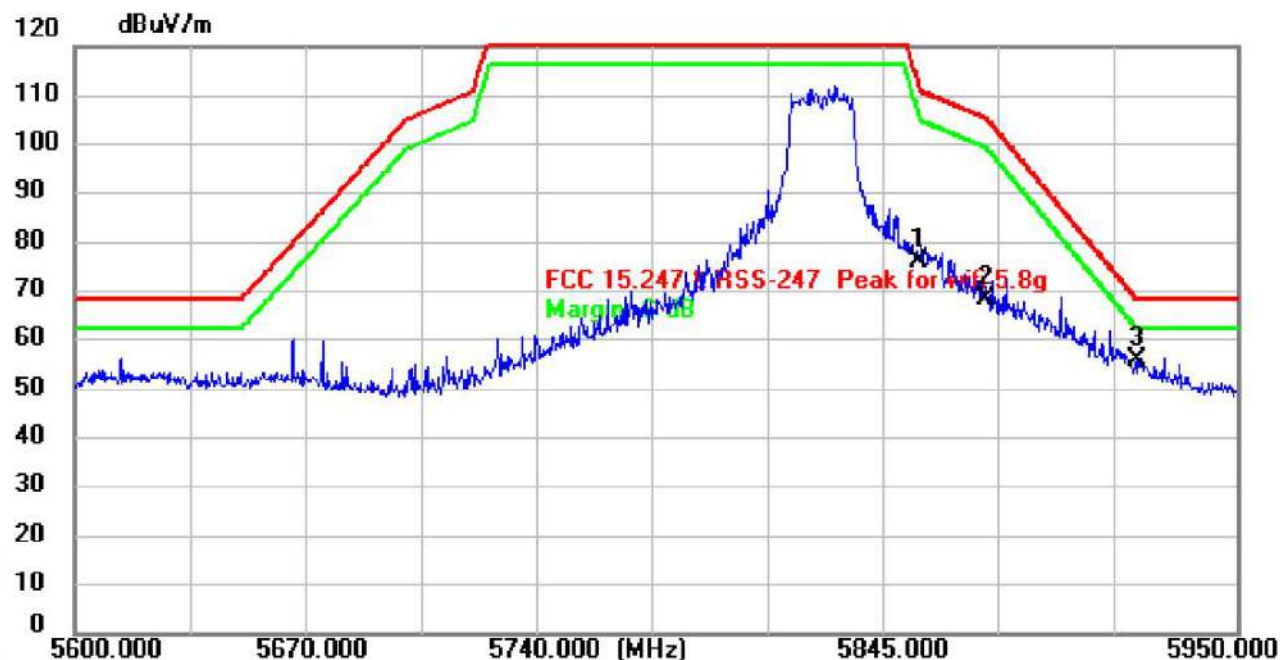


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5854.4500	68.50	7.77	76.27	112.05	-35.78	peak
2	5874.7500	60.38	7.81	68.19	105.27	-37.08	peak
3 *	5919.9000	48.16	7.92	56.08	68.28	-12.20	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 n40 (5755MHz)

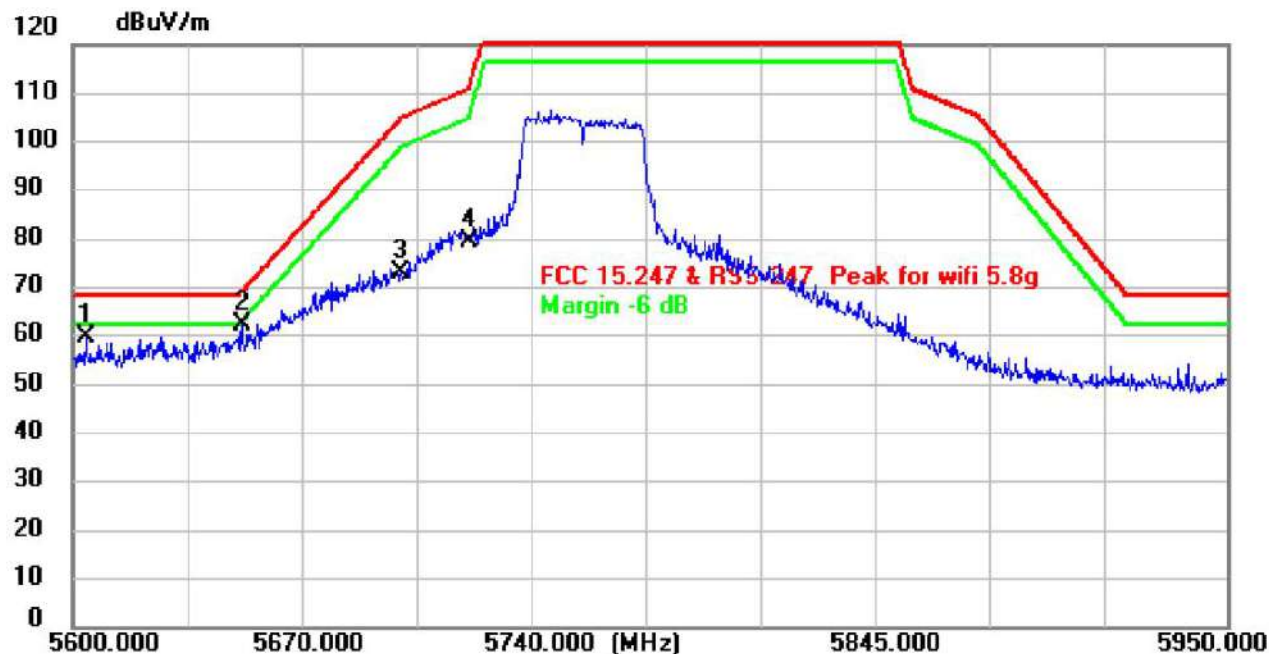


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5603.8500	52.61	6.99	59.60	68.20	-8.60	peak
2 *	5651.4500	55.02	7.26	62.28	69.27	-6.99	peak
3	5699.7500	65.86	7.23	73.09	105.02	-31.93	peak
4	5720.4000	72.43	7.26	79.69	111.71	-32.02	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 n40 (5755MHz)

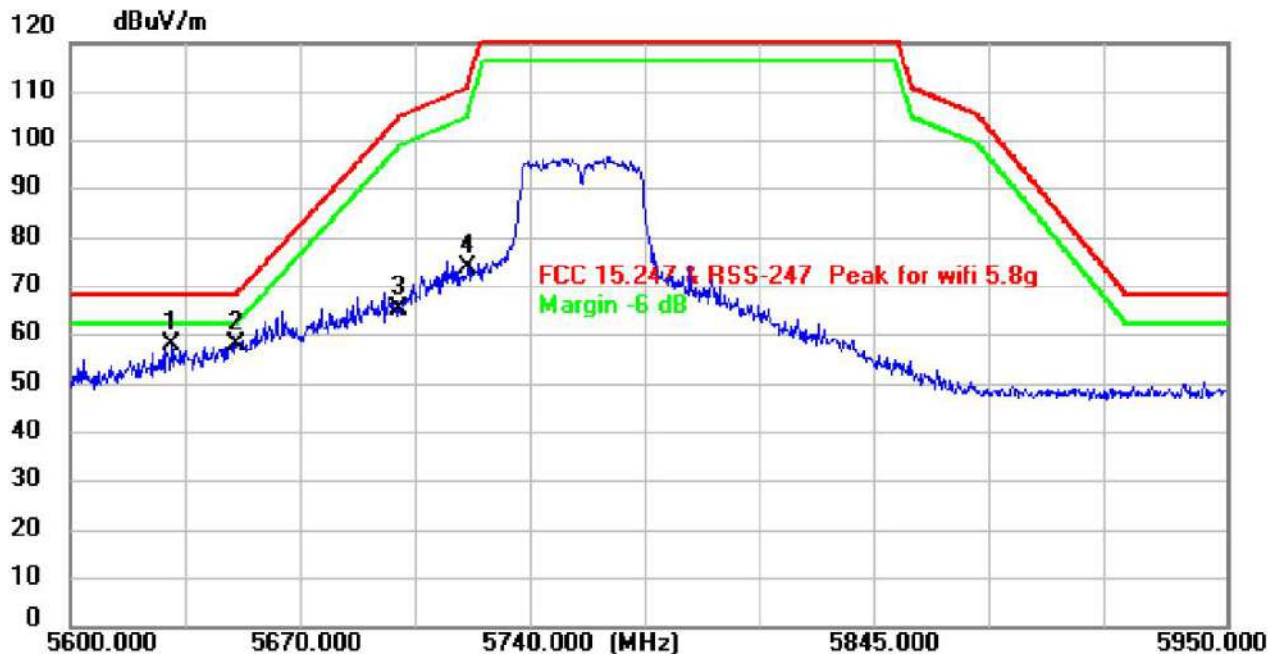


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5630.8000	50.81	7.14	57.95	68.20	-10.25	peak
2 *	5650.0500	50.98	7.26	58.24	68.24	-10.00	peak
3	5699.7500	58.00	7.23	65.23	105.02	-39.79	peak
4	5720.4000	66.83	7.26	74.09	111.71	-37.62	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 n40 (5795MHz)

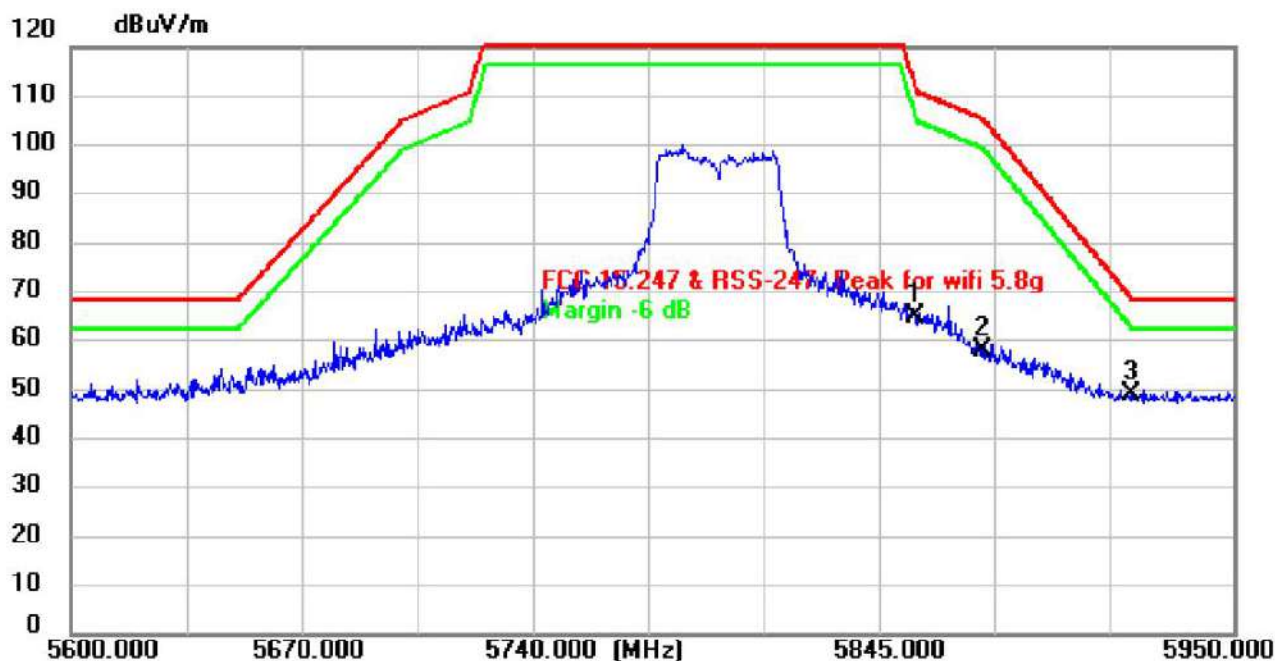


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5854.1000	57.36	7.77	65.13	112.85	-47.72	peak
2	5874.7500	50.10	7.81	57.91	105.27	-47.36	peak
3 *	5919.2000	41.12	7.92	49.04	68.86	-19.82	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 n40 (5795MHz)

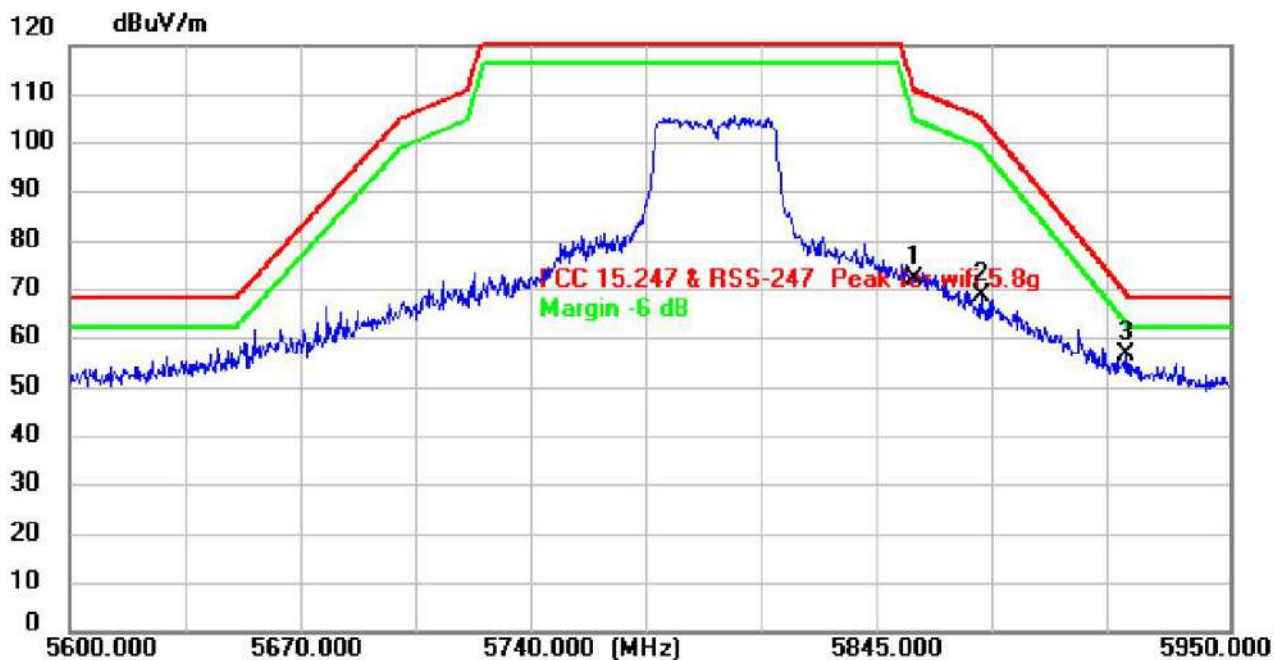


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5854.8000	64.32	7.77	72.09	111.26	-39.17	peak
2	5875.1000	61.09	7.81	68.90	105.12	-36.22	peak
3 *	5918.8500	48.81	7.92	56.73	69.15	-12.42	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ac40 (5755MHz)

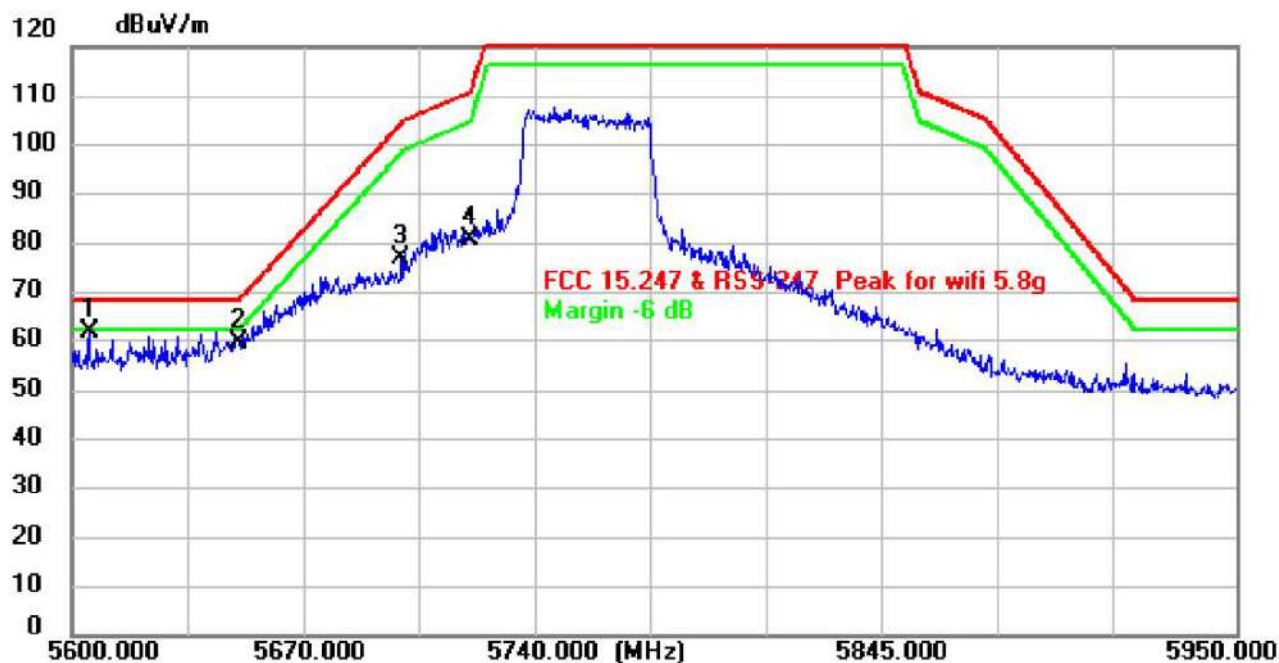


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5605.2500	55.12	7.00	62.12	68.20	-6.08	peak
2	5650.0500	52.61	7.26	59.87	68.24	-8.37	peak
3	5699.0500	69.67	7.23	76.90	104.50	-27.60	peak
4	5719.7000	73.69	7.26	80.95	110.72	-29.77	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ac40 (5755MHz)

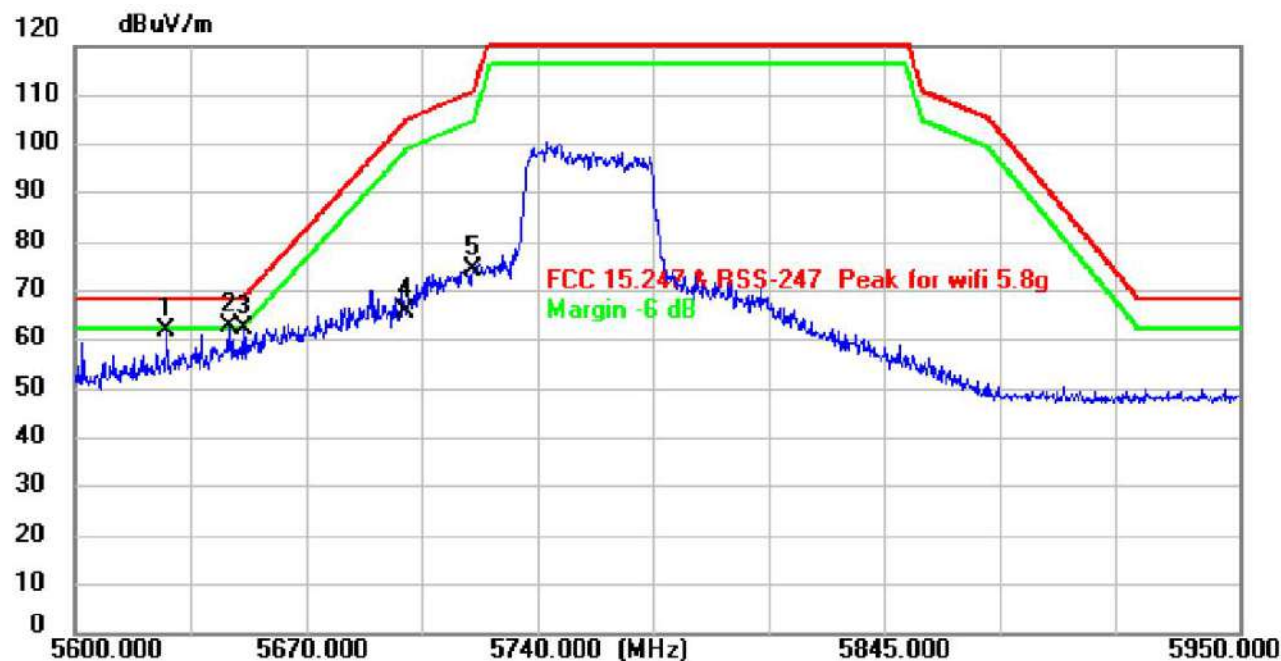


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5627.6500	54.98	7.12	62.10	68.20	-6.10	peak
2 *	5646.2000	55.50	7.22	62.72	68.20	-5.48	peak
3	5650.7500	55.07	7.26	62.33	68.76	-6.43	peak
4	5699.4000	58.56	7.23	65.79	104.76	-38.97	peak
5	5719.7000	67.00	7.26	74.26	110.72	-36.46	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ac40 (5795MHz)

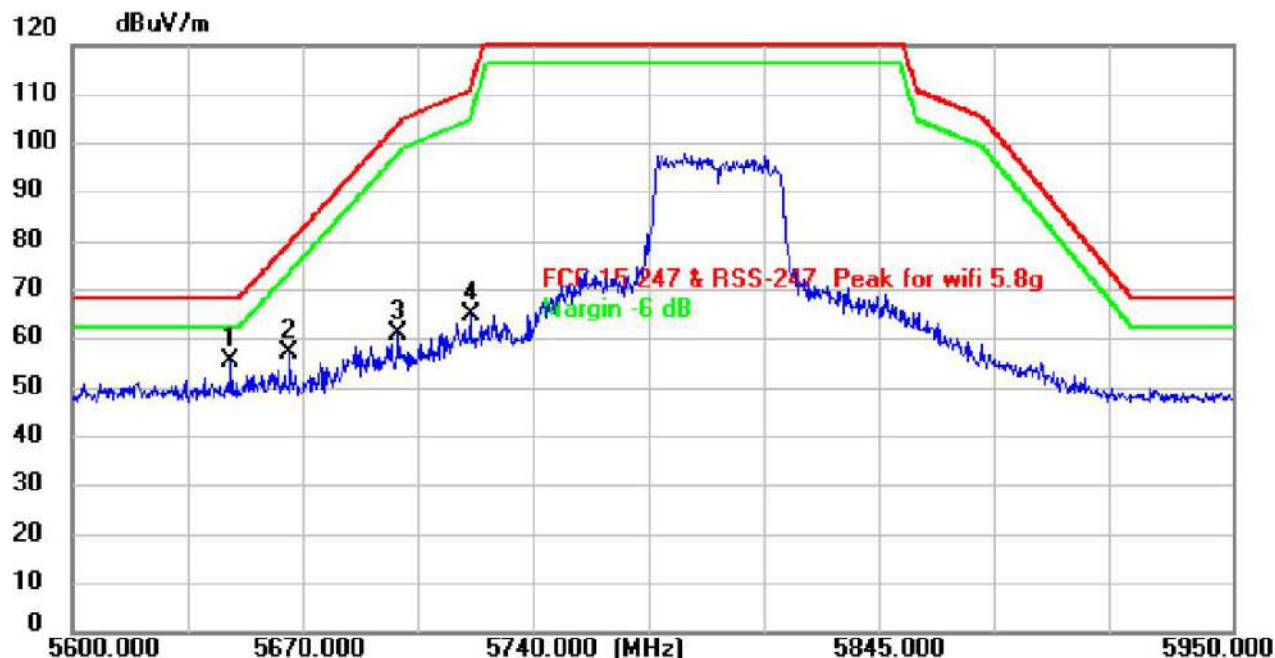


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5647.9500	48.41	7.23	55.64	68.20	-12.56	peak
2	5665.4500	50.13	7.25	57.38	79.63	-22.25	peak
3	5698.3500	53.64	7.23	60.87	103.98	-43.11	peak
4	5720.0500	57.87	7.26	65.13	110.91	-45.78	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ac40 (5795MHz)

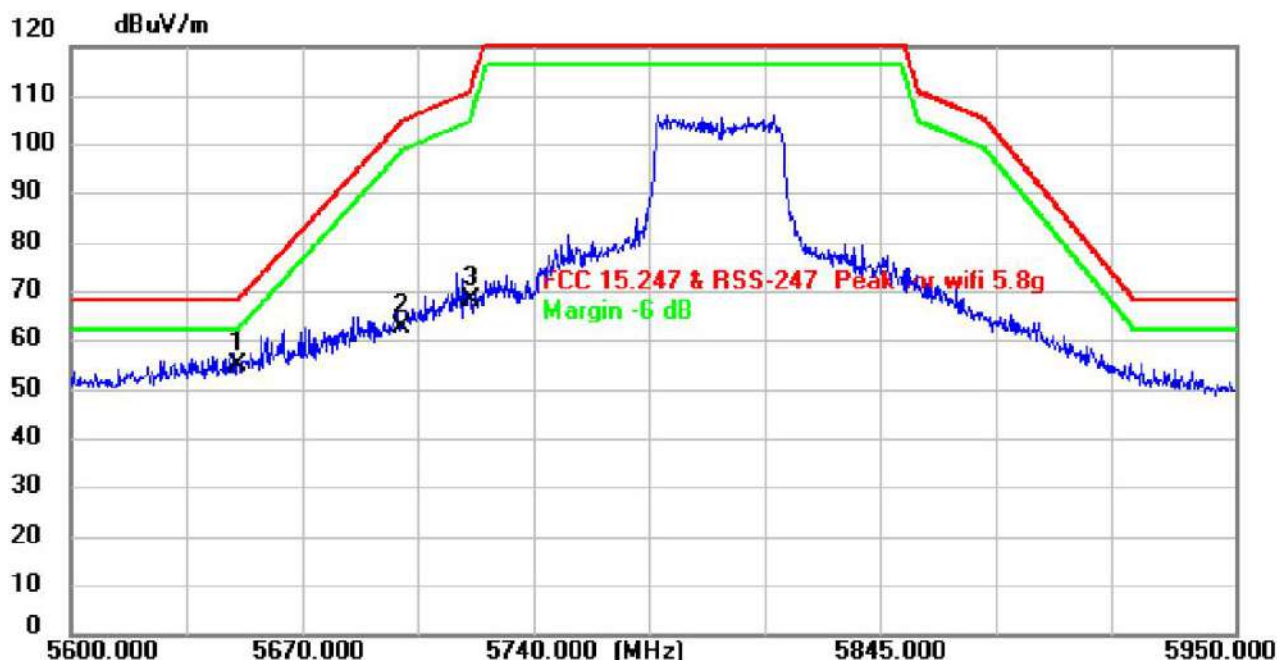


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5650.4000	47.98	7.26	55.24	68.50	-13.26	peak
2	5699.4000	55.58	7.23	62.81	104.76	-41.95	peak
3	5720.0500	61.05	7.26	68.31	110.91	-42.60	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ax40 (5755MHz)

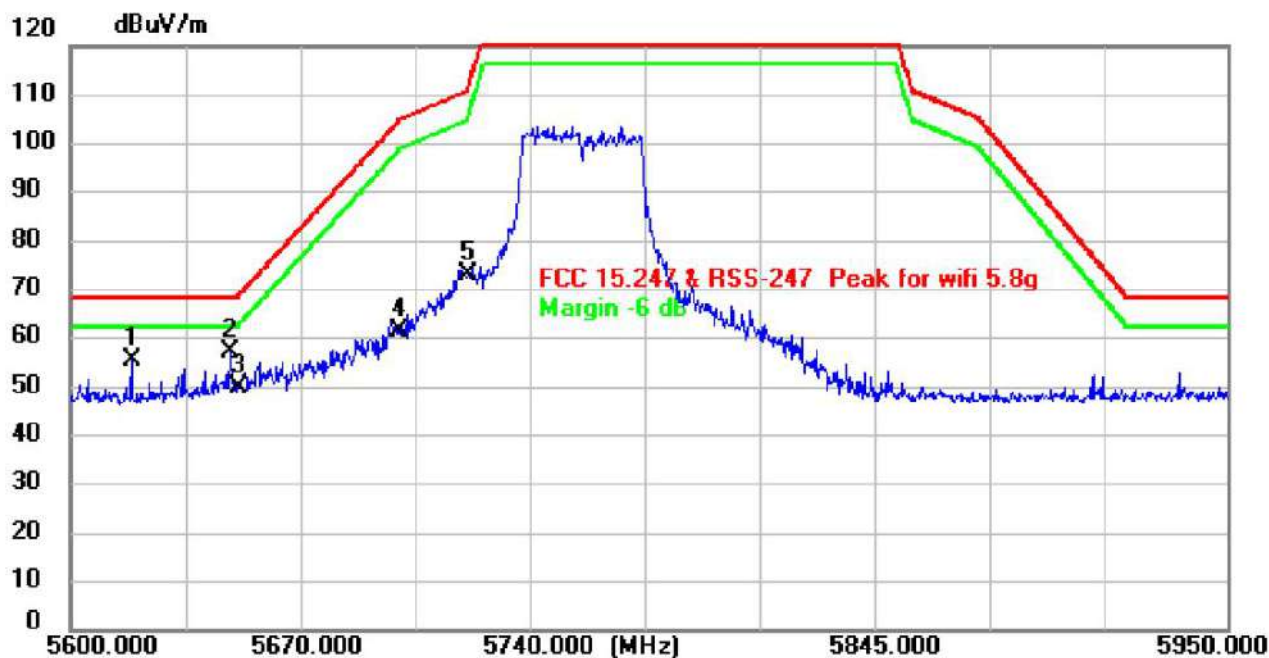


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5618.5500	48.28	7.07	55.35	68.20	-12.85	peak
2 *	5648.3000	49.93	7.23	57.16	68.20	-11.04	peak
3	5651.1000	42.66	7.26	49.92	69.01	-19.09	peak
4	5699.7500	54.33	7.23	61.56	105.02	-43.46	peak
5	5720.0500	65.75	7.26	73.01	110.91	-37.90	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ax40 (5755MHz)

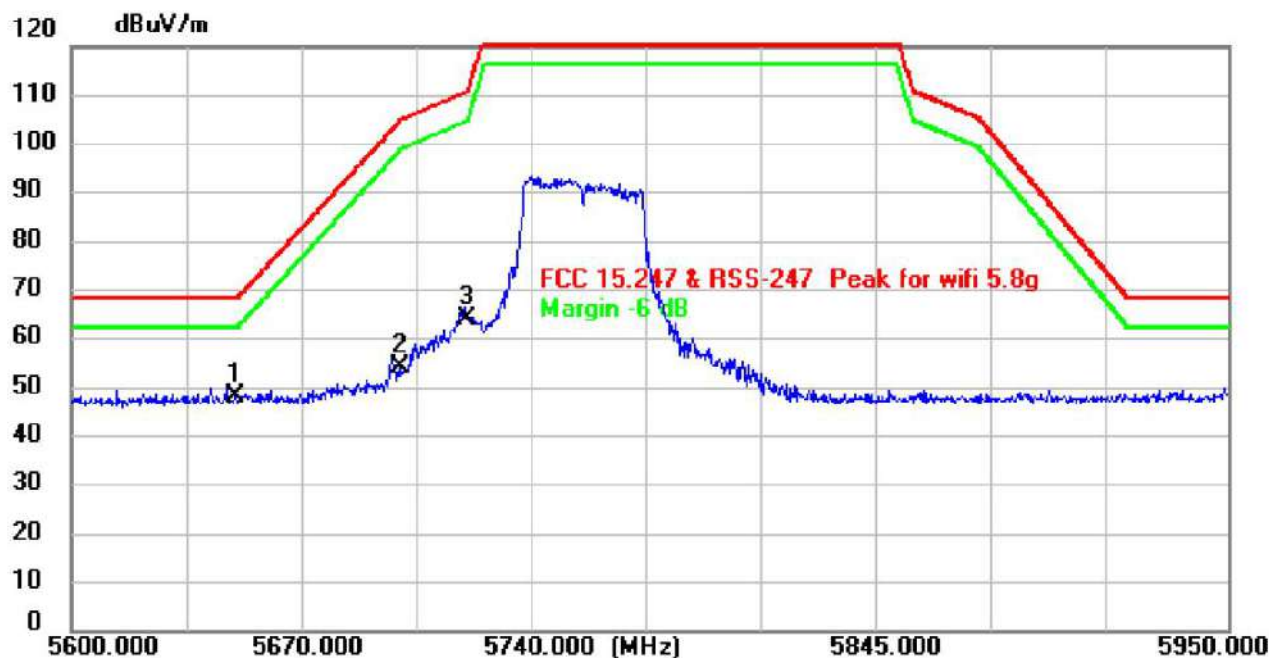


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5649.7000	40.88	7.25	48.13	68.20	-20.07	peak
2	5699.4000	46.89	7.23	54.12	104.76	-50.64	peak
3	5719.7000	56.97	7.26	64.23	110.72	-46.49	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Mode	802.11 ax40 (5795MHz)

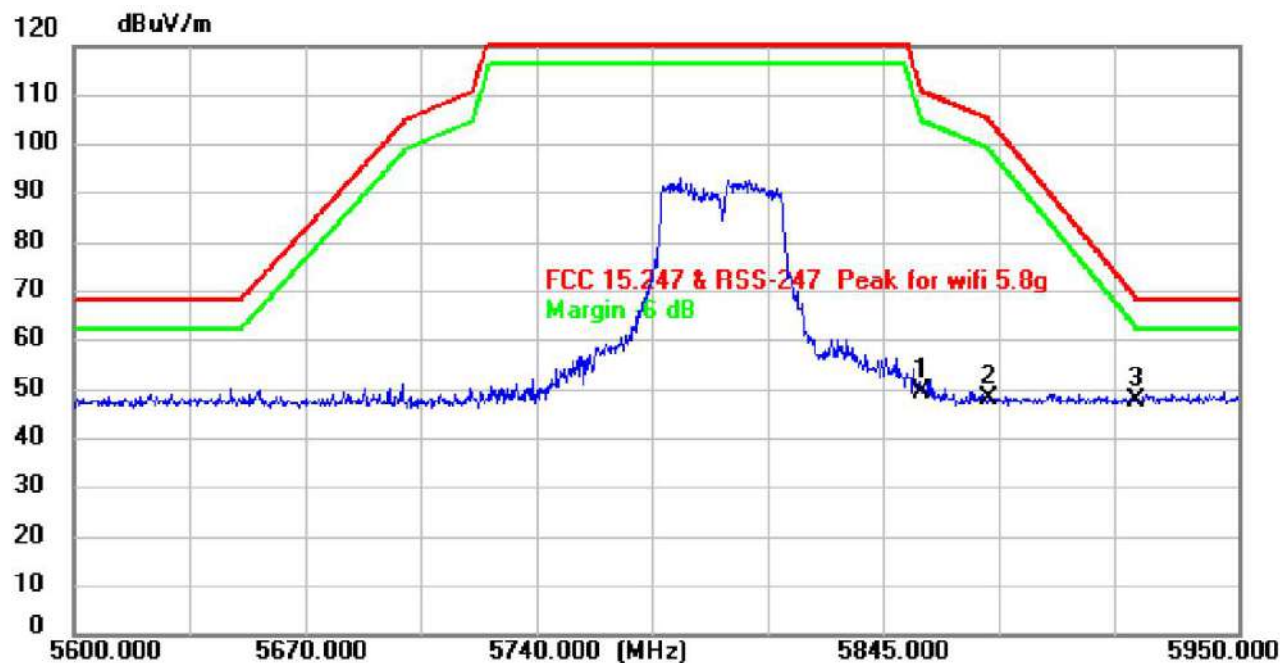

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5854.8000	41.88	7.77	49.65	111.26	-61.61	peak
2	5875.1000	40.56	7.81	48.37	105.12	-56.75	peak
3 *	5919.2000	39.97	7.92	47.89	68.86	-20.97	peak

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Mode	802.11 ax40 (5795MHz)

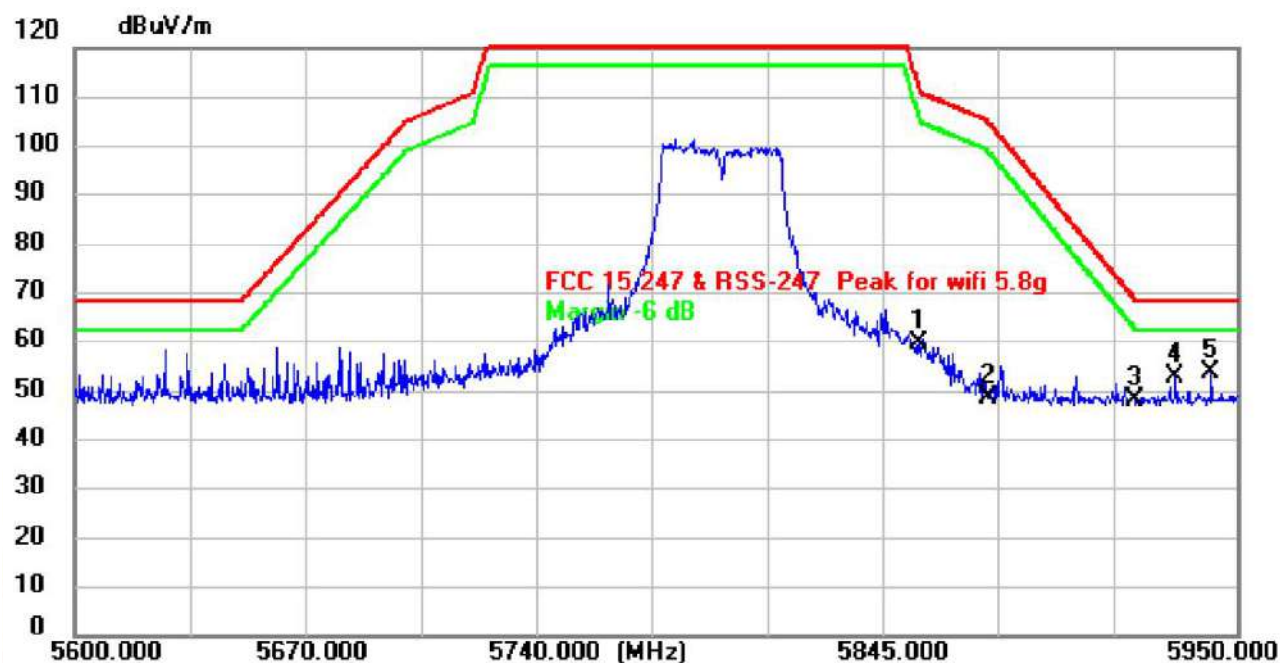

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5854.1000	51.90	7.77	59.67	112.85	-53.18	peak
2	5875.1000	41.00	7.81	48.81	105.12	-56.31	peak
3	5919.2000	40.38	7.92	48.30	68.86	-20.56	peak
4	5931.4500	45.18	7.95	53.13	68.20	-15.07	peak
5 *	5942.3000	45.73	7.99	53.72	68.20	-14.48	peak

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss - Pre-amplifier,
Margin= Emission Level - Limit

8 POWER SPECTRAL DENSITY TEST

8.1 Test Standard and Limit

According to FCC §15.407(3)

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum

power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

8.2 Test Setup



8.3 Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. The testing follows FCC KDB 789033 D02.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
4. For U-NII1, U-NII-2A, U-NII-2C Band:
Set RBW=1MHz, VBW=3MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
For U-NII-3 Band:
Set RBW=510 kHz, VBW=3*RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
5. User the cursor on spectrum to peak search the highest level of trace
6. Record the max. reading and add 10 log(1/duty cycle).

8.4 Test Data


Please see the attachment for WIFI5.2G and WIFI5.8G data.

9 26DB & 6DB & 99% Emission Bandwidth Test

9.1 Test Standard

Test Standard	FCC Part15 C Section 15.407
	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

9.2 Test Setup



9.3 Test Procedure

The following procedure shall be used for measuring (6dB) power bandwidth:

- Set RBW = 100KHz.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring (99 %) power bandwidth:

- Set center frequency to the nominal EUT channel center frequency.
- Set span = 1.5 times to 3.3 times the OBW.
- Set RBW = 1 % to 5 % of the OBW

4. Set $VBW \geq 3 \cdot RBW$

5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

6. Use the 99 % power bandwidth function of the instrument (if available).

7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

The following procedure shall be used for measuring (-26dB) power bandwidth:

1. Set resolution bandwidth (RBW)= approximately 1% to 5% of the EBW.
2. Set the video bandwidth (BW)>RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

9.4 Test Data

Please see the attachment for WIFI5.2G and WIFI5.8G data

10 Maximum Conducted Output Power

10.1 Test Standard and Limit

According to FCC §15.407

For an outdoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For the band 5.725–5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

10.2 Test Setup



10.3 Test Procedure

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
- c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- d) Correct the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle {e.g., $[10 \log (1 / 0.25)]$, if the duty cycle is 25%}.

10.4 Test Data

Please see the attachment for WIFI5.2G and WIFI5.8G data

11 Out of Band Emissions


11.1 Test Standard and Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

11.2 Test Setup



11.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.4 Test Data

Note: The conducted spurious emissions test has compensated for the maximum line loss measurement, and the recorded data represents the worst-case scenario.

Please see the attachment for WIFI5.2G and WIFI5.8G data.

12 Frequency Stability Measurement

12.1 Test Standard and Limit

FCC


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

IC

If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.

12.2 Test Setup



12.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 50^\circ\text{C}$.

12.4 Test Data

Please see the attachment for WIFI5.2G and WIFI5.8G data



13 Antenna Requirement

13.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

13.2 Antenna Connected Construction

The antenna is FPC Antenna which permanently attached, and the best case gain of the antenna is 0.88dBi(WIFI5.2G); 2.47dBi(WIFI5.8G). It complies with the standard requirement.

14 TEST SETUP & EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----

