



HEADQUARTERS: 914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230 • PHONE (410) 354-3300 • FAX (410) 354-3313

06/23/2025

BiPOM Electronics, Inc
9788 Clarewood Dr. Ste:306 Houston, Texas 77036, USA

Dear Oguz Murtezaoglu,

Enclosed is the EMC Wireless test report for compliance testing of the BiPOM Electronics, Inc WB-L-U-2 and WB-L-W-2 as tested to the requirements of FCC 15.247 and RSS-247 Issue 3 for Intentional Radiators. This test report pertains specifically to the Long Range (LoRa) transmitter onboard which operates in the 902MHz to 928MHz band.

Thank you for using the services of Eurofins MET Labs. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
EUROFINS MET LABS

A handwritten signature in blue ink that reads "Nancy LaBrecque".

Nancy LaBrecque
Documentation Department

Reference: WIRA135219_FCC_DTS_Report_R2

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins MET Labs.

The Nation's First Licensed Nationally Recognized Testing Laboratory

Maryland | California | Texas
www.metlabs.com

915MHz ISM Test Report

for the

BiPOM Electronics, Inc
WB-L-U-2 and WB-L-W-2

Tested under
FCC 15.247 and RSS-247 Issue 3 15C
For Intentional Radiators



Veer Patel, Wireless Engineer
Electromagnetic Compatibility Lab



Nancy LaBrecque
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.



Matthew Hinojosa
EMC Manager, Austin Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	05/23/2025	Initial Issue.
1	6/11/2025	TCB Reviewer Comments
2	06/23/2025	TCB Reviewer Comments

Table of Contents

I.	Executive Summary	8
	A. Purpose of Test.....	9
	B. Executive Summary.....	9
II.	Equipment Configuration.....	10
	A. Overview.....	11
	B. References.....	12
	C. Test Site.....	13
	D. Measurement Uncertainty	13
	E. Description of Test Sample.....	13
	F. Equipment Configuration.....	14
	G. Mode of Operation.....	15
	H. Method of Monitoring EUT Operation	15
	I. Modifications	15
	a) Modifications to EUT.....	15
	b) Modifications to Test Standard.....	15
	J. Disposition of EUT.....	15
III.	Electromagnetic Compatibility Criteria for Intentional Radiators	16
	§ 15.203 Antenna Requirement	17
	§ 15.247(a)(a) 6 dB and 99% Bandwidth.....	18
	RSS-GEN (6.7) 99% Bandwidth	19
	§ 15.247(b) Peak Power Output.....	21
	§ 15.247(e) Peak Power Spectral Density.....	24
	§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge	26
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge.....	29
IV.	Test Equipment.....	46

List of Tables

Table 1. Executive Summary.....	9
Table 2. EUT Summary Table.....	11
Table 3. References.....	12
Table 4. Uncertainty Calculations Summary	13
Table 5. Support Equipment.....	14
Table 6. Ports and Cabling Information.....	14
Table 7. Test Channels Utilized	15
Table 8. 99% and 6 dB Occupied Bandwidth, Test Results.....	19
Table 9. Output Power Requirements from §15.247(b).....	21
Table 10. Peak Power and EIRP, Test Results.....	22
Table 11. Peak Power Spectral Density, Test Results.....	24
Table 12. Restricted Bands of Operation.....	29
Table 13. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)	30
Table 14. Test Equipment List.....	47

List of Figures

Figure 1. Block Diagram of Test Configuration.....	14
Figure 2. Block Diagram, Occupied Bandwidth Test Setup.....	19
Figure 3. Analyzer Settings During Measurement.....	22
Figure 4. Peak Power Output Test Setup.....	22
Figure 5. Analyzer Settings During Measurement.....	24
Figure 6. Block Diagram, Peak Power Spectral Density Test Setup	24
Figure 7. Analyzer Settings During Measurement.....	26
Figure 8. Block Diagram, Conducted Spurious Emissions Test Setup.....	26
Figure 9. Worst Case Cabinet Radiation, 9kHz - 30MHz Mid Channel 2JF0415P-010MC137	33
Figure 10. Radiated Spurious, 30MHz - 1GHz (Low Channel) 2JF0415P-010MC137.....	33
Figure 11. Radiated Spurious, 30MHz - 1GHz (Mid Channel) 2JF0415P-010MC137	33
Figure 12. Radiated Spurious, 30MHz - 1GHz (High Channel) 2JF0415P-010MC137.....	34
Figure 13. Radiated Spurious, 1GHz - 18GHz (Low Channel) 2JF0415P-010MC137	34
Figure 14. Radiated Spurious, 1GHz - 18GHz (Mid Channel) 2JF0415P-010MC137	34
Figure 15. Radiated Spurious, 1GHz - 18GHz (High Channel) 2JF0415P-010MC137.....	35
Figure 16. Worst Case Cabinet Radiation, 9kHz - 30MHz 2JW1115-C943B.....	38
Figure 17. Radiated Spurious, 30MHz - 1GHz (Low Channel) 2JW1115-C943B.....	38
Figure 18. Radiated Spurious, 30MHz - 1GHz (Mid Channel) 2JW1115-C943B	38
Figure 19. Radiated Spurious, 30MHz - 1GHz (High Channel) 2JW1115-C943B.....	39
Figure 20. Radiated Spurious, 1GHz - 18GHz (Low Channel) 2JW1115-C943B	39
Figure 21. Radiated Spurious, 1GHz - 18GHz (Mid Channel) 2JW1115-C943B.....	39
Figure 22. Radiated Spurious, 1GHz - 18GHz (High Channel) 2JW1115-C943B.....	40
Figure 23. Worst Case Cabinet Radiation, 9kHz - 30MHz Coil Antenna.....	43
Figure 24. Radiated Spurious, 30MHz - 1GHz (Low Channel) Coil Antenna.....	43
Figure 25. Radiated Spurious, 30MHz - 1GHz (Mid Channel) Coil Antenna	43
Figure 26. Radiated Spurious, 30MHz - 1GHz (High Channel) Coil Antenna.....	44
Figure 27. Radiated Spurious, 1GHz - 18 GHz (Low Channel) Coil Antenna	44
Figure 28. Radiated Spurious, 1GHz - 18 GHz (Mid Channel) Coil Antenna	44
Figure 29. Radiated Spurious, 1GHz - 18 GHz (High Channel) Coil Antenna.....	45

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	microhenry
μ	microfarad
μ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the WB-L-U-2 and WB-L-W-2, with the requirements of FCC 15.247 and RSS-247 Issue 3. BiPOM Electronics, Inc should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the WB-L-U-2 and WB-L-W-2, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC 15.247 and RSS-247 Issue 3, in accordance with BiPOM Electronics, Inc purchase order number 6021. All tests were conducted using measurement procedures ANSI C63.4-2014 and ANSI C63.10-2013.

FCC Reference 47 CFR Part 15.247:2005	IC Reference RSS-247 Issue 3 RSS-GEN Issue 5	Description	Compliance
Title 47 of the CFR, Part 15 §15.203	---	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-GEN(8.8)	Conducted Emission Limits	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(2)	RSS-247 (5.2)	6dB Occupied Bandwidth	Compliant
---	RSS-GEN(6.7)	99% Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	RSS-247(5.4)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	RSS-GEN (6.13), (8.9), & (8.10)	Radiated Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	RSS-247(5.5)	RF Conducted Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	RSS-247(5.2)	Peak Power Spectral Density	Compliant

Table 1. Executive Summary

II. Equipment Configuration

A. Overview

Eurofins MET Labs was contracted by BiPOM Electronics, Inc to perform testing on the WB-L-U-2 and WB-L-W-2, under BiPOM Electronics, Inc's purchase order number 6021.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the WB-L-U-2 and WB-L-W-2.

The results obtained relate only to the item(s) tested.

Product Name:	WB-L-U-2 and WB-L-W-2	
Model(s) Tested:	WB-L-U-2 and WB-L-W-2	
FCCID:	2BCAS-BIPOM-WBL	
ICID:	33805-BIPOMWBL	
Equipment Specifications:	Primary Power:	3.3VDC
	Type of Modulations:	LoRa WAN
	Equipment Code:	DTS
	Peak RF Output Power:	22dBm
	EUT Frequency Ranges:	902MHz to 928MHz
	Antenna Gain ¹ :	2JW1115-C952B: Dipole Antenna: 3.3dBi
		2JF0415P-010MC137: Flex PCB Antenna: 3.6dBi
		SI328100009: Coil (Wire) Antenna: -0.3dBi
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Veer Patel	
Report Date(s):	06/23/2025	

Table 2. EUT Summary Table

¹ The antenna gain information was provided by BiPOM Electronics, Inc and may affect compliance.

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
RSS-247, Issue 3, August 2023	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS-GEN, Issue 5, March 2019	General Requirements and Information for the Certification of Radio Apparatus
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2017	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Table 3. References

C. Test Site

All testing was performed at Eurofins MET Labs, 13501 McCallen Pass, Austin, TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

ISED Lab Info:

CAB Identifier: US0004
Company Number: 2043D

FCC Lab Info:

Designation Number: US1127

D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
Occupied Bandwidth Measurements	±4.52 Hz	2	95%
Conducted Power Measurements	±2.74 dB	2	95%
Power Spectral Density Measurements	±2.74 dB	2	95%
Conducted Spurious Emissions	±2.80 dB	2	95%
Conducted Emissions (Mains)	±2.97 dB	2	95%
Radiated Spurious Emissions (9kHz – 1GHz)	±2.95 dB	2	95%
Radiated Spurious Emissions (1GHz - 40GHz)	±3.54 dB	2	95%

Table 4. Uncertainty Calculations Summary

E. Description of Test Sample

LoRaWAN module based on ST Micro's STM32WL5MOCH6 chip with integrated microcontroller and radio circuit for building LoRaWAN end node and sensor products.

There are 3 antenna variants for the tests:

1- Part number WB-L-U-2 with u.FL connector that allows connecting:

- a) Flex antenna part number 2JF0415P-010MC137 from 2J Antennas or similar type of flex antenna
- b) Dipole stub antenna part number 2JW1115-C943B from 2J Antennas or similar type of dipole stub antenna

2- Part number WB-L-W-2 with coil (wire) antenna that is soldered to the specimen. Antenna part number is SI328100009 from 2J Antennas



Figure 1. Block Diagram of Test Configuration

F. Equipment Configuration

The EUT was set up as outlined in Figure 1 above. The laptop computer was used to send test commands to force the transmitters to operate in the appropriate test mode.

G. Support Equipment

Ref. ID	Name/Description	Manufacturer	Model Number	Customer Supplied Calibration Data
1.5V AA batteries	Amazon Basics	ALK AA20FFP-U	Not applicable	Not applicable
AA battery holder	Shutao	B0CZ3PC511	Not applicable	Not applicable

Table 5. Support Equipment

H. Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
Mini USB	Mini USB to USB A Cable	No	1	1	No	Battery pack for power	Mini USB

Table 6. Ports and Cabling Information

I. Mode of Operation

Using WillowBee Tester firmware, the module can exercise all of its radio functionality:

- 1- Continuous Wave (CW) that transmits continuously at the selected ISM frequency without modulation
- 2- Continuous Modulation (CM) that transmits continuously at the selected ISM frequency with LoRaWAN modulation
- 3- Frequency hopping: This mode sweeps various frequencies while LoRaWAN modulation is in effect. Bandwidth, transmit power, spreading factor (SF) and center frequency (range of frequencies for hopping) can be specified.

Transmit Band	Modulation	Channel Frequencies Tested	Test Tool Power Setting
902MHz to 928MHz	LoRa	903MHz/909.4MHz/914.2MHz	18dBm

Table 7. Test Channels Utilized

J. Method of Monitoring EUT Operation

A spectrum analyzer was used to confirm proper transmitter operation.

K. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

L. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to BiPOM Electronics, Inc upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. The TX antenna is either permanently attached to the unit (in the case of the coil antenna) or it uses a unique antenna connector on the module (in the case of the version with an antenna connector).

Test Engineer(s): Veer Patel

Test Date(s): 03/27/2025

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a)(2) 6 dB Bandwidth

Test Requirements: § 15.247(a)(2): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure: The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, and the VBW > RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

Test Results The EUT was compliant with § 15.247 (a)(2).

The 6 dB Bandwidth was determined from the plots on the following pages.

Test Engineer(s): Veer Patel

Test Date(s): 03/27/2025

Electromagnetic Compatibility Criteria for Intentional Radiators

RSS-GEN (6.7) 99% Bandwidth

Test Requirements: The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

Test Procedure: The transmitter was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, and the VBW > RBW. The 99% Bandwidth was measured and recorded.

Test Results The 99% Bandwidth determined from the plots on the following pages.

Test Engineer(s): Veer Patel

Test Date(s): 03/27/2025 and 04/02/2025





Figure 2. Block Diagram, Occupied Bandwidth Test Setup

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Limit (MHz)	99% Bandwidth (MHz)	Result
Low	903.0	0.643435	0.5	0.519733	Pass
Middle	909.4	0.64507	0.5	0.520	Pass
High	914.2	0.639337	0.5	0.518933	Pass


Table 8. 99% and 6 dB Occupied Bandwidth, Test Results

Occupied Bandwidth Test Results


Occupied Bandwidth Plots

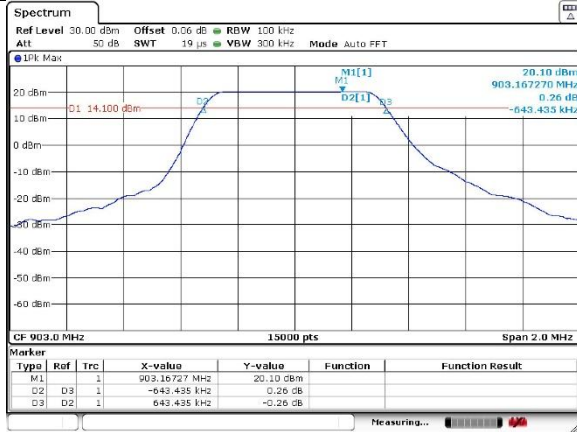

Low Channel 6dB Bandwidth

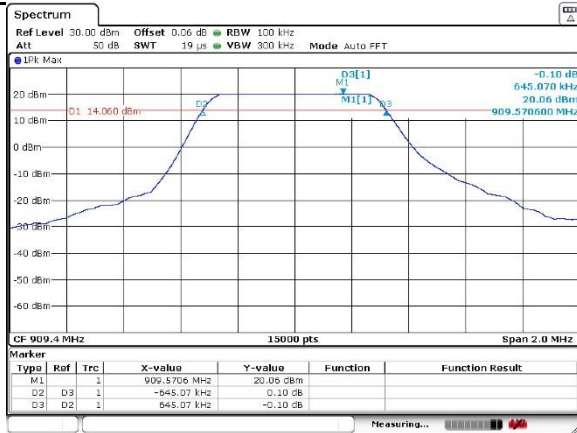

Low Channel 99% Bandwidth

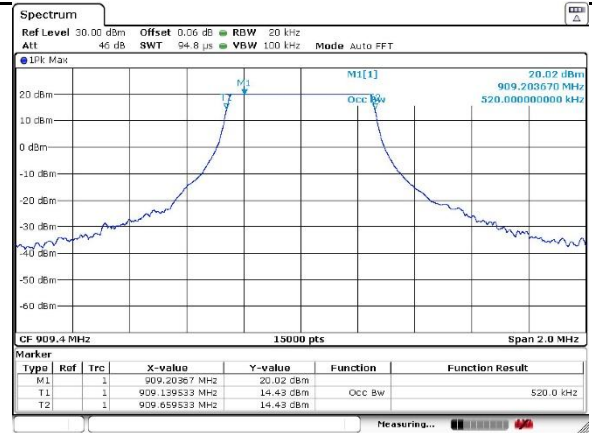

Mid Channel 6dB Bandwidth



Mid Channel 99% Bandwidth



High Channel 6dB Bandwidth

High Channel 99% Bandwidth

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output

Test Requirements: §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

Table 9. Output Power Requirements from §15.247(b)

§15.247(c): if transmitting antennas of directional gain in greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 9, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band and using a point to point application may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, Omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

RSS-247 EIRP Limit: For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

Test Procedure: The transmitter was connected to a calibrated spectrum analyzer. The analyzer reference level was offset by cable loss connecting to the test sample. The peak power was measured at the low, mid and high channels of each band at the maximum power level. The antenna gain provided by the manufacturer was added to the measured conducted power to arrive at the EIRP.

The analyzer settings are shown in the following table:

RBW:	1MHz	Detector:	Peak	Reference Level:	30dBm
VBW:	3MHz	Sweep Time:	Auto	Internal Attenuation:	50dB

Figure 3. Analyzer Settings During Measurement

Test Results: The EUT was compliant with the Peak Power Output limits of §15.247(b) and the EIRP limits from RSS-247.

Test Engineer(s): Veer Patel

Test Date(s): 03/27/2025





Figure 4. Peak Power Output Test Setup

Peak Power Output Test Results

Channel	Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result
Low	903MHz	17.13	30	3.6	20.73	36	Pass
Middle	909.4MHz	17.08	30	3.6	20.68	36	Pass
High	914.2MHz	17.04	30	3.6	20.64	36	Pass

Table 10. Peak Power and EIRP, Test Results

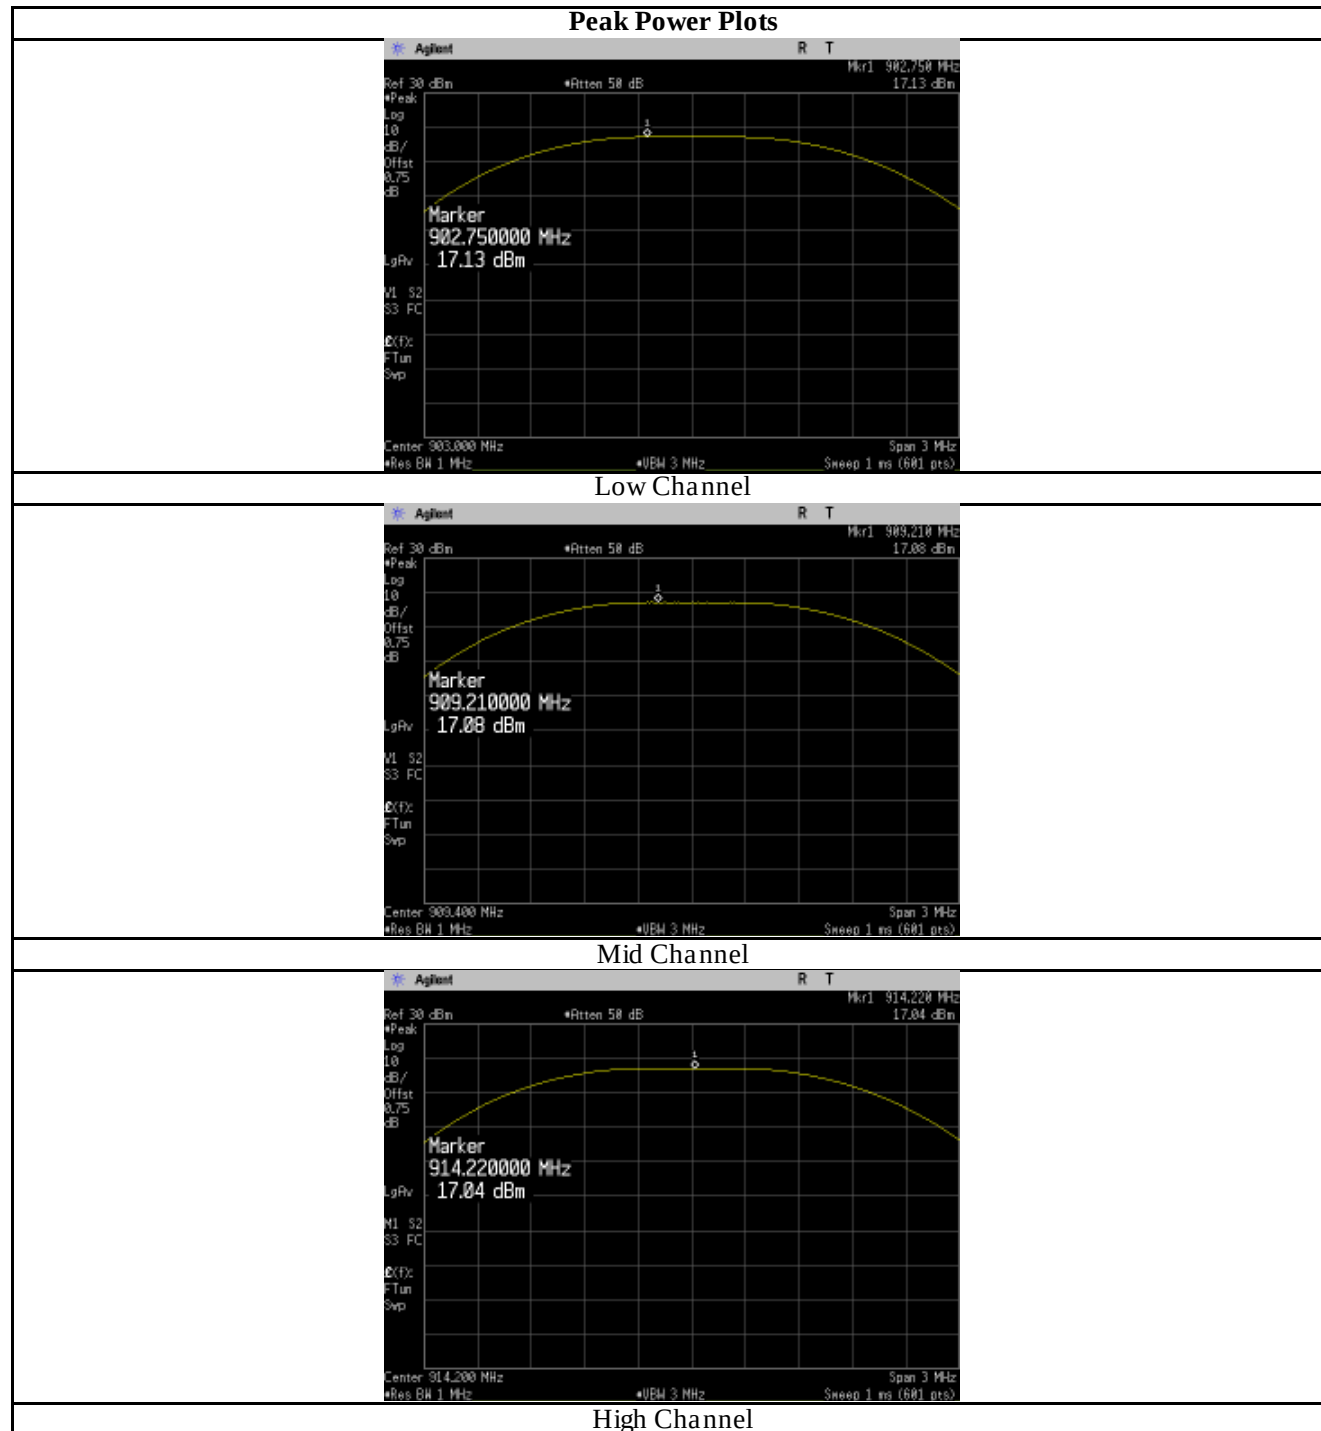

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: §15.247(e): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level. The RBW was set between 3kHz and 100 kHz. The VBW was set to 3x the RBW. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

The analyzer settings are shown in the following table:

RBW:	3kHz	Detector:	Peak	Reference Level:	30dBm
VBW:	10kHz	Sweep Time:	Auto	Internal Attenuation:	50dB

Figure 5. Analyzer Settings During Measurement

Test Results: The EUT was compliant with the peak power spectral density limits of § 15.247 (e).

Test Engineer: Veer Patel

Test Date: 04/02/2025




Figure 6. Block Diagram, Peak Power Spectral Density Test Setup

Channel	Frequency (MHz)	Peak Power Spectral Density (dBm / 3kHz)	Peak Power Spectral Density Limit (dBm / 3kHz)	Result
Low	903	7.40	8	Pass
Middle	909.4	7.30	8	Pass
High	914.2	7.42	8	Pass

Table 11. Peak Power Spectral Density, Test Results


Peak Power Spectral Density Plots



Low Channel



Mid Channel

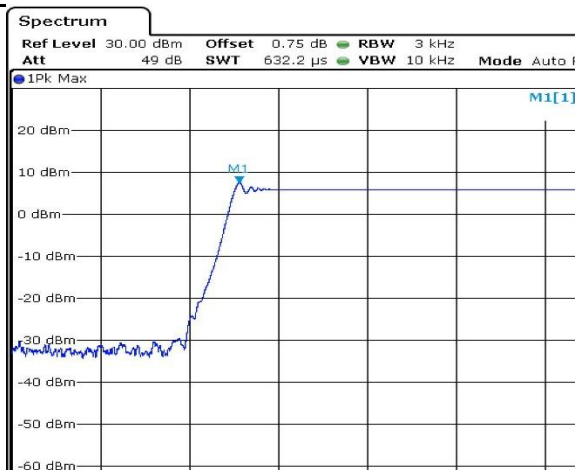

High Channel

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) RF Conducted Spurious Emissions Requirements

Test Requirement: **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per § 15.33(a)(1) and § 15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level. The RBW was set to 100 kHz. The VBW was set to 3x the RBW. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

See following pages for detailed test results with RF Conducted Spurious Emissions.

The analyzer settings are shown in the following table:

RBW:	100kHz	Detector:	Peak	Reference Level:	30dBm
VBW:	300kHz	Sweep Time:	Auto	Internal Attenuation:	50dB

Figure 7. Analyzer Settings During Measurement

Test Results: The EUT was compliant with the Conducted Spurious Emission limits of §15.247(d).

Test Engineer(s): Veer Patel

Test Date(s): 04/02/2025






Figure 8. Block Diagram, Conducted Spurious Emissions Test Setup


Conducted Spurious Plots

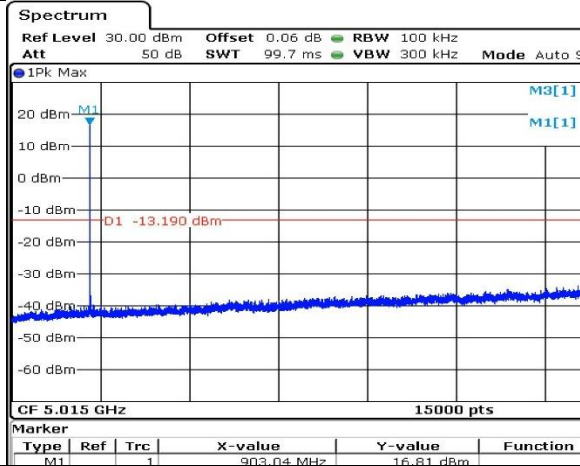


Low Channel

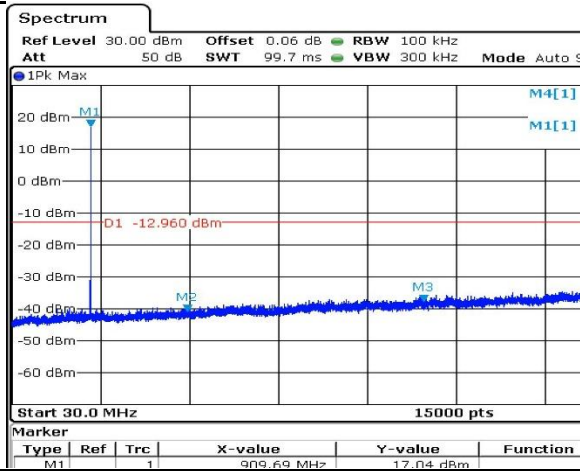

Mid Channel

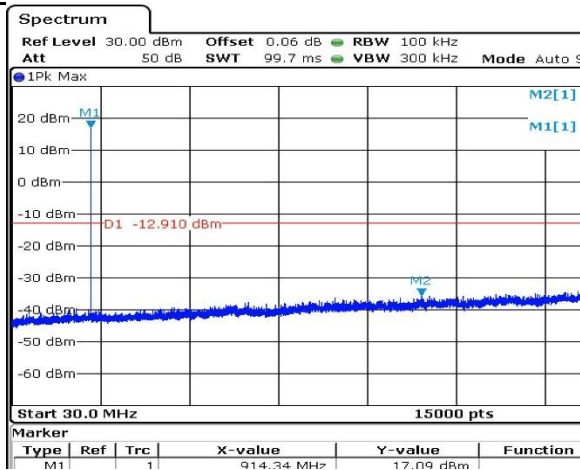

High Channel

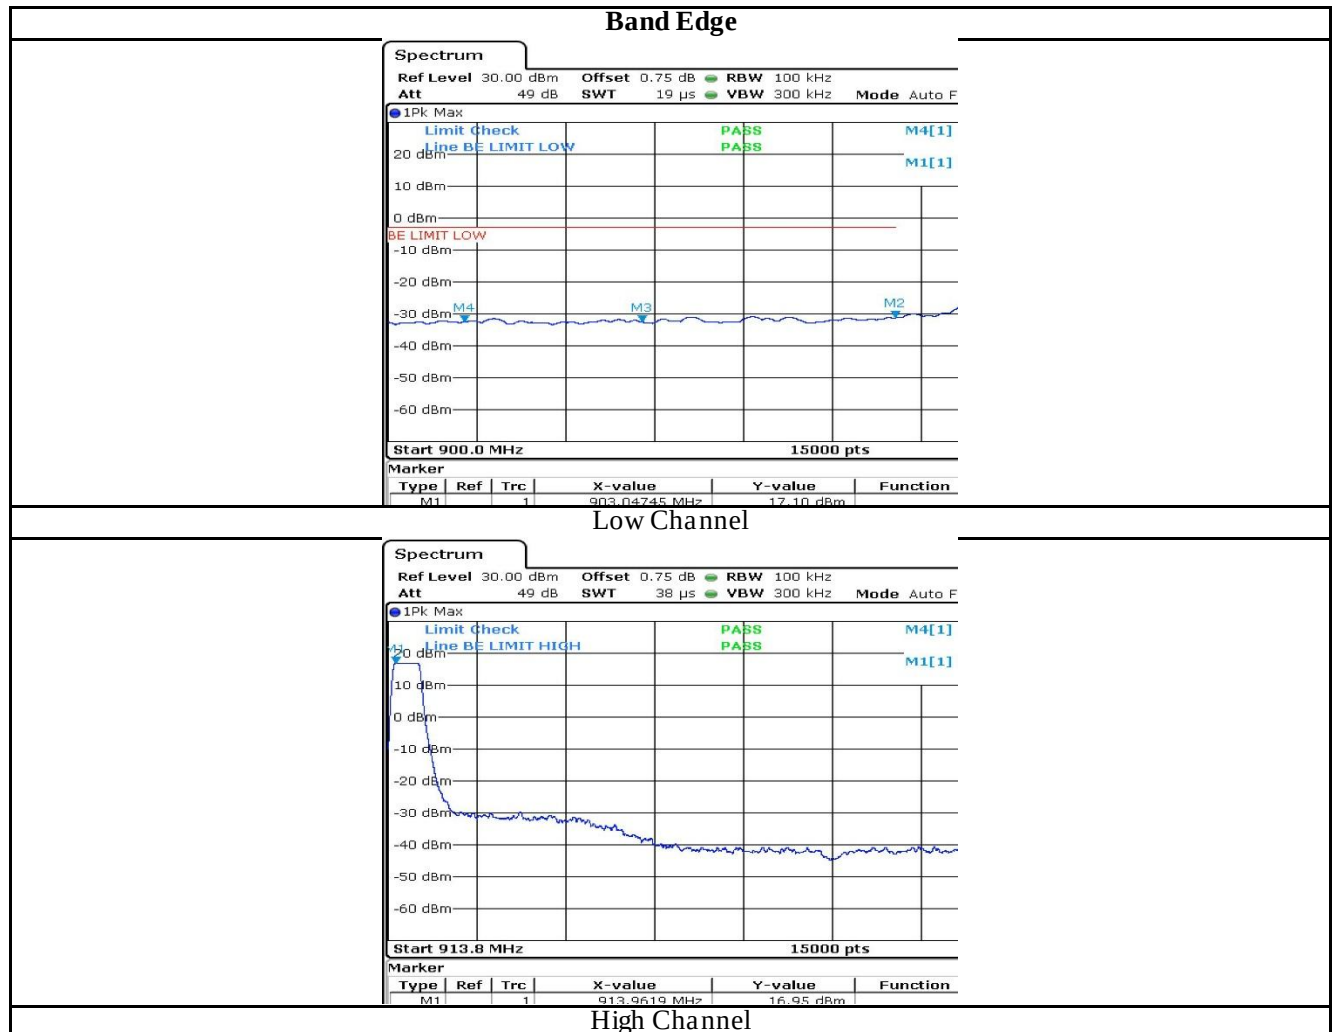

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Radiated Spurious Emissions Requirements

Test Requirements: §15.247(d); §15.205: Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358 36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Table 12. Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6

Test Requirement(s): § 15.209 (a): Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 13.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dBµV) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

Table 13. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)

Test Procedures: The radiated methodology referenced in ANSI C63.10: 2013 Section 11.12.1 was utilized in order to assess the unwanted emissions in the restricted bands.

A radiated scan was performed with the antenna of proper impedance installed. The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes if multiple mounting orientations are supported. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.


Radiated measurements below 30MHz were performed in a semi-anechoic chamber that has been correlated to an open area site.


Test Software: ELEKTRA Version 4.61 (Manufactured by Rohde&Schwarz) was utilized to perform these measurements.

Test Results: The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d).

Test Engineer(s): Veer Patel/An Dang

Test Date(s): 03/28/2025 - 04/03/2025

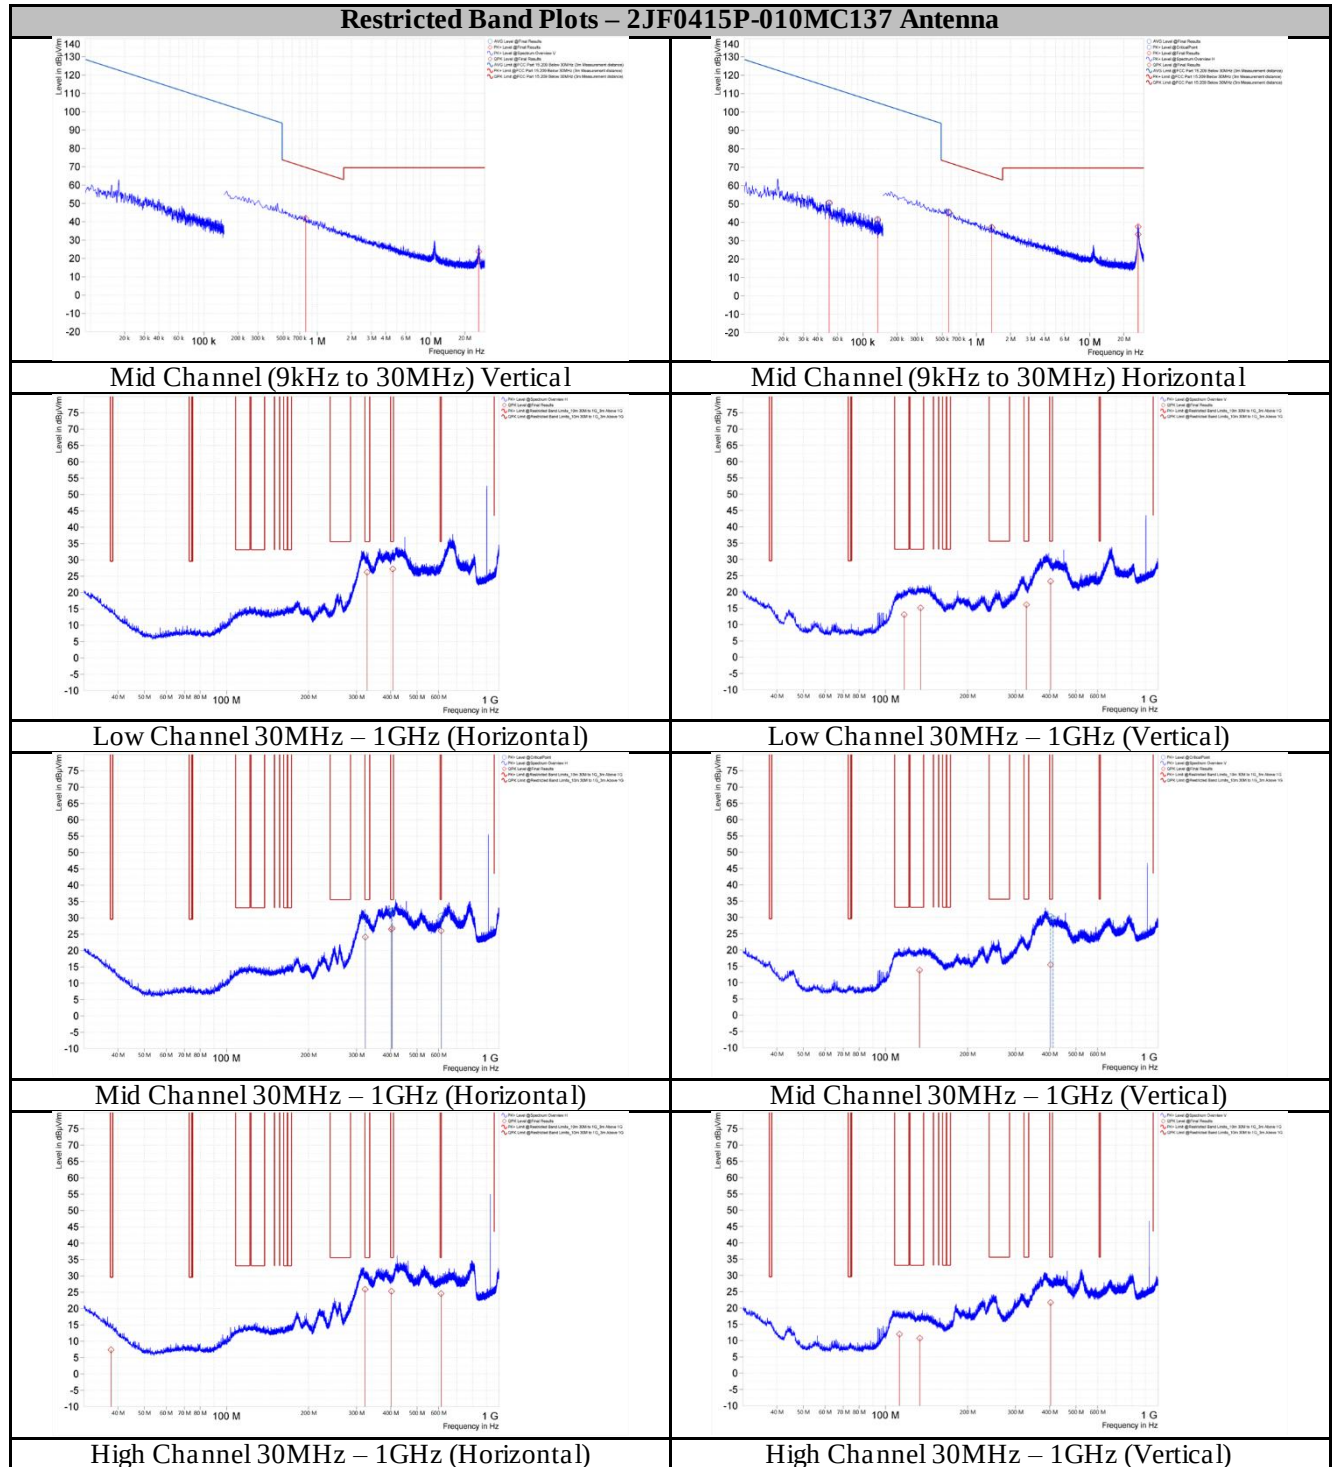

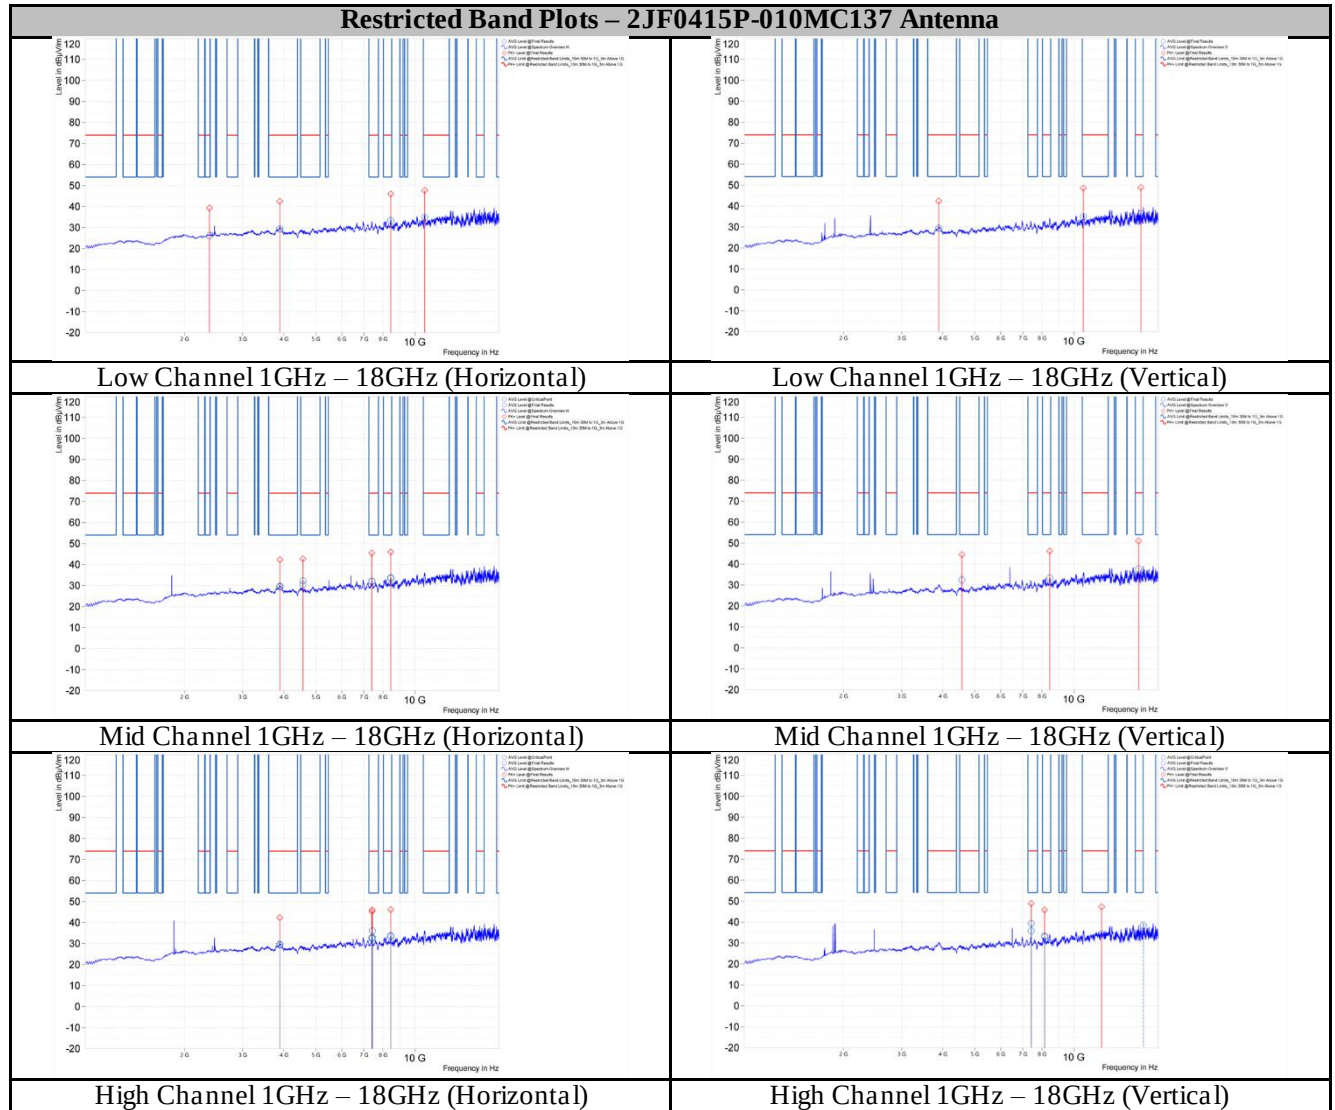

Worst Case Cabinet Spurious Emissions

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
0.050	50.61	113.56	62.95	11.66	H	67.7	1	0.200	Pass
0.135	41.29	105.01	63.72	11.37	H	25.3	1	0.200	Pass
0.569	45.42	72.51	27.09	11.41	H	32.1	1	9.000	Pass
0.789	41.92	69.66	27.74	11.51	V	12.6	1	9.000	Pass
1.370	37.35	64.86	27.51	11.70	H	127.7	1	9.000	Pass
26.583	23.75	69.50	45.75	9.23	V	166.6	1	9.000	Pass
26.790	37.63	69.50	31.87	9.26	H	4.5	1	9.000	Pass

Figure 9. Worst Case Cabinet Radiation, 9kHz - 30MHz Mid Channel 2JF0415P-010MC137

Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
117.030	13.06	33.07	20.01	-7.39	V	248.1	2.12	120.000	Pass
134.580	15.12	33.07	17.95	-6.65	V	276.1	1.82	120.000	Pass
328.050	26.23	35.57	9.34	-4.74	H	94.4	2.6	120.000	Pass
328.920	16.09	35.57	19.48	-4.63	V	112.5	1.14	120.000	Pass
403.110	23.24	35.57	12.33	-2.74	V	171.1	3.01	120.000	Pass
407.490	27.22	35.57	8.35	-2.52	H	263.2	1.89	120.000	Pass

Figure 10. Radiated Spurious, 30MHz - 1GHz (Low Channel) 2JF0415P-010MC137

Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
133.380	13.78	33.07	19.29	-6.72	V	91.2	0.99	120.000	Pass
323.100	24.14	35.57	11.43	-4.77	H	124	2.81	120.000	Pass
402.540	26.51	35.57	9.06	-2.86	H	253.6	2.3	120.000	Pass
402.900	15.49	35.57	20.08	-2.75	V	0	3.83	120.000	Pass
405.240	26.80	35.57	8.77	-2.69	H	250.4	1.85	120.000	Pass
613.530	26.05	35.57	9.52	1.26	H	119.3	1.5	120.000	Pass

Figure 11. Radiated Spurious, 30MHz - 1GHz (Mid Channel) 2JF0415P-010MC137

Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
37.710	7.39	29.55	22.16	-5.83	H	296	3.9	120.000	Pass
112.530	11.94	33.07	21.13	-7.58	V	229.7	1.49	120.000	Pass
133.650	10.70	33.07	22.37	-6.71	V	192.1	1.64	120.000	Pass
322.470	25.88	35.57	9.69	-4.83	H	278.5	3.1	120.000	Pass
402.810	25.30	35.57	10.27	-2.86	H	123.8	2.23	120.000	Pass
403.200	21.67	35.57	13.90	-2.73	V	65.5	3.95	120.000	Pass

Figure 12. Radiated Spurious, 30MHz - 1GHz (High Channel) 2JF0415P-010MC137

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
2,379.000	39.32	74.00	34.68	26.11	54.00	27.89	-2.39	H	320.3	4	Pass
3,889.000	42.49	74.00	31.51	29.36	54.00	24.64	-1.62	H	155.7	1.34	Pass
3,890.000	42.37	74.00	31.63	29.43	54.00	24.57	-1.61	V	283.4	2.89	Pass
8,440.500	45.99	74.00	28.01	33.39	54.00	20.61	-3.70	H	232.1	1.66	Pass
10,682.000	48.55	74.00	25.45	34.97	54.00	19.03	-0.86	V	89.4	1.16	Pass
10,708.000	47.71	74.00	26.29	34.94	54.00	19.06	-0.89	H	233.1	1.9	Pass
15,958.500	48.82	74.00	25.18	36.37	54.00	17.63	-0.77	V	108	3.83	Pass


Figure 13. Radiated Spurious, 1GHz - 18GHz (Low Channel) 2JF0415P-010MC137


Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
3,891.000	42.30	74.00	31.70	29.40	54.00	24.60	-1.62	H	303.2	3.9	Pass
4,569.500	44.44	74.00	29.56	32.42	54.00	21.58	-3.72	V	192.3	3.99	Pass
4,570.500	42.74	74.00	31.26	30.43	54.00	23.57	-3.74	H	140.7	3.81	Pass
7,398.000	45.41	74.00	28.59	31.93	54.00	22.07	-2.47	H	329.2	1.49	Pass
8,440.500	45.98	74.00	28.02	33.35	54.00	20.65	-3.70	H	88.6	1.38	Pass
8,441.500	46.13	74.00	27.87	33.40	54.00	20.60	-3.72	V	202.8	3.5	Pass
15,705.500	50.97	74.00	23.03	37.68	54.00	16.32	1.03	V	119.4	2.76	Pass

Figure 14. Radiated Spurious, 1GHz - 18GHz (Mid Channel) 2JF0415P-010MC137

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
3,889.500	42.31	74.00	31.69	29.41	54.00	24.59	-1.62	H	302.2	2.47	Pass
7,400.500	45.22	74.00	28.78	32.44	54.00	21.56	-2.47	H	298.4	1.61	Pass
7,423.000	48.82	74.00	25.18	35.79	54.00	18.21	-2.75	V	316.9	3	Pass
7,424.000	45.99	74.00	28.01	32.98	54.00	21.02	-2.76	H	102.3	3.9	Pass
8,144.000	45.80	74.00	28.20	32.98	54.00	21.02	-3.85	V	194.4	2.43	Pass
8,440.500	46.16	74.00	27.84	33.40	54.00	20.60	-3.70	H	251.8	2.26	Pass
12,137.000	47.21	74.00	26.79	34.22	54.00	19.78	-1.46	V	62.6	3.22	Pass

Figure 15. Radiated Spurious, 1GHz - 18GHz (High Channel) 2JF0415P-010MC137

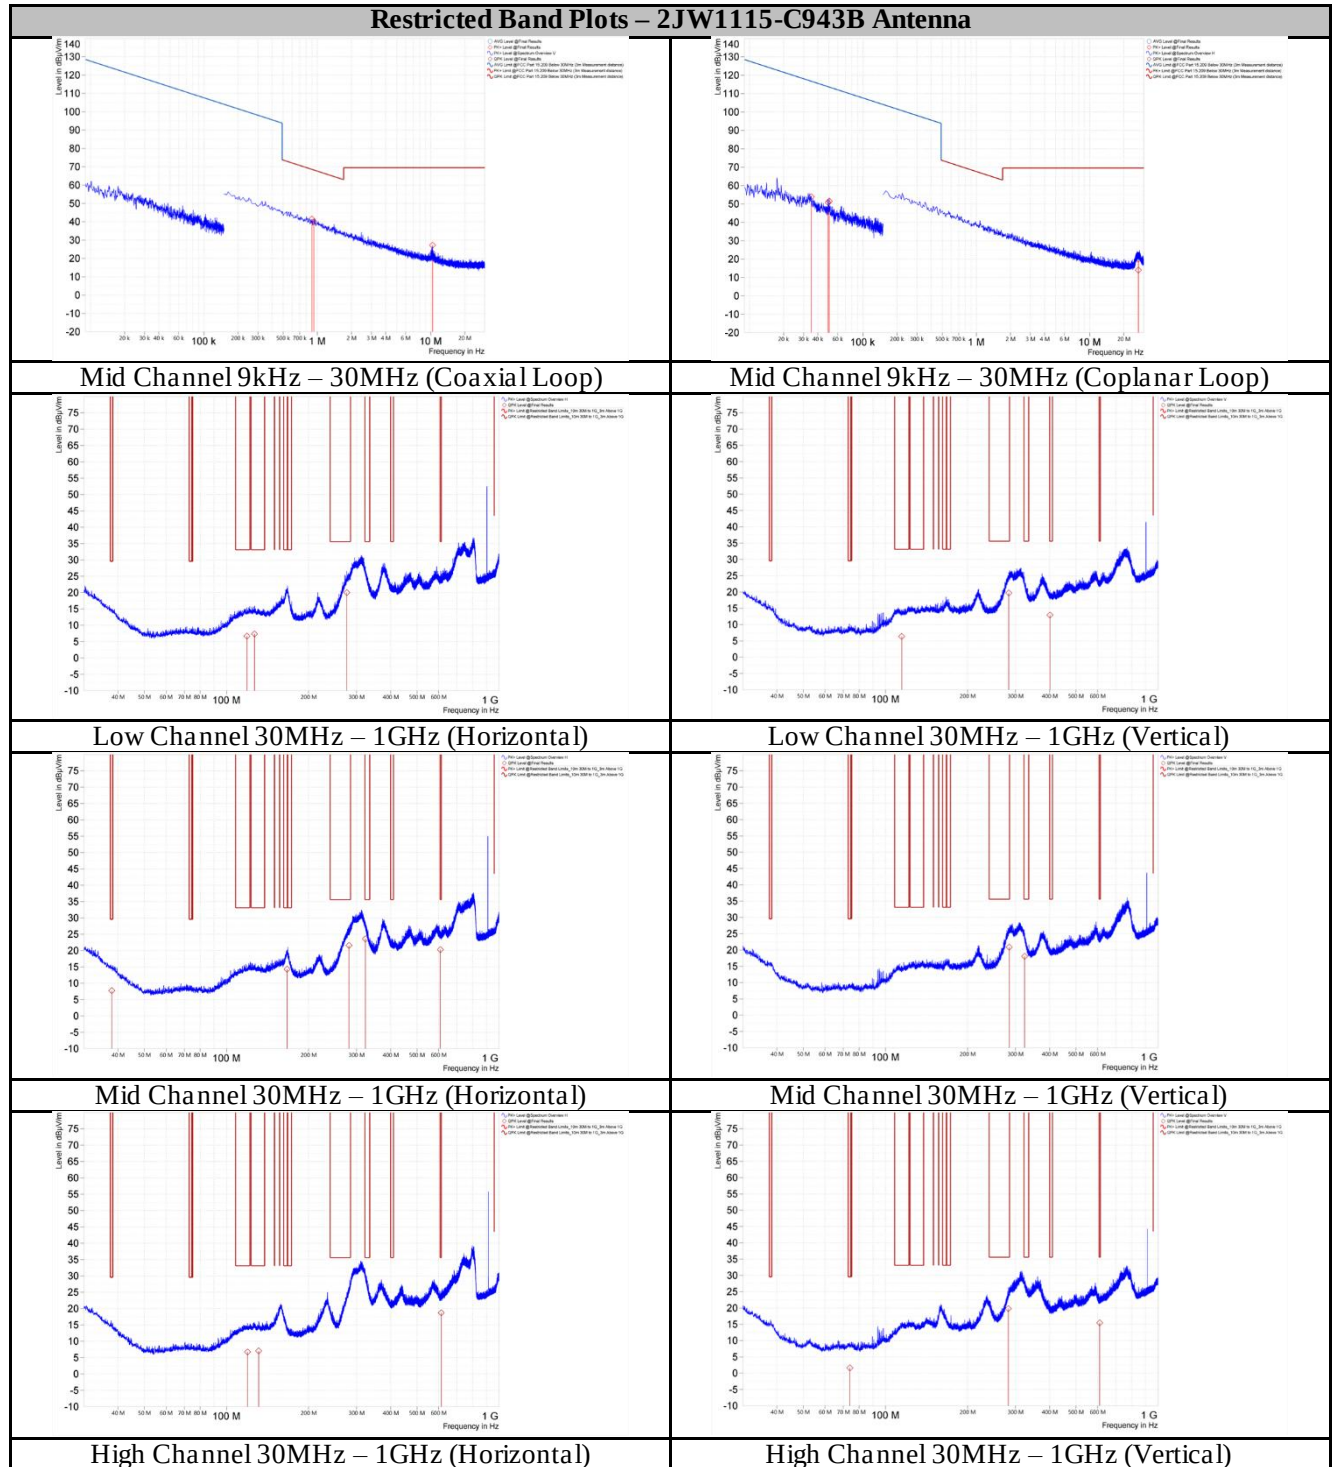

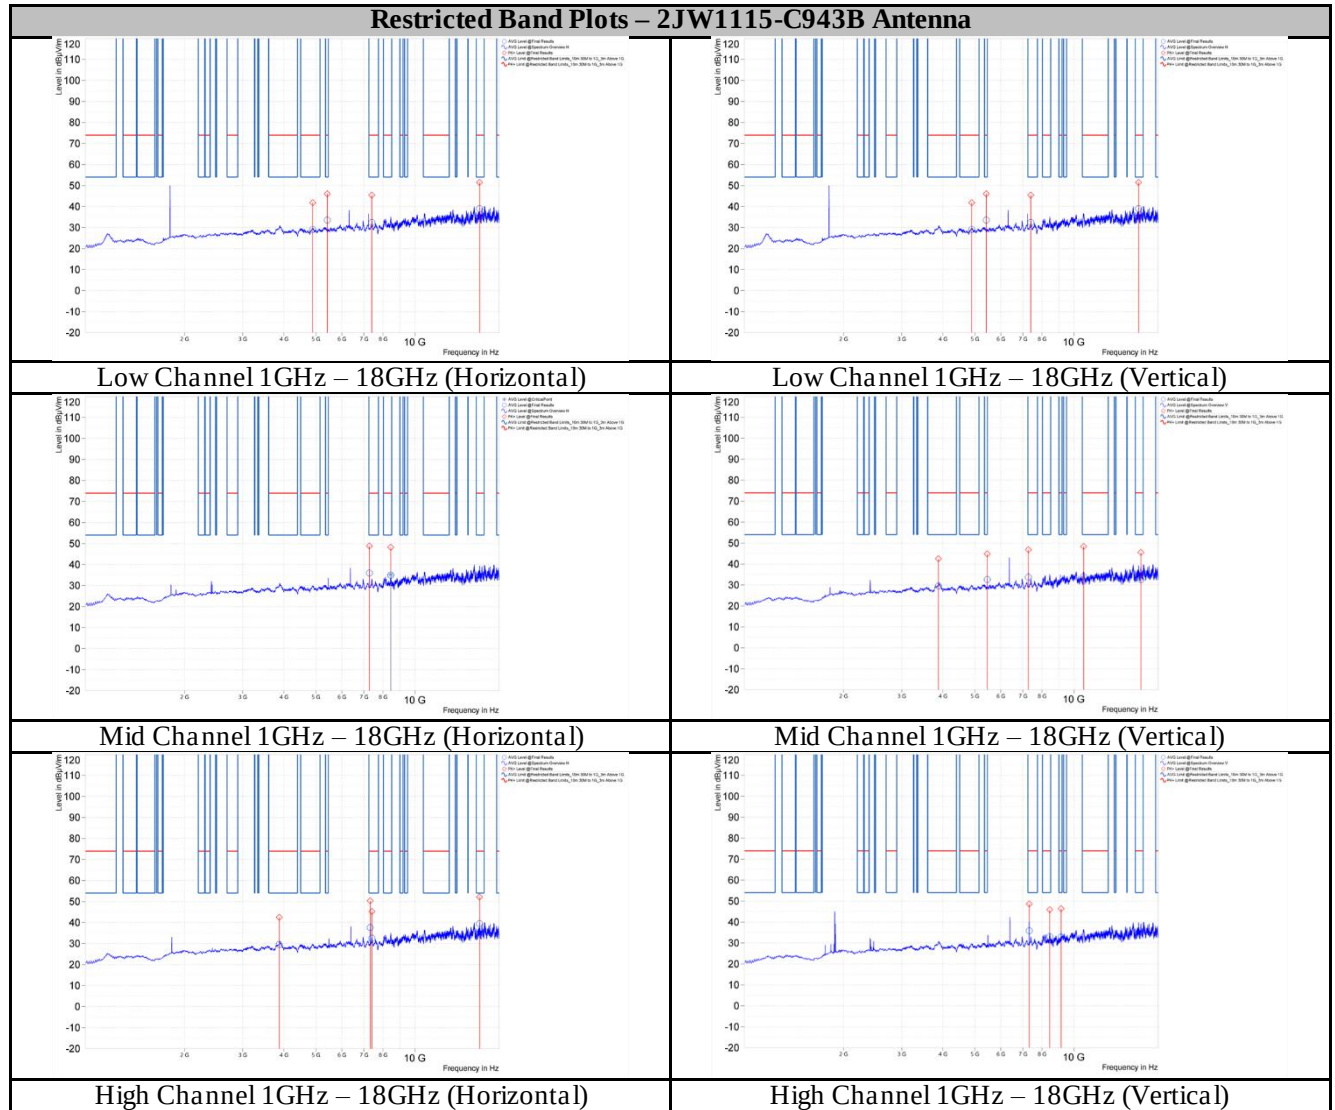

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
0.035	53.90	116.71	62.81	13.24	H	272.3	1	0.200	Pass
0.049	50.72	113.74	63.01	11.72	H	0	1	0.200	Pass
0.050	51.56	113.54	61.98	11.67	H	79.9	1	0.200	Pass
0.897	41.47	68.54	27.07	11.50	V	76.2	1	9.000	Pass
0.933	40.04	68.20	28.16	11.63	V	214.8	1	9.000	Pass
10.374	27.20	69.50	42.30	10.81	V	182.6	1	9.000	Pass
26.907	20.01	69.50	49.49	9.27	H	180	1	9.000	Pass

Figure 16. Worst Case Cabinet Radiation, 9kHz - 30MHz 2JW1115-C943B

Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
114.660	6.35	33.07	26.72	-7.51	V	310.3	3.61	120.000	Pass
118.860	6.68	33.07	26.39	-6.41	H	207.9	2.69	120.000	Pass
126.660	7.33	33.07	25.74	-6.25	H	141	2.06	120.000	Pass
276.270	20.00	35.57	15.57	-5.91	H	108.5	3.72	120.000	Pass
283.410	19.69	35.57	15.88	-5.93	V	81.1	1.4	120.000	Pass
401.100	12.91	35.57	22.66	-2.88	V	177.5	3.97	120.000	Pass

Figure 17. Radiated Spurious, 30MHz - 1GHz (Low Channel) 2JW1115-C943B

Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
37.950	7.75	29.55	21.80	-6.00	H	164.9	2.86	120.000	Pass
166.740	14.29	33.07	18.78	-7.96	H	119.8	3.24	120.000	Pass
281.520	21.56	35.57	14.01	-5.94	H	93	3.52	120.000	Pass
284.190	20.88	35.57	14.69	-5.91	V	107.8	0.99	120.000	Pass
323.490	23.58	35.57	11.99	-4.77	H	132.5	3.43	120.000	Pass
324.000	18.05	35.57	17.52	-4.77	V	175.4	1.5	120.000	Pass

Figure 18. Radiated Spurious, 30MHz - 1GHz (Mid Channel) 2JW1115-C943B

Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
74.040	1.63	29.55	27.92	-12.20	V	106.9	3.77	120.000	Pass
119.520	6.72	33.07	26.35	-6.37	H	228.8	1.79	120.000	Pass
131.250	7.06	33.07	26.01	-6.46	H	0	1.7	120.000	Pass
282.240	19.81	35.57	15.76	-5.93	V	80.5	1.85	120.000	Pass
610.680	15.43	35.57	20.14	1.36	V	342.7	2.82	120.000	Pass
613.530	18.72	35.57	16.85	1.26	H	137.9	1.4	120.000	Pass

Figure 19. Radiated Spurious, 30MHz - 1GHz (High Channel) 2JW1115-C943B

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
3,888.000	43.04	74.00	30.96	30.00	54.00	24.00	-1.63	V	153.3	3.5	Pass
4,893.500	41.82	74.00	32.18	29.06	54.00	24.94	-3.12	H	331.4	1.19	Pass
5,418.000	46.01	74.00	27.99	33.57	54.00	20.43	-4.26	H	188.4	2.86	Pass
7,398.000	45.43	74.00	28.57	32.39	54.00	21.61	-2.47	H	202.8	4.02	Pass
7,398.500	45.30	74.00	28.70	32.50	54.00	21.50	-2.47	V	213.7	1.35	Pass
8,126.500	46.87	74.00	27.13	32.81	54.00	21.19	-4.13	V	159.1	3.87	Pass
15,704.000	51.49	74.00	22.51	39.04	54.00	14.96	1.04	H	326.7	3.95	Pass


Figure 20. Radiated Spurious, 1GHz - 18GHz (Low Channel) 2JW1115-C943B


Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
3,878.500	42.54	74.00	31.46	29.56	54.00	24.44	-1.73	V	195.7	1.5	Pass
5,457.000	44.83	74.00	29.17	32.56	54.00	21.44	-4.17	V	149.3	3.5	Pass
7,275.000	48.86	74.00	25.14	35.95	54.00	18.05	-3.14	H	273.2	3.82	Pass
7,275.000	46.86	74.00	27.14	33.72	54.00	20.28	-3.14	V	300.3	4.01	Pass
8,440.500	48.21	74.00	25.79	34.91	54.00	19.09	-3.70	H	344.3	1.49	Pass
10,695.000	48.40	74.00	25.60	34.06	54.00	19.94	-0.80	V	182.8	1.57	Pass
15,964.000	45.53	74.00	28.47	32.53	54.00	21.47	-0.85	V	47.9	1.41	Pass

Figure 21. Radiated Spurious, 1GHz - 18GHz (Mid Channel) 2JW1115-C943B

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
3,876.500	42.48	74.00	31.52	29.53	54.00	24.47	-1.75	H	316.6	1.64	Pass
7,312.500	48.66	74.00	25.34	35.84	54.00	18.16	-2.83	V	315.4	4	Pass
7,313.500	50.38	74.00	23.62	37.58	54.00	16.42	-2.83	H	273.8	3.66	Pass
7,398.500	45.25	74.00	28.75	32.55	54.00	21.45	-2.47	H	336.5	3.87	Pass
8,440.500	45.85	74.00	28.15	33.12	54.00	20.88	-3.70	V	59.2	3.03	Pass
9,140.500	46.41	74.00	27.59	32.79	54.00	21.21	-3.99	V	306.2	4	Pass
15,703.500	52.16	74.00	21.84	39.49	54.00	14.51	1.04	H	75.6	1.18	Pass

Figure 22. Radiated Spurious, 1GHz - 18GHz (High Channel) 2JW1115-C943B

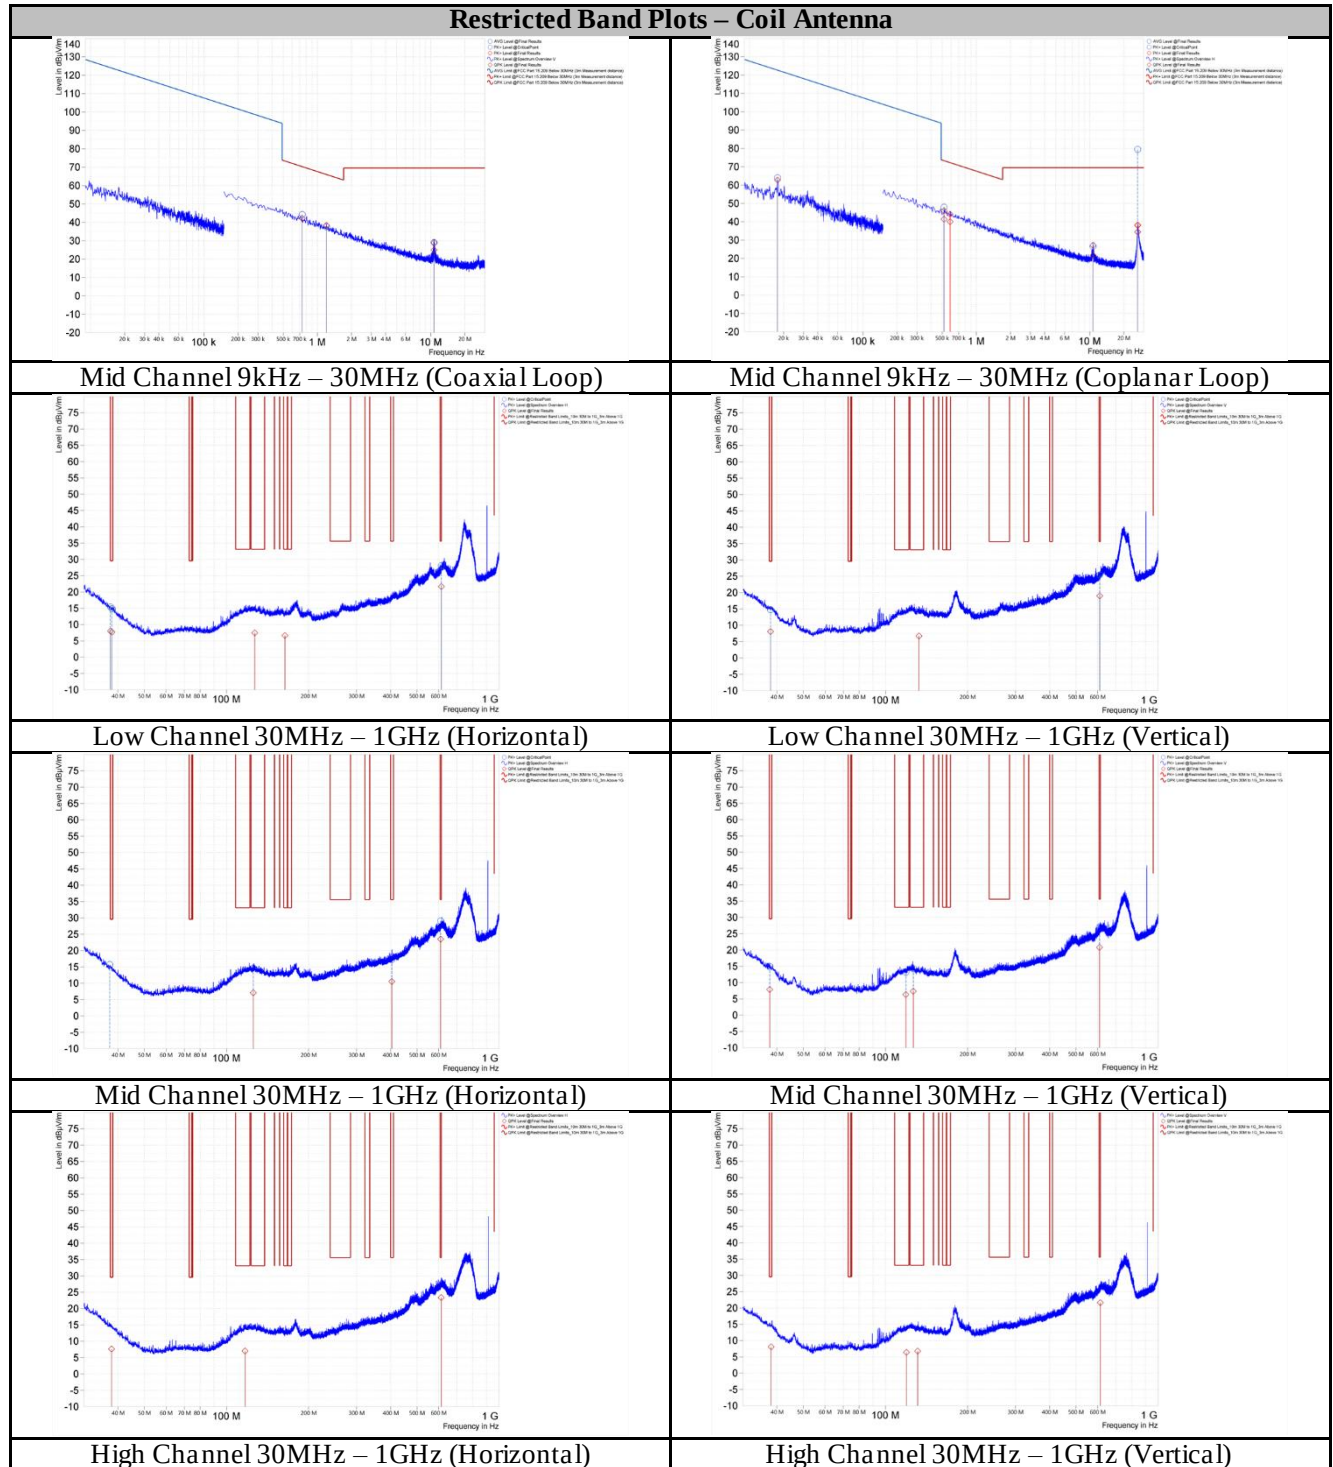

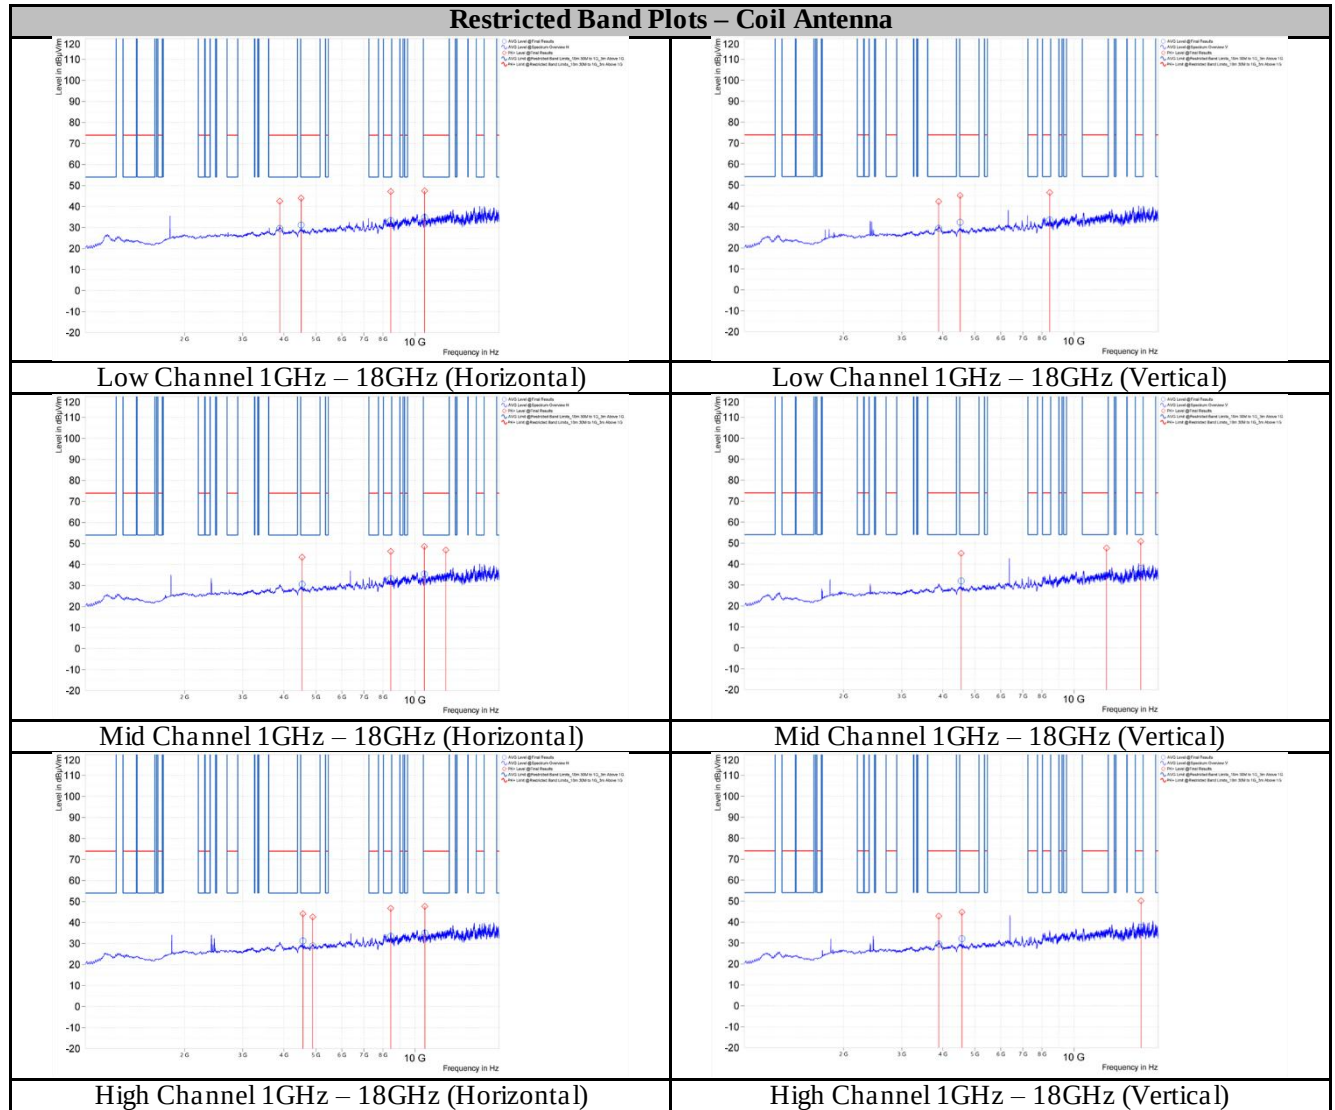

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
0.018	62.69	122.68	59.99	15.28	H	291.2	1	0.200	Pass
0.519	46.05	73.30	27.25	11.34	H	191.6	1	9.000	Pass
0.587	44.13	72.23	28.10	11.33	H	86	1	9.000	Pass
0.735	42.16	70.28	28.12	11.46	V	297.5	1	9.000	Pass
1.203	38.39	65.99	27.60	11.71	V	331.2	1	9.000	Pass
10.698	27.19	69.50	42.31	10.80	H	124.2	1	9.000	Pass
10.698	28.97	69.50	40.53	10.80	V	243.8	1	9.000	Pass

Figure 23. Worst Case Cabinet Radiation, 9kHz - 30MHz Coil Antenna

Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
37.530	7.99	29.55	21.56	-5.69	H	342.7	3.76	120.000	Pass
37.860	8.07	29.55	21.48	-6.25	V	135.1	1.2	120.000	Pass
37.980	7.66	29.55	21.89	-6.03	H	186.6	2.67	120.000	Pass
126.900	7.45	33.07	25.62	-6.25	H	110.2	4	120.000	Pass
132.660	6.73	33.07	26.34	-6.75	V	330	3.25	120.000	Pass
163.860	6.64	33.07	26.43	-7.77	H	270	3.82	120.000	Pass

Figure 24. Radiated Spurious, 30MHz - 1GHz (Low Channel) Coil Antenna

Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
37.590	7.86	29.55	21.69	-6.08	V	268	1.48	120.000	Pass
118.740	6.31	33.07	26.76	-7.03	V	100.9	1.26	120.000	Pass
125.430	7.07	33.07	26.00	-6.25	H	9.4	2.67	120.000	Pass
126.360	7.33	33.07	25.74	-6.42	V	141.6	1.78	120.000	Pass
404.100	10.53	35.57	25.04	-2.73	H	265.8	2.7	120.000	Pass
609.870	20.80	35.57	14.77	1.36	V	93.9	1.5	120.000	Pass
610.260	23.50	35.57	12.07	1.16	H	91	1.71	120.000	Pass

Figure 25. Radiated Spurious, 30MHz - 1GHz (Mid Channel) Coil Antenna

Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
37.860	7.62	29.55	21.93	-5.94	H	67.7	1.52	120.000	Pass
38.070	8.09	29.55	21.46	-6.40	V	71.5	1.15	120.000	Pass
116.910	7.03	33.07	26.04	-6.60	H	325.4	1.3	120.000	Pass
119.370	6.39	33.07	26.68	-6.90	V	287.3	2.87	120.000	Pass
131.190	6.77	33.07	26.30	-6.83	V	54.4	2.85	120.000	Pass
613.110	23.34	35.57	12.23	1.26	H	91.1	1.74	120.000	Pass
613.770	21.64	35.57	13.93	1.46	V	85.8	1.25	120.000	Pass

Figure 26. Radiated Spurious, 30MHz - 1GHz (High Channel) Coil Antenna

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
3,886.000	42.17	74.00	31.83	29.39	54.00	24.61	-1.65	V	250.5	3.71	Pass
3,887.500	42.58	74.00	31.42	29.53	54.00	24.47	-1.64	H	322.1	1.1	Pass
4,514.500	43.96	74.00	30.04	31.21	54.00	22.79	-3.15	H	171.2	2.97	Pass
4,515.500	45.04	74.00	28.96	32.22	54.00	21.78	-3.16	V	200.2	2.4	Pass
8,440.500	47.10	74.00	26.90	33.34	54.00	20.66	-3.70	H	168.2	1.66	Pass
8,440.500	46.43	74.00	27.57	33.40	54.00	20.60	-3.70	V	149.8	3.47	Pass
10,695.500	47.48	74.00	26.52	34.81	54.00	19.19	-0.80	H	191.5	1.32	Pass

Figure 27. Radiated Spurious, 1GHz – 18 GHz (Low Channel) Coil Antenna

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
4,546.000	43.48	74.00	30.52	30.57	54.00	23.43	-3.47	H	182.8	4	Pass
4,548.000	45.12	74.00	28.88	31.97	54.00	22.03	-3.49	V	187.1	2.98	Pass
8,441.000	46.25	74.00	27.75	33.28	54.00	20.72	-3.71	H	30.9	1.02	Pass
10,683.500	48.58	74.00	25.42	35.50	54.00	18.50	-0.86	H	201.1	3.02	Pass
12,412.000	46.87	74.00	27.13	33.54	54.00	20.46	-2.69	H	73.1	2.73	Pass
12,560.000	47.61	74.00	26.39	34.54	54.00	19.46	-2.48	V	309.1	3.49	Pass
15,952.500	50.75	74.00	23.25	37.92	54.00	16.08	-0.67	V	165.1	3.92	Pass

Figure 28. Radiated Spurious, 1GHz – 18 GHz (Mid Channel) Coil Antenna

Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Result
3,887.500	42.83	74.00	31.17	29.51	54.00	24.49	-1.64	V	151.4	1.78	Pass
4,570.500	44.71	74.00	29.29	32.05	54.00	21.95	-3.74	V	241.5	2.43	Pass
4,571.500	44.17	74.00	29.83	31.28	54.00	22.72	-3.75	H	182.4	3.99	Pass
4,893.500	42.68	74.00	31.32	28.85	54.00	25.15	-3.12	H	176.5	3.93	Pass
8,440.500	46.76	74.00	27.24	33.42	54.00	20.58	-3.70	H	308.3	3.34	Pass
10,716.000	47.71	74.00	26.29	34.99	54.00	19.01	-1.00	H	269	1.51	Pass
15,974.500	50.10	74.00	23.90	37.42	54.00	16.58	-1.01	V	59.5	1.25	Pass

Figure 29. Radiated Spurious, 1GHz – 18 GHz (High Channel) Coil Antenna

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1A1250	EMI Test Receiver	Rohde & Schwarz	ESW44	04/08/2024	04/08/2025
MY46180897	Spectrum Analyzer	Agilent Technologies	E4448A	8/28/2024	8/28/2025
1A1088	Preamplifier	Rohde & Schwarz	TS-PR1	See Note	
1A1147	Bi-Log Antenna	Suno Sciences Corp	JB3	04/06/2023	04/06/2025
1A1259	Thermohygrometer with barometer	Traceable	6453	04/25/2024	04/25/2025
1A1176	Loop Antenna	ETS Lindgren	6502	08/22/2024	08/22/2026
1A1044	Generator	COM-Power Corp	CG- 520	See Note	
1A1073	Multi Device Controller	ETS EMCO	2090	See Note	
1A1180	Amplifier	Miteq	AMF-7D-01001800-22-10P	See Note	
1A1183	Double Ridged Waveguide Antenna	ETS Lindgren	3117	02/20/2024	02/20/2026
1A1161	18G – 40G Horn Antenna	ETS Lindgren	3116C-PA	08/01/2024	01/01/2026
1A1234	Spectrum Analyzer	Rohde & Schwarz	FSV 40	03/13/2025	03/13/2027
1A1099	Generator	COM-Power Corp	CGO 51000	See Note	
1A1080	Multi Device Controller	ETS EMCO	2090	See Note	
Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					

Table 14. Test Equipment List

End of Report