

SPECIFICATION FOR APPROVAL

客 户

CUSTOMER: Yuan Zheng

客 户 料 号

CUSTOMER PART NO.: _____

供 应 商

SUPPLIER : Shenzhen Tongxun Precision Technology Co., Ltd

供应商料号

SUPPLIER PART NO. IA.0320.LA.0FE

产 品 名 称

PRODUCT NAME: FPC Antenna

日 期

DATE: 2021-04.-07

Customer Signature : 	Customer Seal:
---	---

NOTE: Please return this copy as a certification of your approval !

Manufacturer's address: No. 52 Qiankeng Road, Qiankeng Community, Fucheng Street, Longhua District, Shenzhen

IA.0320.LA.0FE Bluetooth Antenna Specification

1. Application:

This application shall apply for antenna unit which shall be used such as automotive, conventional communications, smart home, etc..

2. Electrical Specification:

Those specifications were specially defined for customer's model, and all characteristics were measured under the model's handset testing jig .

2-1. Frequency Band:

Frequency Band	MHz
Bluetooth	2400-2500

2-2. Impedance

50 ohm nominal

2-3. VSWR

2-3-1. Measurement frequency points and VSWR value

Frequency Band(MHz)	2400	2450	2500
2-3-3. Typical Value:	1.45	1.38	1.35

2-3-2. VSWR


Frequency Band(MHz)	2400	2450	2500
Typical Value:	≤2	≤2	≤2

UNLESS OTHER SPECIFIED TOLERANCES ON: X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 KINGRF TECHNOLOGY CO., LTD.
SCALE:	UNIT: mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE: IA.0320.LA.0FE Bluetooth Antenna Specification		SPEC REV. P0

2-3-3 Measuring Method

1. A 50 Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR.
2. Keeping this jig away from metal at least 20 cm








2-3-4 Picture

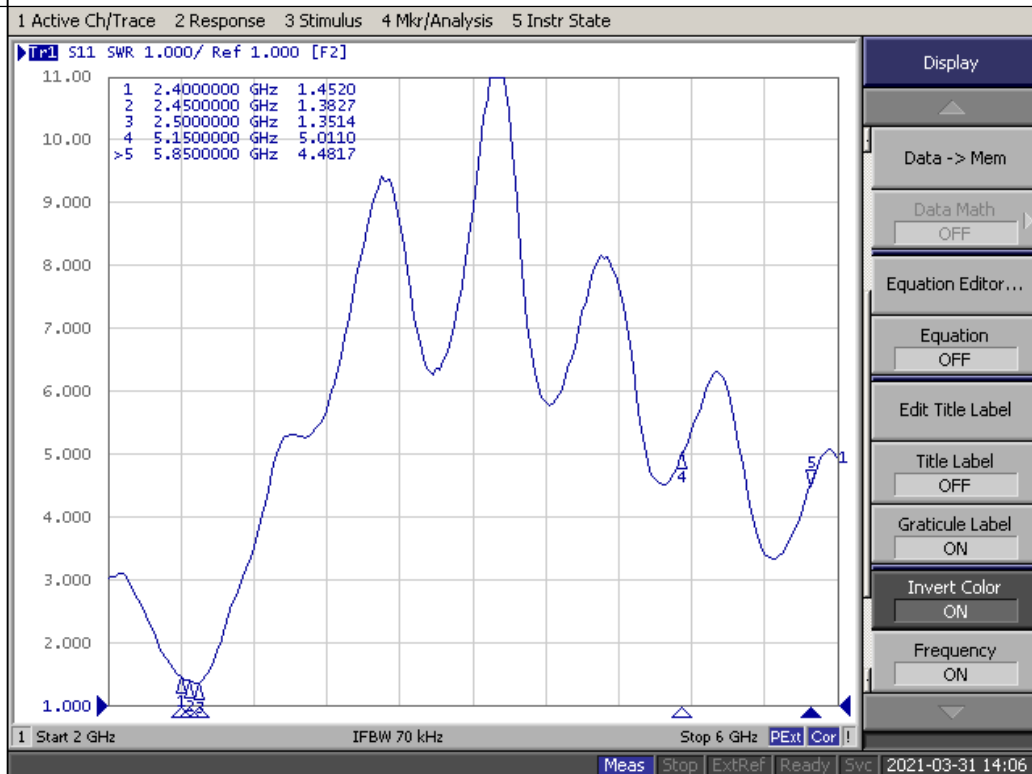

UNLESS OTHER SPECIFIED TOLERANCES ON: X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 KINGRF TECHNOLOGY CO., LTD.
SCALE:	UNIT: mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE: IA.0320.LA.0FE Bluetooth Antenna Specification		
SPEC REV. P0		

2-4-1 Efficiency and Gain

Passive Test For TEST-2.4			
Freq	Effi	Effi	Gain
(MHz)	(%)	(dB)	(dBi)
2400	47.6	-3.22	0.88
2410	52.78	-2.78	1.28
2420	52.74	-2.78	1.19
2430	56.18	-2.5	1.42
2440	48.79	-3.12	0.98
2450	49	-3.1	1.21
2460	52.45	-2.8	1.58
2470	50.3	-2.98	1.65
2480	51.87	-2.85	1.89
2490	51.44	-2.89	2.08
2500	48.76	-3.12	1.93

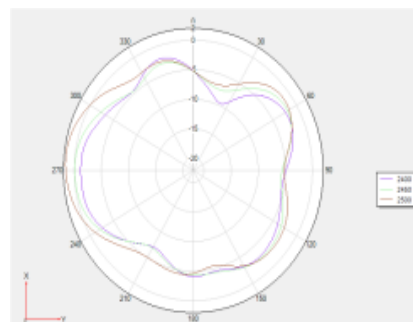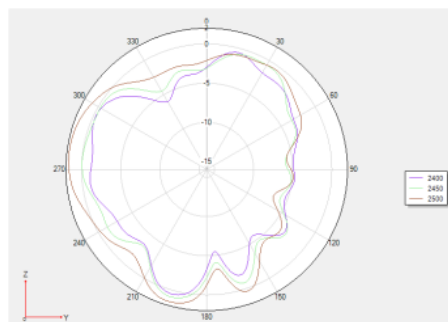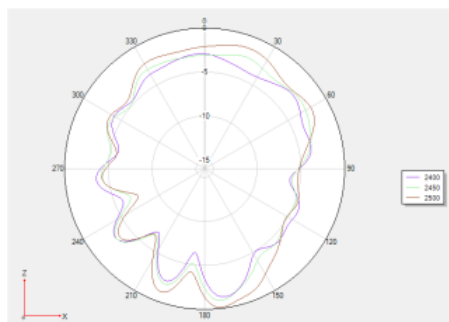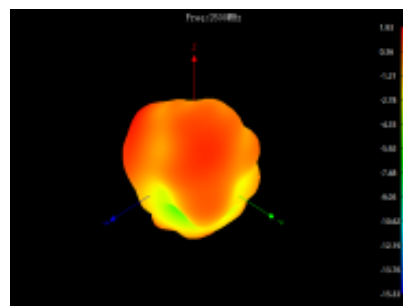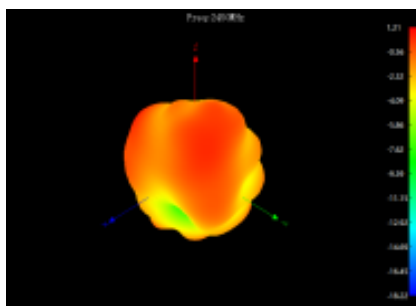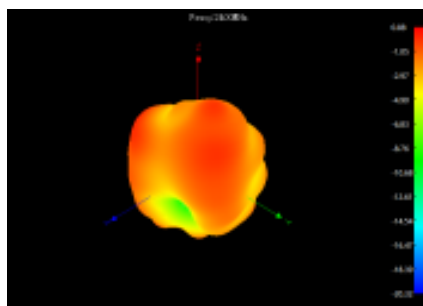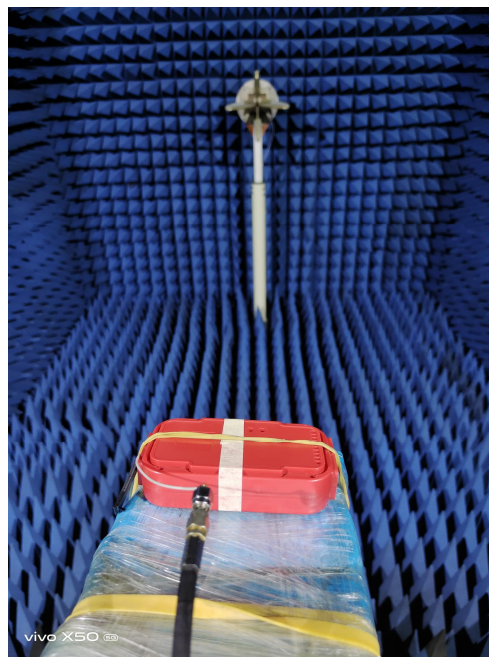

UNLESS OTHER SPECIFIED TOLERANCES ON:

$X = \pm$ $X.X = \pm$ $X.XX = \pm$

ANGLES = $\pm$ HOLEDIA = $\pm$



KINGRF TECHNOLOGY CO., LTD.

SCALE:

UNIT: mm

DRAWN BY: LI

CHECKED BY: YS

DESIGNED BY: De wen

APPROVED BY: YS

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: IA.0320.LA.0FE Bluetooth Antenna Specification


SPEC REV.

P0

2-4-2 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

2-4-3 Chamber definition

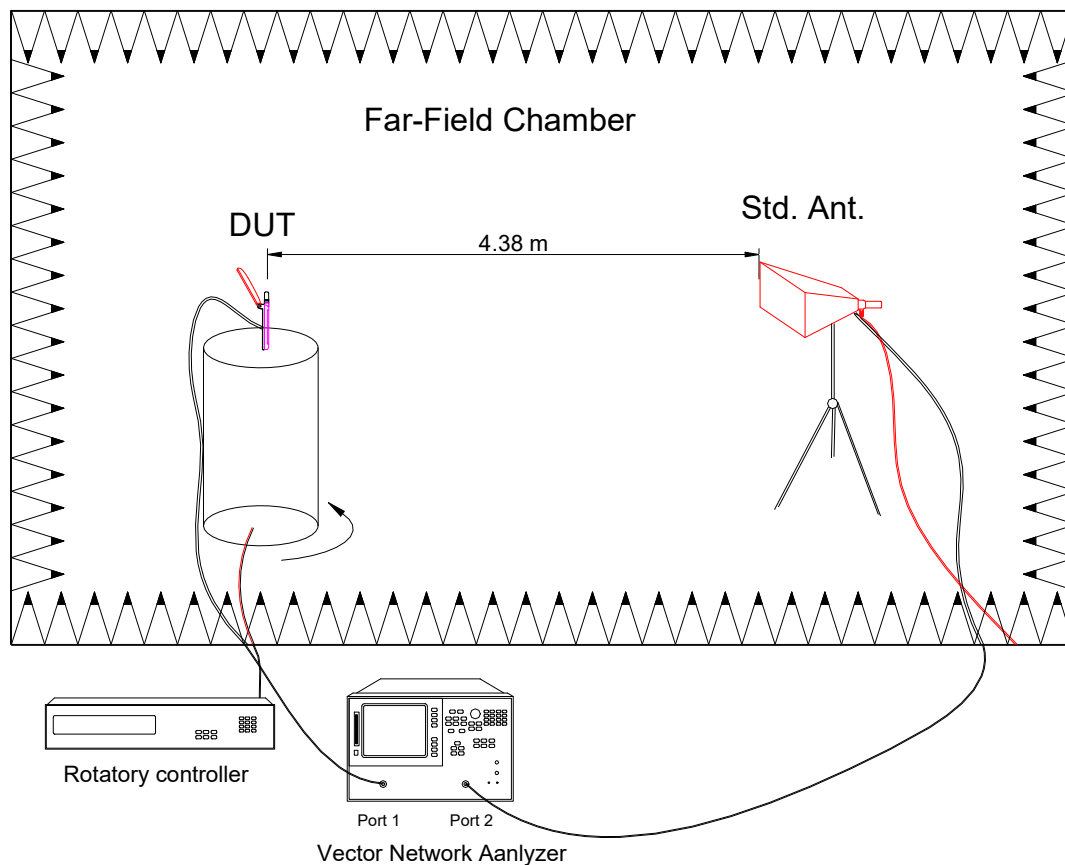


1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quite room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON: X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 KINGRF TECHNOLOGY CO., LTD.
SCALE:	UNIT: mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE: IA.0320.LA.0FE Bluetooth Antenna Specification		
SPEC REV. P0		

3. Mechanical Specification:

3-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing

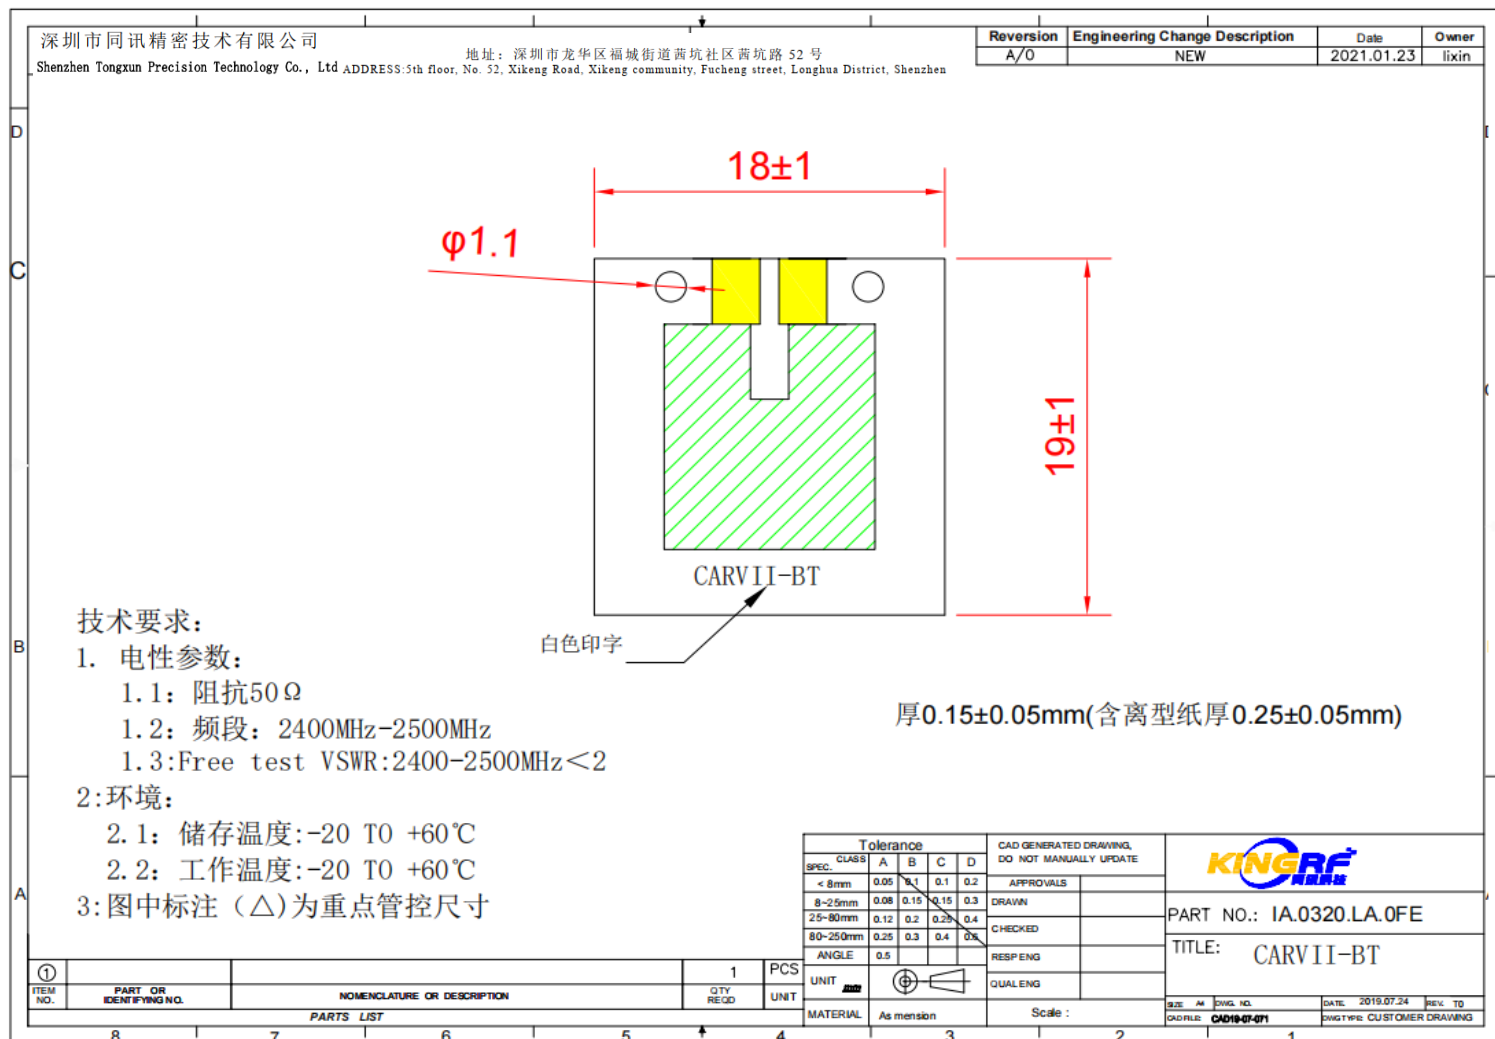

UNLESS OTHER SPECIFIED TOLERANCES ON:

$X=\pm$ $X.X=\pm$ $X.XX=\pm$

ANGLES $=\pm$ HOLEDIA $=\pm$

SCALE:

UNIT: mm

DRAWN BY: LI

CHECKED BY: YS

DESIGNED BY: De wen

APPROVED BY: YS

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE: IA.0320.LA.0FE Bluetooth Antenna Specification

SPEC REV.

P0