

TEST REPORT

Applicant : Shenzhen Yihu Technology Co.,Ltd

Address : 4th Floor, Building 4, Zone A, Yalian Haoshida Industrial Zone,
Bantian Street, Longgang District, Shenzhen, China

Manufacturer : Shenzhen Yihu Technology Co., Ltd

Address : 4th Floor, Building 4, Zone A, Yalian Haoshida Industrial Zone,
Bantian Street, Longgang District, Shenzhen China

Product Name : Sound Effects Machine

Model Number : T19, T16

Trademark : N/A

FCC ID : 2BCCC-T19

Test Date : Aug. 13, 2026 - Sep. 08, 2026

Date of Report : Sep. 08, 2026

Test Result : This device described above has been tested by BKC, and the test results show that the equipment under test (EUT) is in compliance with the Standard requirements. And it is applicable only to the tested sample identified in the report.

Test Procedure Used:

Standards : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024

Prepared by(Test Engineer):
Carey Zheng



Approved(Manager):
Casey Wang



Approved(Manager):
Jerry Liao



TABLE OF CONTENT

1. General Information	5
1.1. Customer basic information	5
1.2. Description of Device (EUT)	5
1.3. Channel List	5
1.4. Summary of test result	6
1.5. Special Accessories and Auxiliary Equipment	6
1.6. Test configuration	6
1.7. Test mode	6
1.8. Block Diagram	7
1.9. Test Conditions	7
1.10. Measurement Uncertainty (95% confidence levels, k=2)	7
1.11. Test Facility	8
1.12. Test Equipment	8
2. Conducted emission at the mains terminals test	10
2.1. Limit	10
2.2. Test Setup	10
2.3. Test Procedure	10
2.4. Test Result	11
3. Radiated Spurious Emissions	13
3.1. Limit	13
3.2. Test Setup	14
3.3. Test Procedure	16
3.4. Test Result	17
4. Conducted Spurious Emissions	29
4.1. Limit	29
4.2. Test Setup	29
4.3. Test Procedure	29
4.4. Test Result	30
5. Band Edge Measurement	31
5.1. Limit	31
5.2. Test setup	31
5.3. Test Procedure	31
5.4. Test Result	32
6. -6 dB Bandwidth and 99% Bandwidth Measurement	33
6.1. Limit	33
6.2. Test Setup	33
6.3. Test Procedure	33
6.4. Test Result	33
7. Maximum Peak Output Power	34
7.1. Limit	34
7.2. Test Setup	34
7.3. Test Procedure	34
7.4. Test Result	35
8. Power Spectral Density	36
8.1. Limit	36
8.2. Test Setup	36
8.3. Test Procedure	36
8.4. Test Result	36
9. Antenna Requirement	37
10. Test Photographs	38

11. Appendix I: Photos of the EUT 39



Revision History of This Test Report

[illegible]

1. General Information

1.1. Customer basic information

Contacts : /
E-Mail : /
Telephone : /

1.2. Description of Device (EUT)

EUT Name : Sound Effects Machine
Model No. : T19, T16
Model Difference : The product is different for model name and outlook color. The main tested model for this certification is the T19.
Power supply : Rating(s): 5V
Battery: 3.7V === 300mAh
Operation frequency : 2402-2480MHz
Max. RF output power: : -0.02dBm
Modulation : GFSK
Data Rate : LE 1Mbps
Antenna Type : PCB Antenna, Maximum Gain is -0.58dBi
Hardware Version : V1.0
Software Version : V1.0
Intend use environment : Residential, commercial and light industrial environment

1.3. Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

1.4. Summary of test result

RF PART		
Test Items	Test Requirement	Result
Antenna requirement	FCC part 15.203/15.247 (c)	PASS
AC Power Line Conducted Emission	FCC part 15.207	PASS
Conducted Peak Output Power	FCC part 15.247 (b)(3)	PASS
Channel Bandwidth& 99% OCB	FCC part 15.247 (a)(2)	PASS
Power Spectral Density	FCC part 15.247 (e)	PASS
Band Edge	FCC part 15.205/15.209 /15.247(d)	PASS
Spurious Emission	FCC part 15.205/15.209 /15.247(d)	PASS
Remark: N/A is an abbreviation for Not Applicable. Measurement Uncertainty is not taken into account for conformity statement		

1.5. Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Hardware Version	Software Version
Serial port board	-	USB-TTL-01	-	-
PC	-	DELL	-	-
Adapter	-	HW088	-	-

1.6. Test configuration

Test Software Version	bt_tool_v1.1.4.exe		
Frequency (MHz)	2402	2440	2480
GFSK LE 1Mbps	default power	default power	default power


1.7. Test mode

The special RF test software was used to control EUT work in Continuous BLE TX mode, and select test channel, wireless mode.


Test mode	Low channel	Middle channel	High channel
GFSK 1M	2402MHz	2440MHz	2480MHz
Note: /			

1.8. Block Diagram


Conducted Emission



Radiated Emission



RF Conducted Test

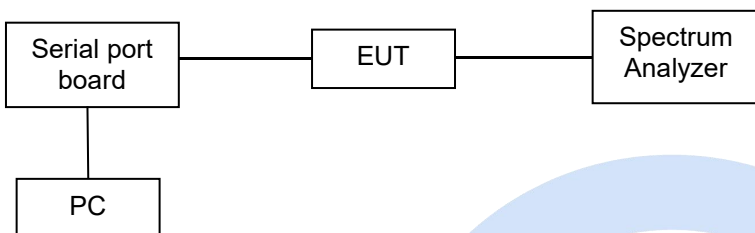

1.9. Test Conditions

Category	Normal Conditions	Extreme Conditions
Temperature range	15-35°C	N/A
Humidity range	20-75%	N/A
Pressure range	86-106kPa	N/A
Power supply	Rating(s): 5V Battery: 3.7V --- 300mAh	N/A
Note: N/A is an abbreviation for Not Applicable.		

1.10. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for radio frequency	$\pm 7 \times 10^{-8}$	
Conducted Emissions (150kHz~30MHz)	$\pm 2.54\text{dB}$	
Radiated Emission(9KHz~30MHz)	$\pm 1.6\text{ dB}$	
Radiated Emission(30MHz~1GHz)	Vertical: $\pm 4.14\text{dB}$ Horizontal: $\pm 4.25\text{dB}$	
Radiated Emission(1GHz~6GHz)	$\pm 3.9\text{dB}$	
Radiated Emission(6GHz~18GHz)	$\pm 4.3\text{dB}$	
Radiated Emission(18GHz~40GHz)	$\pm 3.38\text{dB}$	
Uncertainty for conducted RF Power	$\pm 0.20\text{dB}$	
Conducted spurious emissions	$\pm 0.24\text{dB}$	
Power Spectral Density	$\pm 0.21\text{dB}$	
Uncertainty for temperature	0.6°C	
Uncertainty for humidity	1%	
Bandwidth	$\pm 1.5 \times 10^{-6}$	

Time	$\pm 2\%$	
Duty Cycle	$\pm 2\%$	
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%		

1.11. Test Facility

Site Description		
Name of Firm	:	Shenzhen BKC Testing Co., Ltd.
Site Location	:	Room 103, 1/F, Huaya Building, Huaya Industrial Park, Longhua Community, Longhua District, Shenzhen, Guangdong, China.
ISED CAB identifier	:	CN0188
ISED Company Number	:	34333
FCC Designation Number	:	CN1416
FCC Test Firm Registration Number	:	701543

1.12. Test Equipment

Conducted Test Site

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	102762	Mar. 11, 2026	Mar. 10, 2027
2	EMI Test Receiver	R&S	ESCI	101424	Mar. 11, 2026	Mar. 10, 2027
3	Rf cables	HTEC	HCE 2M-CE	N/A	Mar. 11, 2026	Mar. 10, 2027
4	Coupling/ Decoupling Network	Diamond	CX210	N/A	Mar. 11, 2026	Mar. 10, 2027
5	CE Testing software	EZ	EZ-EMC	/	/	/

Radiated Test Site(Below 1G and Above 1G)

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Antenna	Schwarzbeck	VULB 9168	01321	Mar. 20, 2025	Mar. 19, 2028
2	EMI Test Receiver	R&S	ESRP	101478	Mar. 11, 2026	Mar. 10, 2027
3	Preamplifier	HP	8447D	2727A05345	Mar. 11, 2026	Mar. 10, 2027
4	Double Ridged Broadband	SCHWARZBECK	BBHA 9120D	02621	Mar. 20, 2025	Mar. 19, 2028
5	Preamplifier	Schwarzbeck	BBV 9718D	00041	Mar. 11, 2026	Mar. 10, 2027
6	Rf cables	HUBER+SUHNER	8M-RE	N/A	Mar. 11, 2026	Mar. 10, 2027
7	Rf cables	HUBER+SUHNER	1.5M-RE	N/A	Mar. 11, 2026	Mar. 10, 2027
8	Rf cables	HUBER+SUHNER	1.5M-AP-RE	N/A	Mar. 11, 2026	Mar. 10, 2027
9	Loop antenna	ANRF	ANRF-6603	091802	Mar. 13, 2026	Mar. 12, 2027

10	Spectrum analyzer	R&S	FSP40	200061	Mar. 11, 2026	Mar. 10, 2027
11	Double Ridged Broadband Horn Antenna	COM-POWER	AH-1840	10100009	Mar. 11, 2026	Mar. 10, 2027
12	Spectrum	Agilent	N9020A	MY50510311	Mar. 11, 2026	Mar. 10, 2027
13	Band Stop Filter	Bafang	BSF5G	2024052610	Mar. 11, 2026	Mar. 10, 2027
14	RE Testing software	EZ	EZ-EMC	/	/	/

RF Test Site

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum	Agilent	N9020A	MY50510311	Mar. 11, 2026	Mar. 10, 2027
2	Vector source	Agilent	N5182A	MY47420223	Mar. 11, 2026	Mar. 10, 2027
3	All instrument	Rohde & Schwarz	CMW 500	101131	Mar. 11, 2026	Mar. 10, 2027
4	control unit	MW	MW100-RFCB	MW200411B K-34	Mar. 11, 2026	Mar. 10, 2027
5	RF Testing software	MW	MTS 8310	/	/	/
6	Spectrum analyzer	R&S	FSP40	200061	Mar. 11, 2026	Mar. 10, 2027

Test software

Software name	RF Testing software
Software version	2.0.0.0
Software name	RE Testing software
Software version	EMEC-03A2 RE+
Software name	CE Testing software
Software version	EMEC-3A1+

2. Conducted emission at the mains terminals test


2.1.Limit

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

2.2.Test Setup

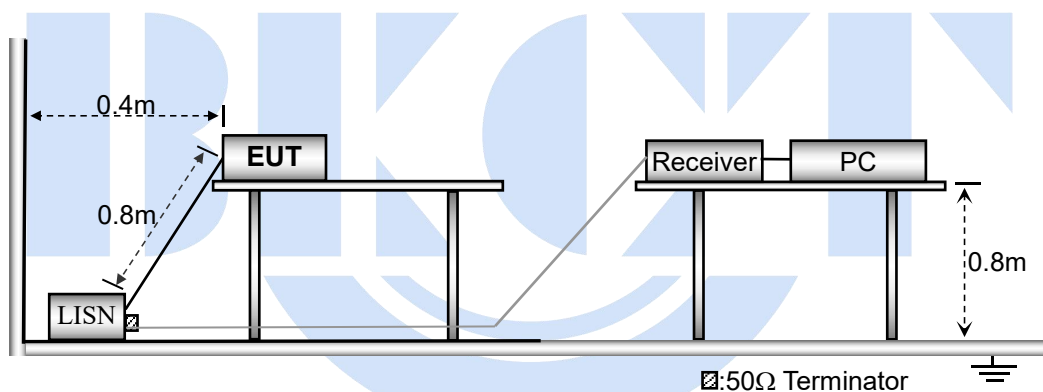


2.3.Test Procedure

1. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. LISN at least 80 cm from nearest part of EUT chassis.
5. For the actual test configuration, please refer to the related Item - EUT Test Photos.

2.4.Test Result


Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	BLE transmitting

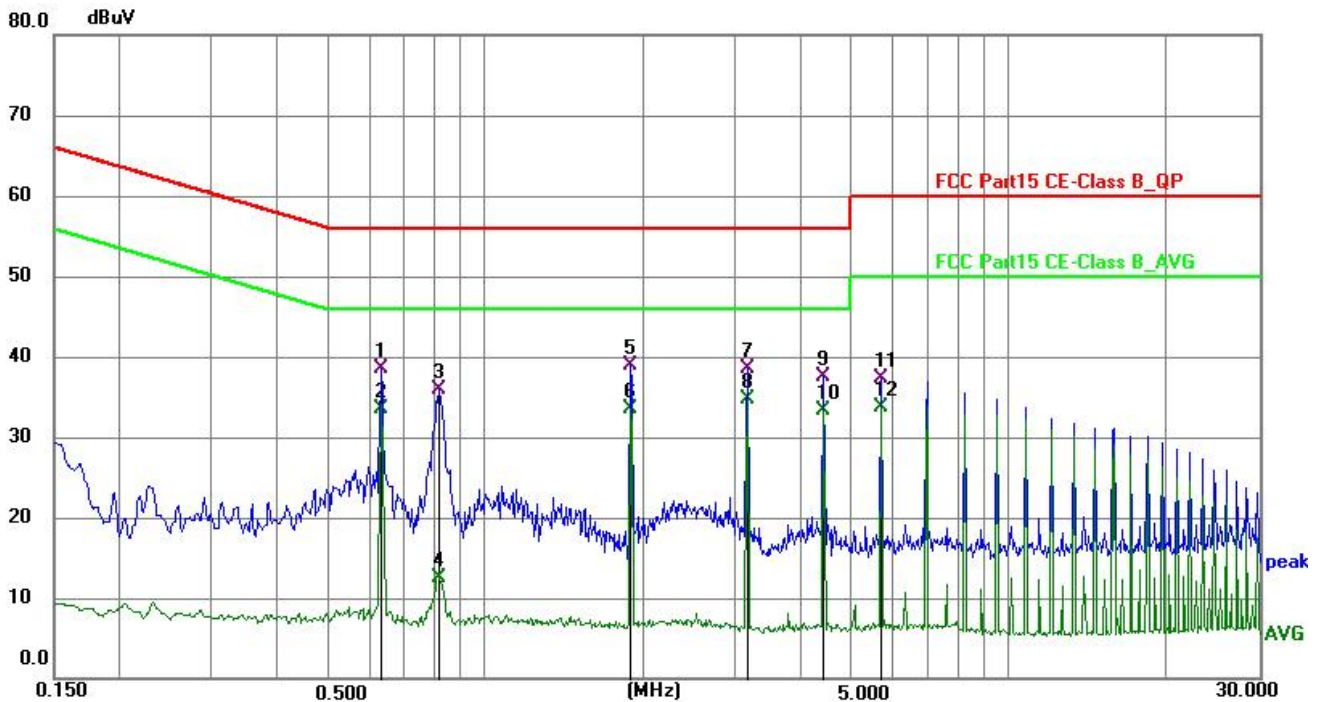

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.6314	28.81	9.77	38.58	56.00	-17.42	QP	P
2	0.6314	23.81	9.77	33.58	46.00	-12.42	AVG	P
3	0.8158	26.06	9.76	35.82	56.00	-20.18	QP	P
4	0.8158	2.74	9.76	12.50	46.00	-33.50	AVG	P
5	1.8959	29.08	9.76	38.84	56.00	-17.16	QP	P
6	1.8959	23.79	9.76	33.55	46.00	-12.45	AVG	P
7	3.1604	28.72	9.79	38.51	56.00	-17.49	QP	P
8 *	3.1604	24.86	9.79	34.65	46.00	-11.35	AVG	P
9	4.4249	27.62	9.81	37.43	56.00	-18.57	QP	P
10	4.4249	23.55	9.81	33.36	46.00	-12.64	AVG	P
11	5.6894	27.50	9.80	37.30	60.00	-22.70	QP	P
12	5.6894	23.93	9.80	33.73	50.00	-16.27	AVG	P

Conducted Emission At The Mains Terminals Test Data

Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	BLE transmitting

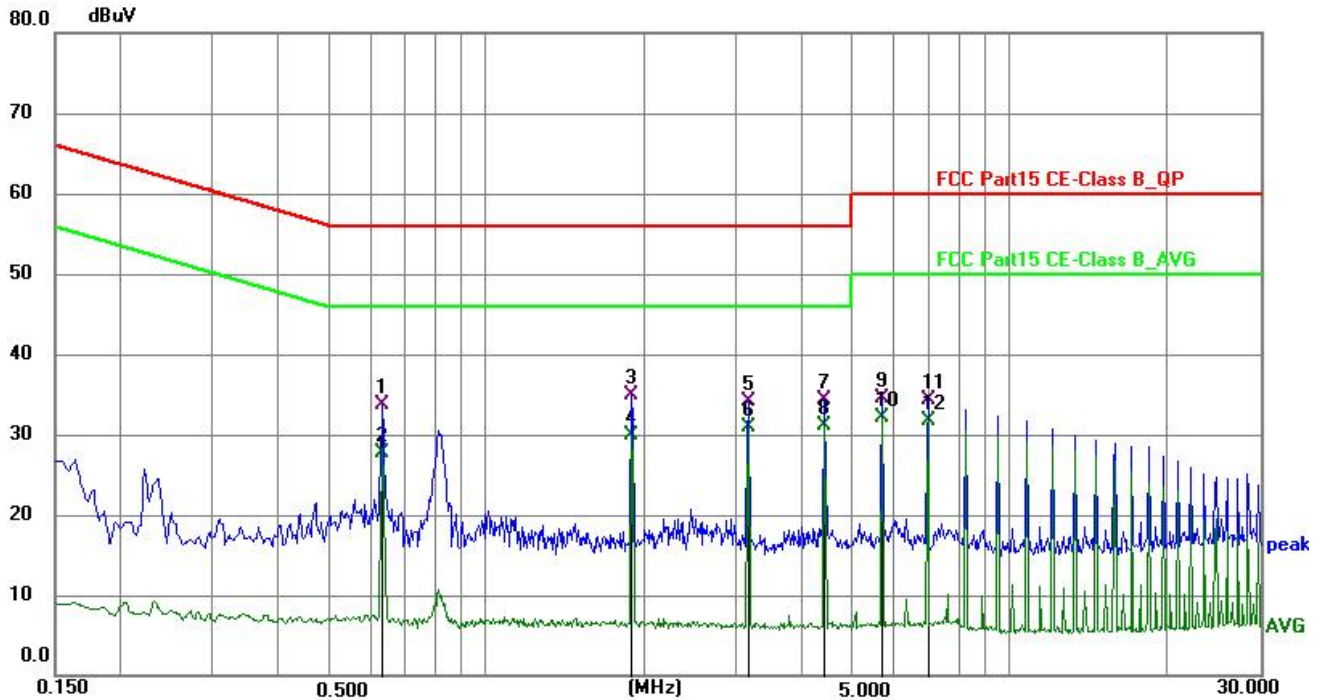

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.6314	23.93	9.69	33.62	56.00	-22.38	QP	P
2	0.6314	18.03	9.69	27.72	46.00	-18.28	AVG	P
3	1.8959	25.12	9.69	34.81	56.00	-21.19	QP	P
4	1.8959	20.15	9.69	29.84	46.00	-16.16	AVG	P
5	3.1604	24.37	9.71	34.08	56.00	-21.92	QP	P
6	3.1604	21.22	9.71	30.93	46.00	-15.07	AVG	P
7	4.4249	24.54	9.73	34.27	56.00	-21.73	QP	P
8 *	4.4249	21.38	9.73	31.11	46.00	-14.89	AVG	P
9	5.6894	24.88	9.72	34.60	60.00	-25.40	QP	P
10	5.6894	22.31	9.72	32.03	50.00	-17.97	AVG	P
11	6.9539	24.58	9.72	34.30	60.00	-25.70	QP	P
12	6.9539	21.94	9.72	31.66	50.00	-18.34	AVG	P

Remark:

- Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss; Level= Reading + Correct factor.
- Only the worst Data GFSK LE 1Mbps/2402MHz mode Record in the report.

3. Radiated Spurious Emissions

3.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to
C63.10a-2024

Test Result: PASS

Measurement Distance: 3m

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120KHz	360KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$


3.2. Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

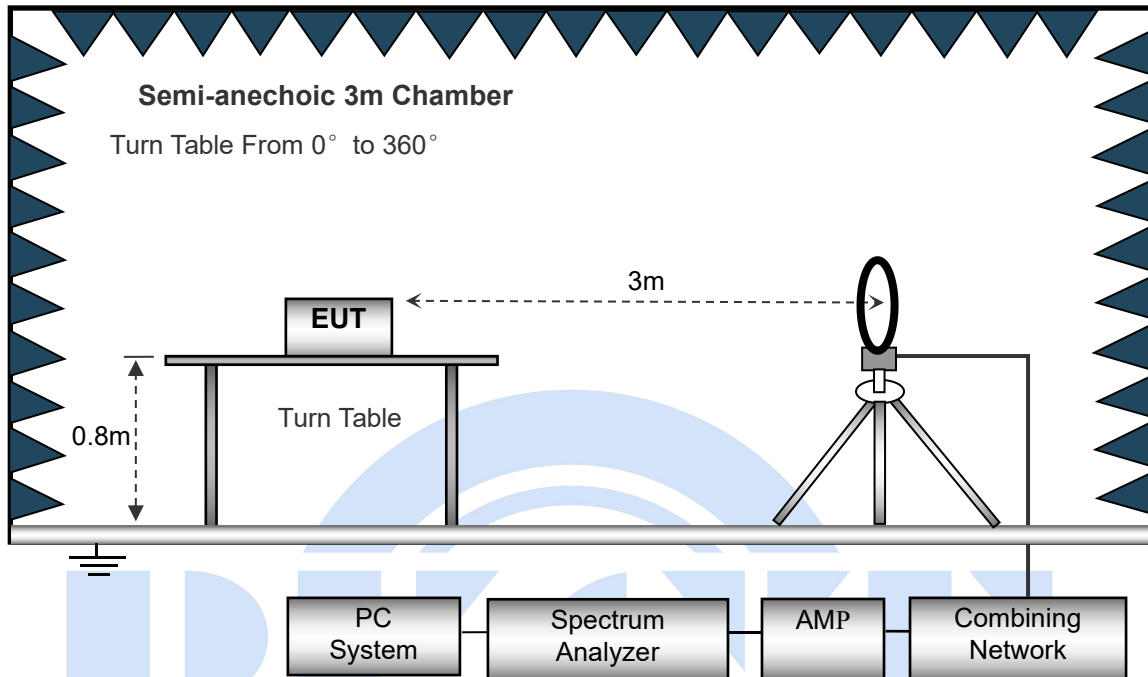

The test setup for emission measurement from 30 MHz to 1 GHz.

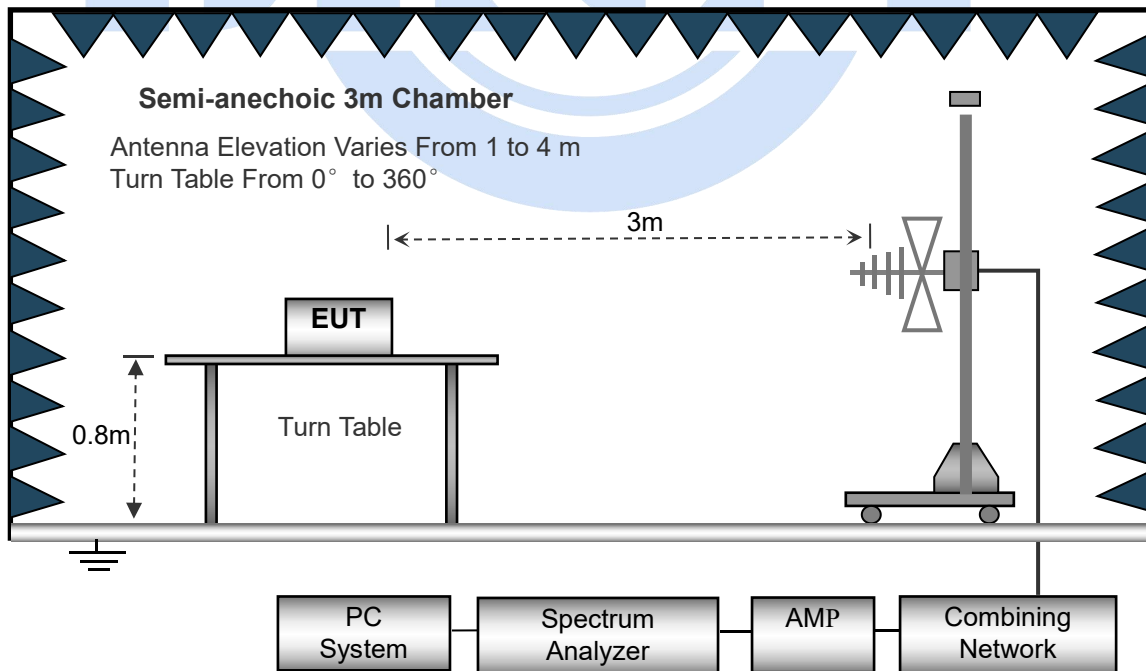

The test setup for emission measurement above 1 GHz.

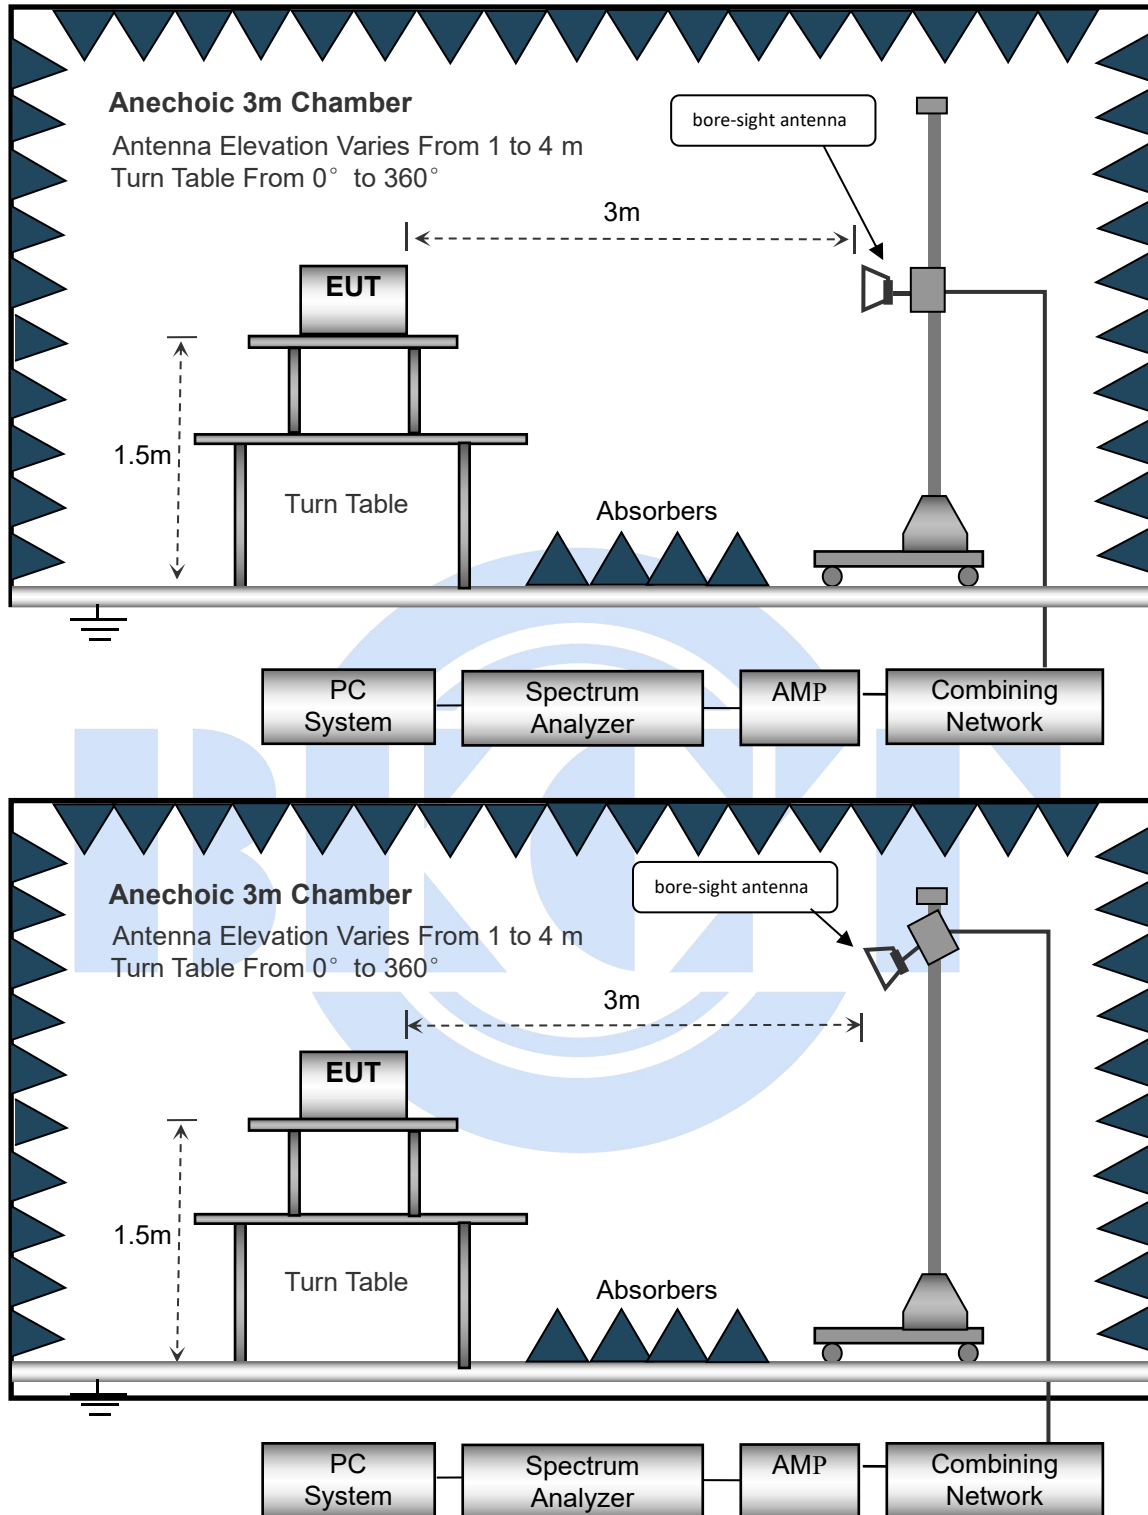

3.3.Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high - pass filter is used during radiated emissions above 1GHz measurement.




3.4. Test Result

Test Frequency: 9KHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 1GHz


Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode	BLE transmitting

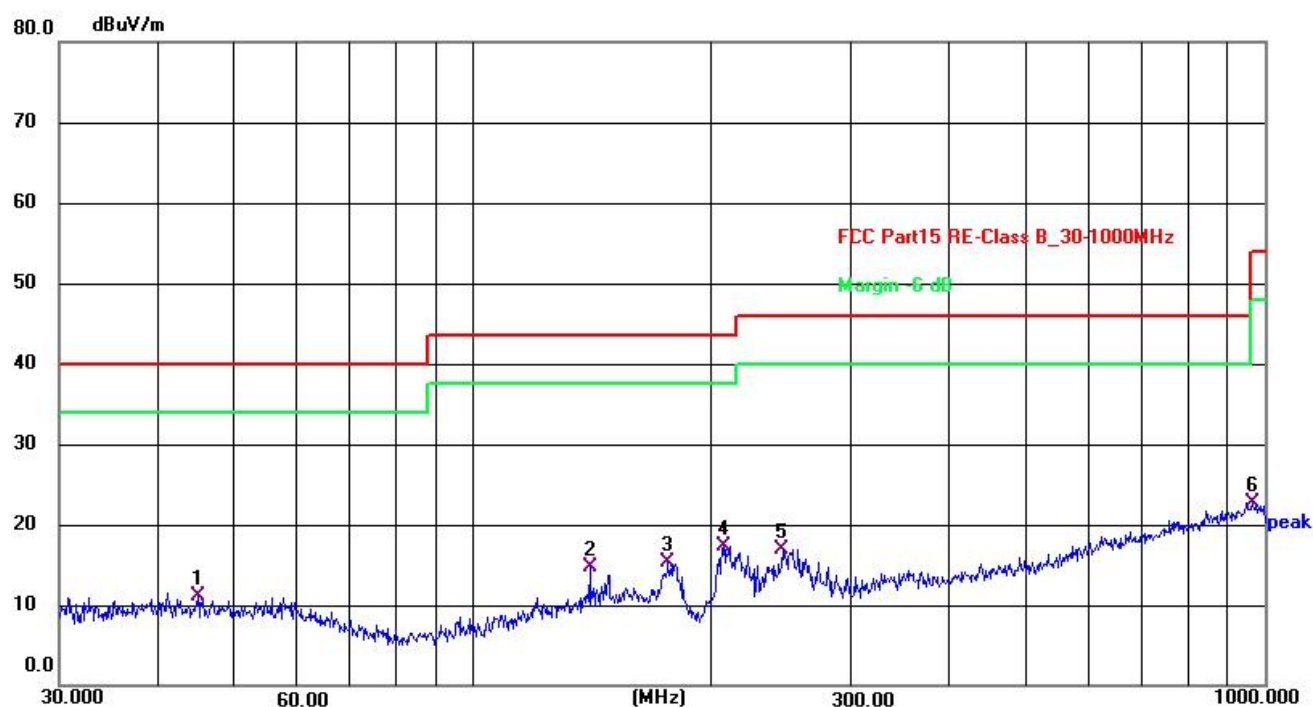

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	44.9006	27.41	-16.40	11.01	40.00	-28.99	QP
2	140.3421	30.48	-15.85	14.63	43.50	-28.87	QP
3	176.2686	31.99	-16.78	15.21	43.50	-28.29	QP
4 *	207.1226	35.92	-18.61	17.31	43.50	-26.19	QP
5	245.9509	33.71	-16.87	16.84	46.00	-29.16	QP
6	965.5421	27.98	-5.27	22.71	54.00	-31.29	QP

Radiation Emission Test Data

Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode	BLE transmitting

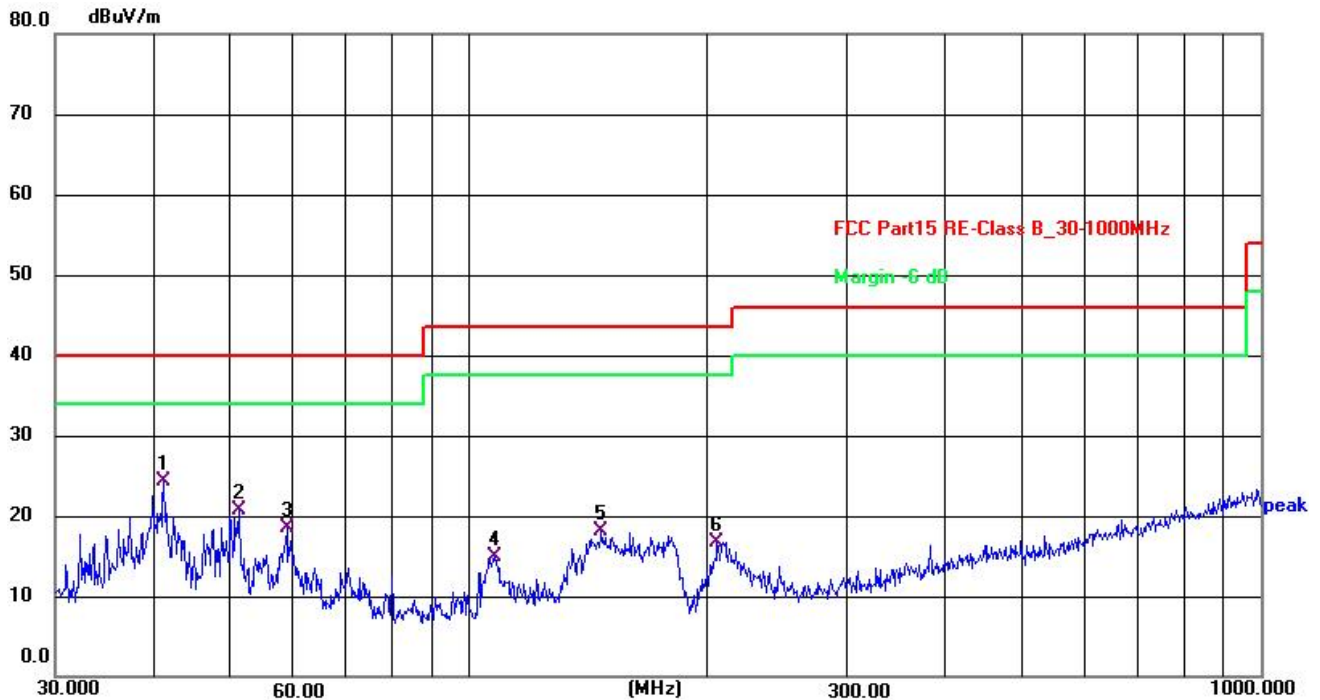


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	41.1320	40.44	-16.17	24.27	40.00	-15.73	QP
2	51.1210	37.29	-16.60	20.69	40.00	-19.31	QP
3	58.8185	35.76	-17.20	18.56	40.00	-21.44	QP
4	107.8877	33.51	-18.53	14.98	43.50	-28.52	QP
5	146.8876	33.45	-15.37	18.08	43.50	-25.42	QP
6	206.0360	35.31	-18.64	16.67	43.50	-26.83	QP

Remark:

1. Level = Reading + Correct Factor
2. Correct Factor=Antenna FCable Loss - Preamplifier Factor
3. Only the worst Data GFSK LE 1Mbps/2402MHz mode Record in the report.


Test Frequency Above 1GHz:

Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	DC 3.7V	Test Mode	2402MHz

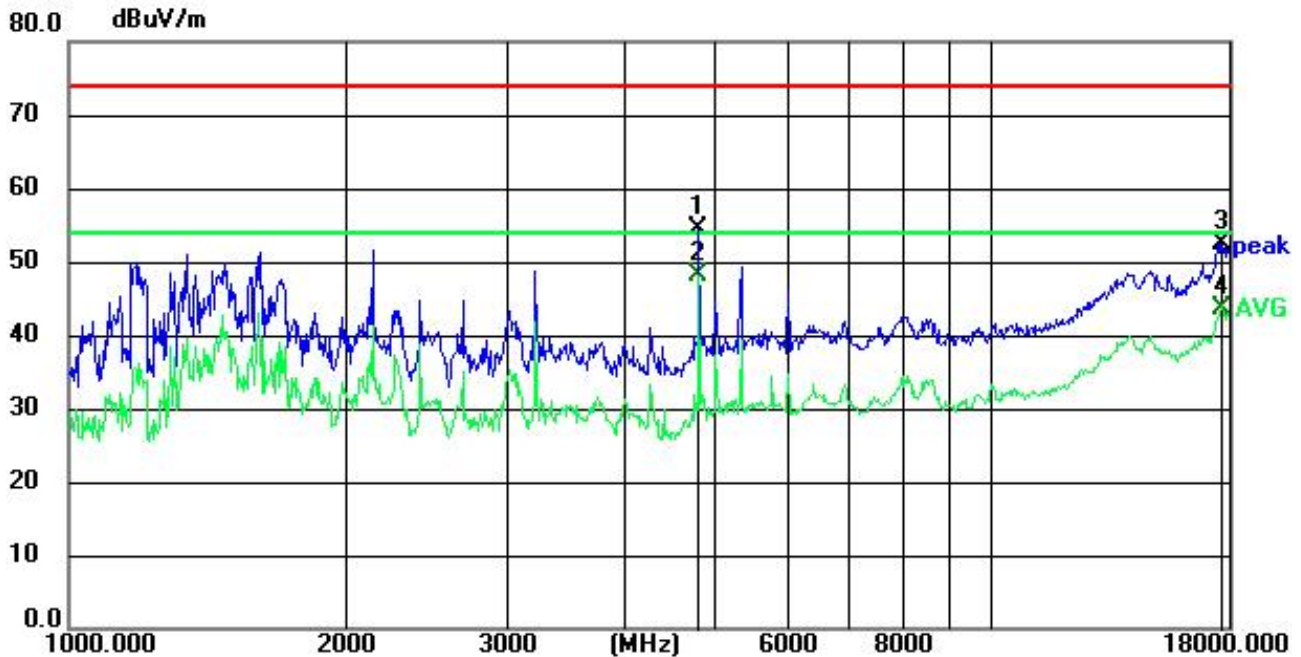


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4806.4000	54.39	0.16	54.55	74.00	-19.45	peak
2 *	4806.4000	47.98	0.16	48.14	54.00	-5.86	AVG
3	17712.3198	34.72	17.70	52.42	74.00	-21.58	peak
4	17712.3198	25.80	17.70	43.50	54.00	-10.50	AVG

Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	DC 3.7V	Test Mode	2402MHz

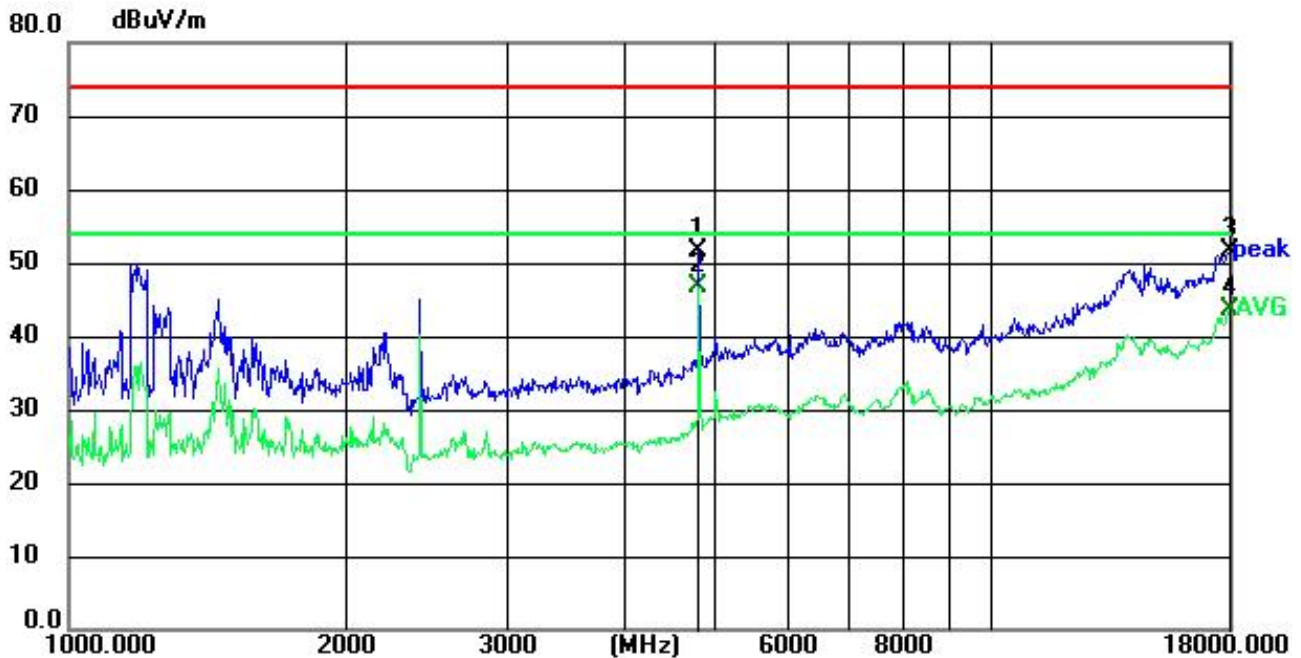


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4806.4000	51.46	0.16	51.62	74.00	-22.38	peak
2 *	4806.4000	46.56	0.16	46.72	54.00	-7.28	AVG
3	18000.0000	32.09	19.51	51.60	74.00	-22.40	peak
4	18000.0000	24.14	19.51	43.65	54.00	-10.35	AVG

Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	DC 3.7V	Test Mode	2440MHz

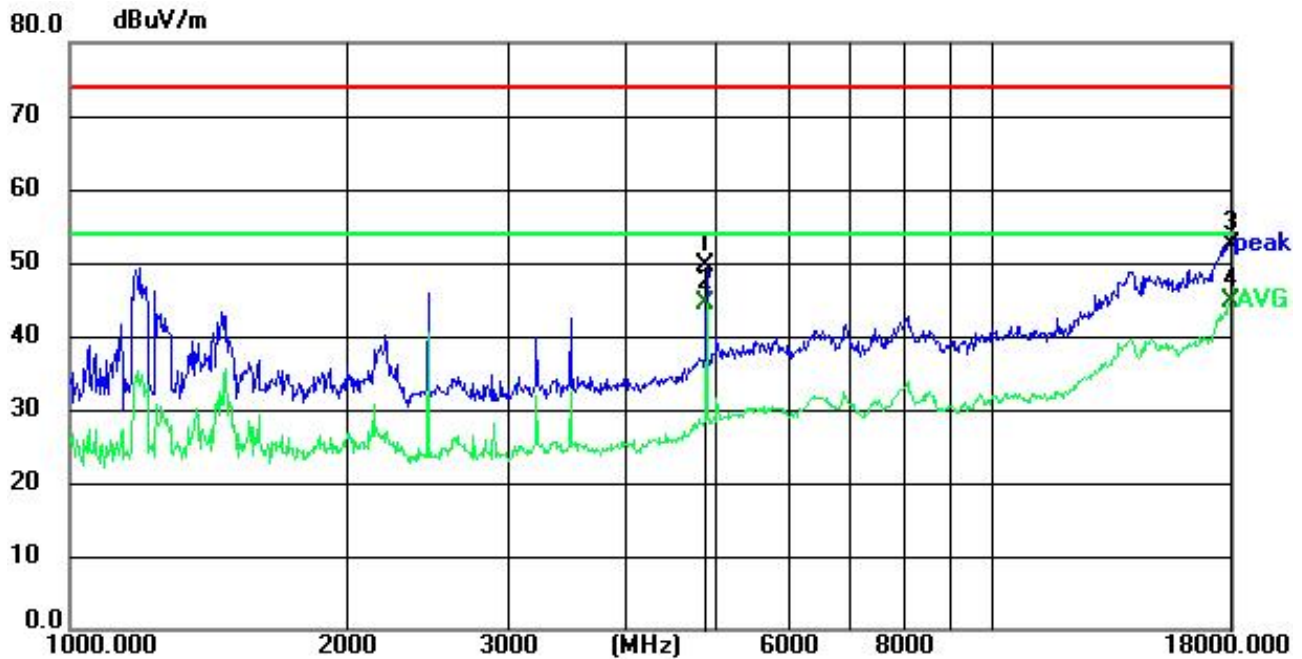


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4883.2000	49.12	0.43	49.55	74.00	-24.45	peak
2	4883.2000	43.89	0.43	44.32	54.00	-9.68	AVG
3	18000.0000	33.06	19.51	52.57	74.00	-21.43	peak
4 *	18000.0000	25.08	19.51	44.59	54.00	-9.41	AVG

Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	DC 3.7V	Test Mode	2440MHz

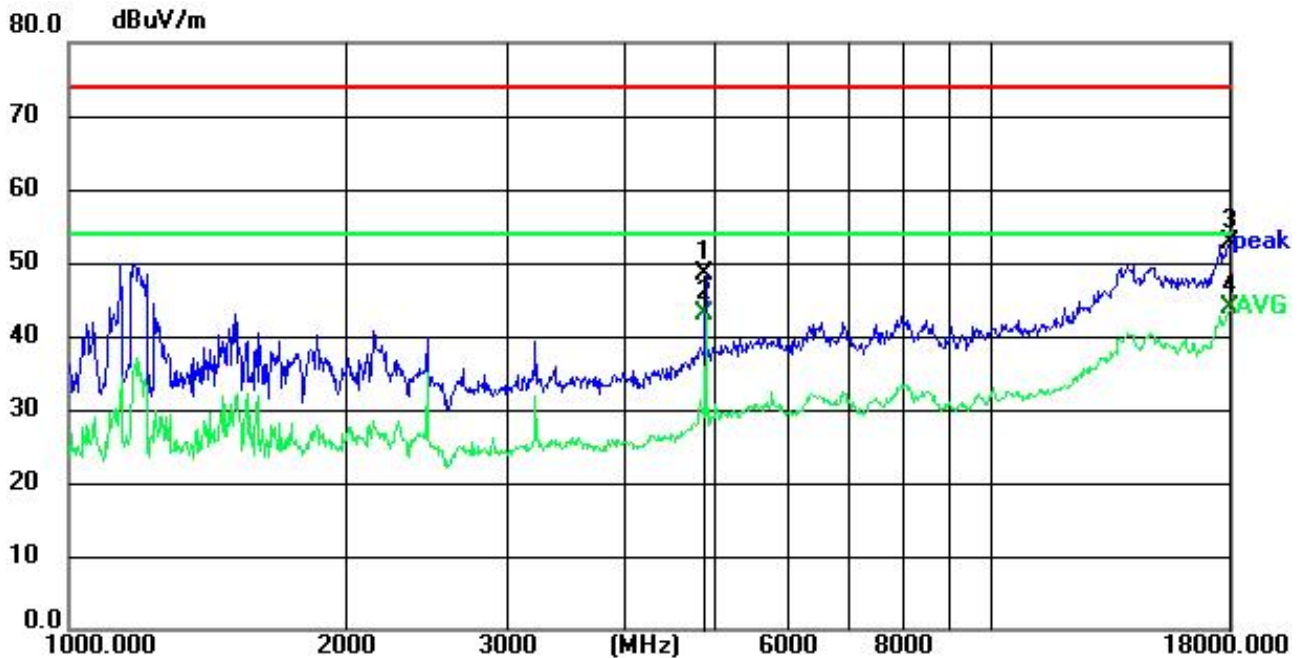


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4883.2000	48.04	0.43	48.47	74.00	-25.53	peak
2	4883.2000	42.50	0.43	42.93	54.00	-11.07	AVG
3	18000.0000	33.10	19.51	52.61	74.00	-21.39	peak
4 *	18000.0000	24.36	19.51	43.87	54.00	-10.13	AVG

Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	DC 3.7V	Test Mode	2480MHz

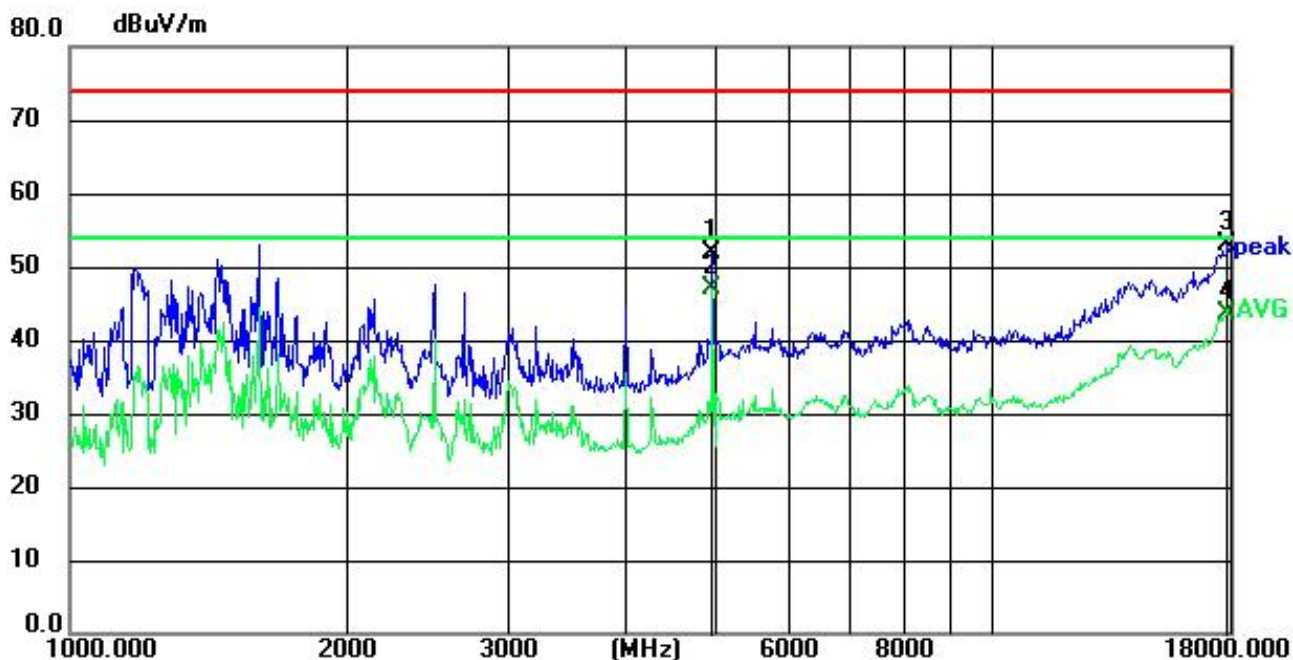

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4962.4000	51.20	0.68	51.88	74.00	-22.12	peak
2 *	4962.4000	46.40	0.68	47.08	54.00	-6.92	AVG
3	17884.3714	34.16	18.78	52.94	74.00	-21.06	peak
4	17884.3714	24.65	18.78	43.43	54.00	-10.57	AVG

Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	DC 3.7V	Test Mode	2480MHz

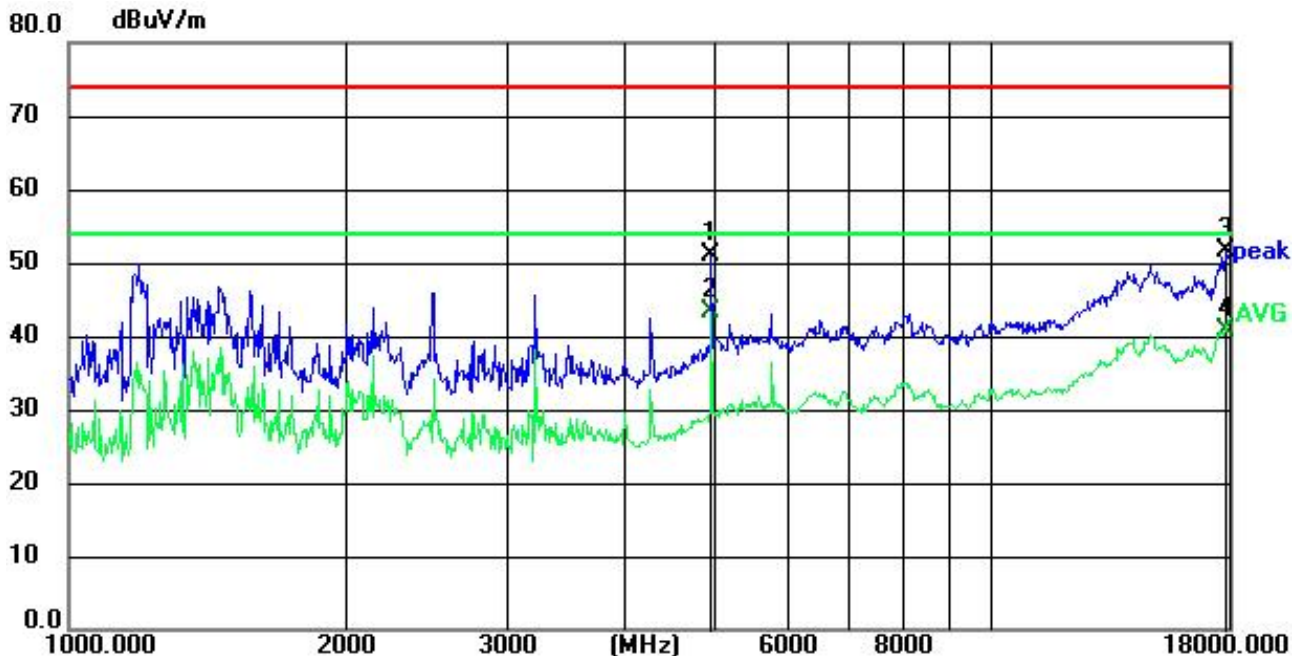


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4962.4000	50.34	0.68	51.02	74.00	-22.98	peak
2 *	4962.4000	42.49	0.68	43.17	54.00	-10.83	AVG
3	17826.8360	33.13	18.42	51.55	74.00	-22.45	peak
4	17826.8360	22.41	18.42	40.83	54.00	-13.17	AVG

Remark:

1. Measurement = Reading + Factor
2. Factor = Antenna Factor + Cable loss - Pre Amplifier gain
3. Margin= Emission Level - Limit.
4. From 18GHz to 25GHz,the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Spurious Emission in Restricted Band

Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	DC 3.7V	Test Mode	2402MHz

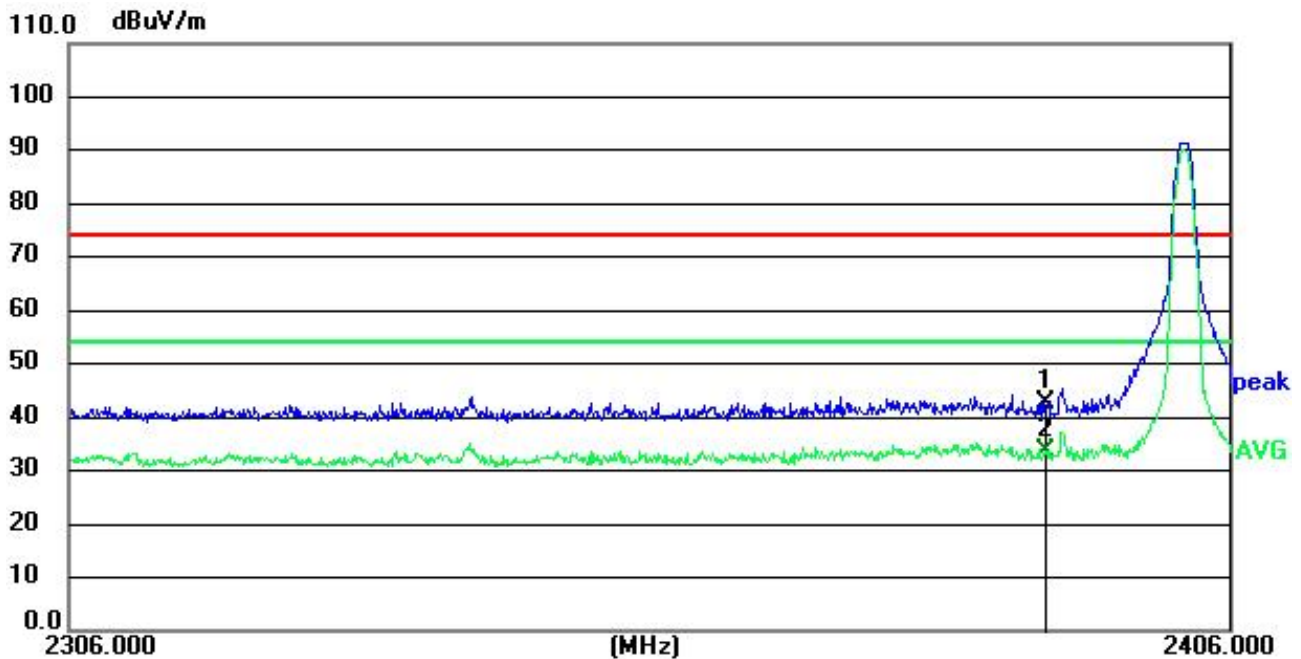


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.0000	45.09	-2.28	42.81	74.00	-31.19	peak
2 *	2390.0000	35.99	-2.28	33.71	54.00	-20.29	AVG

Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	DC 3.7V	Test Mode	2402MHz

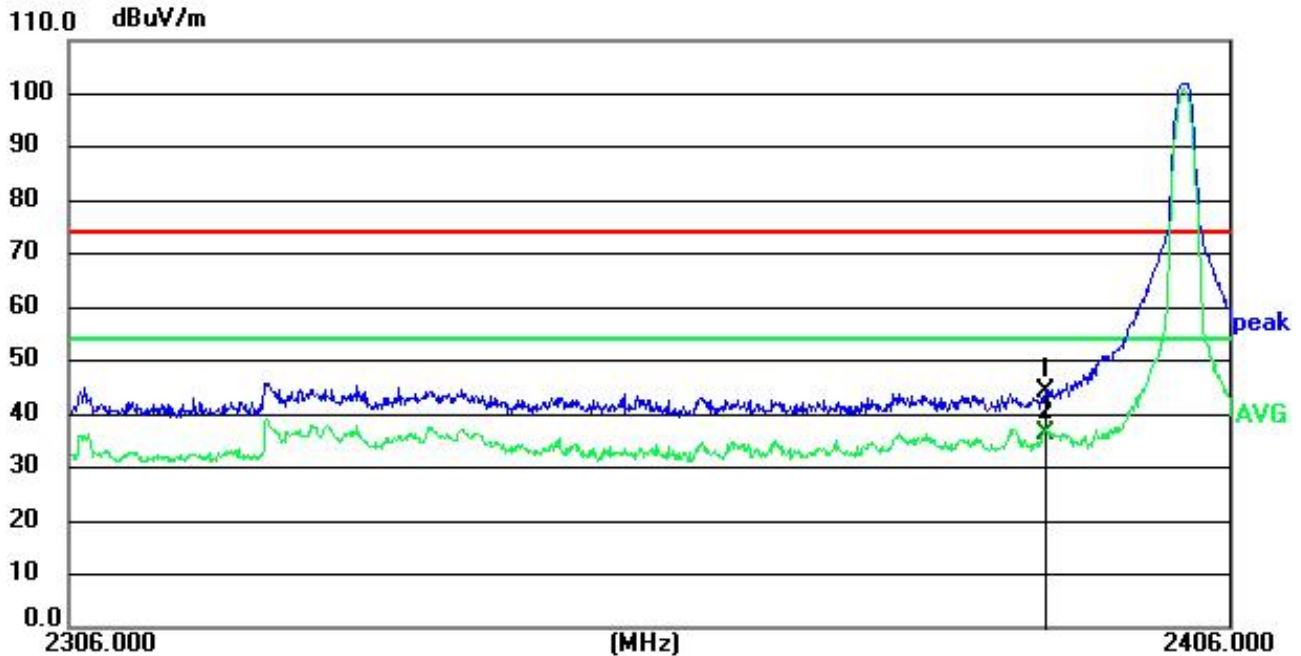


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.0000	46.63	-2.28	44.35	74.00	-29.65	peak
2 *	2390.0000	38.80	-2.28	36.52	54.00	-17.48	AVG

Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	DC 3.7V	Test Mode	2480MHz

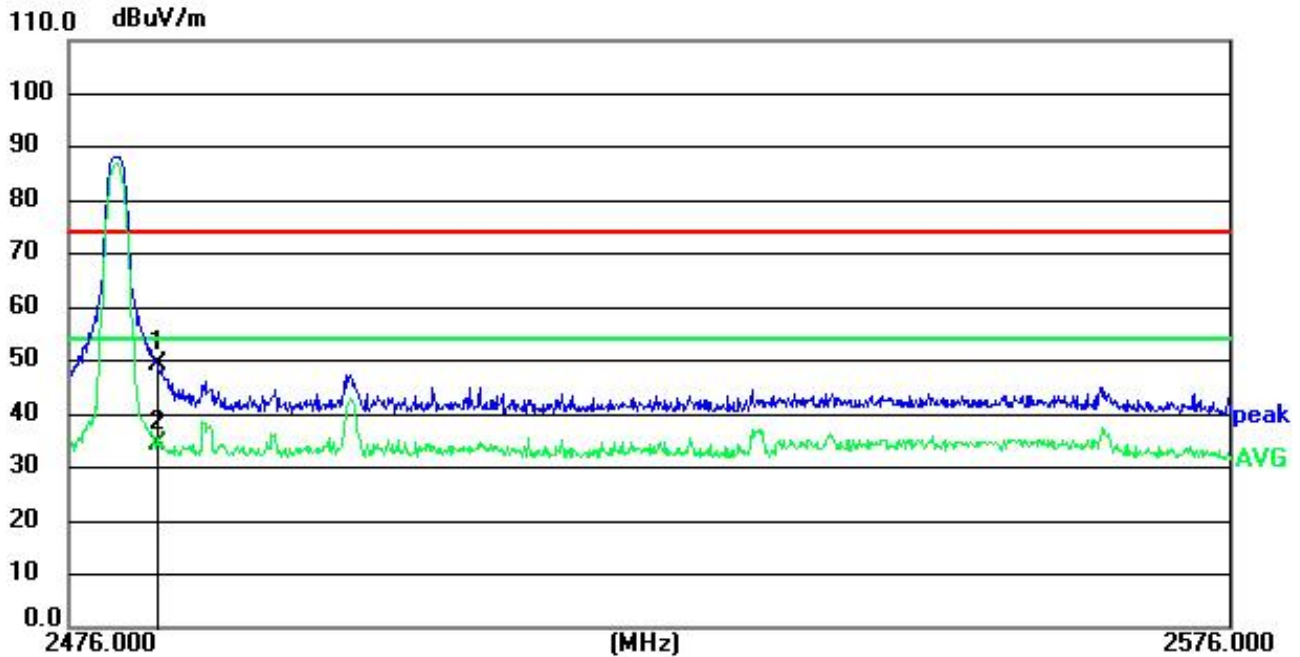

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.5000	51.53	-2.07	49.46	74.00	-24.54	peak
2 *	2483.5000	36.59	-2.07	34.52	54.00	-19.48	AVG

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	DC 3.7V	Test Mode	2480MHz

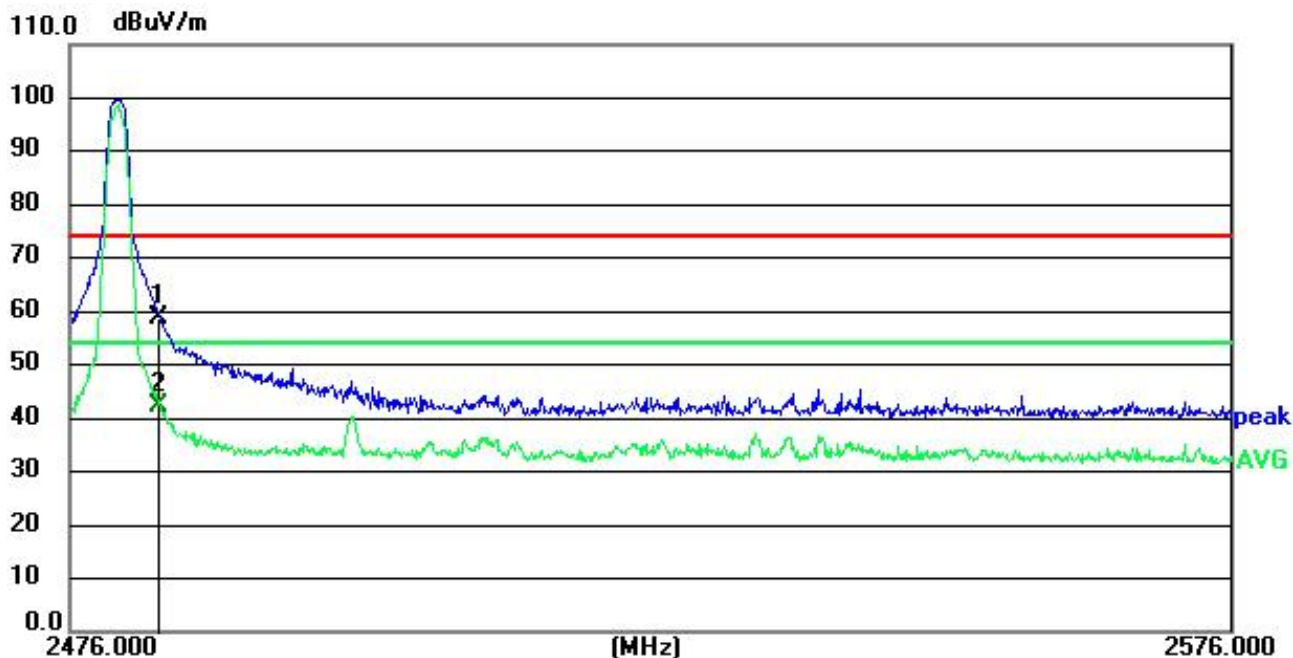

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.5000	60.87	-2.07	58.80	74.00	-15.20	peak
2 *	2483.5000	44.24	-2.07	42.17	54.00	-11.83	AVG

Remark:

1. Measurement = Reading + Factor
2. Factor = Antenna Factor + Cable loss - Pre Amplifier gain
3. Margin= Emission Level - Limit.

4. Conducted Spurious Emissions

4.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to
C63.10a-2024
Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.2.Test Setup



4.3.Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
3. Establish a reference level by using the following procedure
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to ~ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW $\geq [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = No faster than coupled (auto) time.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

4. Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = No faster than coupled (auto) time.
- f) Trace mode = max-hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

4.4. Test Result

Please see the attachment for data.



5. Band Edge Measurement

5.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting

5.2.Test setup



5.3.Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
3. Establish a reference level by using the following procedure
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to ≈ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW $\approx [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = No faster than coupled (auto) time.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
4. Establish an emission level by using the following procedure:
 - a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.NOTE—the number of points can also be increased for large spans to retain frequency resolution
 - b) Set the RBW = 100 kHz.
 - c) Set the VBW $\geq [3 \times \text{RBW}]$.
 - d) Detector = peak.
 - e) Sweep time = No faster than coupled (auto) time.
 - f) Trace mode = max-hold.
 - g) Allow trace to fully stabilize.
 - h) Use the peak marker function to determine the maximum amplitude level.

5.4. Test Result

Please see the attachment for data.



6. -6 dB Bandwidth and 99% Bandwidth Measurement

6.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024

6.2.Test Setup



6.3.Test Procedure

DTS Bandwidth

- Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.

Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

99% Bandwidth

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement

- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.

Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

6.4.Test Result

Please see the attachment for data.

7. Maximum Peak Output Power

7.1.Limit


Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;

ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.2.Test Setup

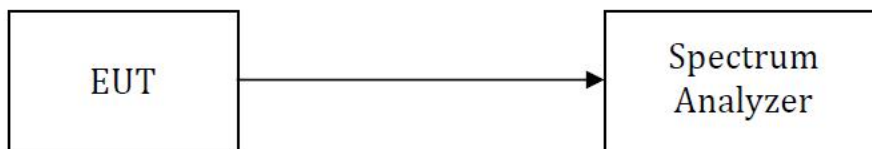

7.3.Test Procedure

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW ≥ 3 RBW.
- Set span $\geq 3 \times$ RBW
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- Set the RBW = 1% to 5% of the OBW, not to exceed 1 MHz..
- Set the VBW $\geq 3 \times$ RBW
- Set the span $\geq 1.5 \times$ OBW.
- Detector = RMS.
- Sweep time = auto couple.
- trigger = free run..
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\geq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Trace average at least 100 traces in power averaging (rms) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.4. Test Result

Please see the attachment for data.



8. Power Spectral Density

8.1.Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

8.2.Test Setup



8.3.Test Procedure

KDB 558074 D01 15.247 Meas Guidance v05r02;

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the peak marker function to determine the maximum amplitude level within the RBW. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

8.4.Test Result

Please see the attachment for data.

9. Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

This product has an PCB Antenna, and the maximum antenna gain is -0.58dBi, fulfill the requirement of this section.



10. Test Photographs

Please see Attachment BKC26084862HE-3.



11. Appendix I: Photos of the EUT

Please see Attachment BKC26084862HE-4 and BKC26084862HE-5.

***** END OF REPORT *****