



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15.236

Report Reference No. : CTL2303133041-WF

Compiled by: Happy Guo
(position+printed name+signature) (File administrators)

Tested by: Yapeng Jin
(position+printed name+signature) (Test Engineer)

Approved by: Ivan Xie
(position+printed name+signature) (Manager)



Product Name : Wireless Mic

Model/Type reference : M6740

List Model(s)..... : N/A

Trade Mark..... : UIBI

FCC ID..... : 2BCCE-M6740

Applicant's name : SHENZHEN UIBI TECHNOLOGY CO.,LTD

Address of applicant : 208, office building 4, Chongwen garden, No. 1 tangling Road,
Fuguang community, Taoyuan Street, Nanshan District,
Shenzhen, China

Test Firm..... : Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification..... :

Standard : FCC Part 15.236: Operation of wireless microphones in the bands
54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and
614-698 MHz

TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF..... : Dated 2011-01

Date of receipt of test item : March. 27, 2023

Date of Test Date..... : May. 10, 2023–July. 24, 2023

Data of Issue : July. 25, 2023

Result..... : Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL2303133041-WF	July. 25, 2023
		Date of issue

Equipment under Test : Wireless Mic

Sample No. CTL230313304-1-S001

Model /Type : M6740

Listed Models : N/A

Applicant : **SHENZHEN UIBI TECHNOLOGY CO.,LTD**

Address : 208, office building 4, Chongwen garden, No. 1 tangling Road, Fuguang community, Taoyuan Street, Nanshan District, Shenzhen, China

Manufacturer : **Shenzhen Zhizhuang Technology Co.,LTD**

Address : 1105, 11th Floor, Building 8, Jindi Zhihui Port, No.95 Jiaoping Avenue, Tangxia Town, Dongguan City, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

**** Modified History ****

[illegible]

Table of Contents

Page

1. SUMMARY	6
1.1. TEST STANDARDS	6
1.2. TEST DESCRIPTION	6
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY	7
1.5. AUXILIARY TEST EQUIPMENT INFORMATION	7
GENERAL INFORMATION	8
1.6. ENVIRONMENTAL CONDITIONS	8
1.7. GENERAL DESCRIPTION OF EUT	8
1.8. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	9
1.9. EQUIPMENTS USED DURING THE TEST	10
1.10. RELATED SUBMITTAL(S) / GRANT(S)	10
1.11. MODIFICATIONS	10
2. TEST CONDITIONS AND RESULTS	11
2.1. CONDUCTED EMISSIONS TEST	11
.....	12
3.2. MAXIMUM OUTPUT POWER	12
2.2. OCCUPIED BANDWIDTH MEASUREMENT	17
2.3. NECESSARY BANDWIDTH	22
2.4. TRANSMITTER SPURIOUS EMISSIONS	27
2.5. FREQUENCY STABILITY	36
NOTE: THE REPORT TESTS ALL CHANNEL DATA, BUT THIS REPORT ONLY RECORDS THE WORST CHANNEL DATA.	37
3. TEST SETUP PHOTOS OF THE EUT	38
4. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	39

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.236](#): operation of wireless microphones in the bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-698 MHz

[ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices

According to KDB 206256 D01 Wireless Microphone Certification v02.

1.2. Test Description

Test Specification clause		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.236(d)	RF Power Output	PASS
FCC Part 15.236(f)(2)	Occupied Bandwidth	PASS
FCC Part 15.236(g) ETSI EN 300 422-1 v1.4.2	Necessary Bandwidth Spurious emissions	PASS
FCC Part 15.236(f)(3)	Frequency Stability	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSIC63.10 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan.22, 2019.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	± 0.57 dB	(1)
Transmitter power Radiated	± 2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	± 2.20 dB	(1)
Occupied Bandwidth	± 0.01 ppm	(1)
Radiated Emission 30~1000MHz	± 4.10 dB	(1)
Radiated Emission Above 1GHz	± 4.32 dB	(1)
Conducted Disturbance 0.15~30MHz	± 3.20 dB	(1)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.5. Auxiliary test equipment information

Manufacturer	Description	Model	Serial Number
SHENZHEN UIBI TECHNOLOGY CO.,LTD	Portable outdoor power station	B1200	---
SHENZHEN SUMERSON TECHNOLOGY Wire Co., Ltd	Antenna	1P/XH*100mm	---

GENERAL INFORMATION

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

1.7. General Description of EUT

Product Name:	Wireless Mic
Model/Type reference:	M6740
Power supply:	DC 3.0V from battery
Wireless microphone	
Modulation:	FSK
Operation frequency:	Group A: 580MHz -589MHz Group B: 590MHz -599MHz
Channel number:	20
Channel separation:	1MHz
Antenna type:	Internal Antenna
Antenna gain:	0.83dBi

Note1: For more details, please refer to the user's manual of the EUT.

Note2: Antenna gain provided by the applicant.

Note3: The product cannot be configured to operate outside the current frequency band plan through software configuration, Third parties are not allowed to change any software parameter configuration of the product.

1.8. Description of Test Modes and Test Frequency

The system is configured to test under continuous transmission conditions and transmission frequency through the switch button control. And the number of channels provided to EUT is 20, select channel 00/05/09 for testing.

Operation Frequency List :

Group-A		Group-B	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	580	00	590
01	581	01	591
--	--	--	--
--	--	--	--
04	584	04	594
05	585	05	595
06	586	06	596
--	--	--	--
--	--	--	--
09	589	09	599

Note: The line display in grey is the channel selected to perform test.

1.9. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ESH2-Z5	860014/010	2023/05/04	2024/05/03
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2023/05/05	2024/05/04
EMI Test Receiver	R&S	ESCI	1166.5950.03	2023/05/04	2024/05/03
Spectrum Analyzer	Agilent	N9020A	US46220290	2023/05/05	2024/05/04
Spectrum Analyzer	Keysight	N9020A	MY53420874	2023/05/05	2024/05/04
Controller	EM Electronics	EM 1000	060859	2023/05/05	2024/05/04
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2021/12/23	2024/12/22
Active Loop Antenna	Da Ze	ZN30900A	/	2021/05/13	2024/05/12
Amplifier	Agilent	8449B	3008A02306	2023/05/04	2024/05/03
Amplifier	Agilent	8447D	2944A10176	2023/05/04	2024/05/03
Temperature/Humidity Meter	Ji Yu	MC501	/	2023/05/09	2024/05/08
Power Sensor	Agilent	U2021XA	MY55130004	2023/05/05	2024/05/04
Power Sensor	Agilent	U2021XA	MY55130006	2023/05/05	2024/05/04
Spectrum Analyzer	RS	FSP	1164.4391.38	2023/05/05	2024/05/04
Audio signal generator	GOOD WILL INSTRUMENT	8121C	NS 021110854	2023/05/05	2024/05/04
Audio Analyzer	R&S	UPV	1146.2003K02-101721-UW	2023/05/05	2024/05/04
Test Software					
Name of Software			Version		
TST-PASS			1.0.5		
ES-K1(Below 1GHz)			V1.71		
e3(Above 1GHz)			6.111221a		

1.10. Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended to comply with Section 15.236 of the FCC Part 15, Subpart C Rules.

1.11. Modifications

No modifications were implemented to meet testing criteria.

2. TEST CONDITIONS AND RESULTS

2.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

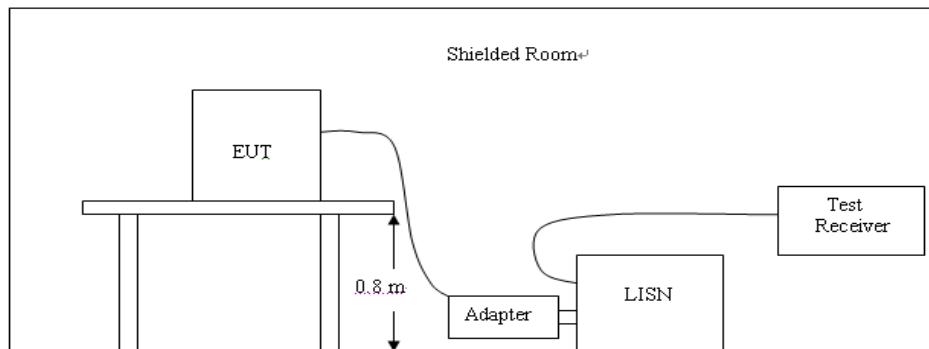

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

The EUT is battery powered and does not require this test.

3.2. Maximum Output Power

Limit

The maximum radiated power shall not exceed the following values:


(1) In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50 mW EIRP

(2) In the 600 MHz guard band and the 600 MHz duplex gap: 20 mW EIRP.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.

Test Configuration





Test Results

Modulation	Channel	Output power (dBm)	Ant. Gain (dBi)	EIRP (dBm)	Limit (dBm)	Result
FM (Group-A)	CH00	3.516	0.83	4.346	17	Pass
	CH05	3.088	0.83	3.918	17	Pass
	CH09	2.944	0.83	3.774	17	Pass
FM (Group-B)	CH00	3.185	0.83	4.015	17	Pass
	CH05	3.090	0.83	3.92	17	Pass
	CH09	2.851	0.83	3.681	17	Pass


Note: 1.The test results including the cable lose.
2. The RF cable is 50 ohm.

Test plot as follows:

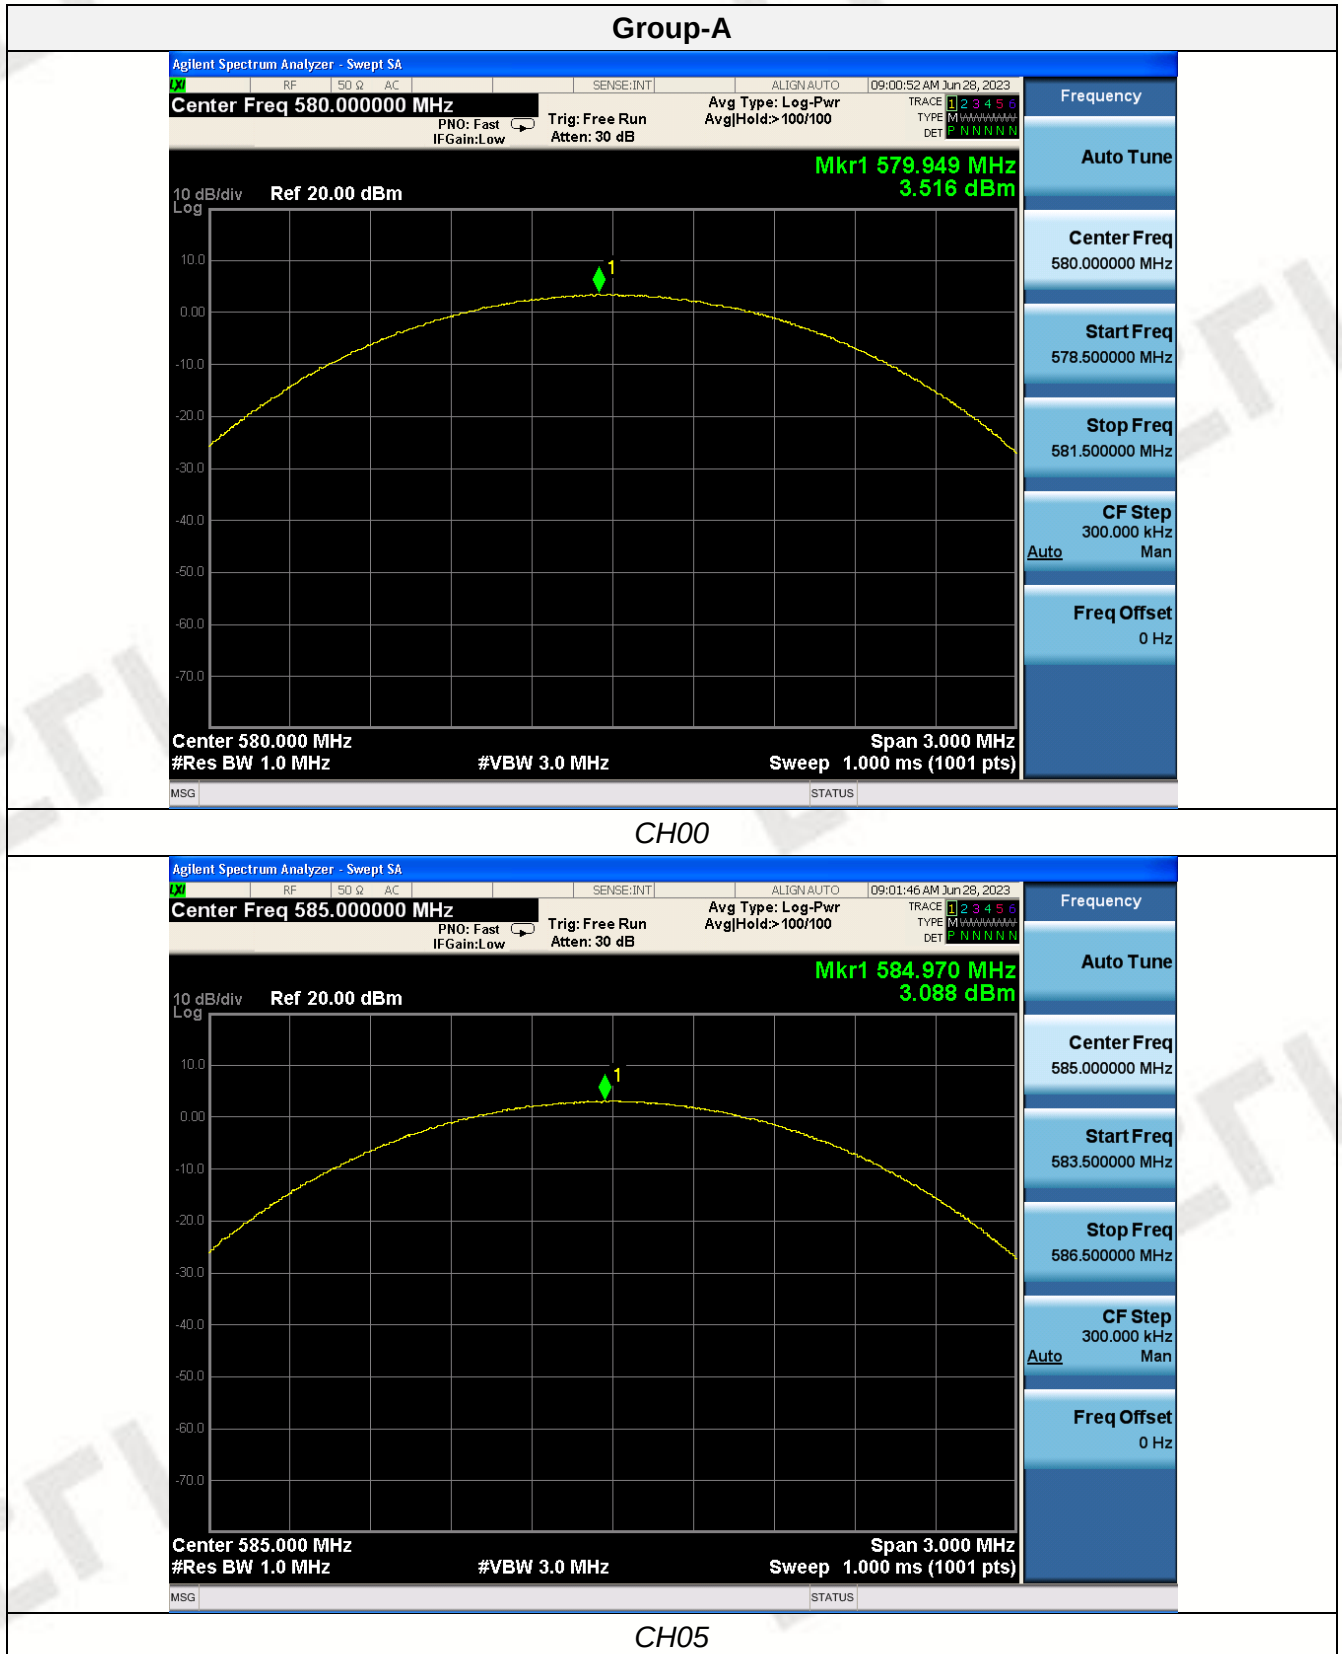


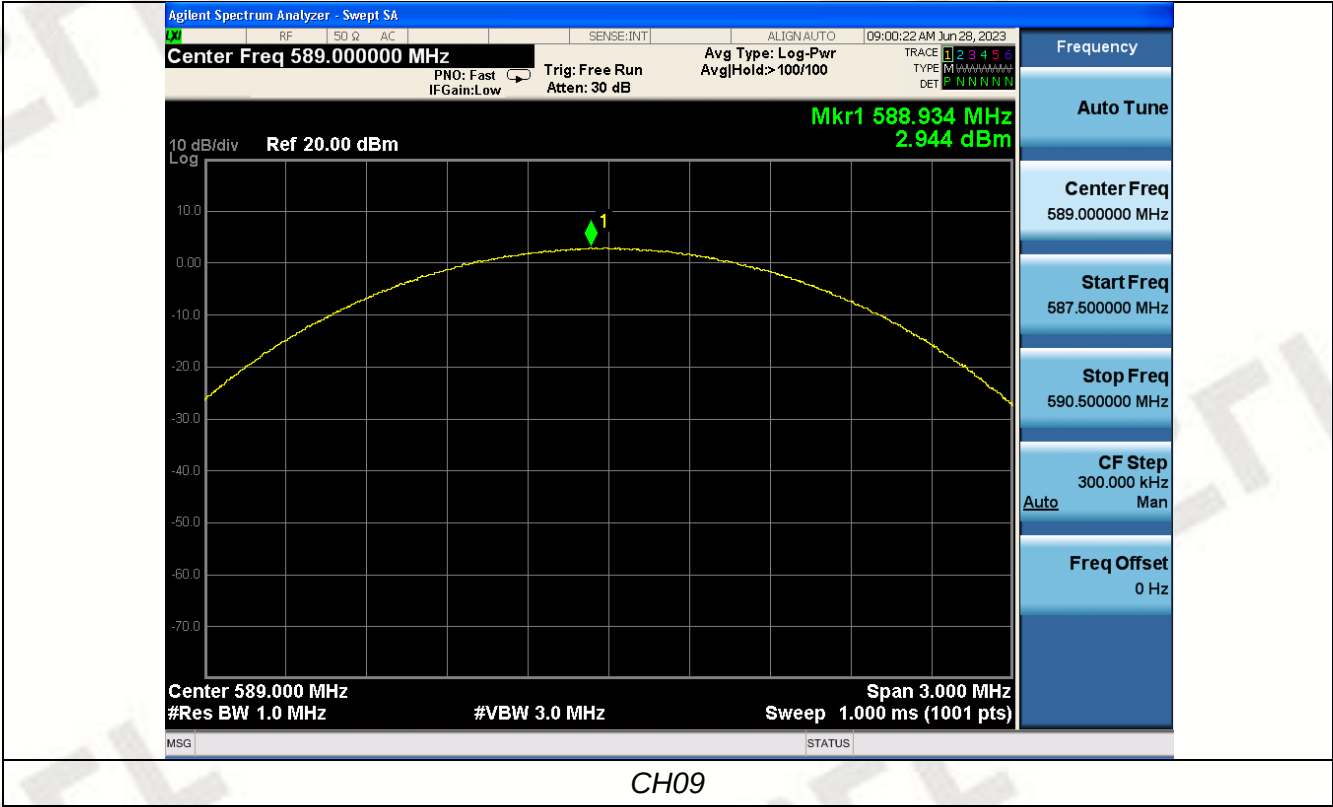


Group-B

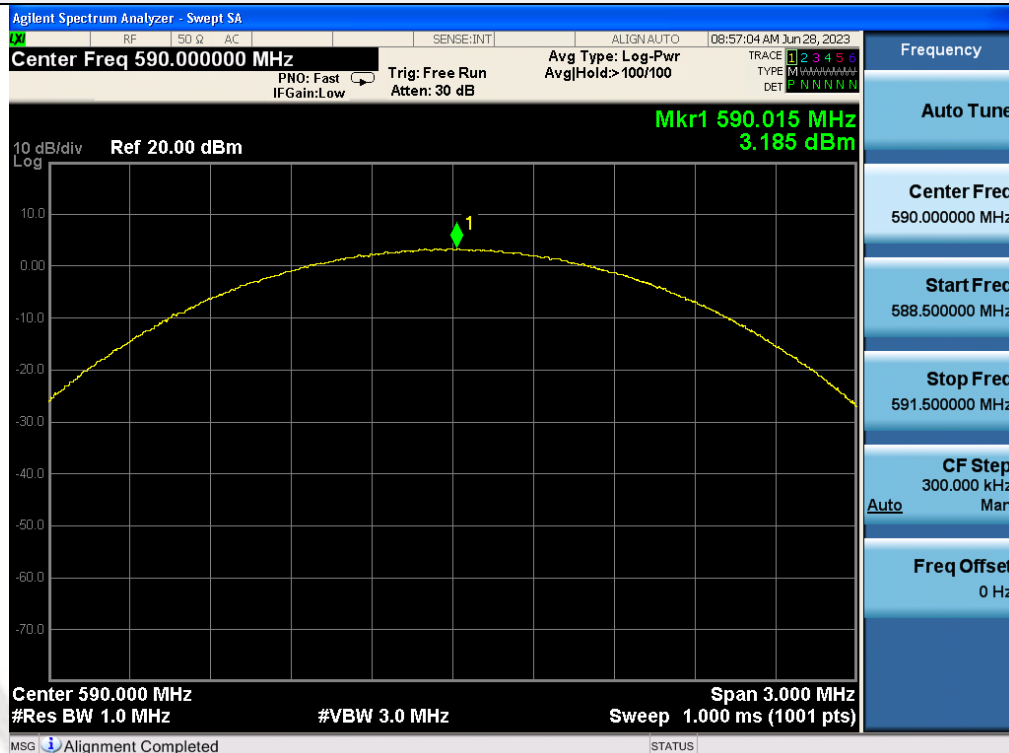

CH00

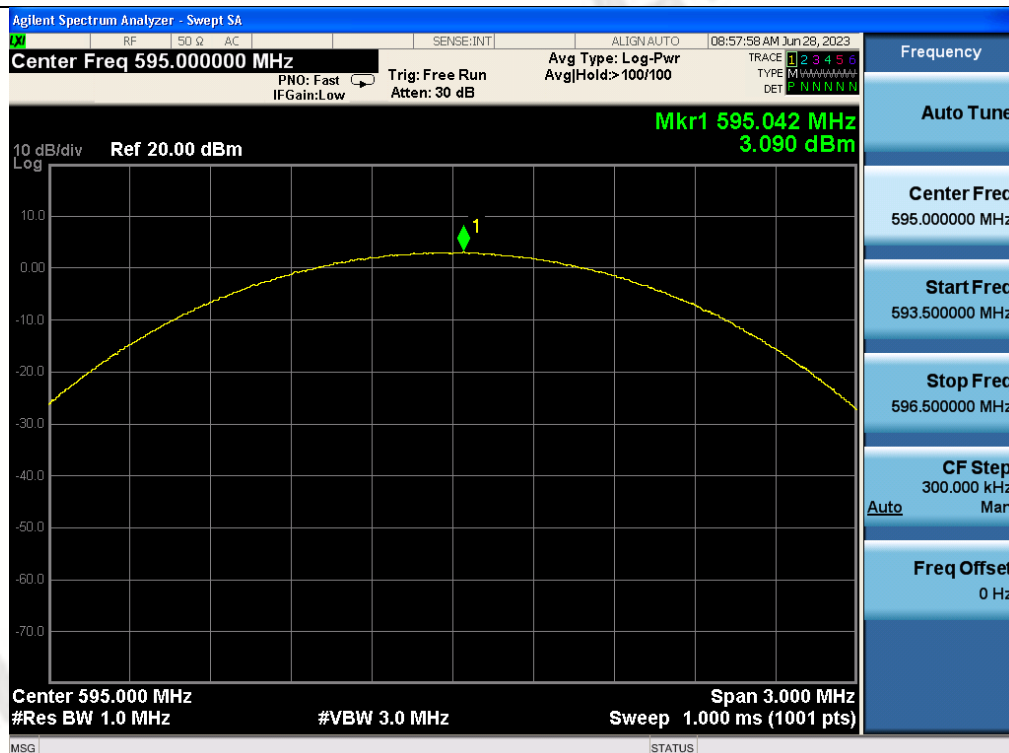

CH05

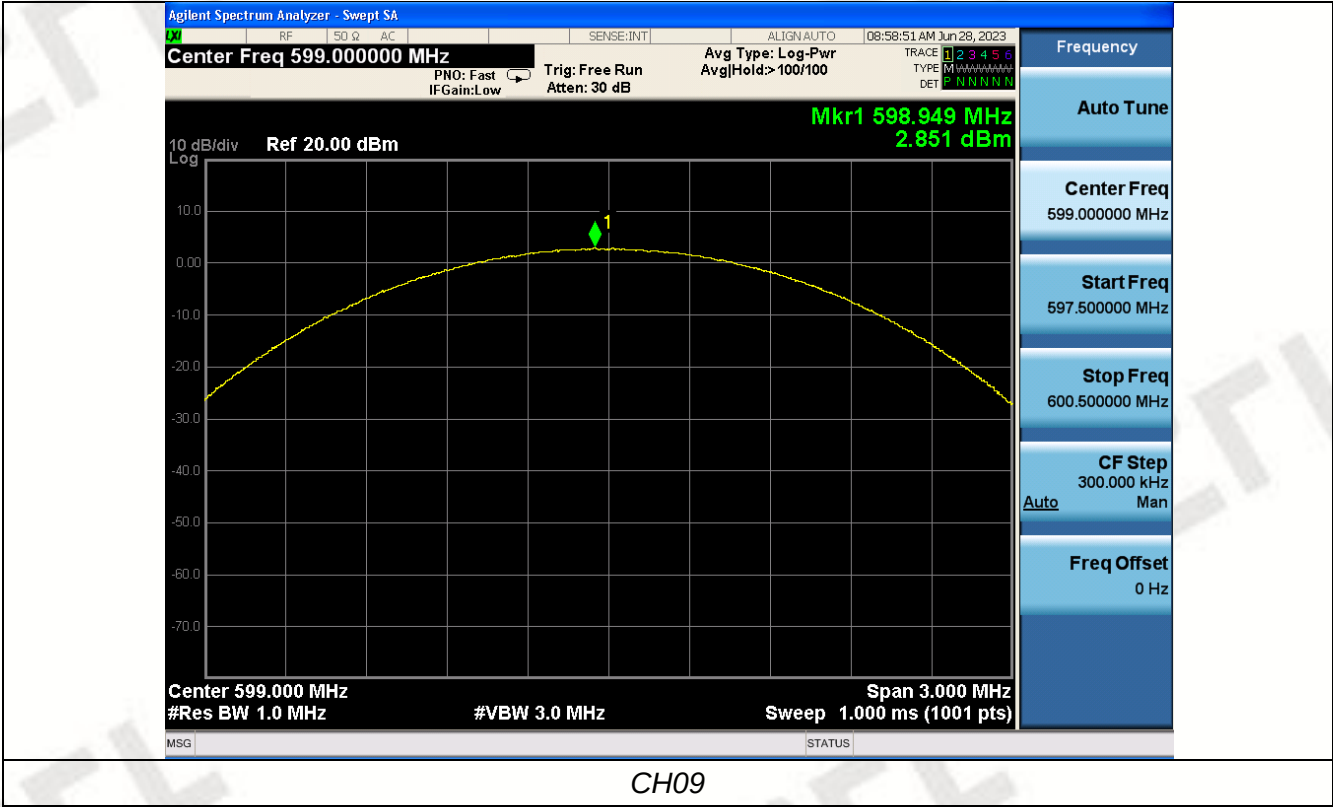

2.2. Occupied Bandwidth Measurement

Limit

One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200 kHz.

Test Configuration




Test Procedure


The test shall be modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation.

Test Results


Modulation	Channel	99% OBW (KHz)	Limit (KHz)	Result
FM (Group-A)	CH00	61.859	200	Pass
	CH05	61.901	200	
	CH09	61.880	200	
FM (Group-B)	CH00	61.476	200	Pass
	CH05	61.663	200	
	CH09	61.862	200	

Test plot as follows:

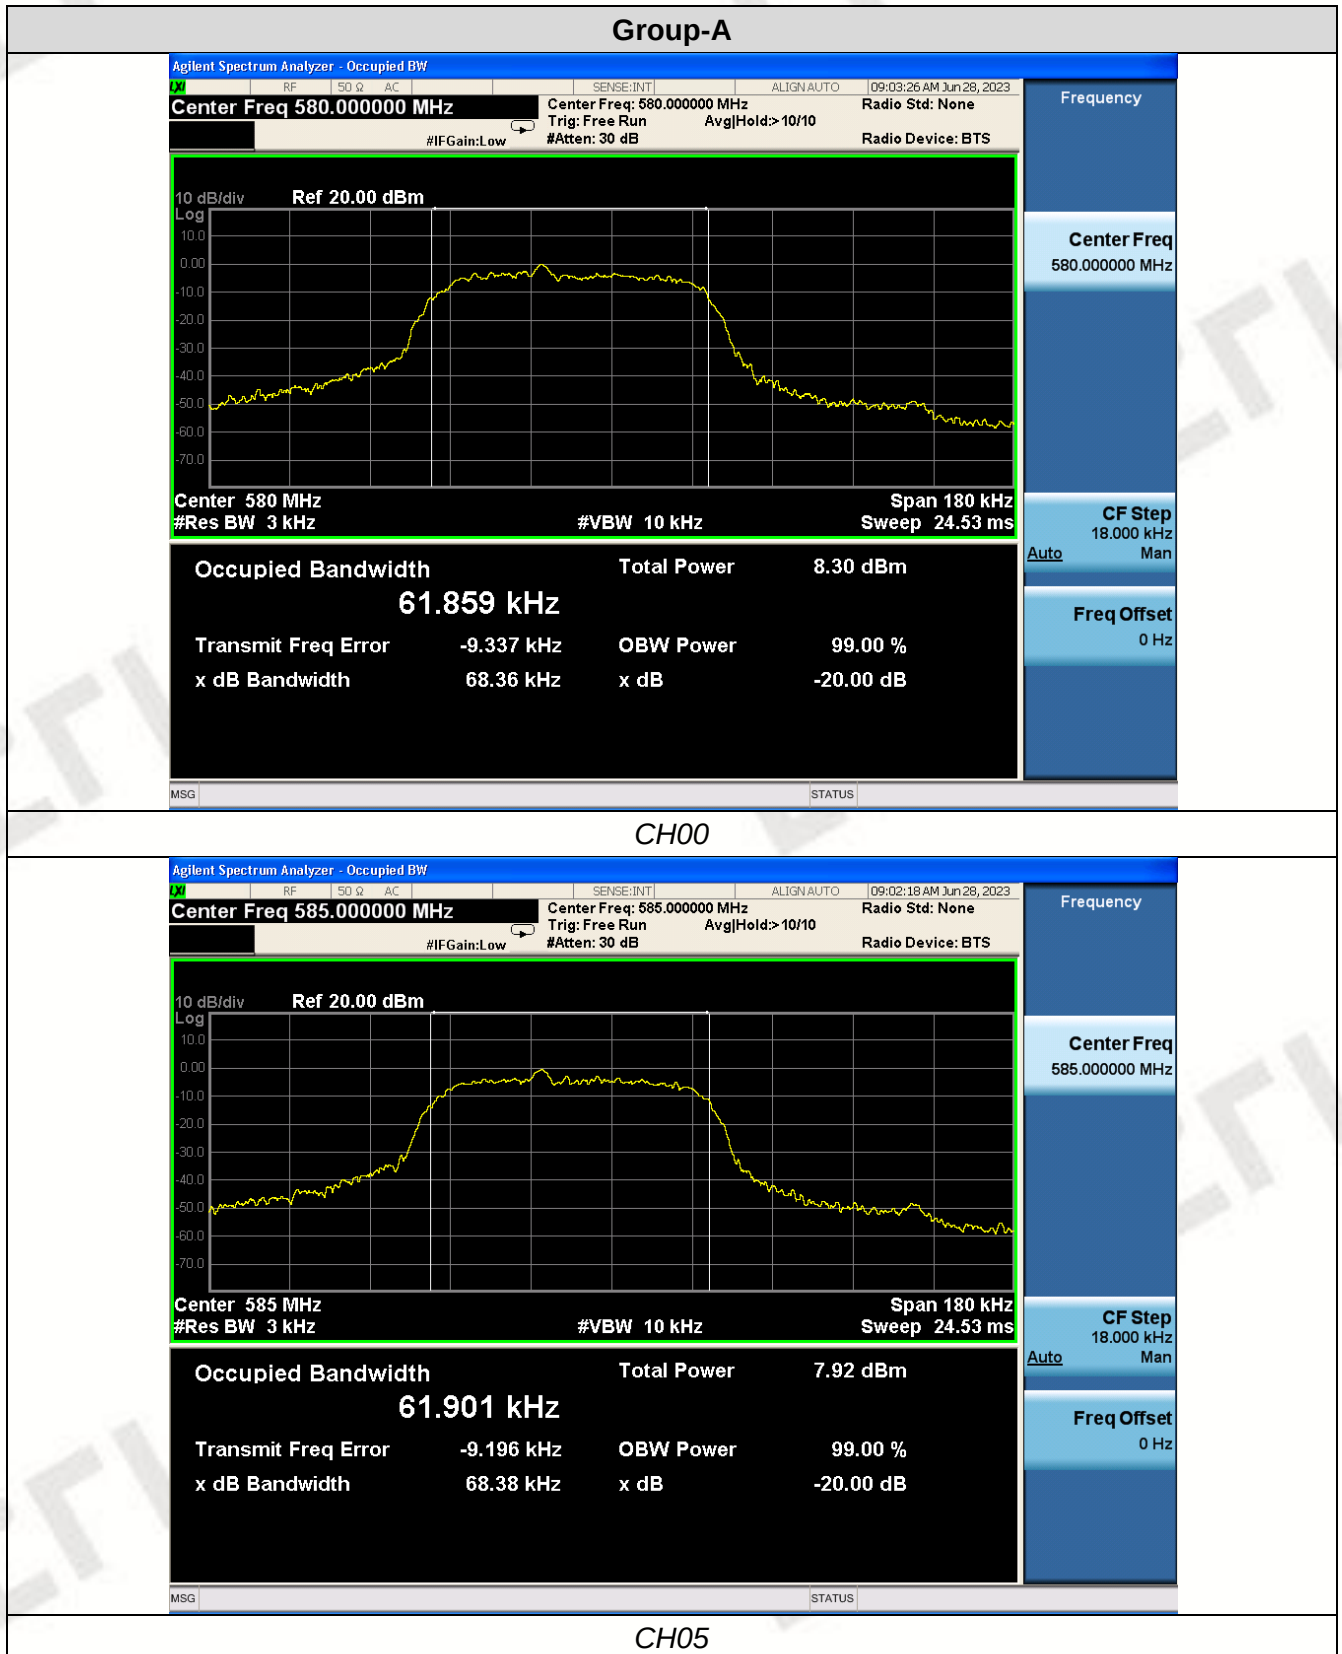


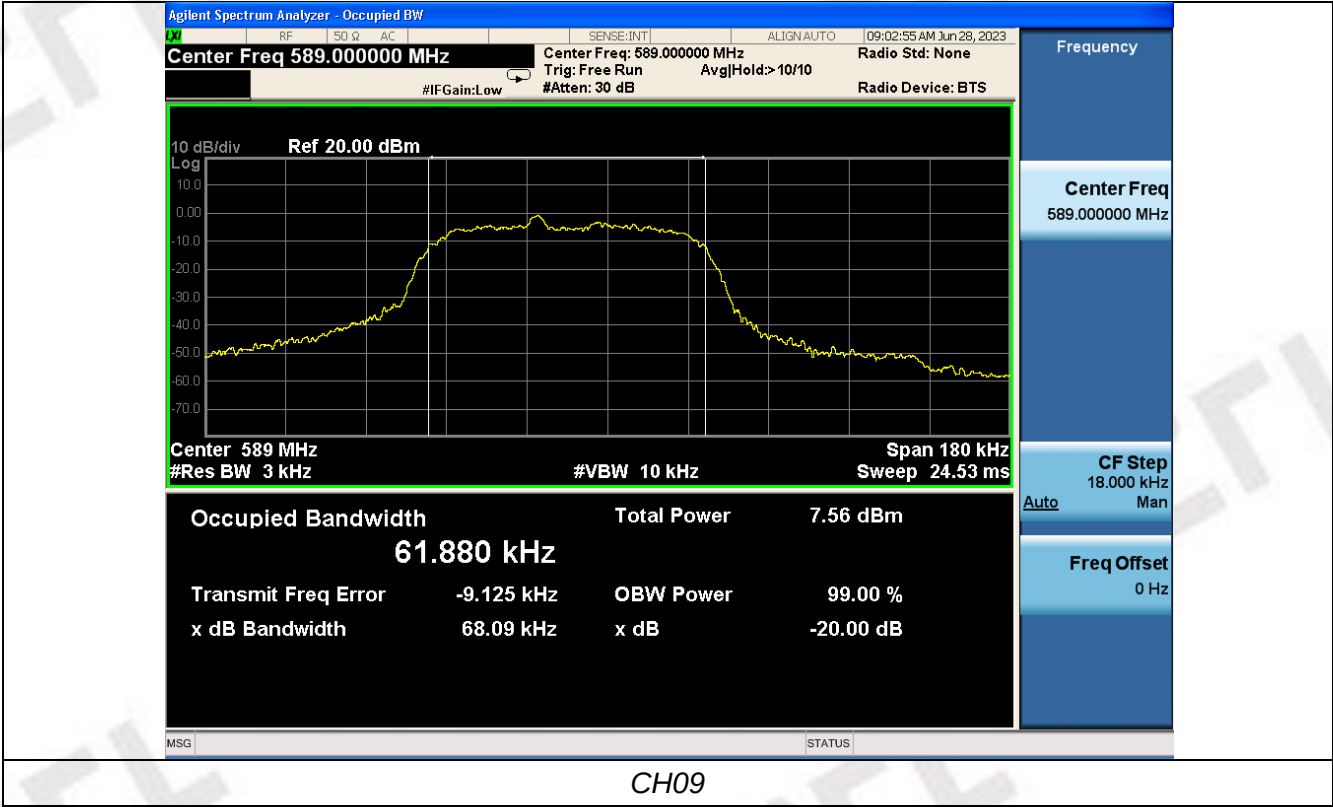


Group-B

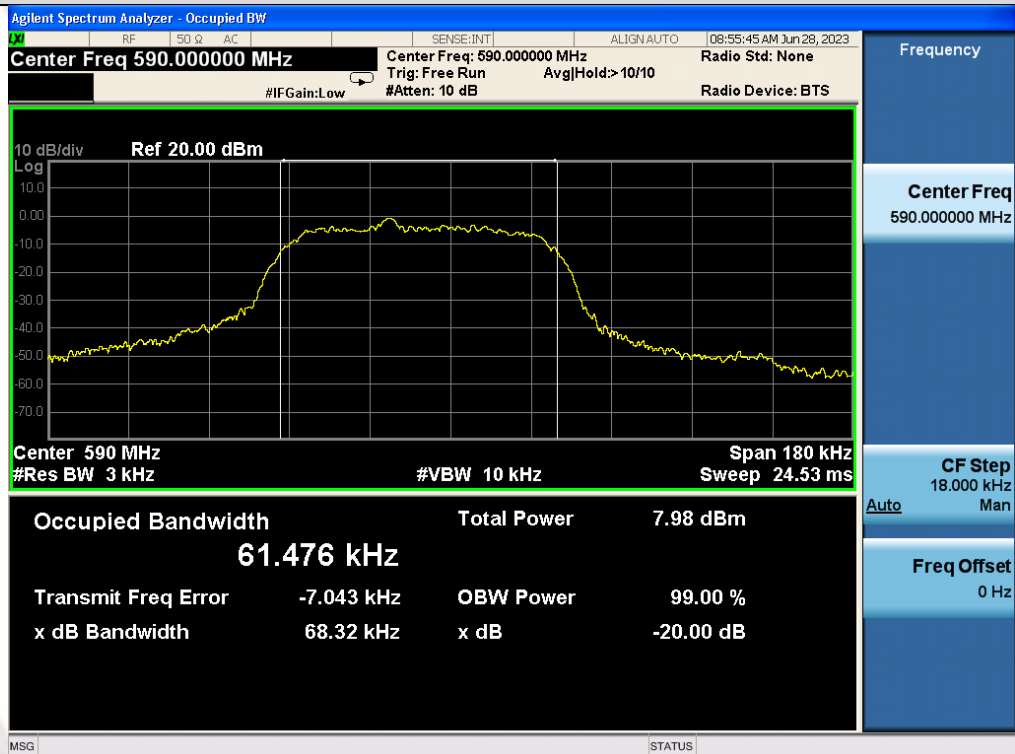

CH00

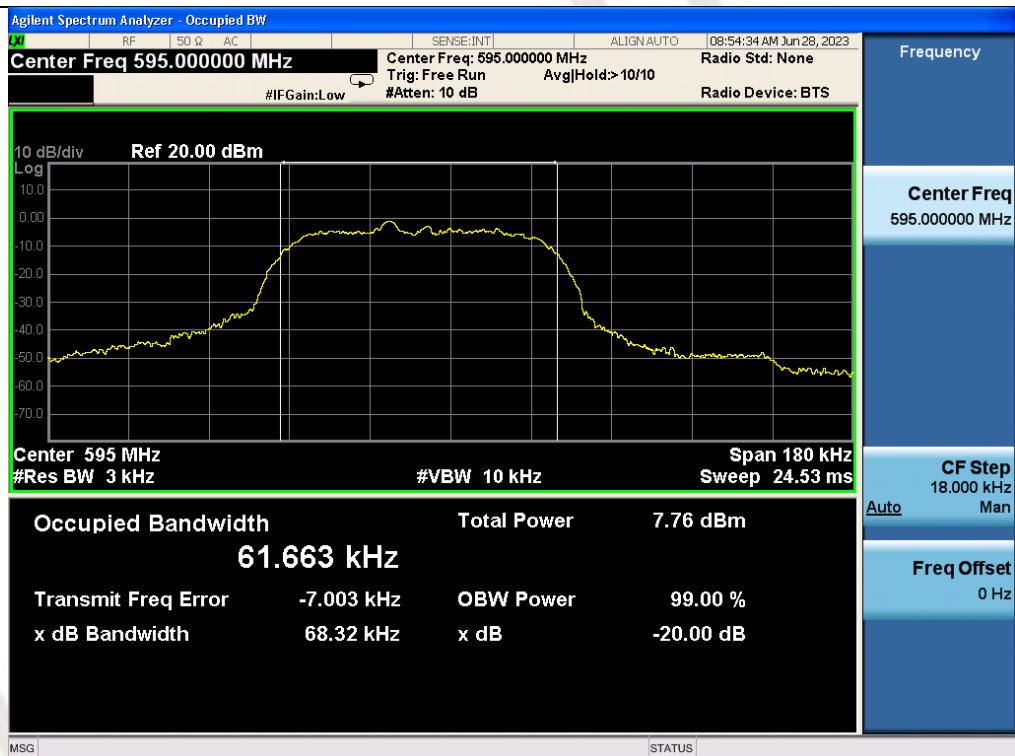

CH05

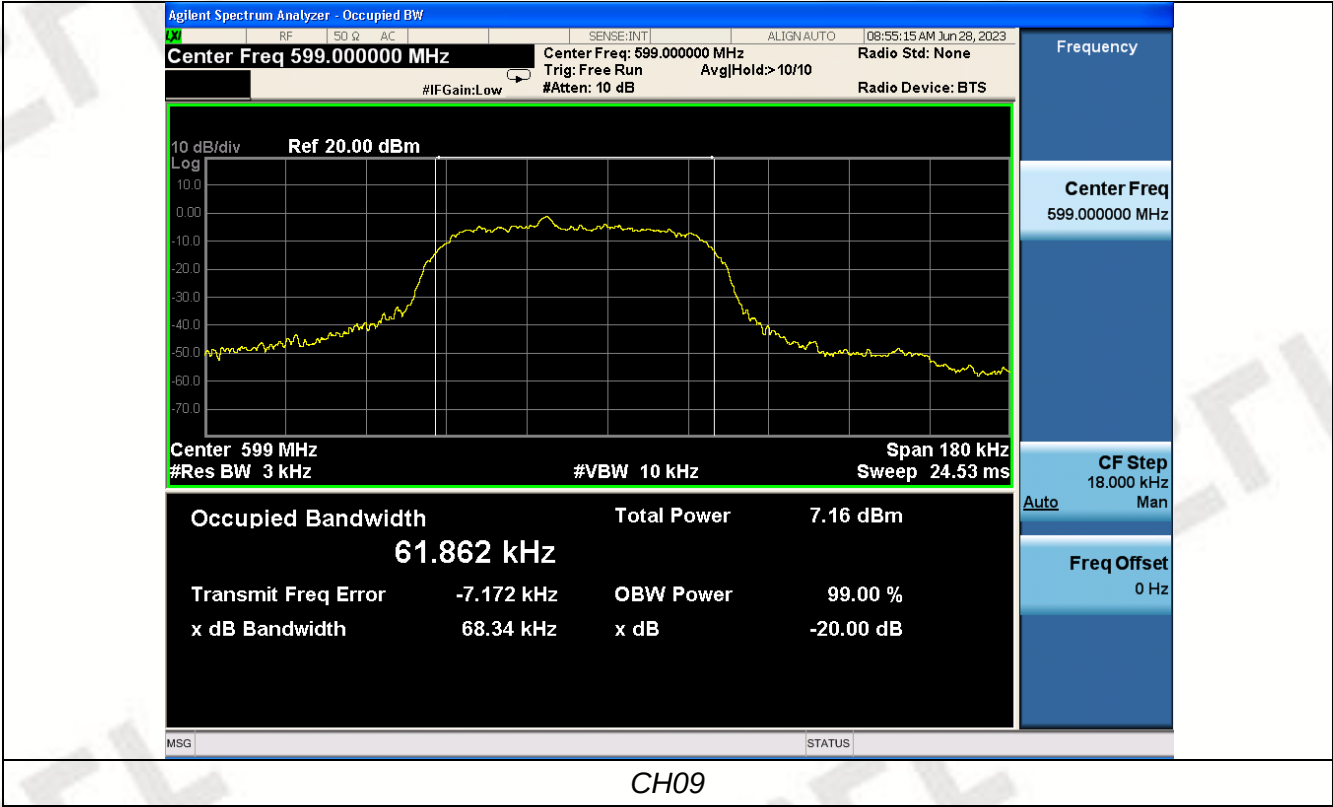

2.3. Necessary Bandwidth

LIMIT

According to ETSI EN 300 422-1 v1.4.2(2011-08) section 8.4, the trum mask for all analogue systems in the band. The -90 dBc point shall be ± 1 MHz from fc measured with an average detector. To comply, a measured value shall fall below the mask limit as shown in figure 4.

The transmitter output spectrum shall be within the mask defined in figure 4. This mask may also be used for analogue.

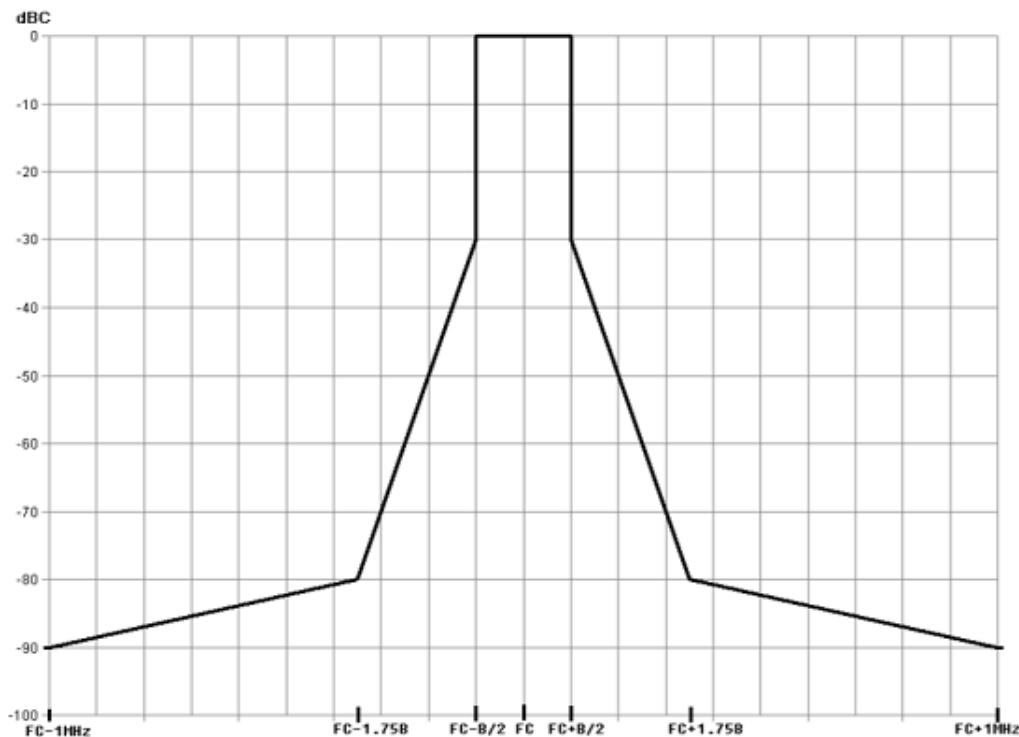


Figure 4: Spectrum mask for digital systems below 1 GHz

For the measurement uncertainty, see clause 10. The -90 dBc point shall be ± 1 MHz from fc measured with an average detector.

TEST PROCEDURE

The arrangement of test equipment as shown in figure B.1 shall be used. Note that the noise meter conforms to (quasi) without weighting filter (flat).

With the Low Frequency (LF) audio signal generator set to 500 Hz, the audio input level to the DUT shall be adjusted to 8 dB below the limiting threshold (-8 dB (lim)) as declared by the manufacturer. The corresponding audio output level from the demodulator shall be measured and recorded.

The input impedance of the noise meter shall be sufficiently high to avoid more than 0,1 dB change in input level when the meter is switched between input and output.

The audio input level shall be increased by 20 dB, i.e. to +12 dB (lim), and the corresponding change in output level shall be measured.

It shall be checked that the audio output level has increased by ≤ 10 dB.

If this condition is not met, the initial audio input level shall be increased from -8 dB (lim) in 1 dB steps until the above condition is fulfilled, and the input level recorded in the test report. This level replaces the value derived from the manufacturer's declaration and is defined as -8 dB (lim).

Measure the input level at the transmitter required to give +12 dB (lim).

The LF generator shall be replaced with the weighted noise source to Recommendation ITU-R BS.559-2 [i.3], band-limited to 15 kHz as described in IEC 60244-13 [2], and the level shall be adjusted such that the measured input to the transmitter corresponds to +12 dB (lim).

If the transmitter incorporates any ancillary coding or signalling channels (e.g. pilot-tones), these shall be enabled prior to any spectral measurements.


If the transmitter incorporates more than one audio input, e.g. stereo systems, the second and

subsequent channels shall be simultaneously driven from the same noise source, attenuated to a level of -6 dB (lim).


The transmitter RF output spectrum shall be measured, using a spectrum analyser with the following settings:


- centre frequency: f_c : Transmitter (Tx) nominal frequency;
- dispersion (Span): $f_c - 1 \text{ MHz}$ to $f_c + 1 \text{ MHz}$;
- Resolution BandWidth (RBW): 1 kHz;
- Video BandWidth (VBW): 1 kHz;
- detector: Average hold.

TEST CONFIGURATION

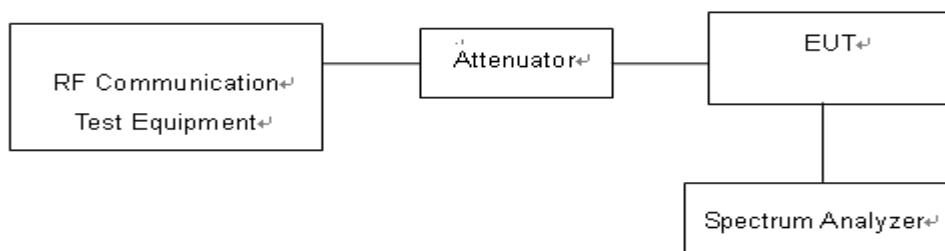


TEST RESULTS


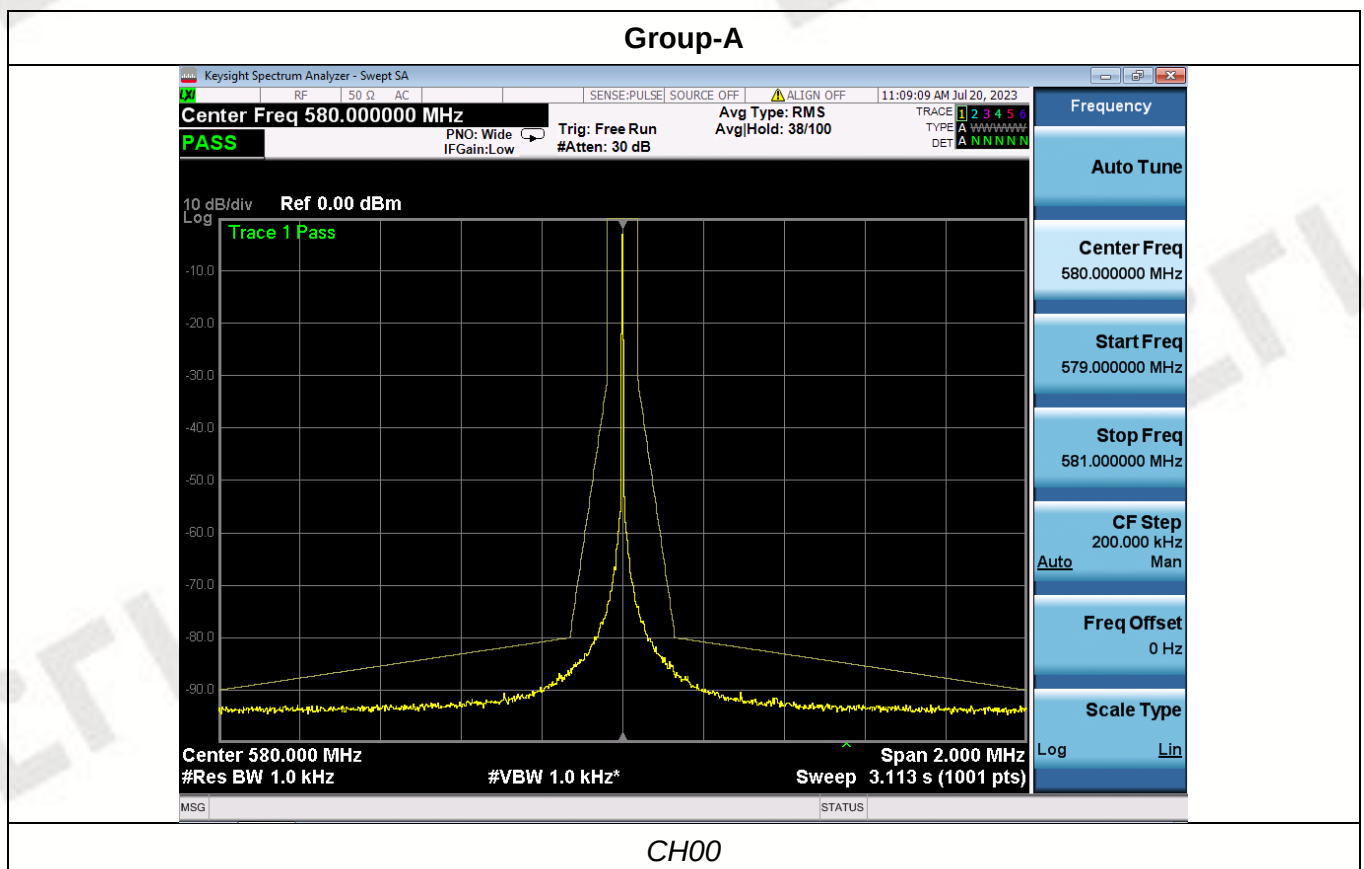


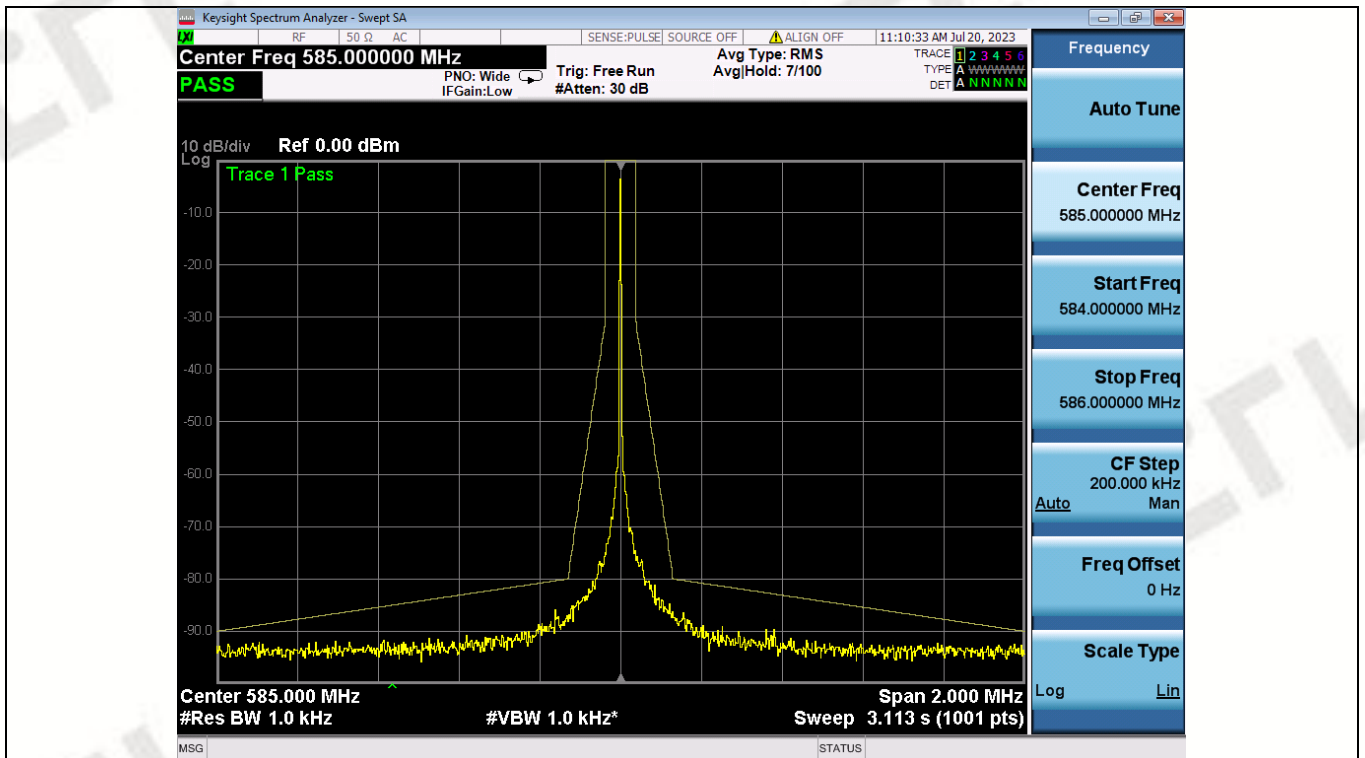


CH05

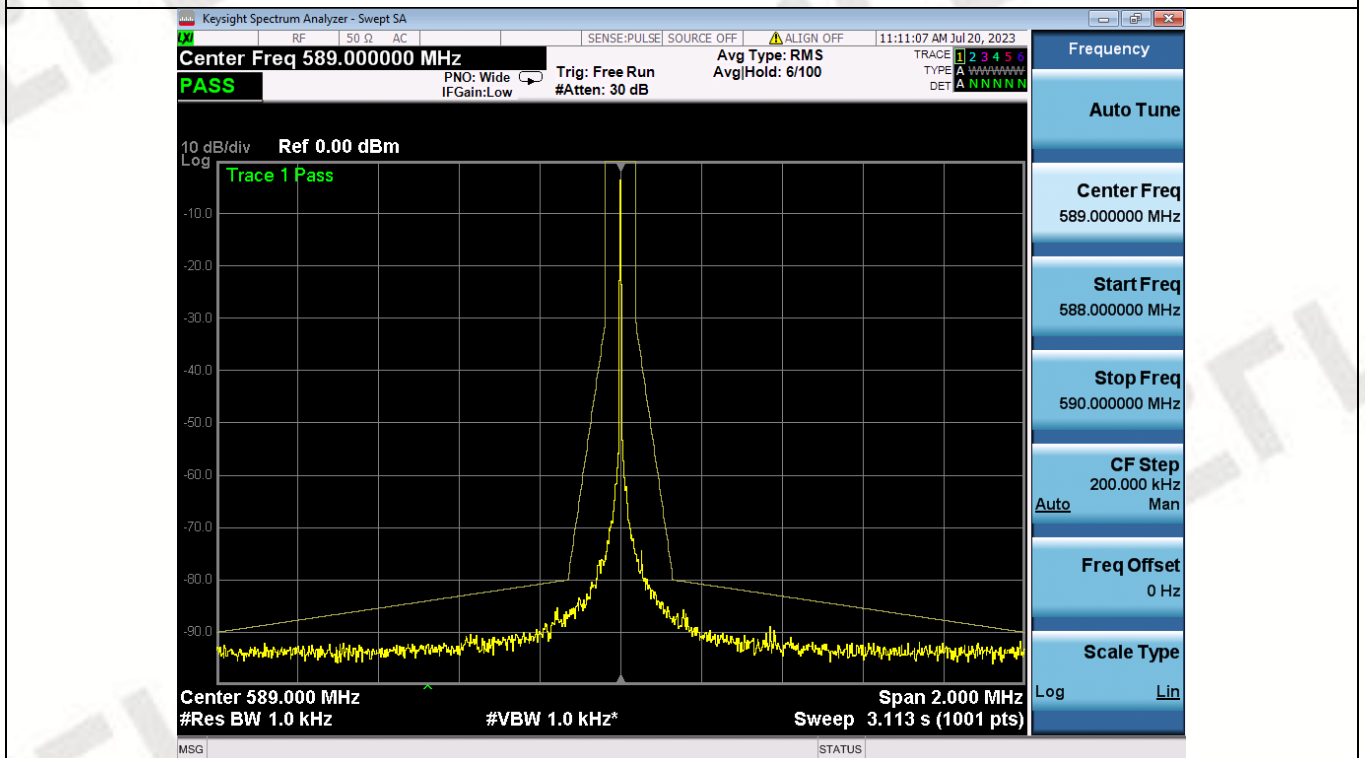

CH09

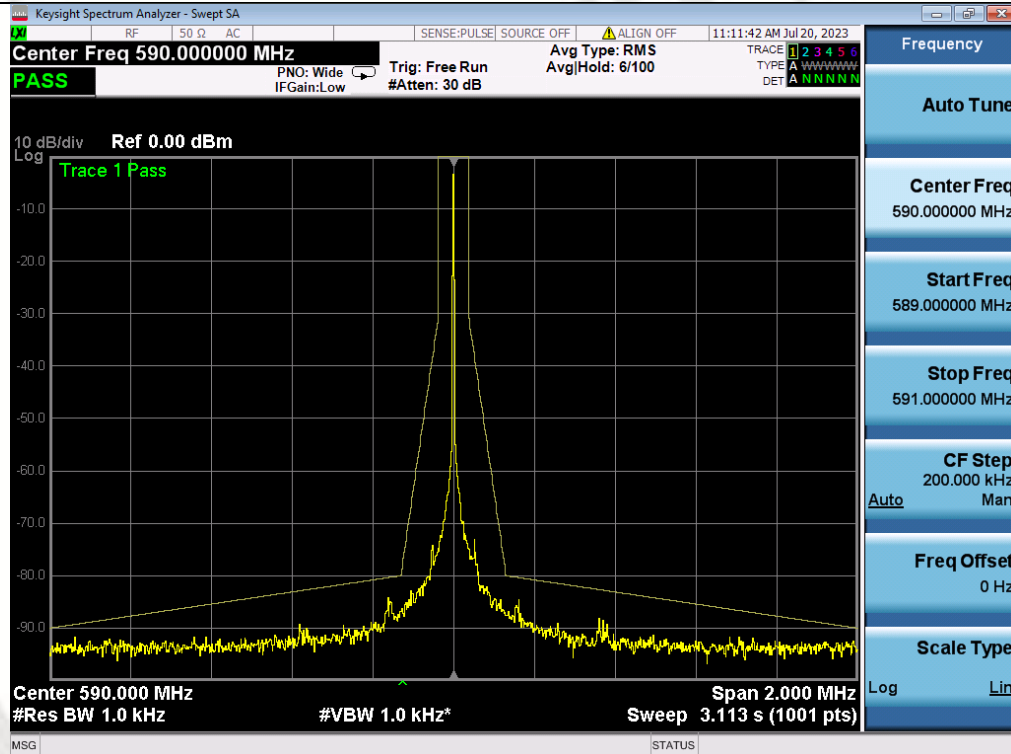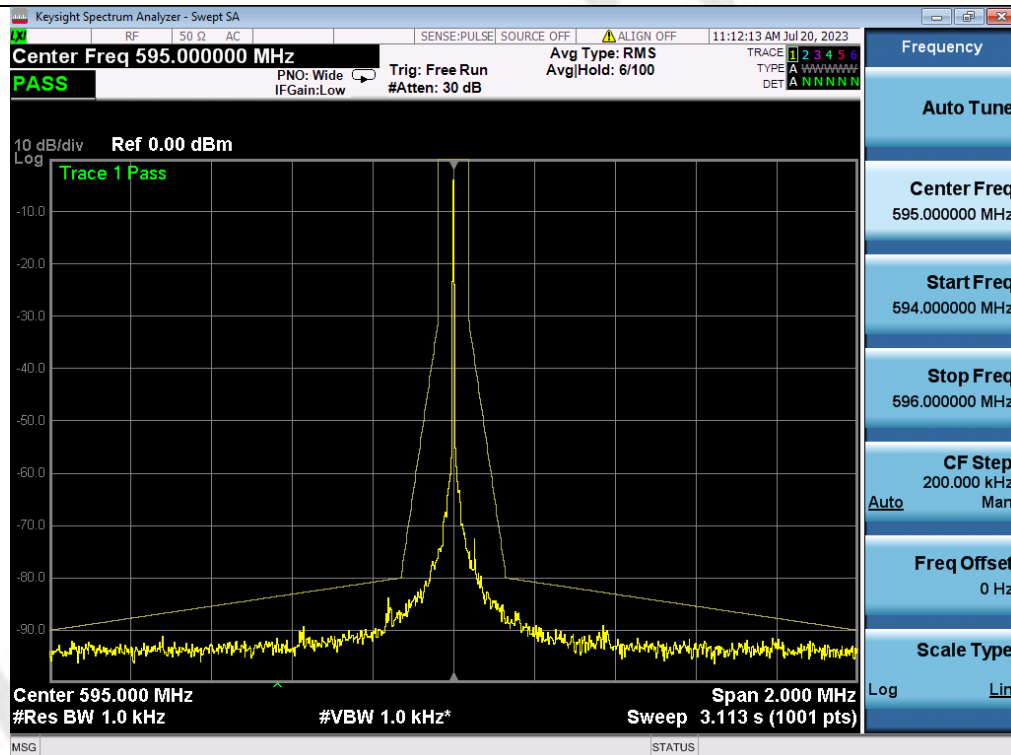Group-B**CH00****CH05**

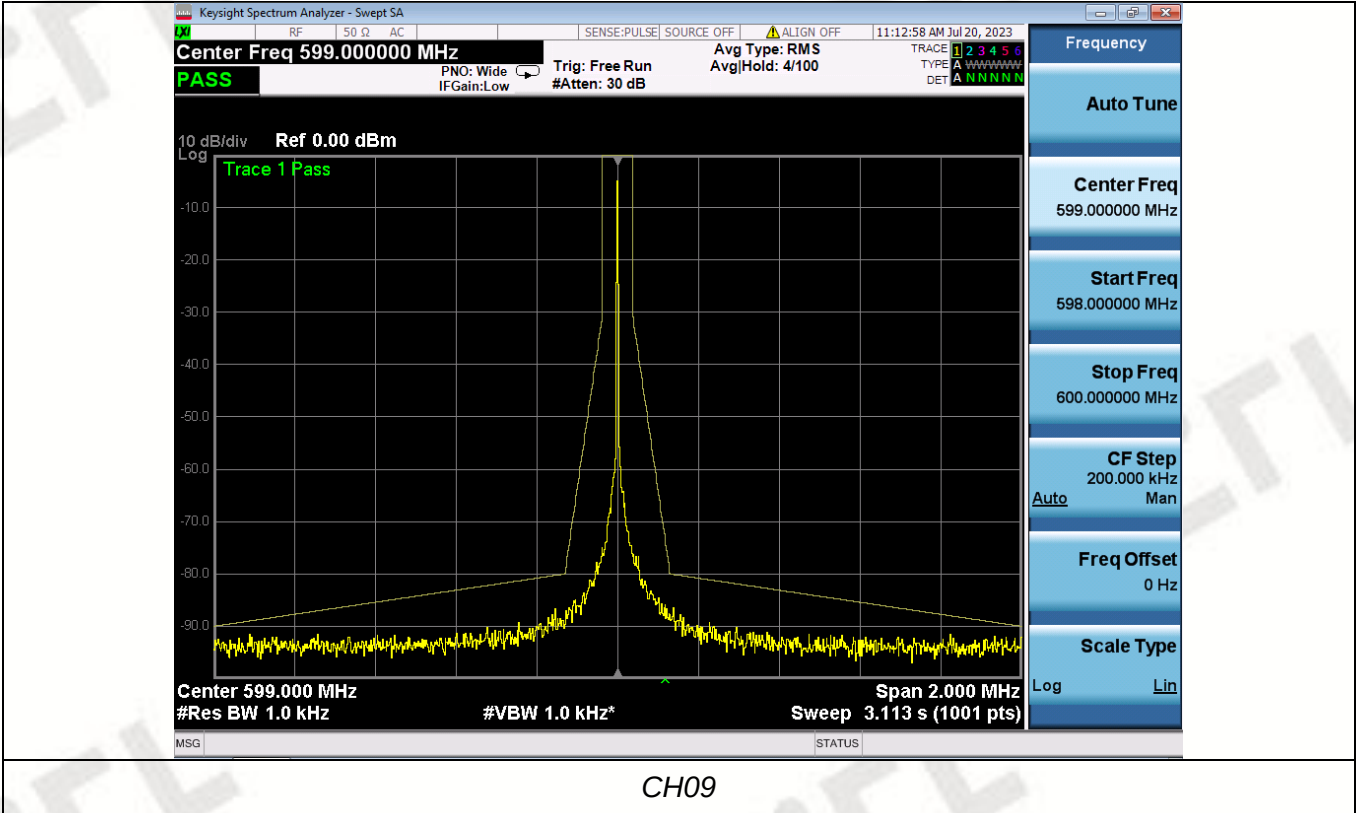

2.4. Transmitter spurious emissions

Limit

Spurious emissions are emissions outside the frequency range(s) of the equipment. The power of the spurious emissions shall not exceed the limits of table as below:


State	Frequency		
	47 MHz to 74 MHz 87,5 MHz to 137 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies below 1 000 MHz	Frequencies above 1 000 MHz
Operation	4 nW	250 nW	1 μ W
Standby	2 nW	2 nW	20 nW

Test Procedure

1. EUT shall be placed on a 0.8m high table for frequency below 1GHz
2. EUT shall be placed on a 1.5m high table for frequency above 1GHz, The test distance between the receiving antenna and the EUT is 1m up to 4m, Set EUT in continuous transmitting with maximum output power at test frequency.
3. The table was rotated from 0 to 360 degree to search the highest radiated emission.
4. Repeat step 3 to 4 for each polarization and test channel to find the worst emission level.
5. The results obtained are compared to the limits in order to prove compliance with the requirement.
6. Please refer to ETSI EN 300 422-1 V1.4.2 (2011-08) clause 6.1 for the test conditions.
7. Please refer to ETSI EN 300 422-1 V1.4.2 (2011-08) clause 8.4.2 for the measurement method.

Test Configuration

Effective Radiated Power measurement (30 MHz to 12.75 GHz)

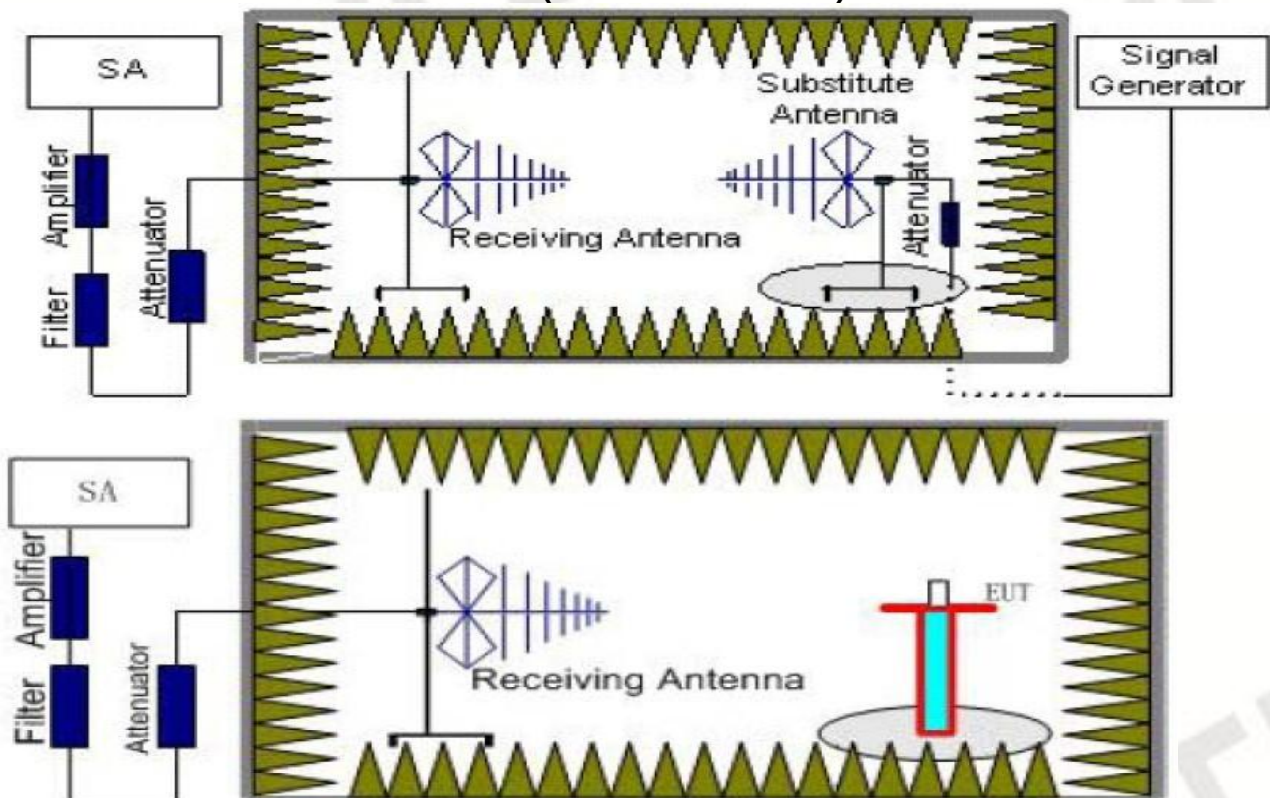



Test Results**Group-A**

Channel:

CH00

Polarity:

Horizontal

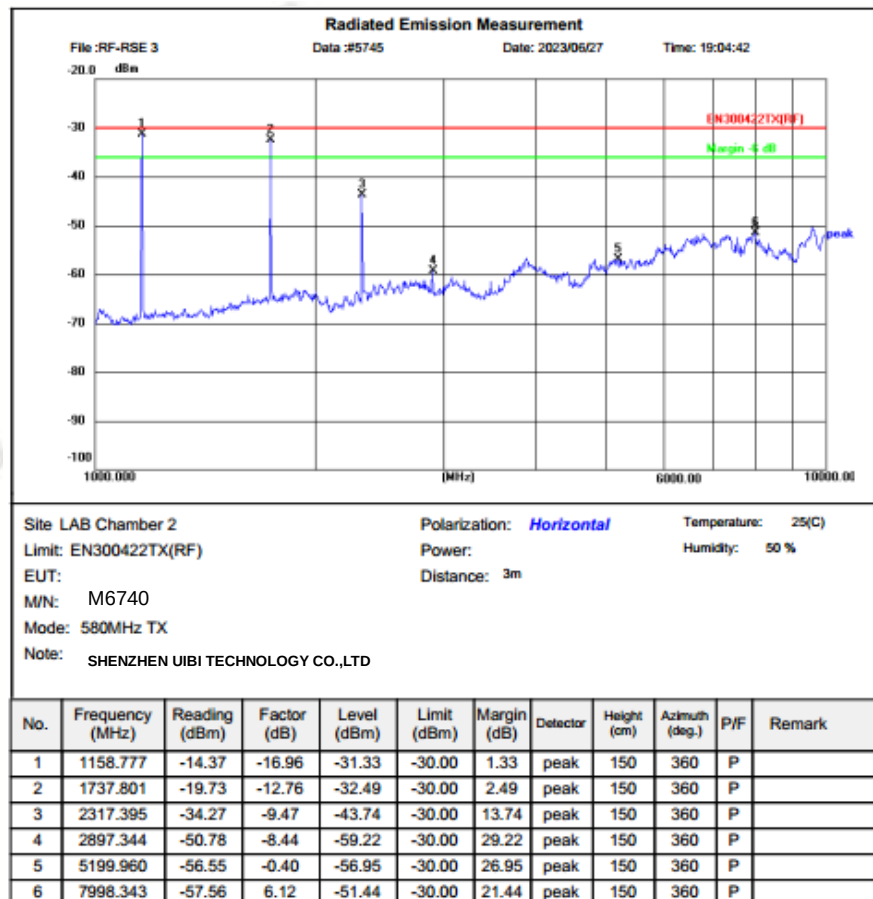
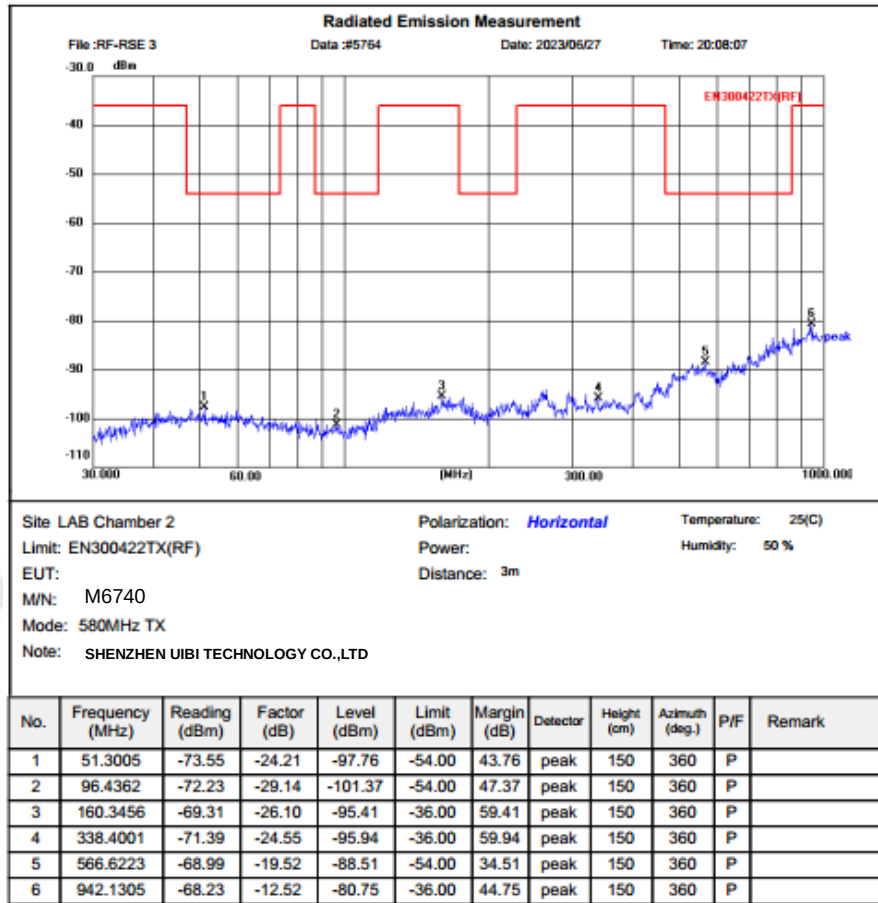


Channel:

CH00

Polarity:

Vertical

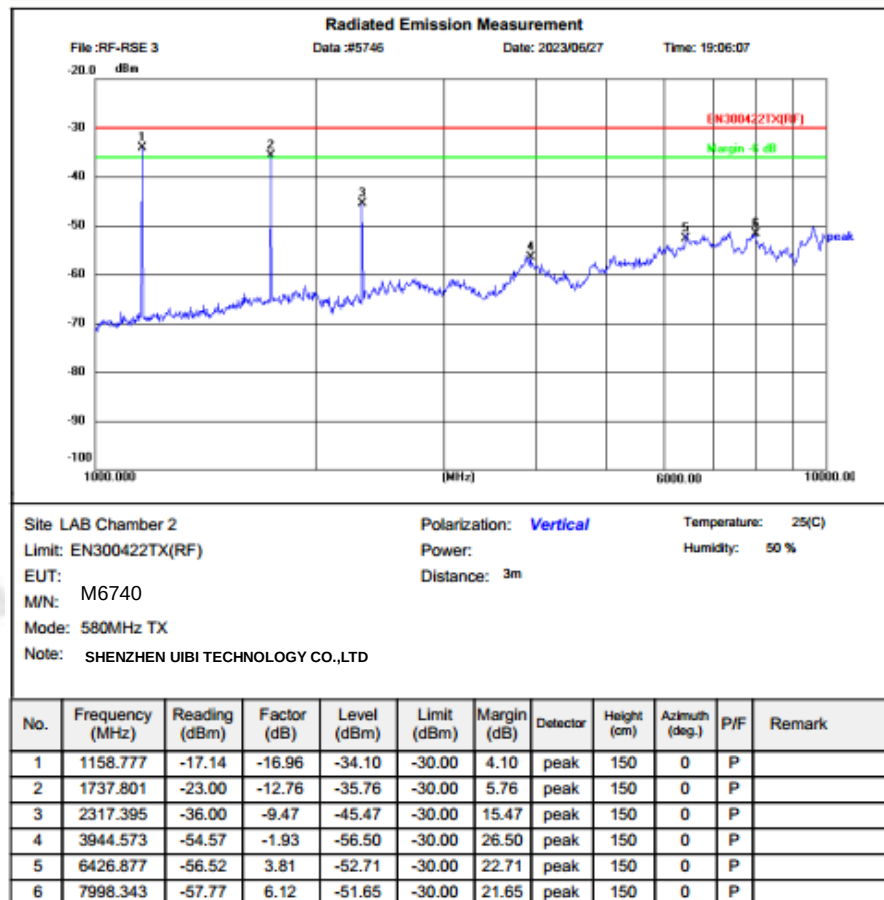
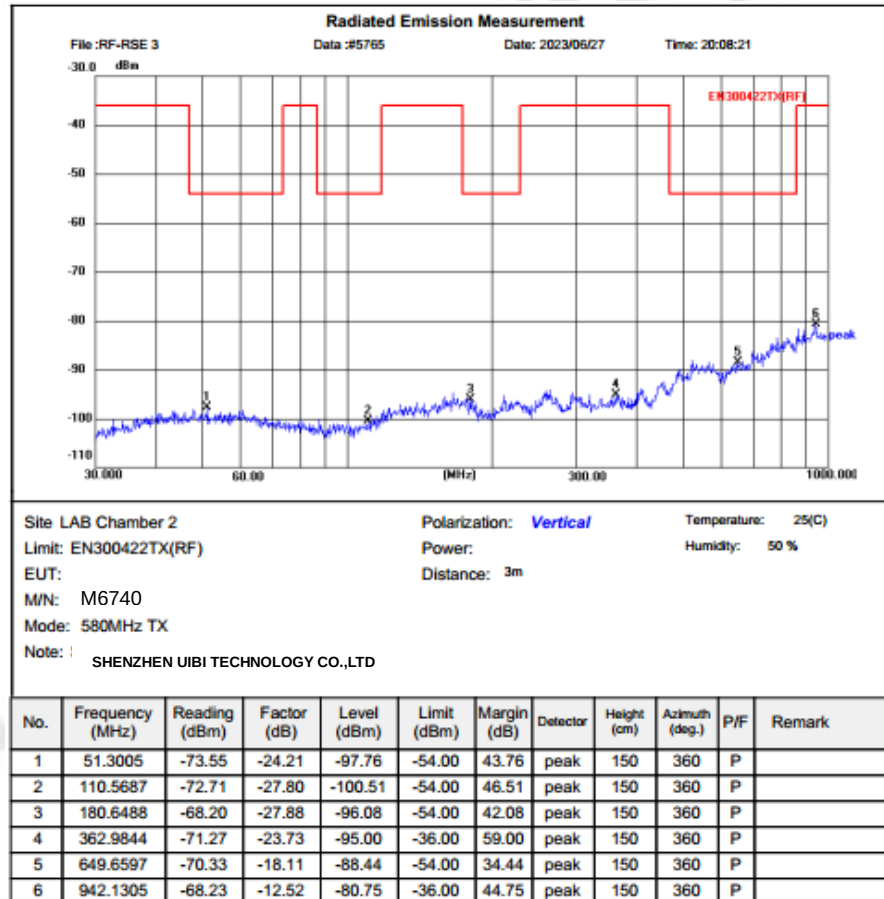


Channel:

CH09

Polarity:

Horizontal

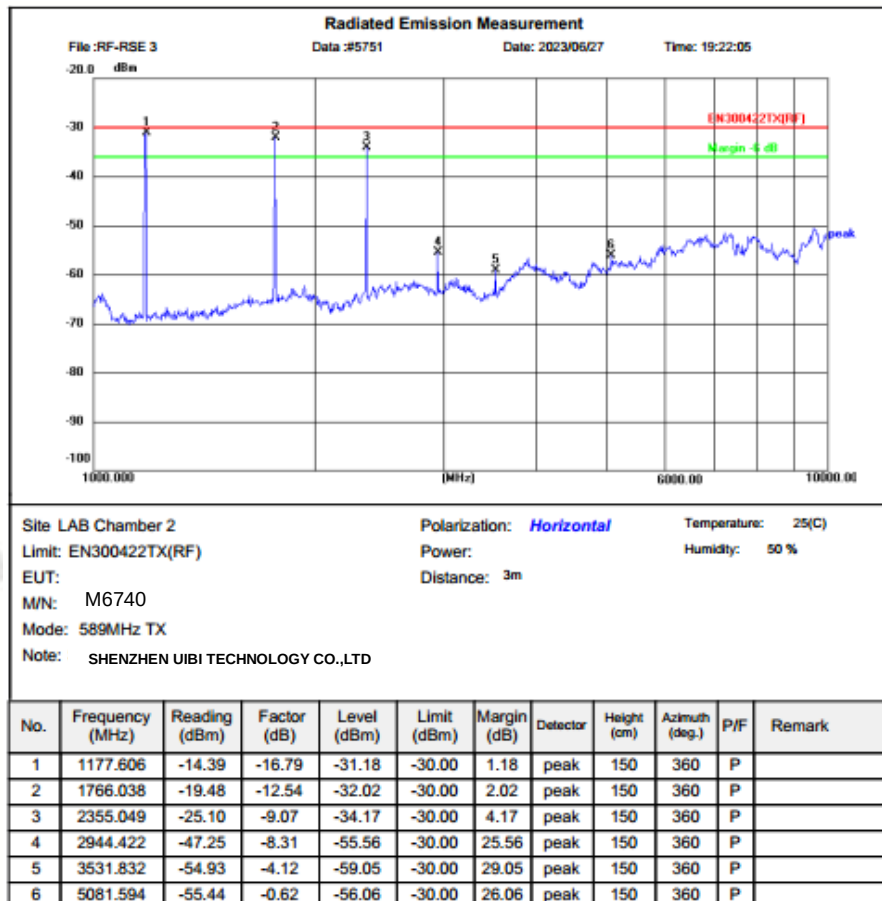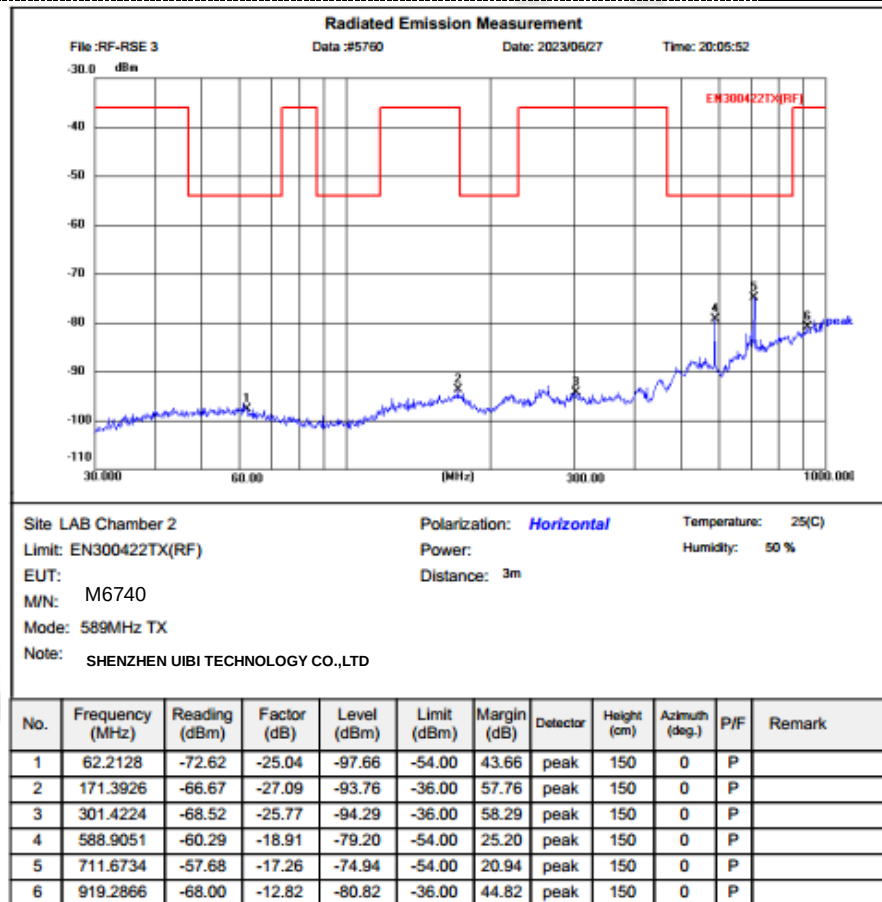


Channel:

CH09

Polarity:


Vertical

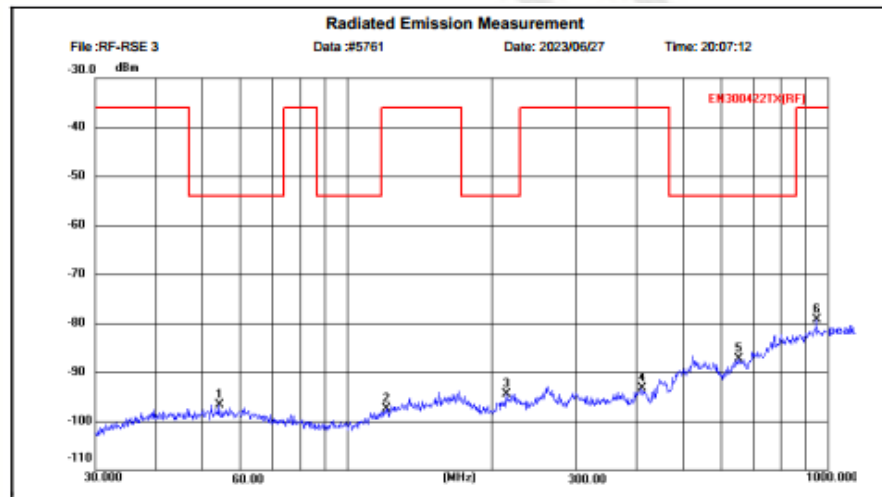

Site: LAB Chamber 2
 Limit: EN300422TX(RF)
 EUT:
 M/N: M6740
 Mode: 589MHz TX
 Note:

Polarization: **Vertical** Temperature: 25(C)
 Power: Humidity: 50 %
 Distance: 3m

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	54.2610	-72.48	-24.31	-96.79	-54.00	42.79	peak	150	360	P	
2	121.1231	-70.79	-26.73	-97.52	-36.00	61.52	peak	150	360	P	
3	215.2678	-66.65	-27.84	-94.49	-54.00	40.49	peak	150	360	P	
4	410.3825	-70.89	-22.34	-93.23	-36.00	57.23	peak	150	360	P	
5	654.2318	-69.15	-18.08	-87.23	-54.00	33.23	peak	150	360	P	
6	948.7610	-66.82	-12.42	-79.24	-36.00	43.24	peak	150	360	P	

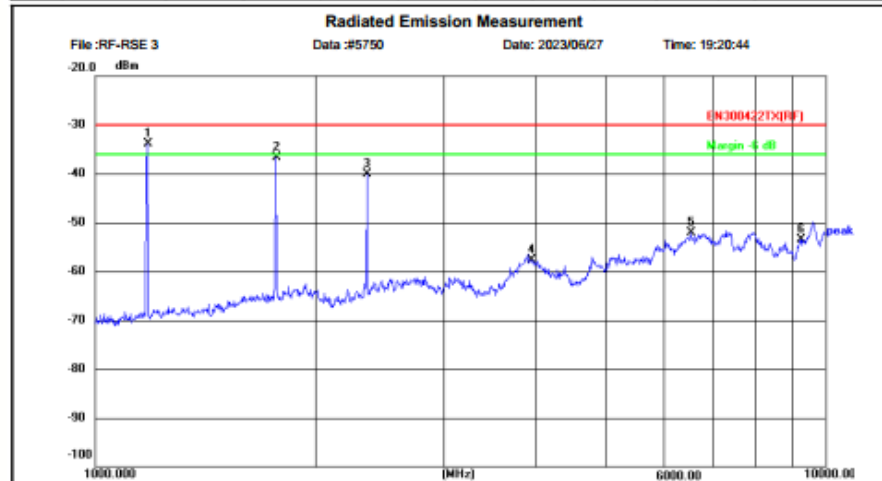

Site: LAB Chamber 2
 Limit: EN300422TX(RF)
 EUT:
 M/N: M6740
 Mode: 589MHz TX
 Note:

Polarization: **Vertical** Temperature: 25(C)
 Power: Humidity: 50 %
 Distance: 3m

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1177.606	-17.03	-16.79	-33.82	-30.00	3.82	peak	150	0	P	
2	1766.038	-24.18	-12.54	-36.72	-30.00	6.72	peak	150	0	P	
3	2355.049	-31.00	-9.07	-40.07	-30.00	10.07	peak	150	0	P	
4	3962.780	-55.79	-2.00	-57.79	-30.00	27.79	peak	150	0	P	
5	6546.362	-56.23	4.05	-52.18	-30.00	22.18	peak	150	0	P	
6	9268.298	-58.54	5.07	-53.47	-30.00	23.47	peak	150	0	P	



Group-B

Channel:

CH00

Polarity:

Horizontal

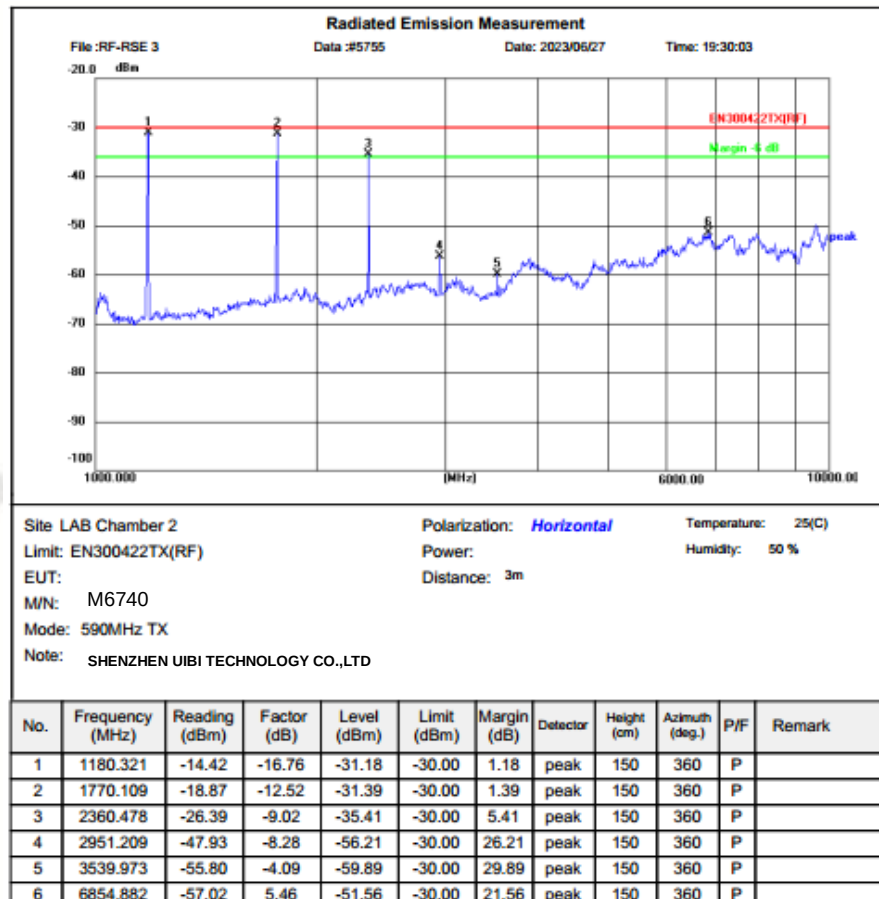
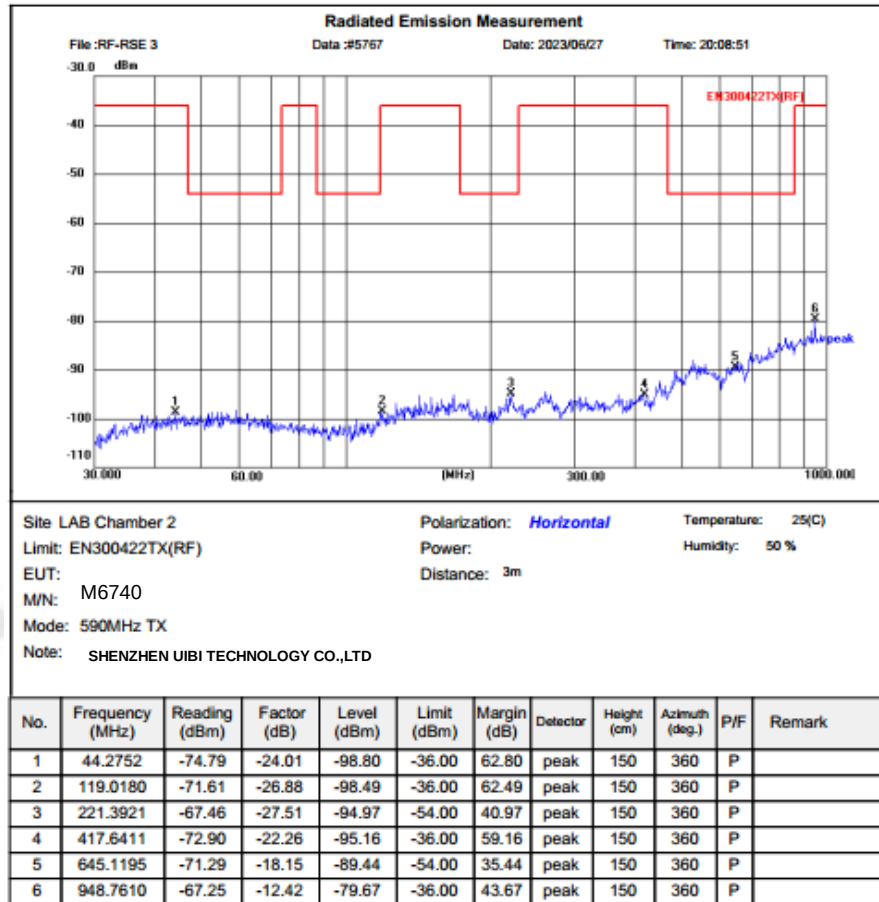


Channel:

CH00

Polarity:

Vertical

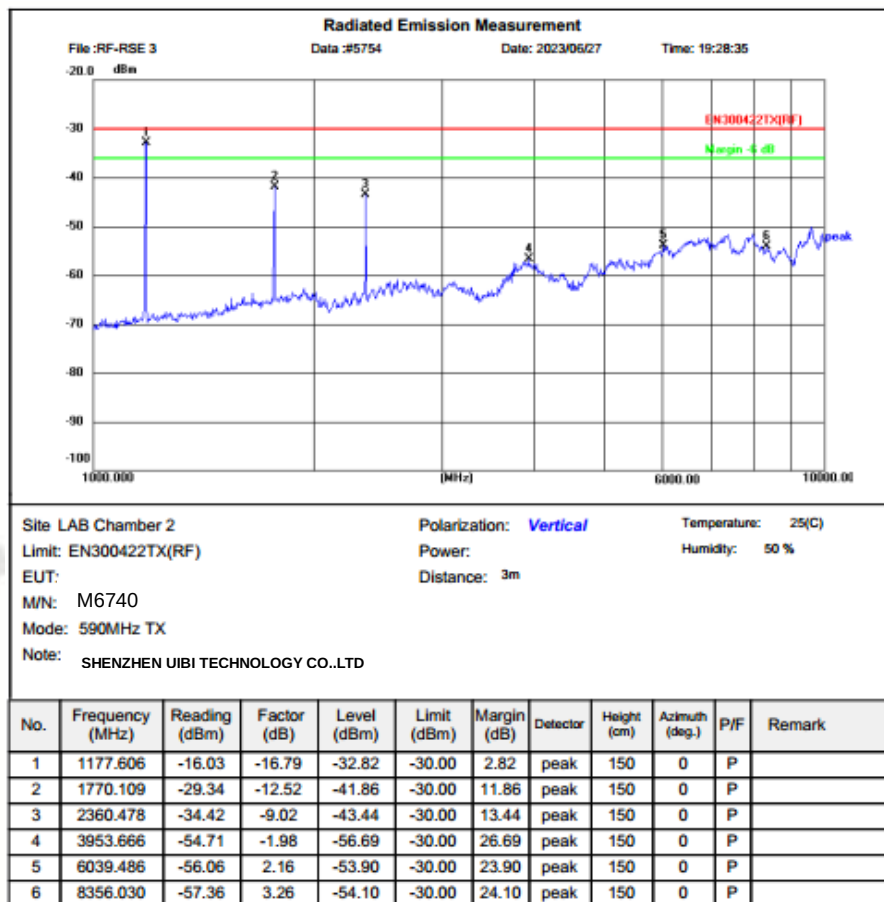
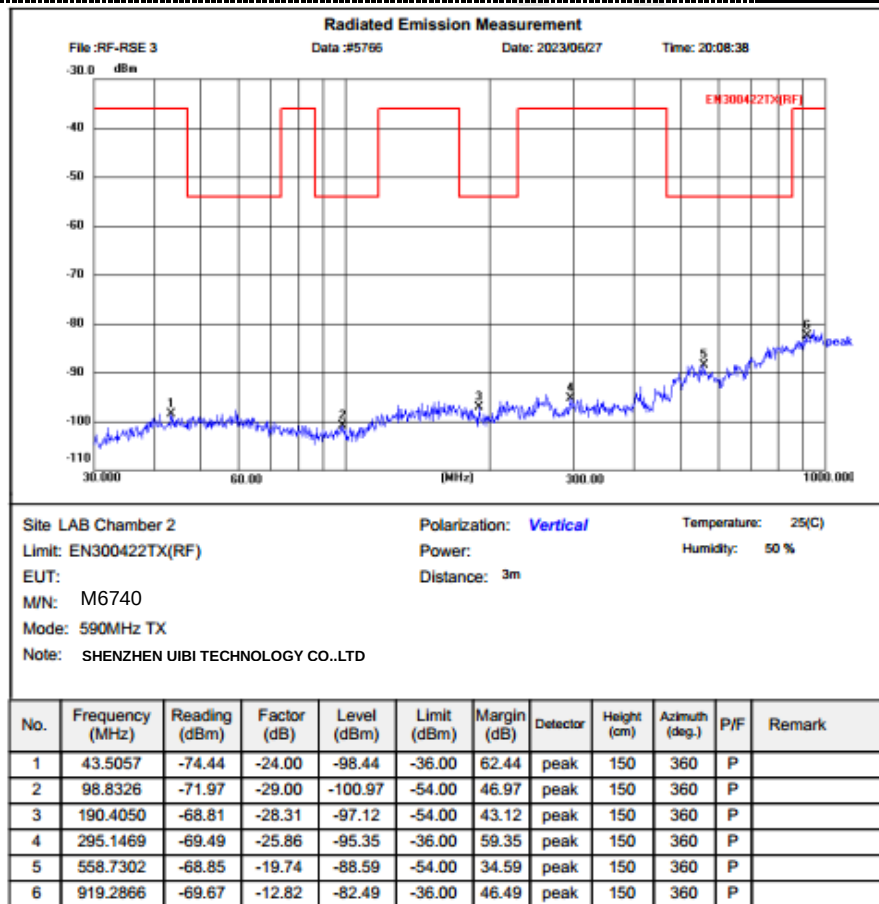


Channel:

CH09

Polarity:

Horizontal

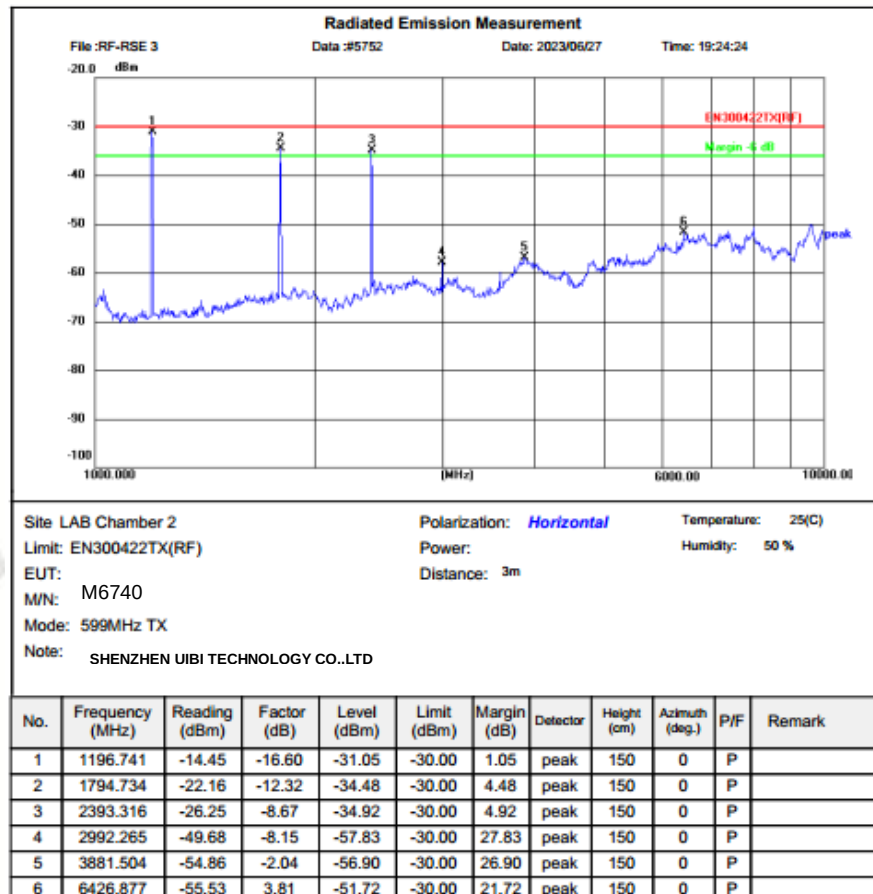
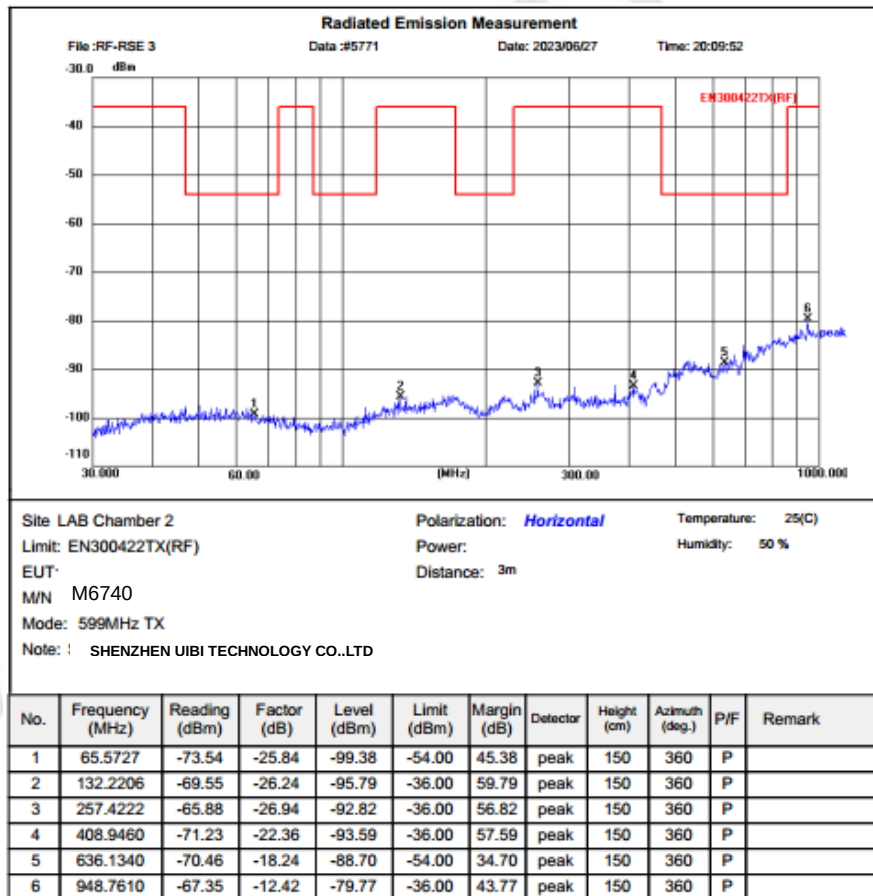


Channel:

CH09

Polarity:

Vertical

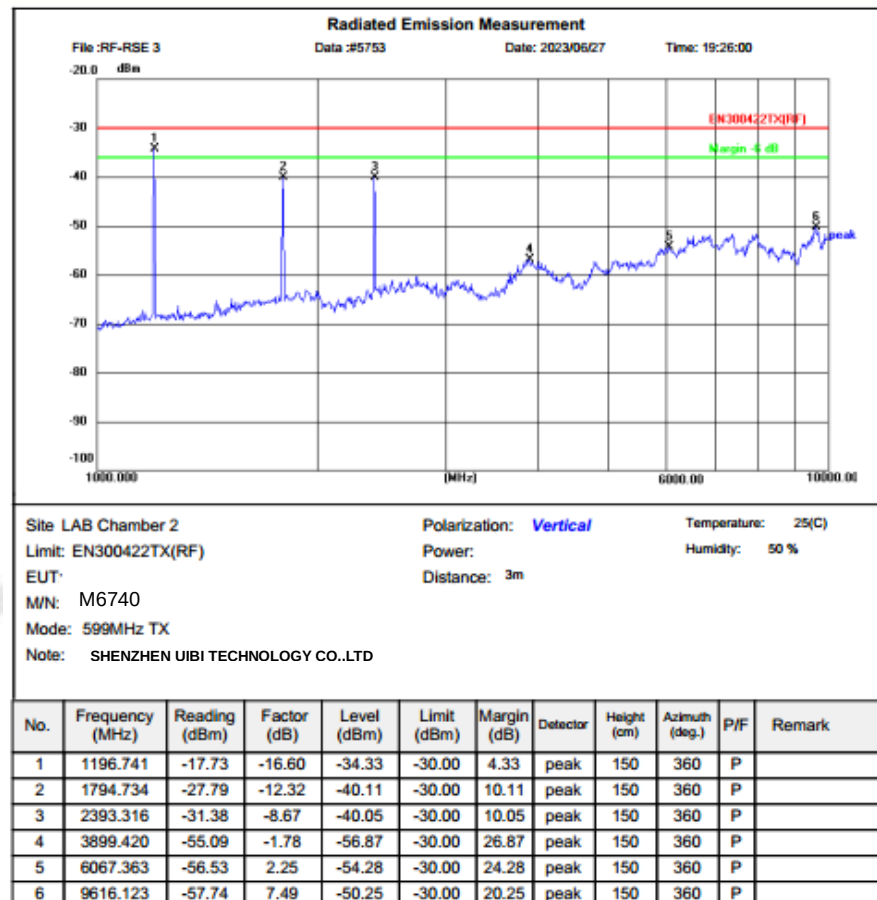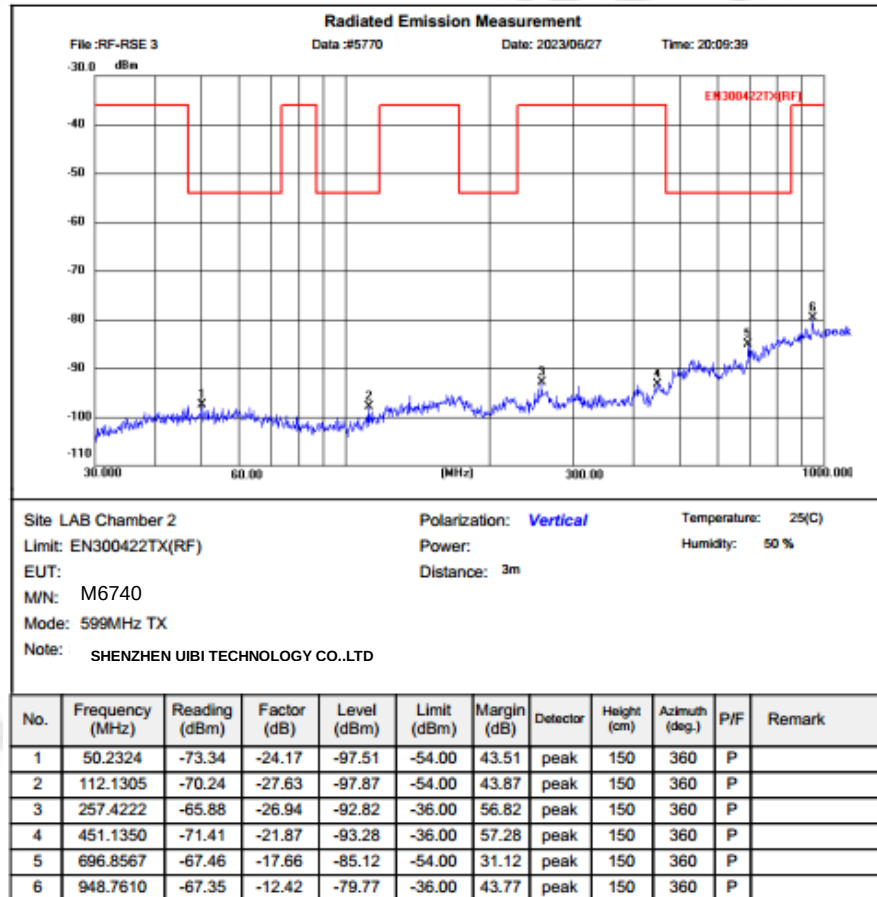

2.5. Frequency Stability

Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery.

Test Procedure


a) Frequency stability versus environmental temperature

1. Setup as Test Configuration for frequencies measured at ambient temperature if it is within 15°C to 25°C . Otherwise, an environmental chamber set for a temperature of 20°C shall be used.
2. Turn on EUT and set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 3 kHz, VBW to 10kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -20°C is measured, record all measurement frequencies.

b) Frequency stability versus input voltage

1. Setup as Test Configuration for frequencies measured at ambient temperature if it is within 15°C to 25°C . Otherwise, an environmental chamber set for a temperature of 20°C shall be used. Install new batteries in the EUT.
2. Set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 3kHz, VBW to 10kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. For non hand carried, battery operated device, supply the EUT primary voltage with 85 and 115 percent of the nominal value and record the frequency.

Test Configuration

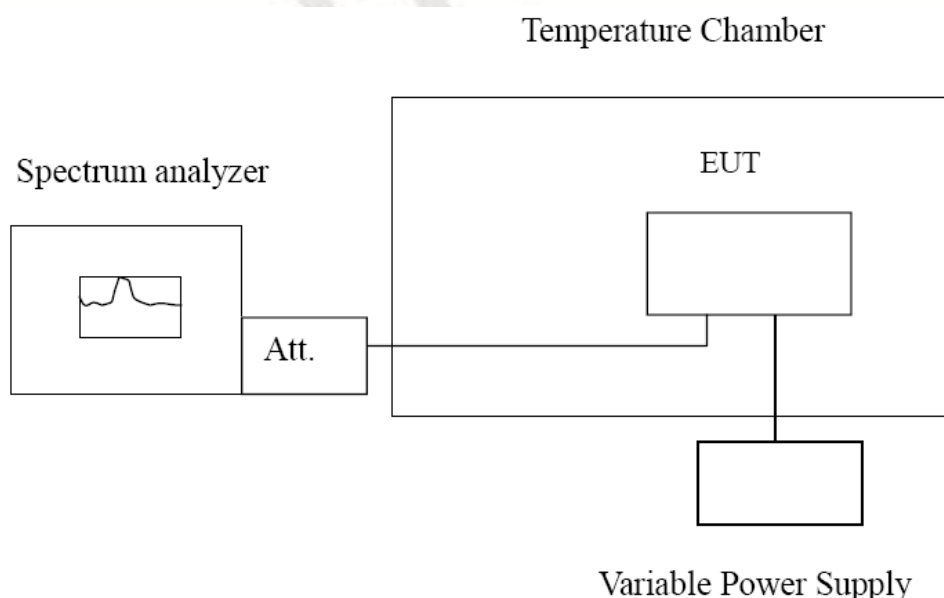

Test Results

Group-A					
Reference Frequency: 580MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.01815	0.00349%	±0.005	PASS
	-10	0.01842	0.00354%		
	0	0.01725	0.00332%		
	10	0.01792	0.00345%		
	20	0.01820	0.00350%		
	30	0.01762	0.00339%		
	40	0.01743	0.00335%		
	50	0.01827	0.00351%		
3.3	25	0.01910	0.00367%		
2.7	25	0.01914	0.00368%		

Group-B					
Reference Frequency: 590MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.0	-20	0.01808	0.00347%	±0.005	PASS
	-10	0.01838	0.00352%		
	0	0.01716	0.00328%		
	10	0.01786	0.00343%		
	20	0.01814	0.00347%		
	30	0.01752	0.00326%		
	40	0.01734	0.00334%		
	50	0.01821	0.00350%		
3.3	25	0.01915	0.00364%		
2.7	25	0.01917	0.00361%		



Note: The report tests all channel data, but this report only records the worst channel data.


3. Test Setup Photos of the EUT



4. External and Internal Photos of the EUT

External Photos of EUT

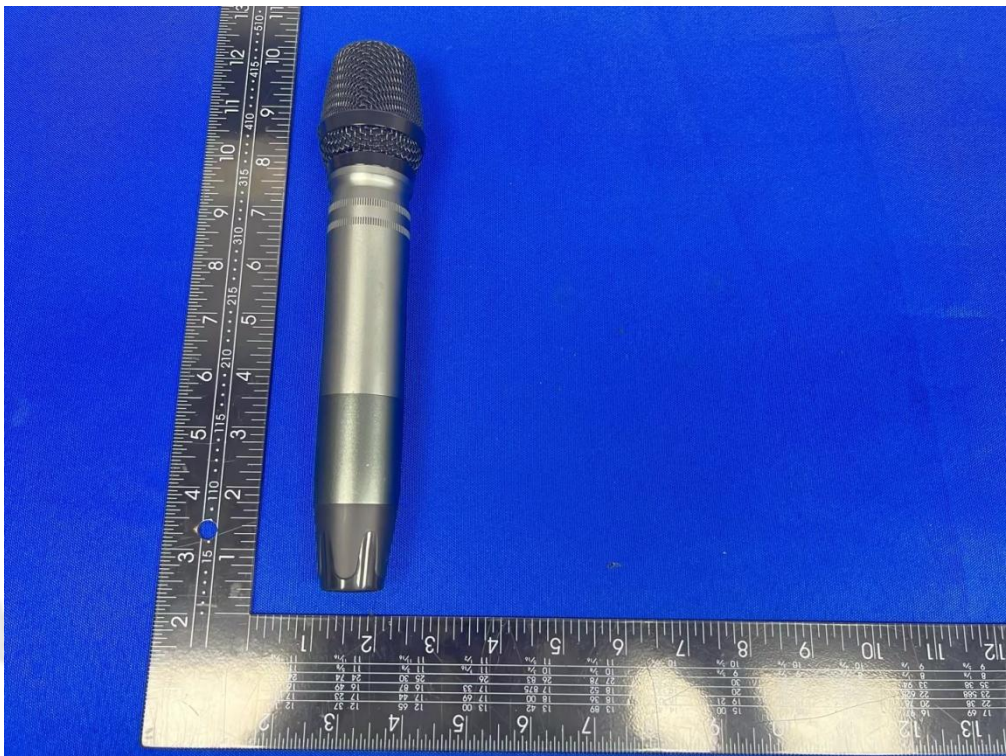
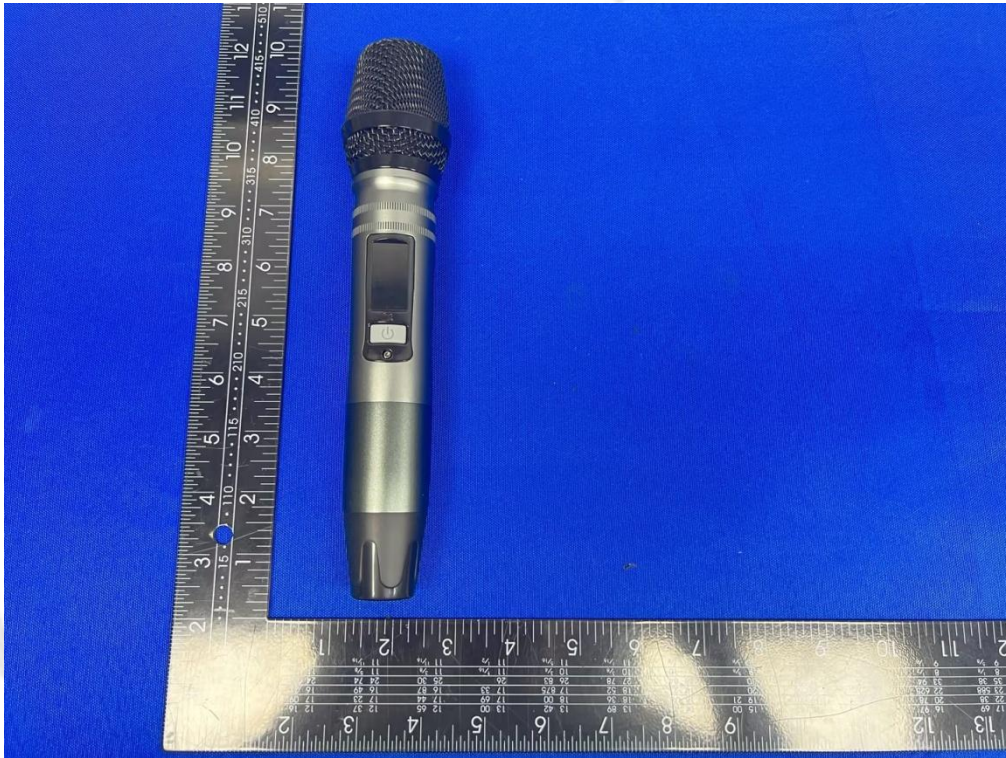


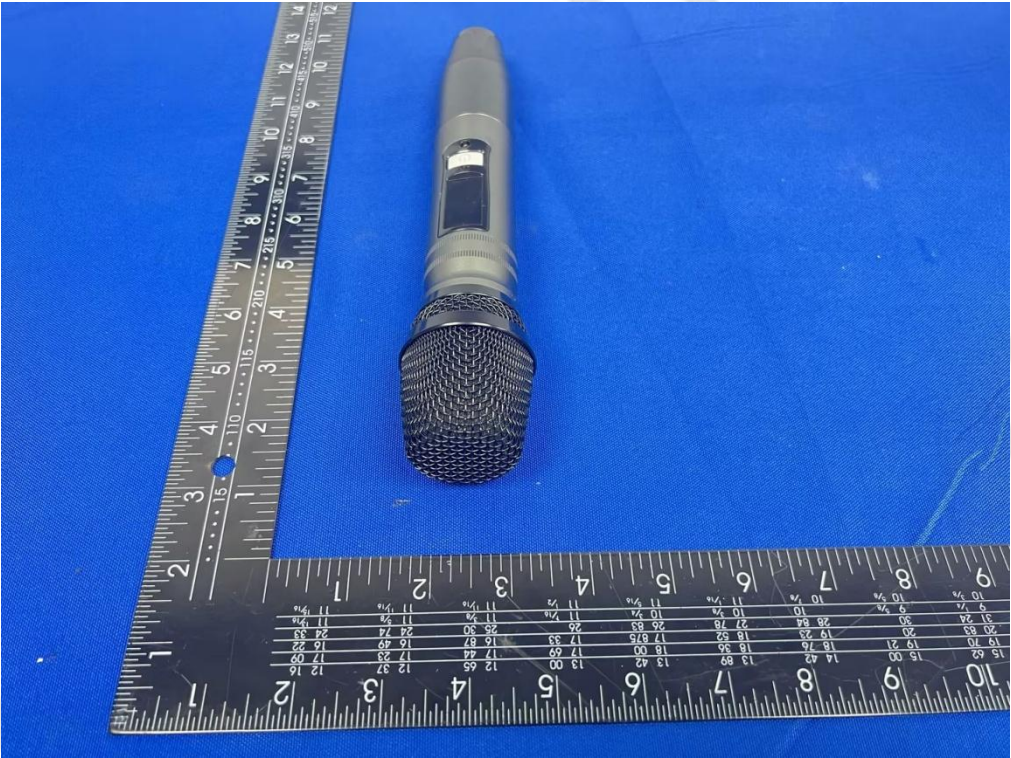




Internal Photos of EUT



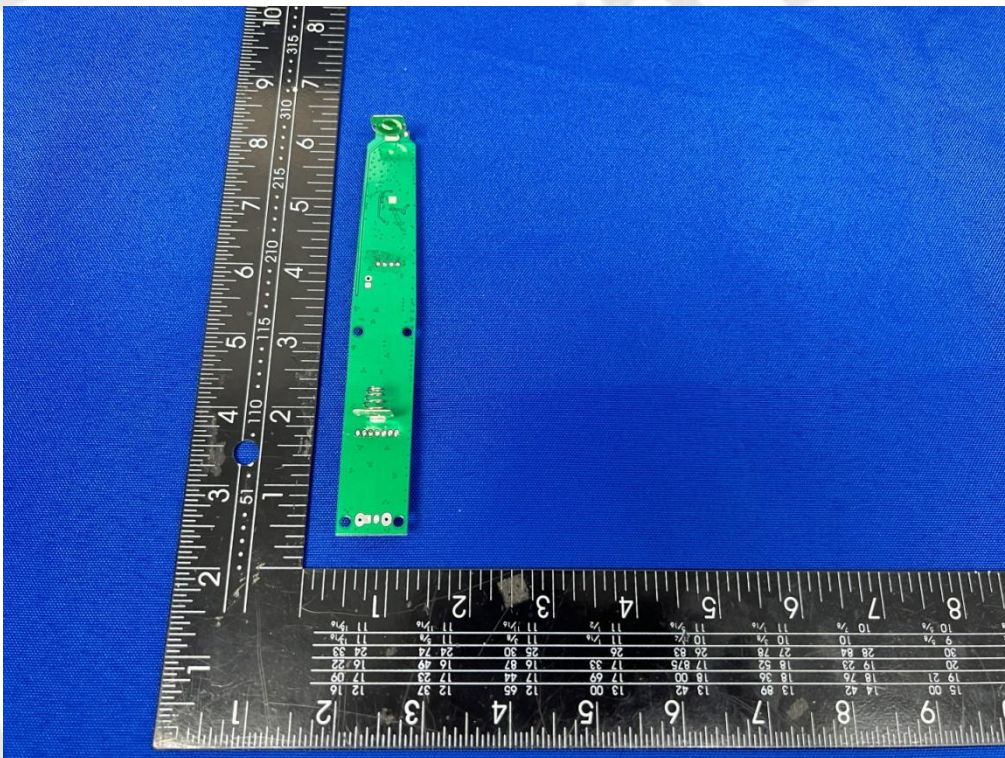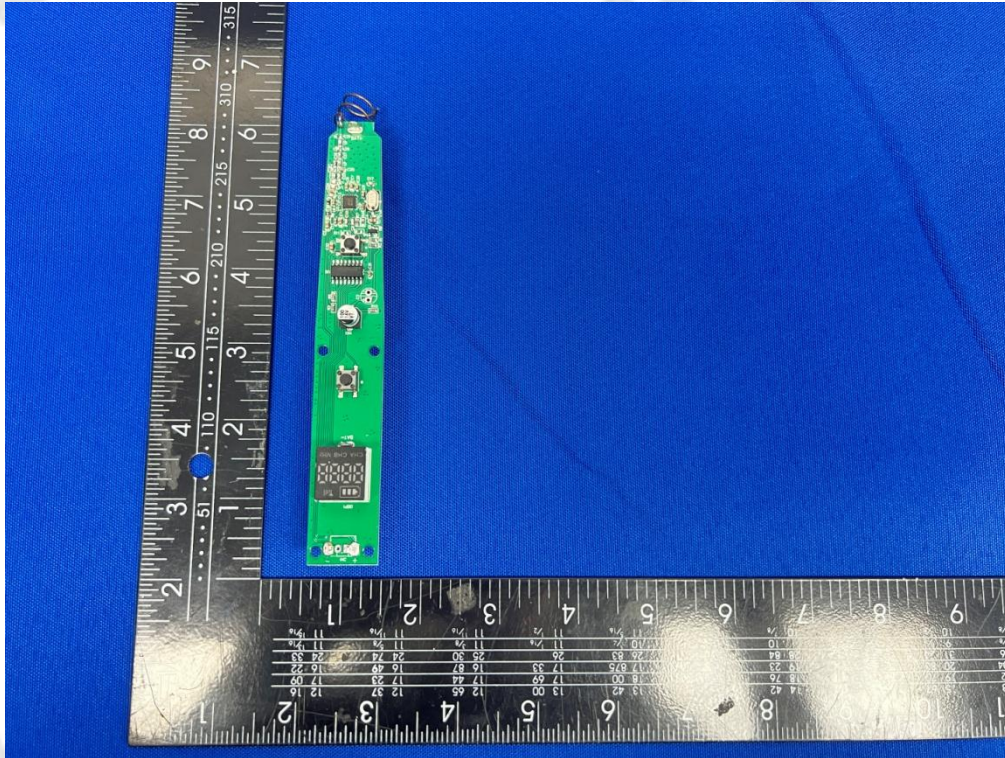

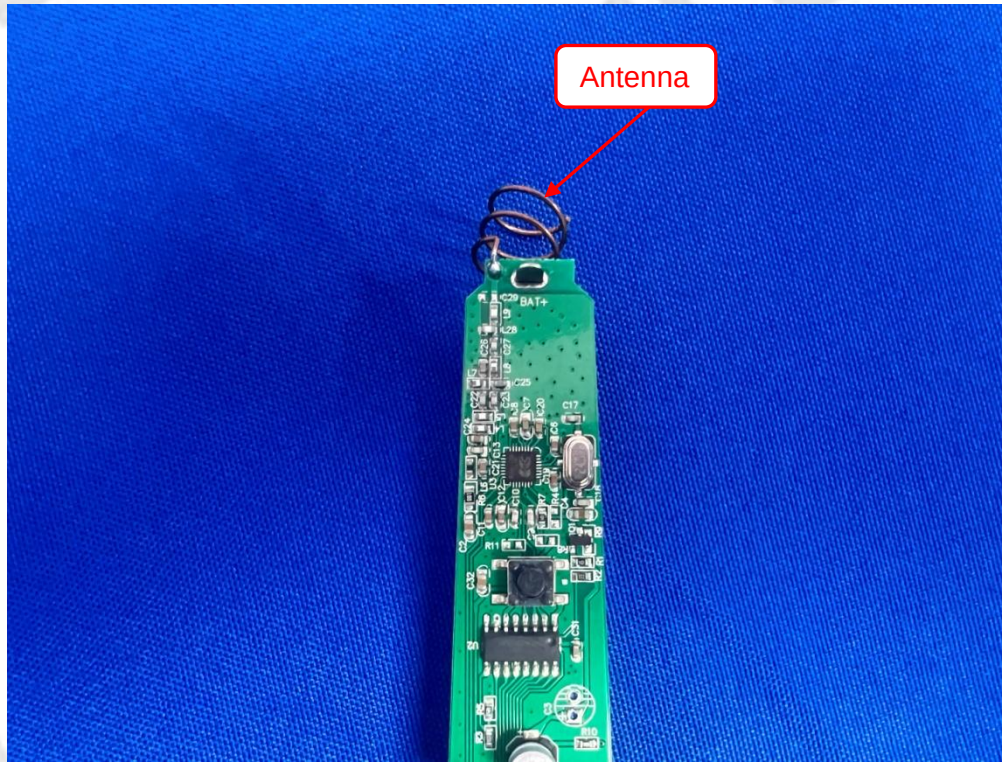

*****End of Report*****