
Antenna specification

CUSTOMER:

CUST P/N:

FINE P/N:

G43-6.5UH Single coil 0.08*24P*2P*10TS

DESC:

Φ43.5MMX5.3MMX0.8MM

DATE:

2023.08.15

Version:

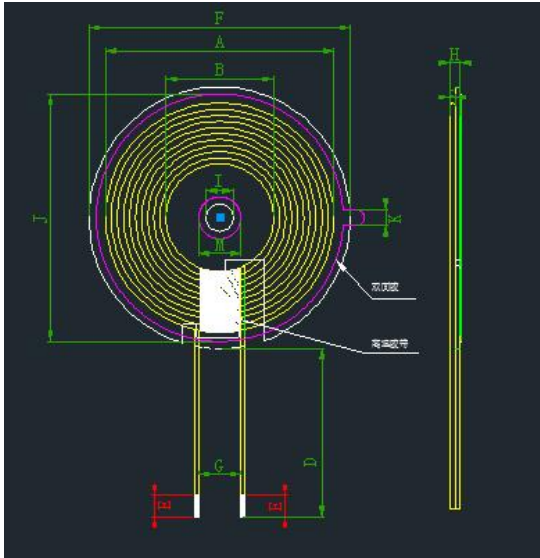
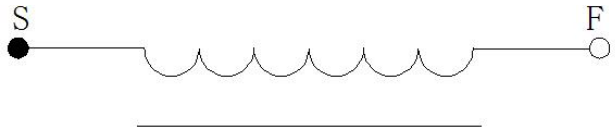
A.0

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE

Shenzhen Sansheng Chuang electronic Technology Co., LTD

Factory address: 2nd Floor, No. 19, Dayang Road, Yulu Community, Yutang Street, Guangming District, Shenzhen

SPECIFICATION

DESC	Φ 20.5x40-6.5uH-0.8x24P-30mm		Rev: A.0	CUST:	XXX	
				CUST P/N:		
1、DIMENSION:(mm)  Operation frequency:113kHz-205kHz				A	40±1	
				B	20.5±0.5	
				C	1.25	
				D	30±2	
				E	3±2	
				F	43.5±0.5	
				G	10	
				H	1.8	
				I	5.3 ±0.5	
				M	8.0	
J	42±1					
K	3.0±1					
				Note: 1. Cross out wire; 2. Wrap 8mm(ref) width high-temperature adhesive paper 1-2Ts around the outlet position; 3. The coil is attached to the circular hard magnetic disc with groove, the magnetic disc size is 43.5±0.5mm, the inner hole is 5.3mm, and the thickness is 0.8±0.1		
2、SCHEMATIC DIAGRAM: 						
3、Winding Specification:						
NO.	TERMINAL		WIRE	Turns	Winding Direction	
1	S	F	Hot air wire 0.08*24P	10Ts	CCW	
4、ELECTRICAL CHARACTERISTICS:						
TEMPERATURE:25±10°C, RELATIVE HUMIDITY:65±20%						
NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS	
1	IND.	S-F	4.0uH ±10%	100KHz/1.0V	LCZ METER 1062B	
2	IND.	S-F	6.5uH ±10%	100KHz/1.0V	LCZ METER 1062B	
3	DCR	S-F	≤80m Ω	100KHz/1.0V	LCZ METER 502B	
4	Q	S-F	≥42	100KHz/1.0V	LCZ METER 502B	
PREPARED BY/DATE				CHECKED BY/DATE		
2023.08.15				2023.08.15		