

HT-6766BEM Router

Cutting-edge WiFi 7 (BE) Tri-Band gateway, designed to deliver an exceptional and seamless online experience with support for speeds of up to 10G, setting a new benchmark in connectivity. Leveraging advanced WiFi 7 technology and premium components, this gateway offers ultra-fast speeds and remarkably low latency, ensuring all your online activities, from immersive gaming to ultra-HD streaming, run effortlessly. Say goodbye to delays and interruptions, and enjoy a superior browsing experience with the next-generation WiFi 7 (BE) gateway.



10G WAN Port



10G LAN Port



1G LAN Ports



WiFi 7 BE



FxS

Package Contents:



Router HT-6766BEM



Power Adapter



LAN Cable



Phone Cable



Quick Installation Guide

LED Indicators:



Not connected to the Internet



Connected to the Internet with WiFi OFF



Router Booting Up



Connected to the Internet


HT-6766BEM

Quick Installation Guide




Connect the Hardware

- ① Place your HT-6766BEM router near your Internet-connected modem.
- ② Connect the LAN cable to your modem and to the port labeled WAN on the router.
- ③ Connect the supplied power adapter to the router and a power outlet.
- ④ Turn on the router by pressing the power button and wait approximately one minute until the router finishes the initial startup.
- ⑤ Download the Plume Home app by Plume and launch it. Follow the instructions in the app. In the app, you will be able to manage your wireless home network, including configuring the name and password of your Wireless Network (SSID), and enjoy cyber protection and much more.

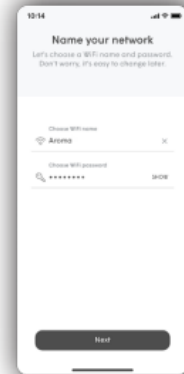

Back Panel

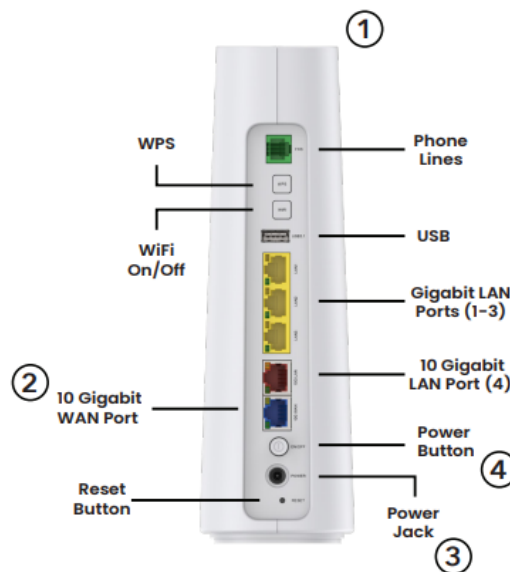

FCC Regulations:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Note:

Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC regulations restrict the operation of this device to indoor use only.

The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet.

Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems

RF Exposure Information

This device meets the government's requirements for exposure to radio waves.

This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government.

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment.

In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 25 cm during normal operation.