



## 802.11g Out-of-Band Emissions - Ant 2

## Channel 01 (2412MHz)


## Reference Level

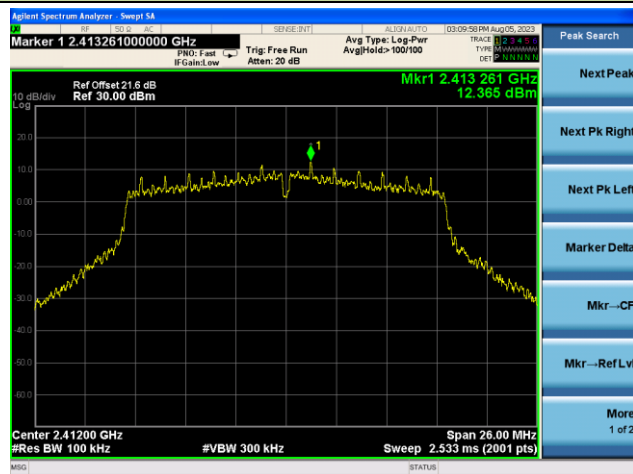

## Low Band Edge

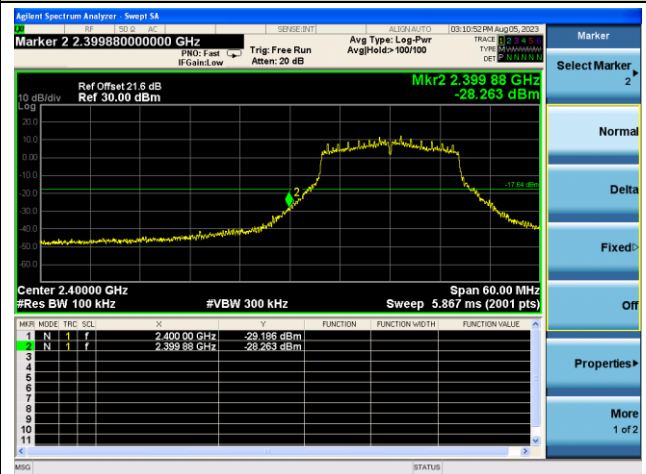


## Spurious Emission

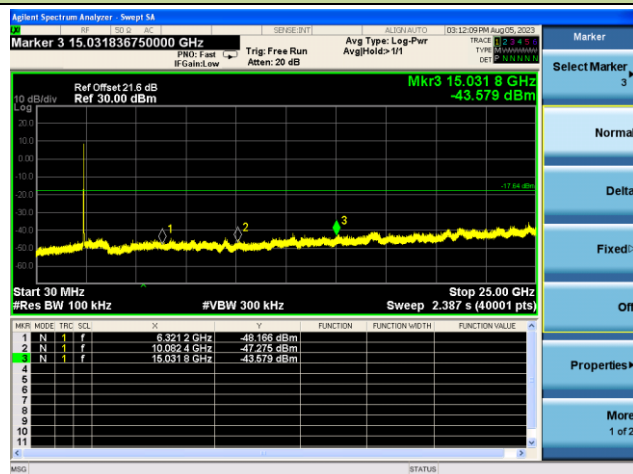


## Channel 06 (2437MHz)

## Reference Level

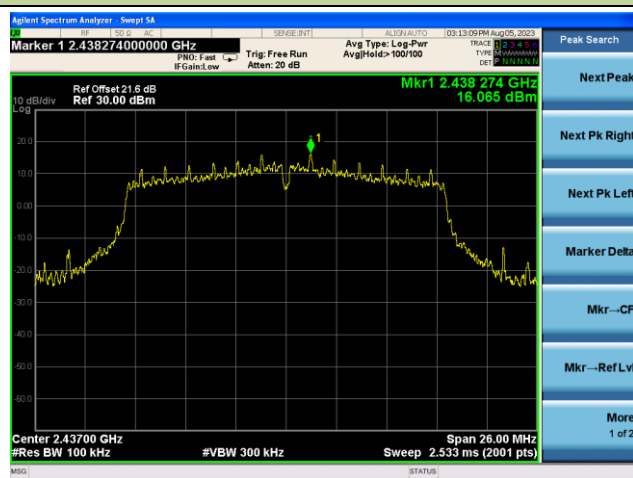

## Spurious Emission

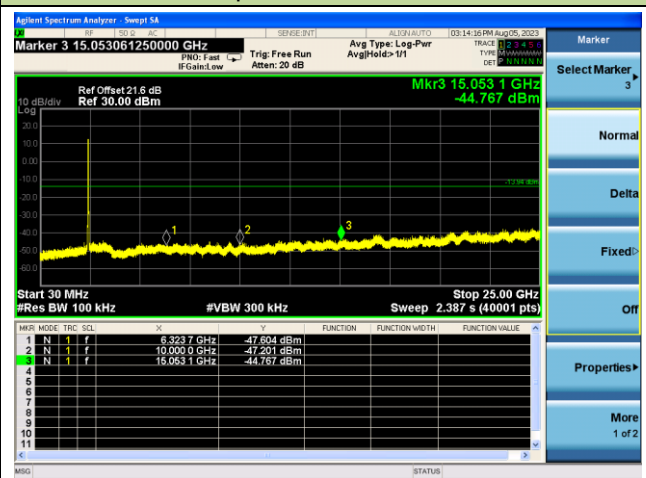


## 802.11g Out-of-Band Emissions - Ant 2

## Channel 11 (2462MHz)


## Reference Level



## High Band Edge

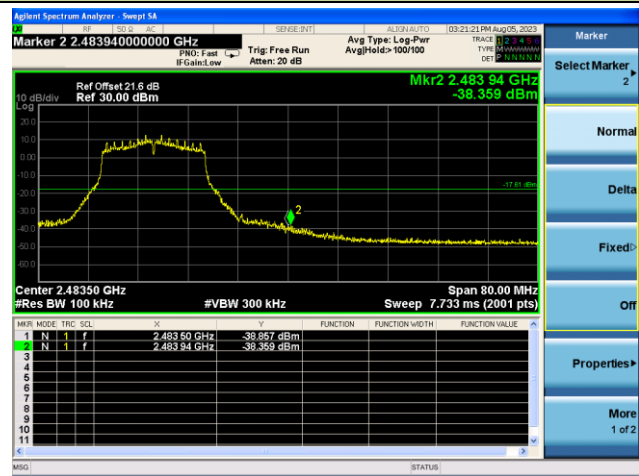


## Spurious Emission

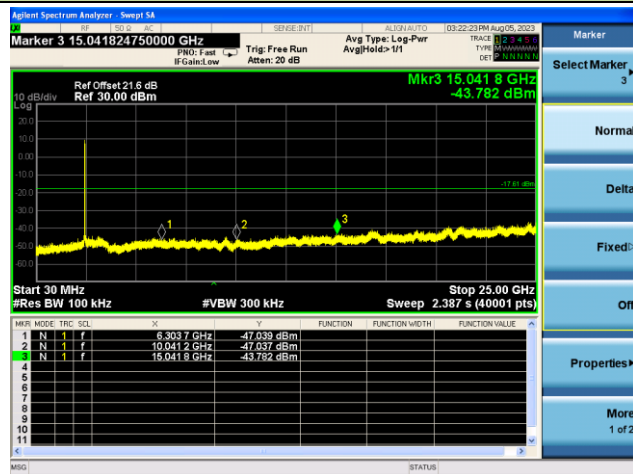


## 802.11n-HT20 Out-of-Band Emissions - Ant 2

## Channel 01 (2412MHz)


## Reference Level

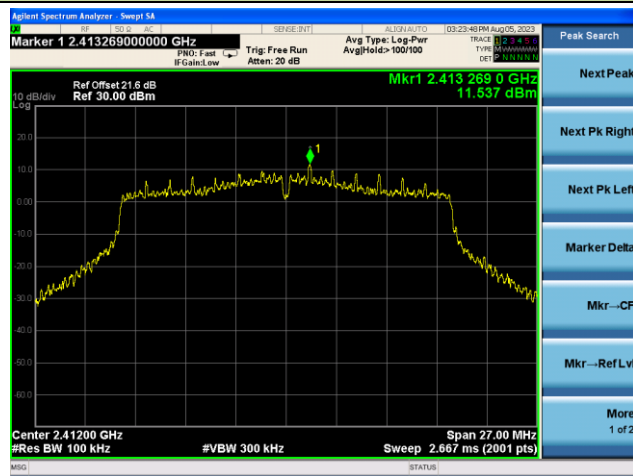

## Low Band Edge

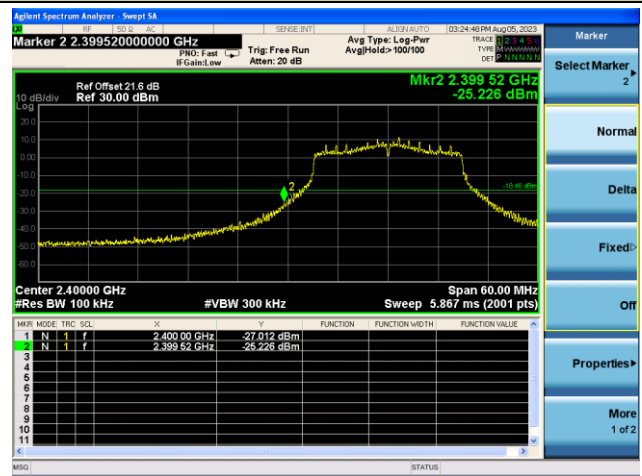


## Spurious Emission

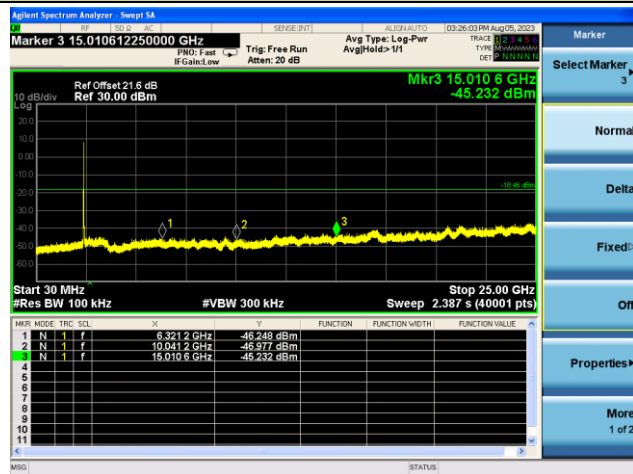


## Channel 06 (2437MHz)

## Reference Level

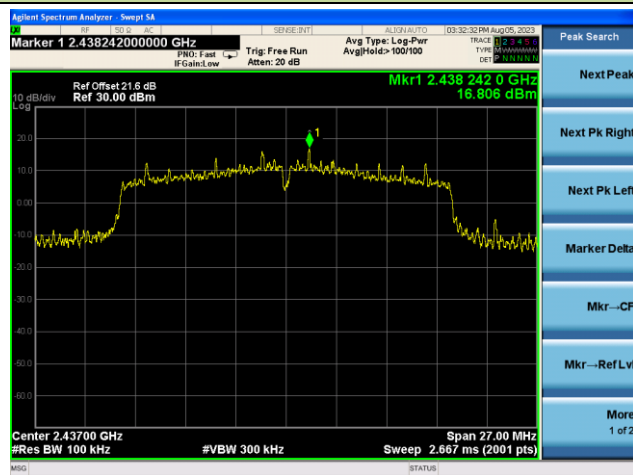


## Spurious Emission

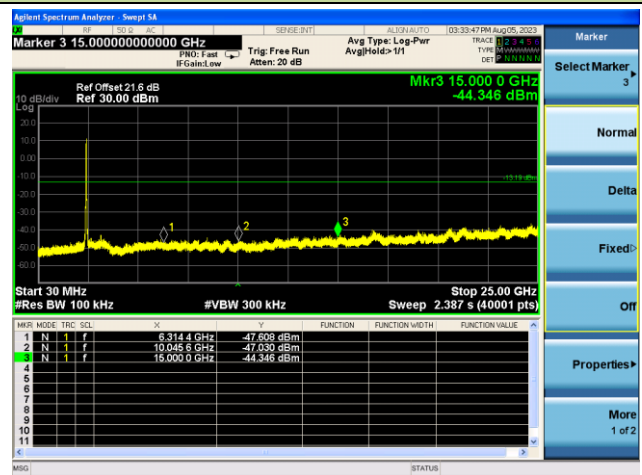


## 802.11n-HT20 Out-of-Band Emissions - Ant 2

## Channel 11 (2462MHz)


## Reference Level

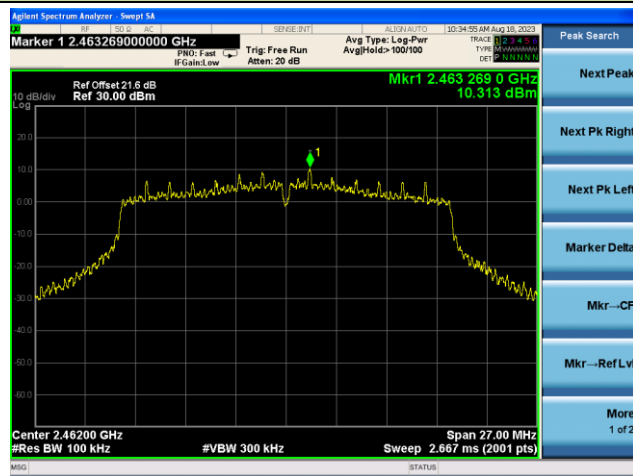

## High Band Edge

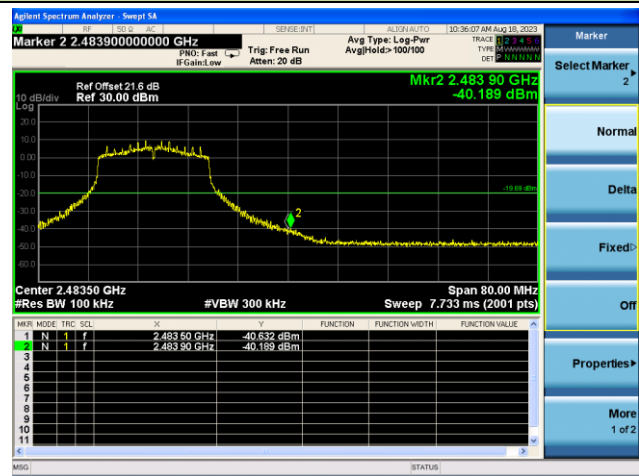


## Spurious Emission

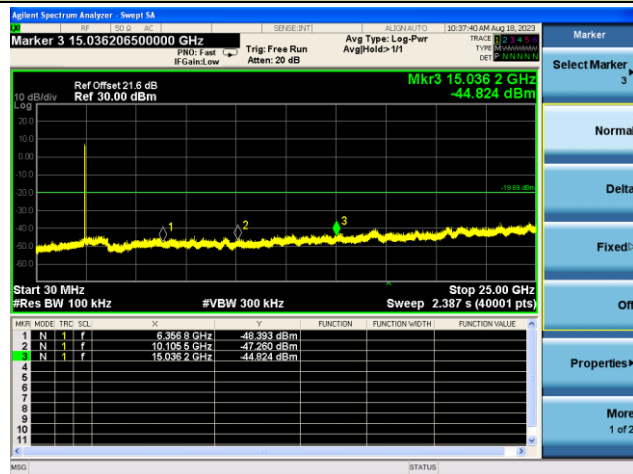


## 802.11n-HT40 Out-of-Band Emissions - Ant 2

## Channel 03 (2422MHz)


## Reference Level

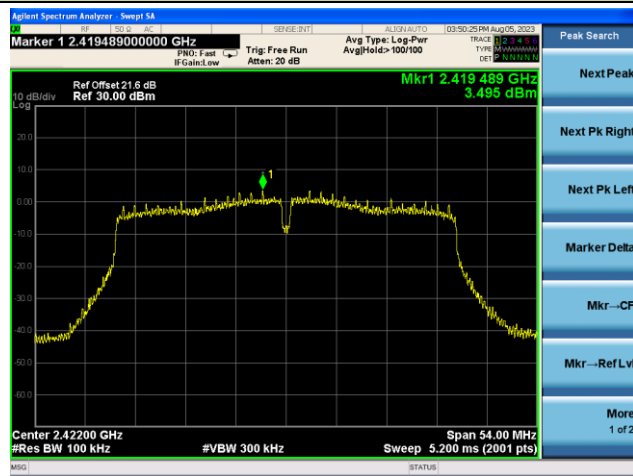

## Low Band Edge

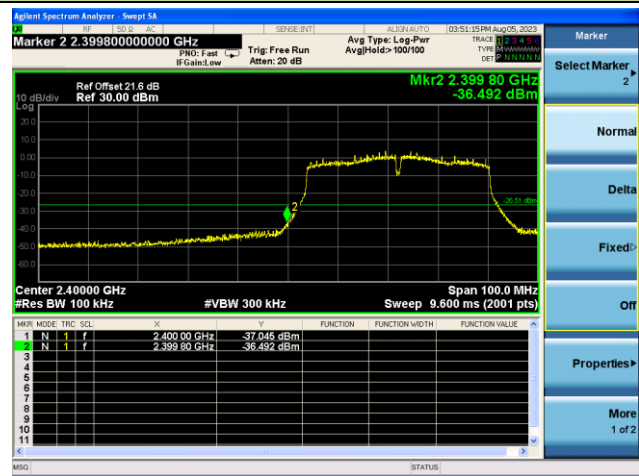


## Spurious Emission

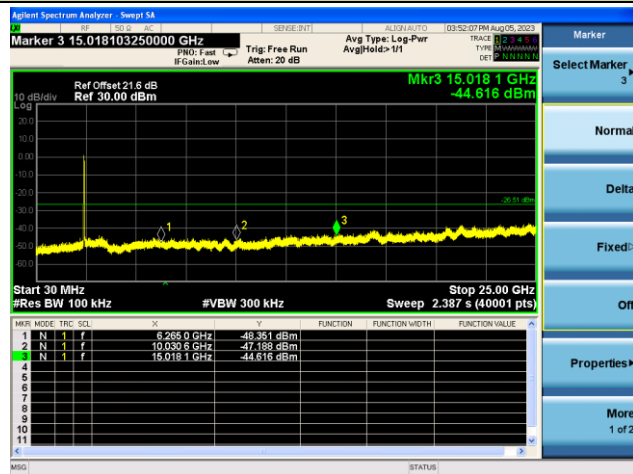


## Channel 06 (2437MHz)

## Reference Level

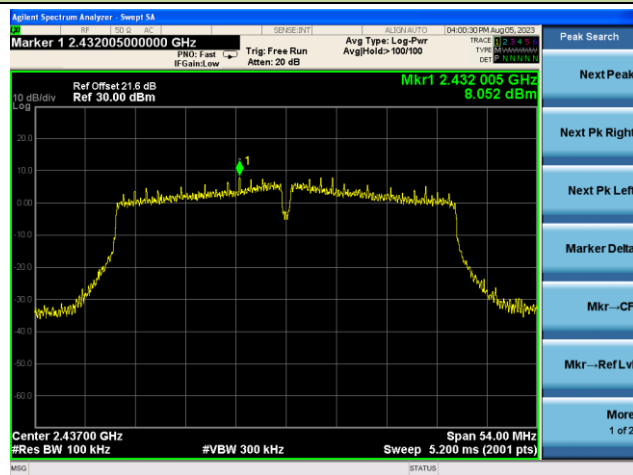

## Spurious Emission

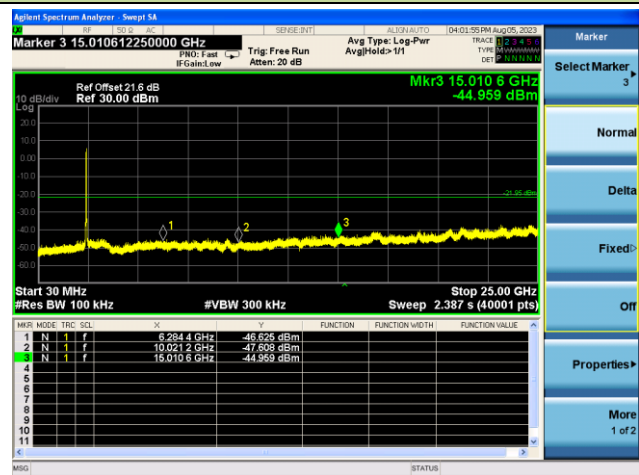


## 802.11n-HT40 Out-of-Band Emissions - Ant 2

## Channel 09 (2452MHz)


## Reference Level



## High Band Edge

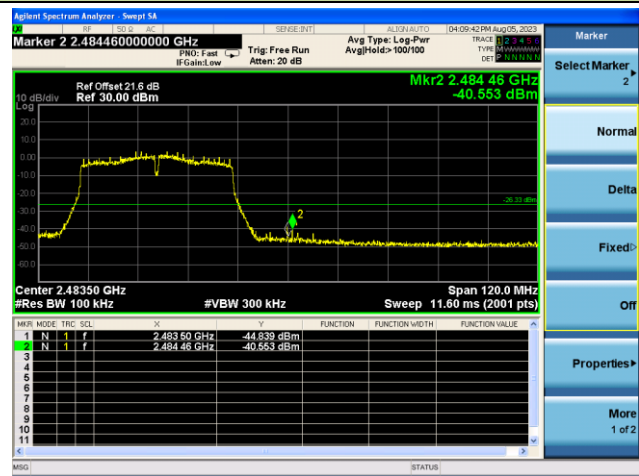


## Spurious Emission

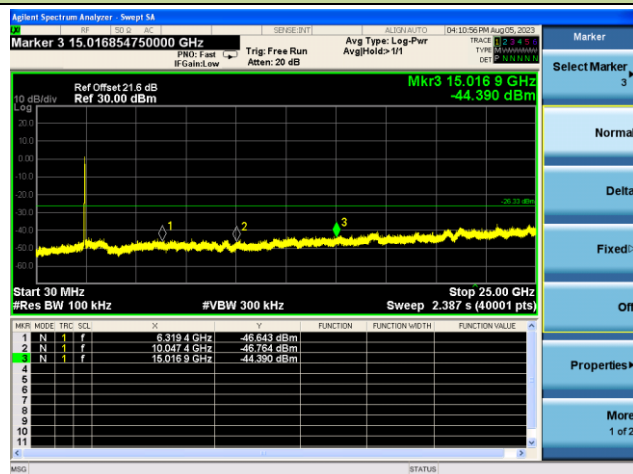


## 802.11ax-HE20 Out-of-Band Emissions - Ant 2

## Channel 01 (2412MHz)


## Reference Level

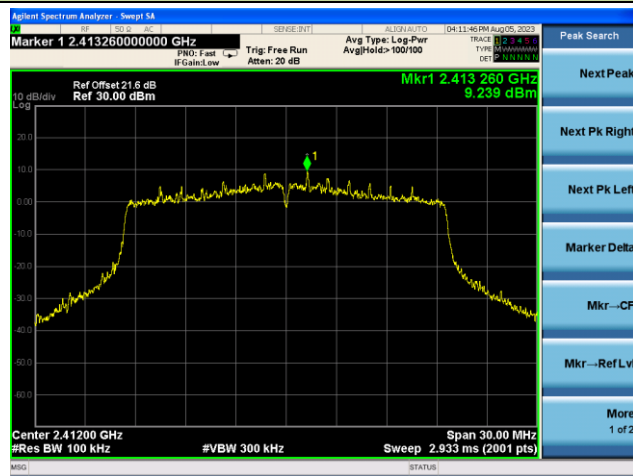

## Low Band Edge

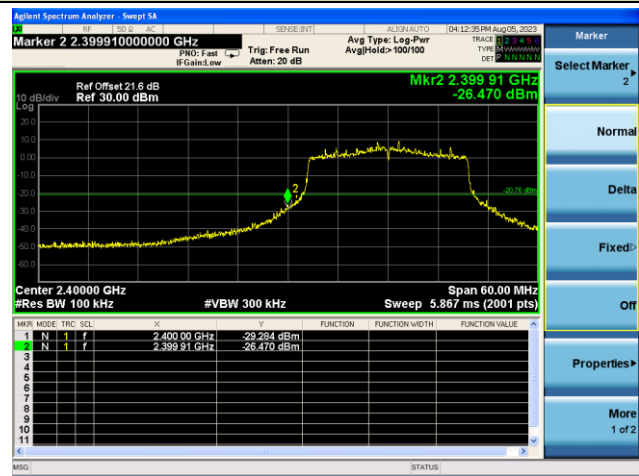


## Spurious Emission

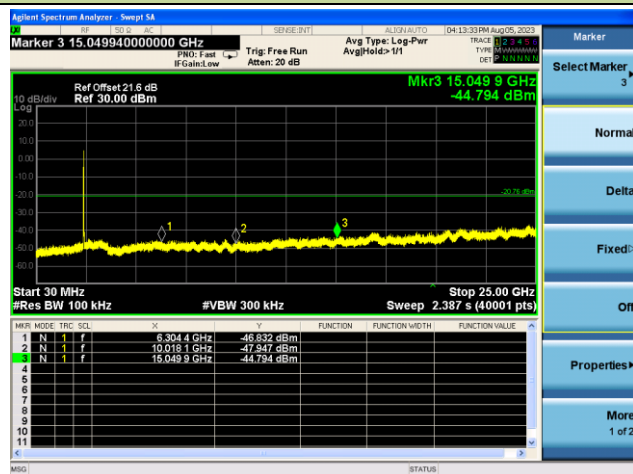


## Channel 06 (2437MHz)

## Reference Level

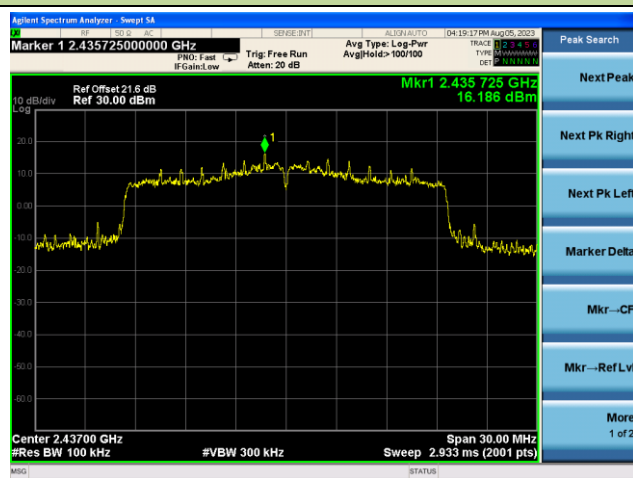


## Spurious Emission

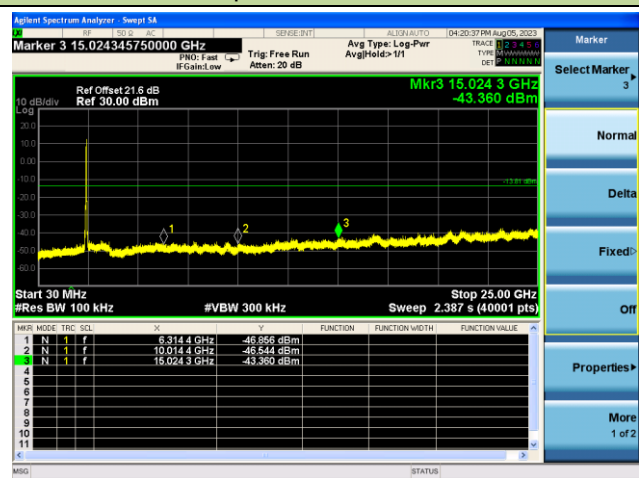


## 802.11ax-HE20 Out-of-Band Emissions - Ant 2

## Channel 11 (2462MHz)


## Reference Level

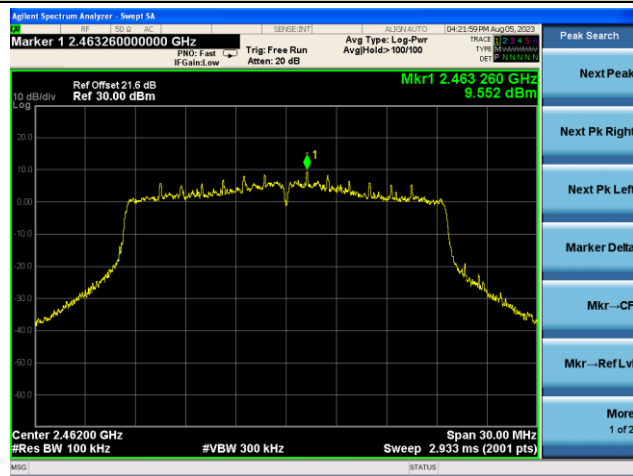

## High Band Edge

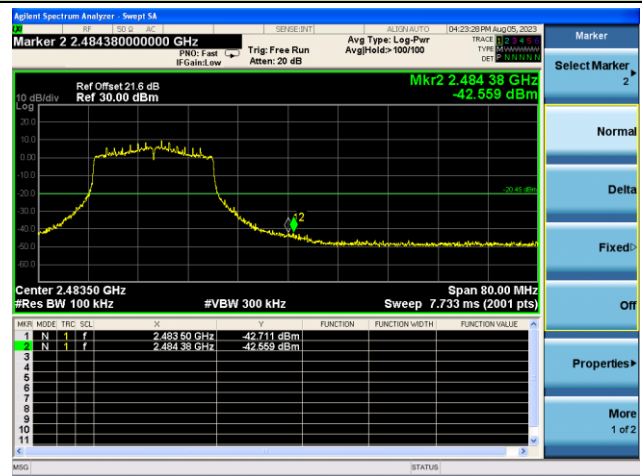


## Spurious Emission

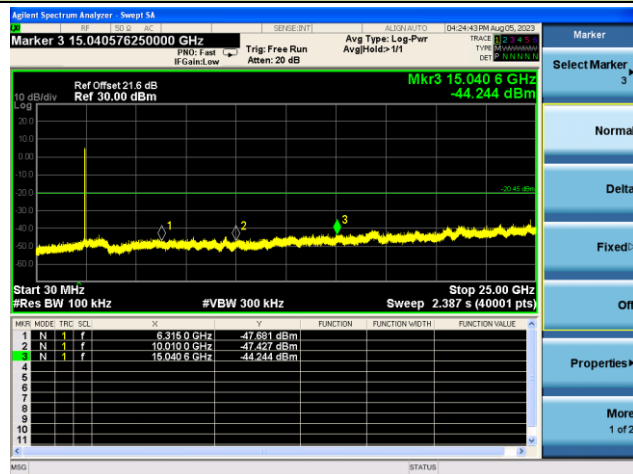


## 802.11ax-HE40 Out-of-Band Emissions - Ant 2

## Channel 03 (2422MHz)


## Reference Level

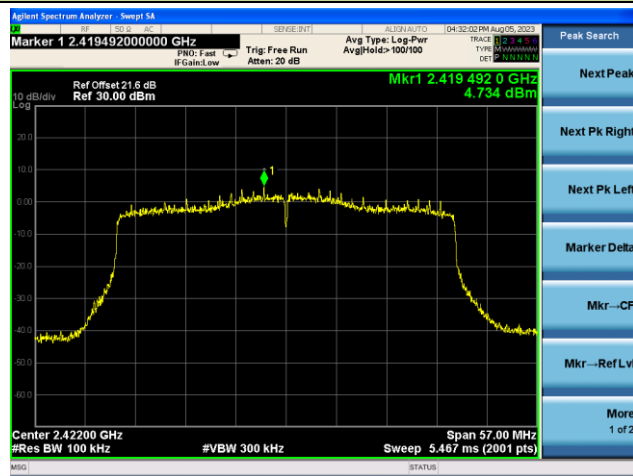

## Low Band Edge

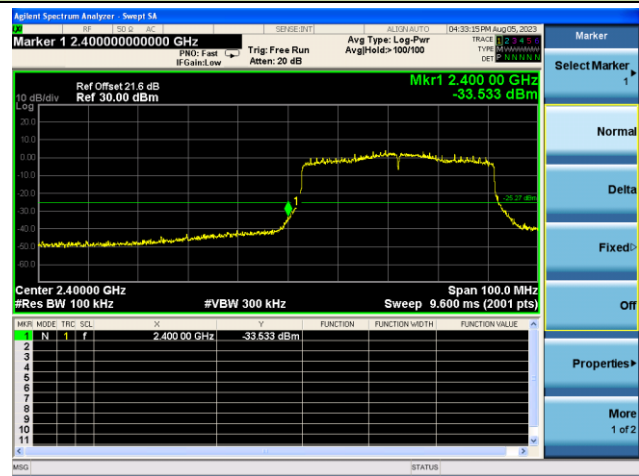


## Spurious Emission

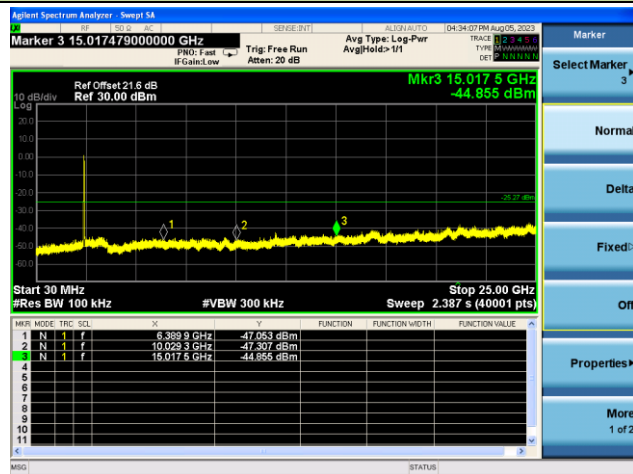


## Channel 06 (2437MHz)

## Reference Level

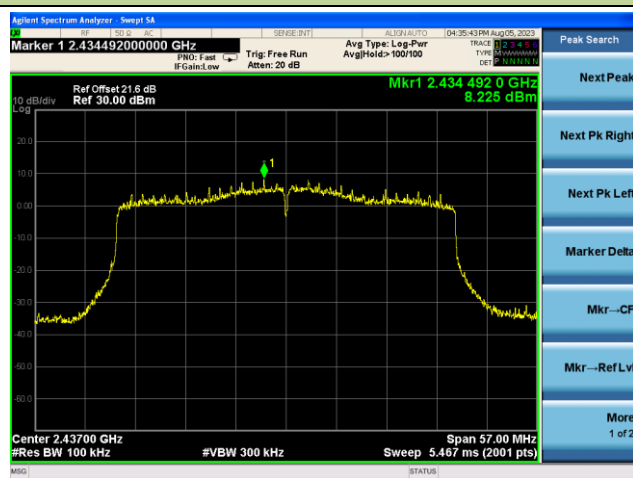


## Spurious Emission

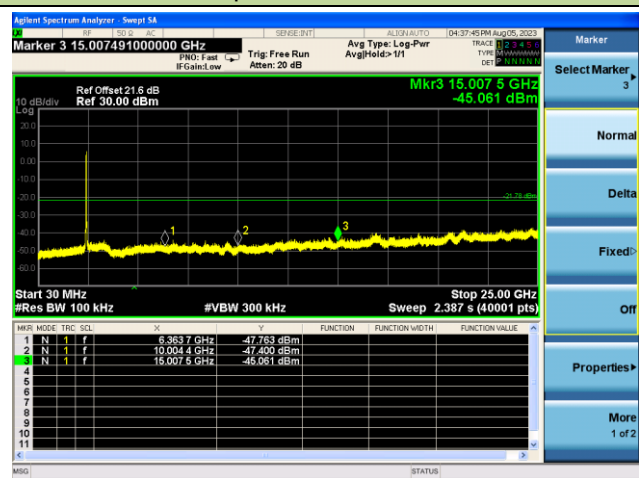


## 802.11ax-HE40 Out-of-Band Emissions - Ant 2

## Channel 09 (2452MHz)


## Reference Level

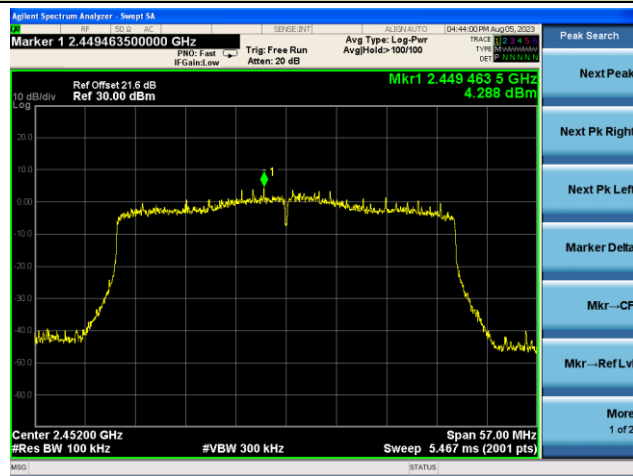

## High Band Edge

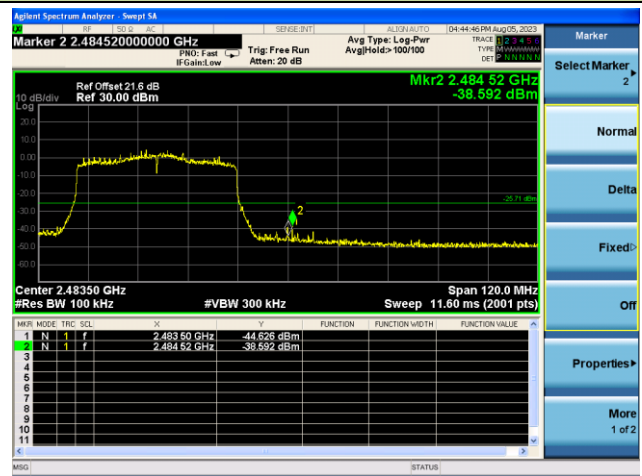

## Spurious Emission

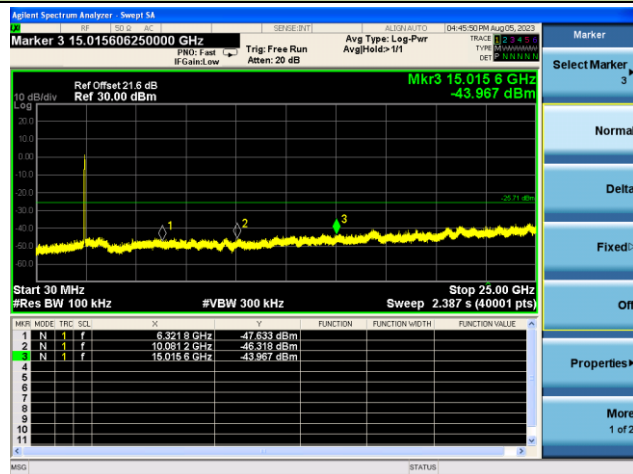

### A.6 Radiated Spurious Emission Test Result

|           |                                                                                                                                                                                   |               |           |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|
| Test Site | NS-AC1                                                                                                                                                                            | Test Engineer | Flag Yang |
| Test Date | 2023-08-22                                                                                                                                                                        | Test Mode:    | 802.11b   |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |           |

| Test Channel                                                                                                                                             | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 01                                                                                                                                                       | 7426.0          | 36.4                 | 10.4          | 46.8                   | 74.0           | -27.2       | Peak     | Horizontal   |
|                                                                                                                                                          | 9330.0          | 38.2                 | 11.9          | 50.1                   | 74.0           | -23.9       | Peak     | Horizontal   |
|                                                                                                                                                          | 11149.0         | 35.4                 | 15.4          | 50.8                   | 74.0           | -23.2       | Peak     | Horizontal   |
|                                                                                                                                                          | 7324.0          | 37.1                 | 9.5           | 46.6                   | 74.0           | -27.4       | Peak     | Vertical     |
|                                                                                                                                                          | 9389.5          | 38.1                 | 11.7          | 49.8                   | 74.0           | -24.2       | Peak     | Vertical     |
|                                                                                                                                                          | 10698.5         | 36.9                 | 14.3          | 51.2                   | 74.0           | -22.8       | Peak     | Vertical     |
| 06                                                                                                                                                       | 7460.0          | 36.1                 | 10.3          | 46.4                   | 74.0           | -27.6       | Peak     | Horizontal   |
|                                                                                                                                                          | 9491.5          | 37.9                 | 11.5          | 49.4                   | 74.0           | -24.6       | Peak     | Horizontal   |
|                                                                                                                                                          | 10962.0         | 36.6                 | 15.3          | 51.9                   | 74.0           | -22.1       | Peak     | Horizontal   |
|                                                                                                                                                          | 4876.0          | 42.5                 | 1.5           | 44.0                   | 74.0           | -30.0       | Peak     | Vertical     |
|                                                                                                                                                          | 7468.5          | 36.9                 | 10.2          | 47.1                   | 74.0           | -26.9       | Peak     | Vertical     |
|                                                                                                                                                          | 11089.5         | 35.5                 | 15.6          | 51.1                   | 74.0           | -22.9       | Peak     | Vertical     |
| 11                                                                                                                                                       | 7485.5          | 36.7                 | 10.1          | 46.8                   | 74.0           | -27.2       | Peak     | Horizontal   |
|                                                                                                                                                          | 9330.0          | 37.1                 | 11.9          | 49.0                   | 74.0           | -25.0       | Peak     | Horizontal   |
|                                                                                                                                                          | 11302.0         | 36.0                 | 15.9          | 51.9                   | 74.0           | -22.1       | Peak     | Horizontal   |
|                                                                                                                                                          | 4927.0          | 42.9                 | 1.4           | 44.3                   | 74.0           | -29.7       | Peak     | Vertical     |
|                                                                                                                                                          | 7451.5          | 36.5                 | 10.2          | 46.7                   | 74.0           | -27.3       | Peak     | Vertical     |
|                                                                                                                                                          | 11387.0         | 36.6                 | 15.2          | 51.8                   | 74.0           | -22.2       | Peak     | Vertical     |
| Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |           |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|
| Test Site | NS-AC1                                                                                                                                                                            | Test Engineer | Flag Yang |
| Test Date | 2023-08-22                                                                                                                                                                        | Test Mode:    | 802.11g   |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |           |

| Test Channel                                                                                                                                             | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 01                                                                                                                                                       | 4825.0          | 39.6                 | 1.7           | 41.3                   | 74.0           | -32.7       | Peak     | Horizontal   |
|                                                                                                                                                          | 7851.0          | 39.7                 | 9.0           | 48.7                   | 74.0           | -25.3       | Peak     | Horizontal   |
|                                                                                                                                                          | 10885.5         | 36.6                 | 14.8          | 51.4                   | 74.0           | -22.6       | Peak     | Horizontal   |
|                                                                                                                                                          | 7434.5          | 36.3                 | 10.2          | 46.5                   | 74.0           | -27.5       | Peak     | Vertical     |
|                                                                                                                                                          | 9474.5          | 38.8                 | 11.5          | 50.3                   | 74.0           | -23.7       | Peak     | Vertical     |
|                                                                                                                                                          | 11217.0         | 35.5                 | 16.0          | 51.5                   | 74.0           | -22.5       | Peak     | Vertical     |
| 06                                                                                                                                                       | 7596.0          | 37.2                 | 9.6           | 46.8                   | 74.0           | -27.2       | Peak     | Horizontal   |
|                                                                                                                                                          | 9474.5          | 38.1                 | 11.5          | 49.6                   | 74.0           | -24.4       | Peak     | Horizontal   |
|                                                                                                                                                          | 10724.0         | 36.1                 | 14.5          | 50.6                   | 74.0           | -23.4       | Peak     | Horizontal   |
|                                                                                                                                                          | 4876.0          | 40.6                 | 1.5           | 42.1                   | 74.0           | -31.9       | Peak     | Vertical     |
|                                                                                                                                                          | 9389.5          | 38.0                 | 11.7          | 49.7                   | 74.0           | -24.3       | Peak     | Vertical     |
|                                                                                                                                                          | 11268.0         | 36.0                 | 15.4          | 51.4                   | 74.0           | -22.6       | Peak     | Vertical     |
| 11                                                                                                                                                       | 4969.5          | 39.5                 | 1.8           | 41.3                   | 74.0           | -32.7       | Peak     | Horizontal   |
|                                                                                                                                                          | 9381.0          | 38.5                 | 11.6          | 50.1                   | 74.0           | -23.9       | Peak     | Horizontal   |
|                                                                                                                                                          | 11208.5         | 36.0                 | 15.8          | 51.8                   | 74.0           | -22.2       | Peak     | Horizontal   |
|                                                                                                                                                          | 7366.5          | 36.1                 | 9.9           | 46.0                   | 74.0           | -28.0       | Peak     | Vertical     |
|                                                                                                                                                          | 9474.5          | 37.7                 | 11.5          | 49.2                   | 74.0           | -24.8       | Peak     | Vertical     |
|                                                                                                                                                          | 11336.0         | 36.4                 | 15.2          | 51.6                   | 74.0           | -22.4       | Peak     | Vertical     |
| Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |              |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------|
| Test Site | NS-AC1                                                                                                                                                                            | Test Engineer | Flag Yang    |
| Test Date | 2023-08-22                                                                                                                                                                        | Test Mode:    | 802.11n-HT20 |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |              |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 01           | 7366.5          | 36.6                 | 9.9           | 46.5                   | 74.0           | -27.5       | Peak     | Horizontal   |
|              | 9474.5          | 37.7                 | 11.5          | 49.2                   | 74.0           | -24.8       | Peak     | Horizontal   |
|              | 11412.5         | 36.7                 | 15.5          | 52.2                   | 74.0           | -21.8       | Peak     | Horizontal   |
|              | 7468.5          | 36.3                 | 10.2          | 46.5                   | 74.0           | -27.5       | Peak     | Vertical     |
|              | 9423.5          | 38.2                 | 11.6          | 49.8                   | 74.0           | -24.2       | Peak     | Vertical     |
|              | 11208.5         | 34.8                 | 15.8          | 50.6                   | 74.0           | -23.4       | Peak     | Vertical     |
| 06           | 7366.5          | 36.7                 | 9.9           | 46.6                   | 74.0           | -27.4       | Peak     | Horizontal   |
|              | 9381.0          | 38.3                 | 11.6          | 49.9                   | 74.0           | -24.1       | Peak     | Horizontal   |
|              | 11242.5         | 35.4                 | 15.5          | 50.9                   | 74.0           | -23.1       | Peak     | Horizontal   |
|              | 4876.0          | 40.1                 | 1.5           | 41.6                   | 74.0           | -32.4       | Peak     | Vertical     |
|              | 7375.0          | 36.6                 | 9.9           | 46.5                   | 74.0           | -27.5       | Peak     | Vertical     |
|              | 11098.0         | 36.2                 | 15.2          | 51.4                   | 74.0           | -22.6       | Peak     | Vertical     |
| 11           | 4808.0          | 39.9                 | 1.4           | 41.3                   | 74.0           | -32.7       | Peak     | Horizontal   |
|              | 9483.0          | 37.2                 | 11.7          | 48.9                   | 74.0           | -25.1       | Peak     | Horizontal   |
|              | 11115.0         | 35.9                 | 15.2          | 51.1                   | 74.0           | -22.9       | Peak     | Horizontal   |
|              | 5122.5          | 38.8                 | 2.2           | 41.0                   | 74.0           | -33.0       | Peak     | Vertical     |
|              | 9415.0          | 38.1                 | 11.7          | 49.8                   | 74.0           | -24.2       | Peak     | Vertical     |
|              | 11140.5         | 35.4                 | 15.4          | 50.8                   | 74.0           | -23.2       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |              |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------|
| Test Site | NS-AC1                                                                                                                                                                            | Test Engineer | Flag Yang    |
| Test Date | 2023-08-22                                                                                                                                                                        | Test Mode:    | 802.11n-HT40 |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |              |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 03           | 5122.5          | 39.4                 | 2.2           | 41.6                   | 74.0           | -32.4       | Peak     | Horizontal   |
|              | 9474.5          | 37.4                 | 11.5          | 48.9                   | 74.0           | -25.1       | Peak     | Horizontal   |
|              | 10953.5         | 35.7                 | 15.2          | 50.9                   | 74.0           | -23.1       | Peak     | Horizontal   |
|              | 5097.0          | 38.5                 | 2.5           | 41.0                   | 74.0           | -33.0       | Peak     | Vertical     |
|              | 9372.5          | 37.3                 | 11.8          | 49.1                   | 74.0           | -24.9       | Peak     | Vertical     |
|              | 11208.5         | 35.9                 | 15.8          | 51.7                   | 74.0           | -22.3       | Peak     | Vertical     |
| 06           | 5114.0          | 38.8                 | 2.2           | 41.0                   | 74.0           | -33.0       | Peak     | Horizontal   |
|              | 8352.5          | 38.3                 | 9.7           | 48.0                   | 74.0           | -26.0       | Peak     | Horizontal   |
|              | 11472.0         | 36.0                 | 15.8          | 51.8                   | 74.0           | -22.2       | Peak     | Horizontal   |
|              | 4825.0          | 39.5                 | 1.7           | 41.2                   | 74.0           | -32.8       | Peak     | Vertical     |
|              | 9398.0          | 37.9                 | 11.8          | 49.7                   | 74.0           | -24.3       | Peak     | Vertical     |
|              | 11268.0         | 36.1                 | 15.4          | 51.5                   | 74.0           | -22.5       | Peak     | Vertical     |
| 09           | 4765.5          | 38.8                 | 1.8           | 40.6                   | 74.0           | -33.4       | Peak     | Horizontal   |
|              | 9406.5          | 37.2                 | 11.8          | 49.0                   | 74.0           | -25.0       | Peak     | Horizontal   |
|              | 10996.0         | 36.5                 | 14.6          | 51.1                   | 74.0           | -22.9       | Peak     | Horizontal   |
|              | 4893.0          | 39.8                 | 1.6           | 41.4                   | 74.0           | -32.6       | Peak     | Vertical     |
|              | 7426.0          | 36.2                 | 10.4          | 46.6                   | 74.0           | -27.4       | Peak     | Vertical     |
|              | 10970.5         | 35.4                 | 15.1          | 50.5                   | 74.0           | -23.5       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                   |               |               |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------|
| Test Site | NS-AC1                                                                                                                                                                            | Test Engineer | Flag Yang     |
| Test Date | 2023-08-22                                                                                                                                                                        | Test Mode:    | 802.11ax-HE20 |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |               |

| Test Channel                                                                                                                                             | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 01                                                                                                                                                       | 5131.0          | 39.4                 | 2.2           | 41.6                   | 74.0           | -32.4       | Peak     | Horizontal   |
|                                                                                                                                                          | 7375.0          | 36.4                 | 9.9           | 46.3                   | 74.0           | -27.7       | Peak     | Horizontal   |
|                                                                                                                                                          | 9398.0          | 38.9                 | 11.8          | 50.7                   | 74.0           | -23.3       | Peak     | Horizontal   |
|                                                                                                                                                          | 5012.0          | 39.2                 | 2.1           | 41.3                   | 74.0           | -32.7       | Peak     | Vertical     |
|                                                                                                                                                          | 9372.5          | 37.9                 | 11.8          | 49.7                   | 74.0           | -24.3       | Peak     | Vertical     |
|                                                                                                                                                          | 11174.5         | 35.6                 | 15.2          | 50.8                   | 74.0           | -23.2       | Peak     | Vertical     |
| 06                                                                                                                                                       | 4867.5          | 38.9                 | 1.5           | 40.4                   | 74.0           | -33.6       | Peak     | Horizontal   |
|                                                                                                                                                          | 8080.5          | 38.1                 | 9.3           | 47.4                   | 74.0           | -26.6       | Peak     | Horizontal   |
|                                                                                                                                                          | 10809.0         | 36.0                 | 14.9          | 50.9                   | 74.0           | -23.1       | Peak     | Horizontal   |
|                                                                                                                                                          | 4876.0          | 41.1                 | 1.5           | 42.6                   | 74.0           | -31.4       | Peak     | Vertical     |
|                                                                                                                                                          | 7426.0          | 36.7                 | 10.4          | 47.1                   | 74.0           | -26.9       | Peak     | Vertical     |
|                                                                                                                                                          | 11276.5         | 35.9                 | 15.5          | 51.4                   | 74.0           | -22.6       | Peak     | Vertical     |
| 11                                                                                                                                                       | 5114.0          | 38.9                 | 2.2           | 41.1                   | 74.0           | -32.9       | Peak     | Horizontal   |
|                                                                                                                                                          | 9415.0          | 38.4                 | 11.7          | 50.1                   | 74.0           | -23.9       | Peak     | Horizontal   |
|                                                                                                                                                          | 10945.0         | 36.2                 | 15.0          | 51.2                   | 74.0           | -22.8       | Peak     | Horizontal   |
|                                                                                                                                                          | 5088.5          | 38.8                 | 2.3           | 41.1                   | 74.0           | -32.9       | Peak     | Vertical     |
|                                                                                                                                                          | 7332.5          | 36.8                 | 9.8           | 46.6                   | 74.0           | -27.4       | Peak     | Vertical     |
|                                                                                                                                                          | 10741.0         | 35.8                 | 14.6          | 50.4                   | 74.0           | -23.6       | Peak     | Vertical     |
| Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

|           |                                                                                                                                                                                   |               |               |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------|
| Test Site | NS-AC1                                                                                                                                                                            | Test Engineer | Flag Yang     |
| Test Date | 2023-08-22                                                                                                                                                                        | Test Mode:    | 802.11ax-HE40 |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |               |               |


| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 03           | 4893.0          | 39.8                 | 1.6           | 41.4                   | 74.0           | -32.6       | Peak     | Horizontal   |
|              | 9474.5          | 38.3                 | 11.5          | 49.8                   | 74.0           | -24.2       | Peak     | Horizontal   |
|              | 11208.5         | 35.4                 | 15.8          | 51.2                   | 74.0           | -22.8       | Peak     | Horizontal   |
|              | 4621.0          | 38.7                 | 1.8           | 40.5                   | 74.0           | -33.5       | Peak     | Vertical     |
|              | 7383.5          | 37.4                 | 9.9           | 47.3                   | 74.0           | -26.7       | Peak     | Vertical     |
|              | 10970.5         | 36.2                 | 15.1          | 51.3                   | 74.0           | -22.7       | Peak     | Vertical     |
| 06           | 5394.5          | 39.0                 | 1.8           | 40.8                   | 74.0           | -33.2       | Peak     | Horizontal   |
|              | 9449.0          | 37.9                 | 11.4          | 49.3                   | 74.0           | -24.7       | Peak     | Horizontal   |
|              | 11293.5         | 35.2                 | 15.7          | 50.9                   | 74.0           | -23.1       | Peak     | Horizontal   |
|              | 4561.5          | 39.5                 | 1.1           | 40.6                   | 74.0           | -33.4       | Peak     | Vertical     |
|              | 7468.5          | 36.7                 | 10.2          | 46.9                   | 74.0           | -27.1       | Peak     | Vertical     |
|              | 11421.0         | 35.3                 | 15.7          | 51.0                   | 74.0           | -23.0       | Peak     | Vertical     |
| 09           | 5046.0          | 38.5                 | 2.0           | 40.5                   | 74.0           | -33.5       | Peak     | Horizontal   |
|              | 7460.0          | 36.2                 | 10.3          | 46.5                   | 74.0           | -27.5       | Peak     | Horizontal   |
|              | 9483.0          | 38.4                 | 11.7          | 50.1                   | 74.0           | -23.9       | Peak     | Horizontal   |
|              | 4714.5          | 37.8                 | 1.7           | 39.5                   | 74.0           | -34.5       | Peak     | Vertical     |
|              | 7426.0          | 36.2                 | 10.4          | 46.6                   | 74.0           | -27.4       | Peak     | Vertical     |
|              | 11259.5         | 35.4                 | 15.5          | 50.9                   | 74.0           | -23.1       | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The Result of Radiated Emission below 1GHz:

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-08-08 |
| Limit: FCC_Part15.209_RSE(3m)                 | Engineer: Flag Yang   |
| Probe: NS-AC1_VULB9162                        | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2437MHz     |                       |

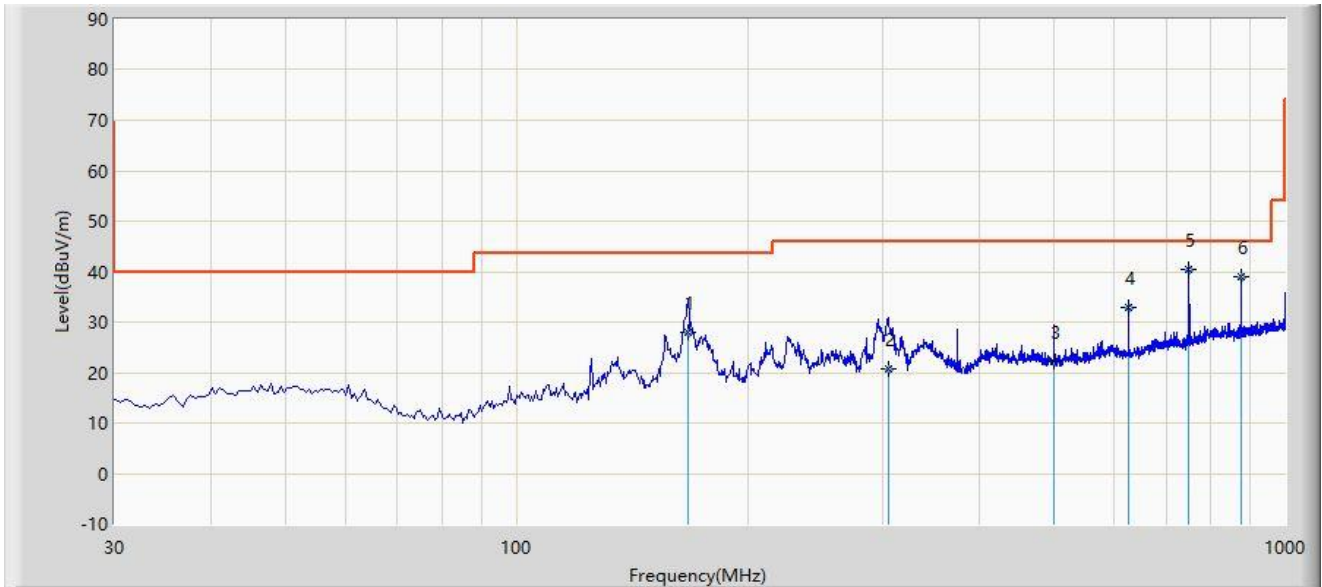

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 167.255         | 28.009                 | 14.400               | -15.491     | 43.500         | 13.609        | QP   |
| 2  |      | 305.055         | 20.653                 | 2.100                | -25.347     | 46.000         | 18.553        | QP   |
| 3  |      | 499.965         | 22.273                 | -0.600               | -23.727     | 46.000         | 22.873        | QP   |
| 4  |      | 624.981         | 32.967                 | 8.400                | -13.033     | 46.000         | 24.567        | QP   |
| 5  | *    | 749.966         | 40.420                 | 13.700               | -5.580      | 46.000         | 26.720        | QP   |
| 6  |      | 874.974         | 38.912                 | 10.900               | -7.088      | 46.000         | 28.011        | QP   |

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-08-08 |
| Limit: FCC_Part15.209_RSE(3m)                 | Engineer: Flag Yang   |
| Probe: NS-AC1_VULB9162                        | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2437MHz     |                       |

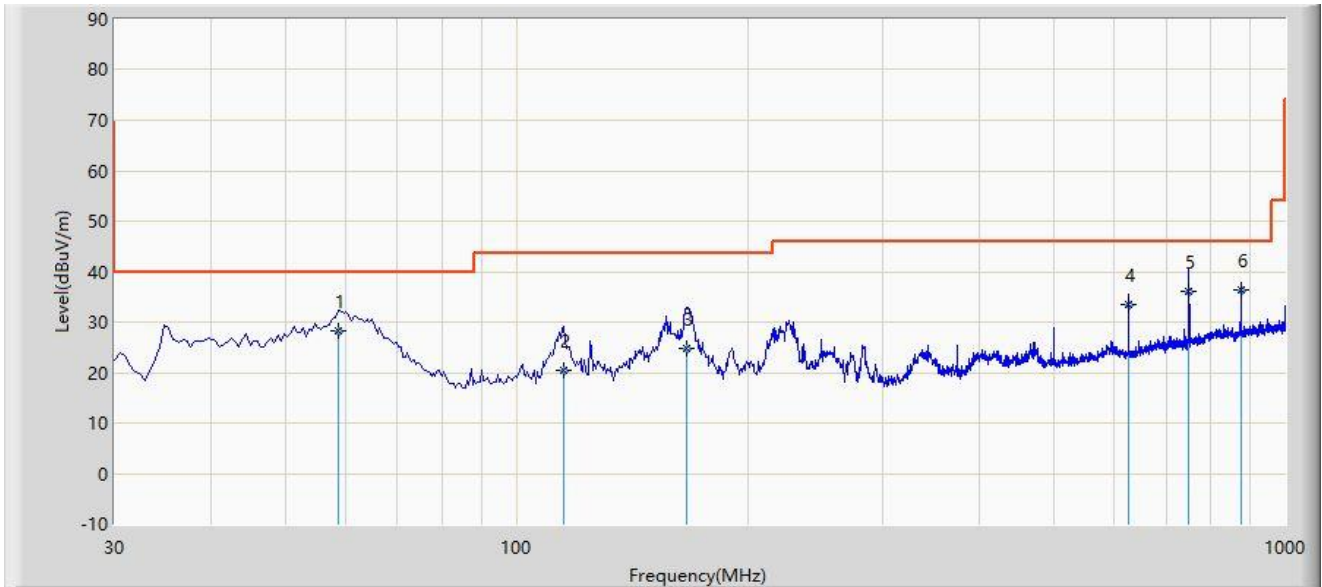

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 58.615          | 28.178                 | 10.600               | -11.822     | 40.000         | 17.578        | QP   |
| 2  |      | 115.360         | 20.470                 | 5.300                | -23.030     | 43.500         | 15.170        | QP   |
| 3  |      | 166.285         | 24.851                 | 11.300               | -18.649     | 43.500         | 13.550        | QP   |
| 4  |      | 624.960         | 33.467                 | 8.900                | -12.533     | 46.000         | 24.567        | QP   |
| 5  |      | 749.961         | 36.120                 | 9.400                | -9.880      | 46.000         | 26.720        | QP   |
| 6  | *    | 874.990         | 36.312                 | 8.300                | -9.688      | 46.000         | 28.013        | QP   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

### A.7 Radiated Restricted Band Edge Test Result

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2412MHz     |                       |

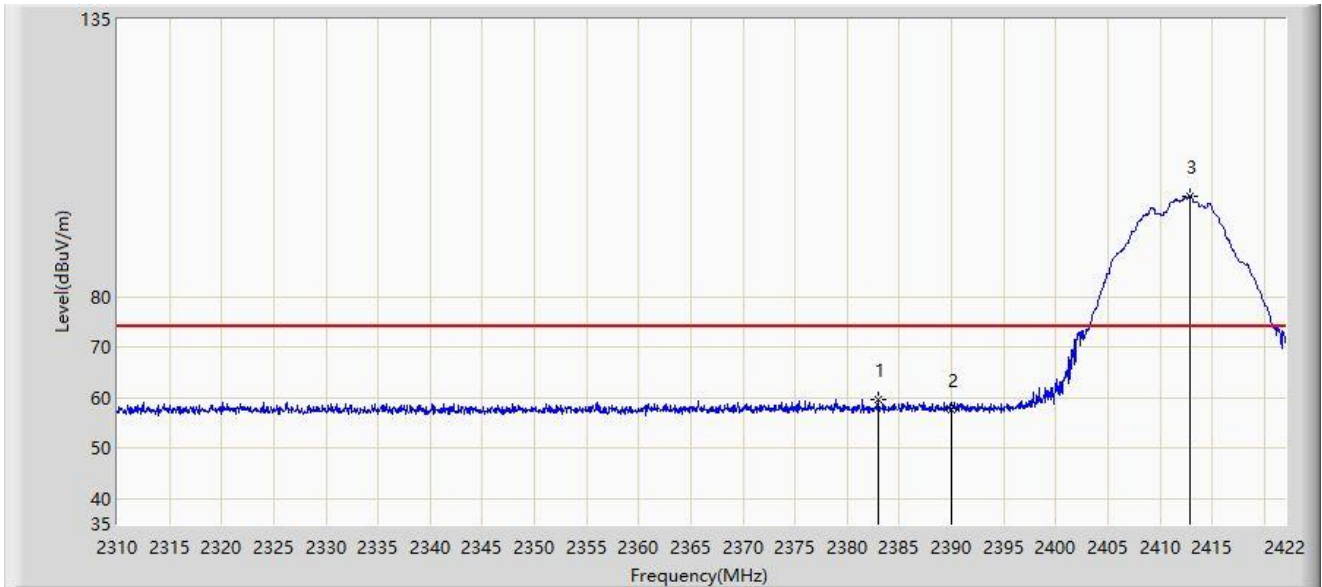


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2382.968        | 59.625                 | 28.713               | -14.375     | 74.000         | 30.912        | PK   |
| 2  |      | 2390.000        | 57.666                 | 26.815               | -16.334     | 74.000         | 30.850        | PK   |
| 3  |      | 2412.816        | 100.014                | 69.163               | N/A         | N/A            | 30.851        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2412MHz     |                       |

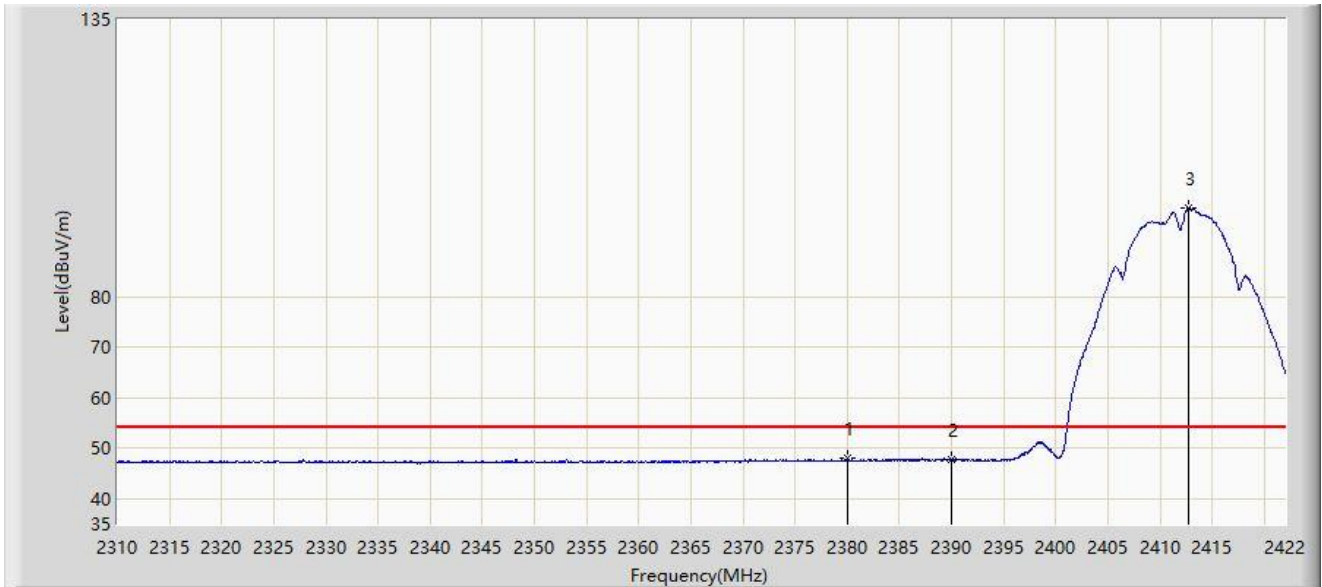


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2380.000        | 48.018                 | 17.080               | -5.982      | 54.000         | 30.938        | AV   |
| 2  |      | 2390.000        | 47.741                 | 16.890               | -6.259      | 54.000         | 30.850        | AV   |
| 3  |      | 2412.704        | 97.665                 | 66.813               | N/A         | N/A            | 30.852        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2412MHz     |                       |

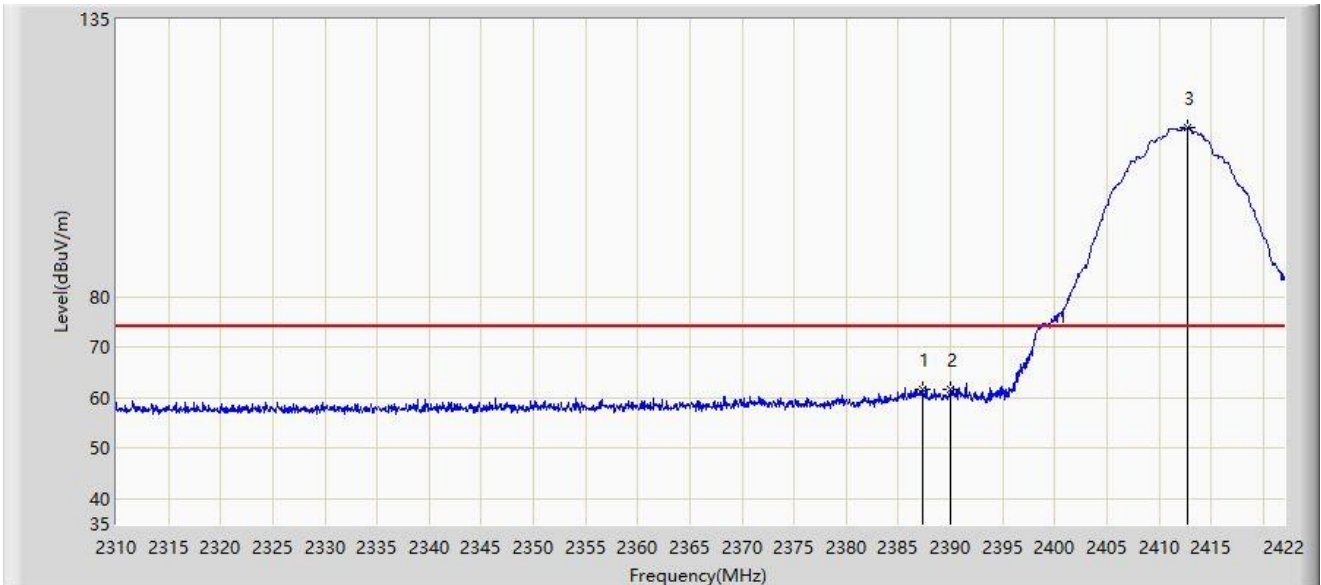


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2387.280        | 61.703                 | 30.828               | -12.297     | 74.000         | 30.874        | PK   |
| 2  |      | 2390.000        | 61.553                 | 30.702               | -12.447     | 74.000         | 30.850        | PK   |
| 3  |      | 2412.760        | 113.570                | 82.719               | N/A         | N/A            | 30.851        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2412MHz     |                       |

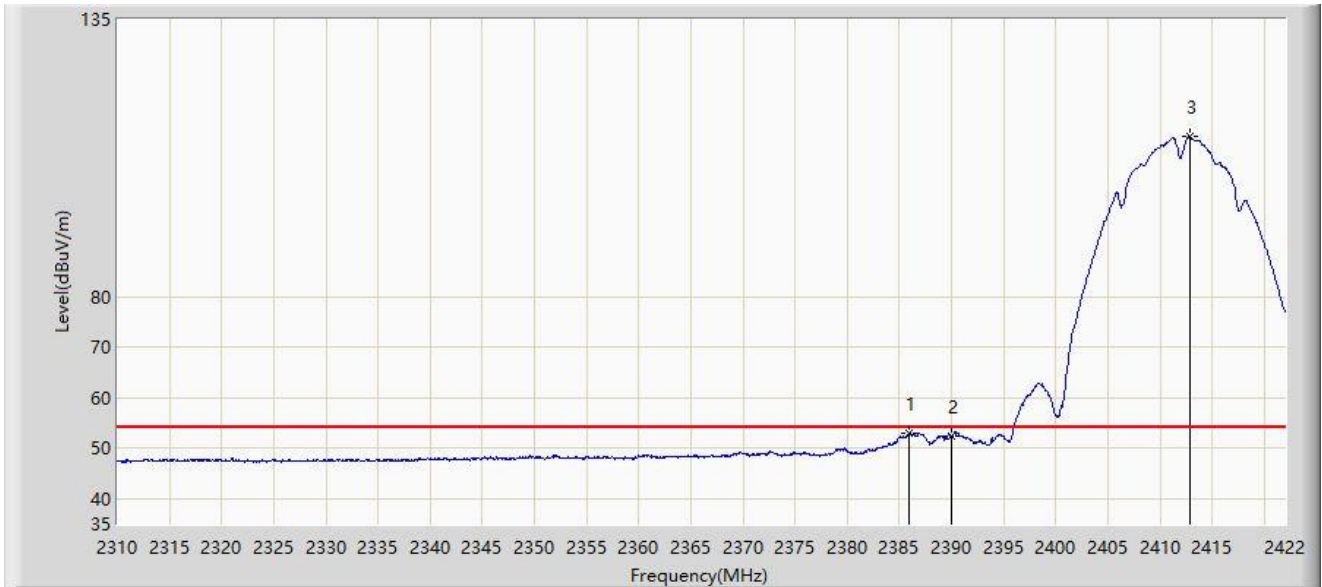


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2385.936        | 52.955                 | 22.069               | -1.045      | 54.000         | 30.886        | AV   |
| 2  |      | 2390.000        | 52.483                 | 21.632               | -1.517      | 54.000         | 30.850        | AV   |
| 3  |      | 2412.872        | 111.892                | 81.041               | N/A         | N/A            | 30.851        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2417MHz     |                       |

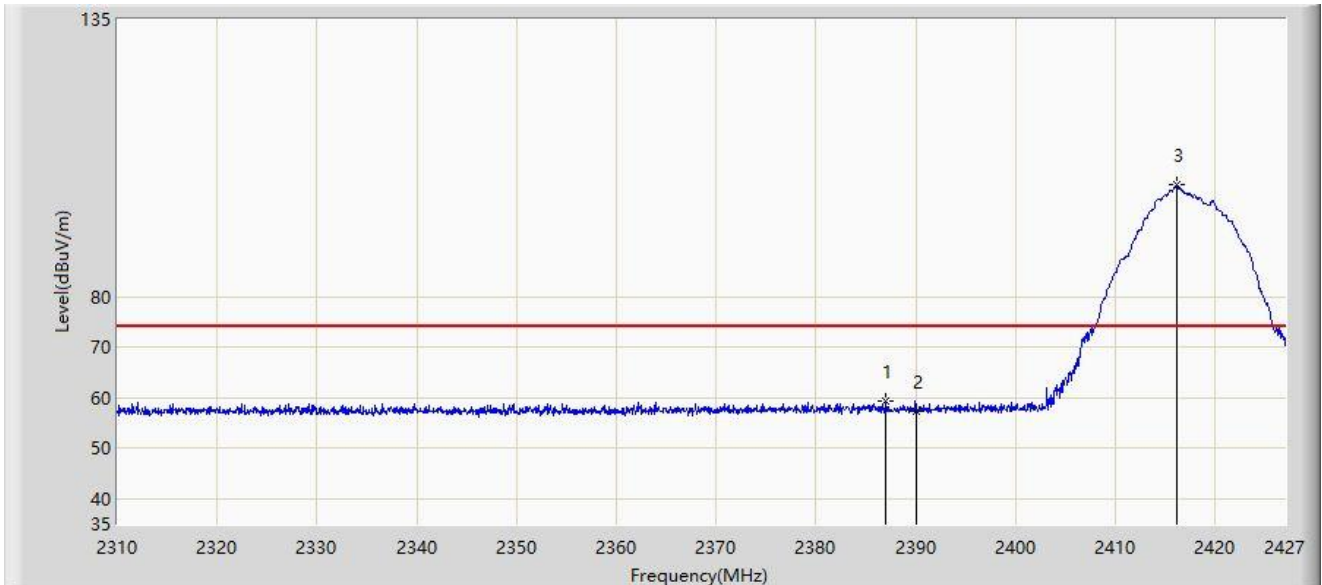


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2387.044        | 59.395                 | 28.518               | -14.605     | 74.000         | 30.877        | PK   |
| 2  |      | 2390.000        | 57.361                 | 26.510               | -16.639     | 74.000         | 30.850        | PK   |
| 3  |      | 2416.119        | 102.104                | 71.276               | N/A         | N/A            | 30.827        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2417MHz     |                       |

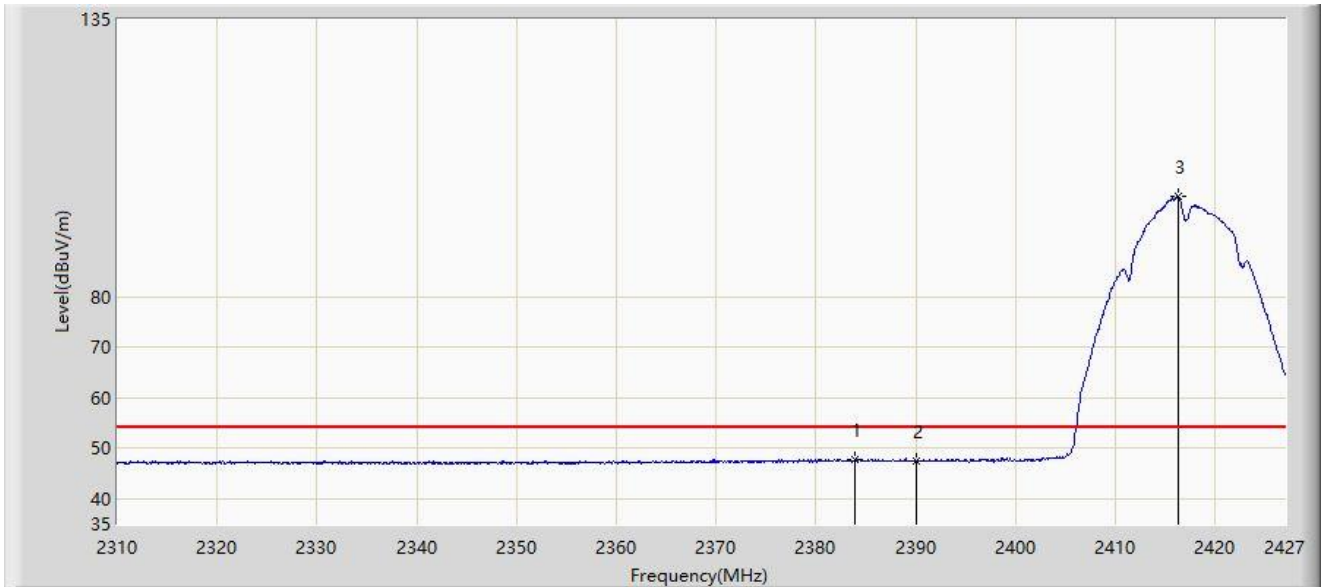


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2383.827        | 47.861                 | 16.956               | -6.139      | 54.000         | 30.905        | AV   |
| 2  |      | 2390.000        | 47.497                 | 16.646               | -6.503      | 54.000         | 30.850        | AV   |
| 3  |      | 2416.353        | 99.931                 | 69.105               | N/A         | N/A            | 30.826        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2417MHz     |                       |

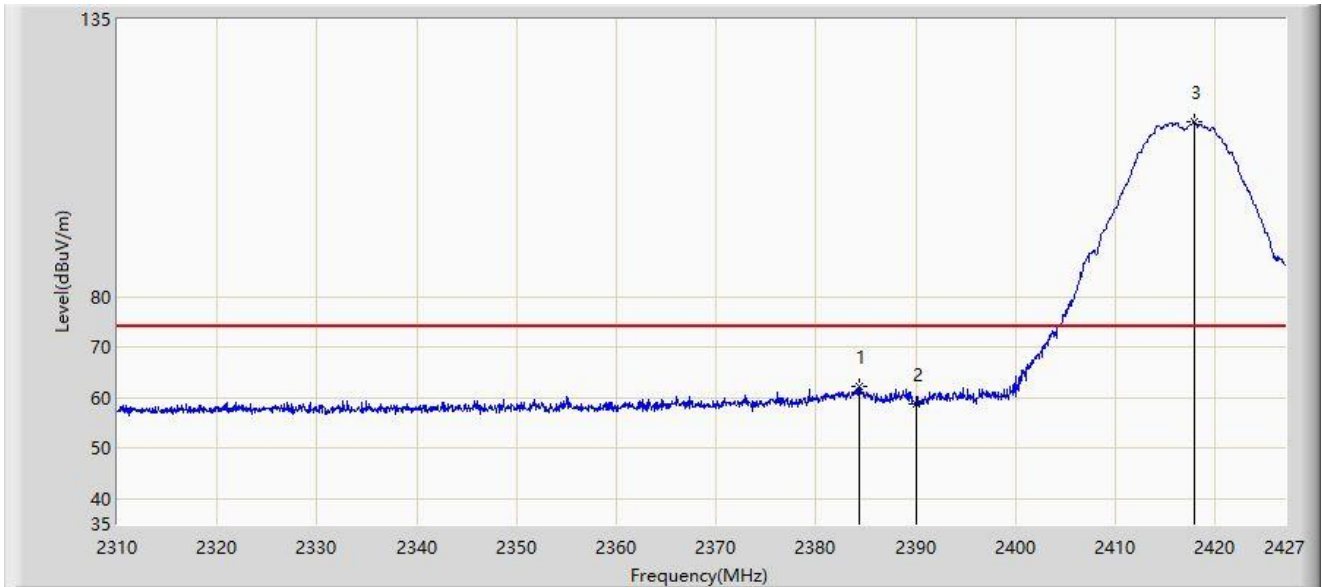


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2384.295        | 62.142                 | 31.242               | -11.858     | 74.000         | 30.901        | PK   |
| 2  |      | 2390.000        | 58.759                 | 27.908               | -15.241     | 74.000         | 30.850        | PK   |
| 3  |      | 2417.874        | 114.694                | 83.879               | N/A         | N/A            | 30.815        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2417MHz     |                       |

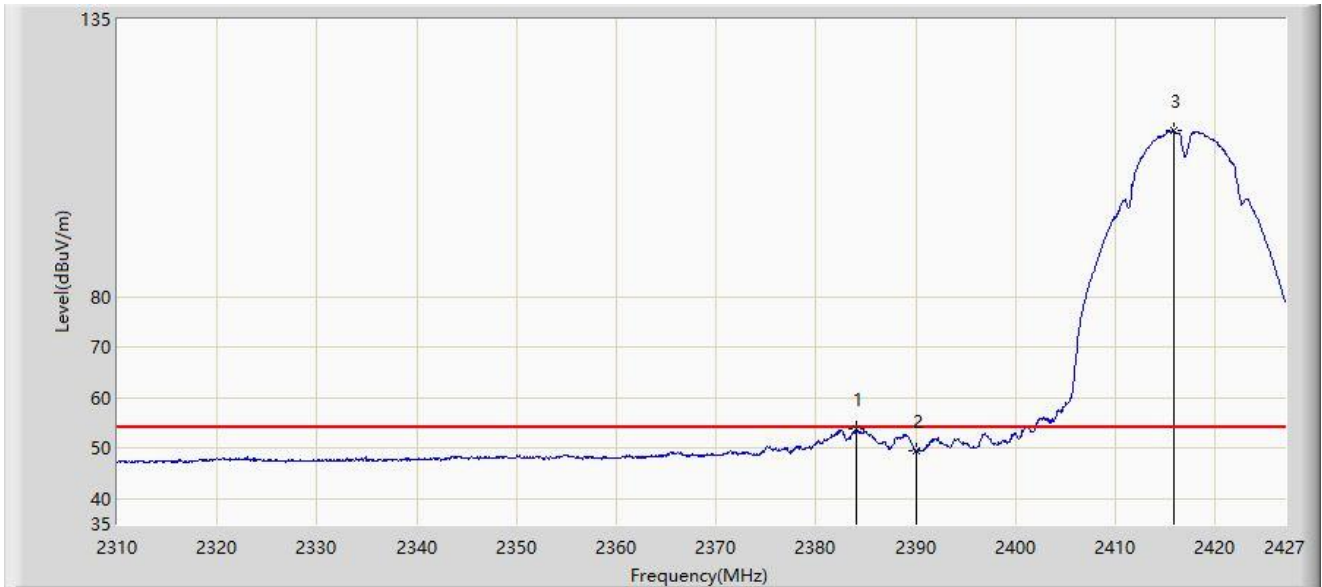


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2384.002        | 53.717                 | 22.814               | -0.283      | 54.000         | 30.903        | AV   |
| 2  |      | 2390.000        | 49.488                 | 18.637               | -4.512      | 54.000         | 30.850        | AV   |
| 3  |      | 2415.826        | 113.072                | 82.242               | N/A         | N/A            | 30.830        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2437MHz     |                       |

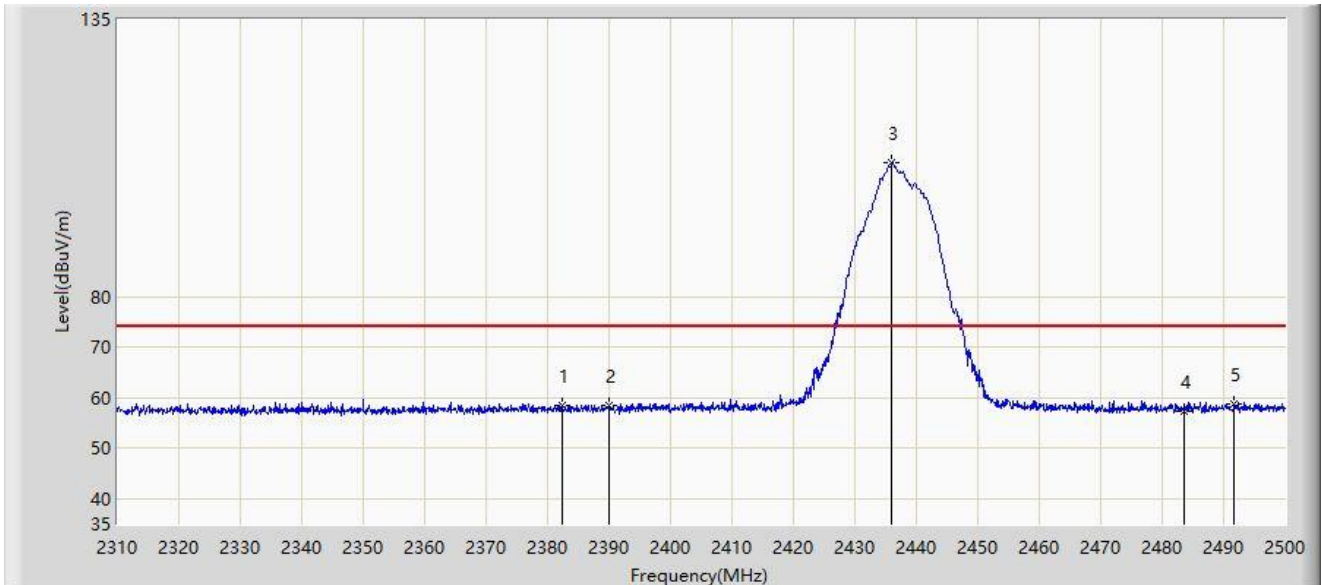


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2382.390        | 58.616                 | 27.699               | -15.384     | 74.000         | 30.917        | PK   |
| 2  |      | 2390.000        | 58.410                 | 27.559               | -15.590     | 74.000         | 30.850        | PK   |
| 3  |      | 2435.970        | 106.470                | 75.675               | N/A         | N/A            | 30.794        | PK   |
| 4  |      | 2483.500        | 57.422                 | 26.660               | -16.578     | 74.000         | 30.761        | PK   |
| 5  | *    | 2491.735        | 58.897                 | 28.132               | -15.103     | 74.000         | 30.766        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2437MHz     |                       |

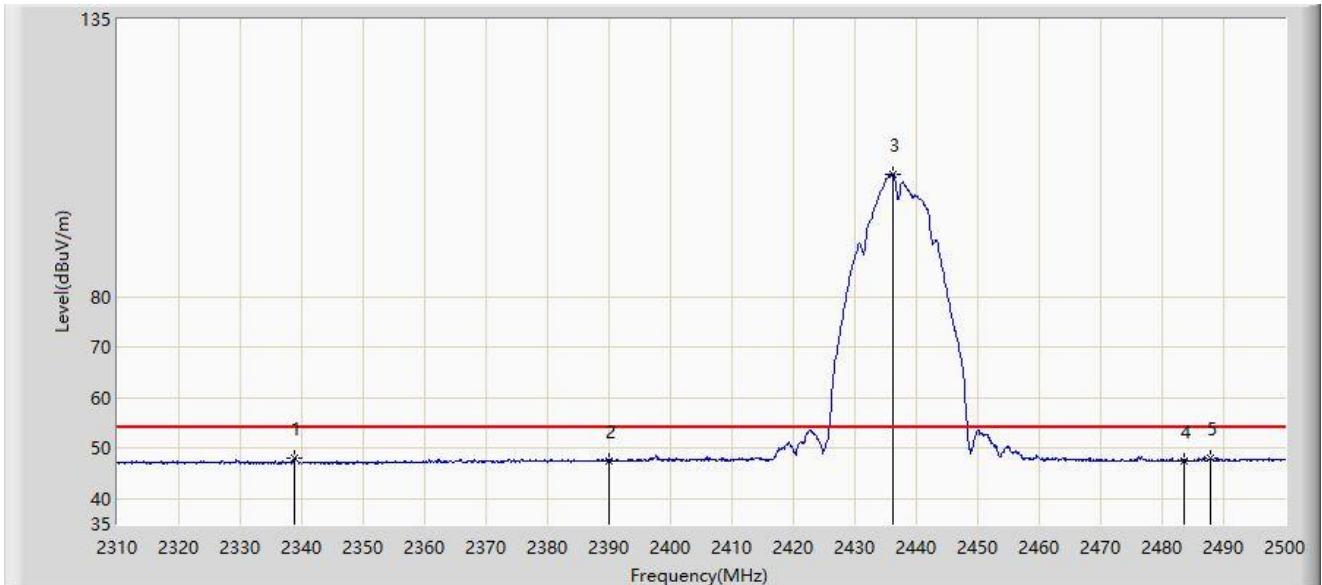


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2338.785        | 47.902                 | 16.944               | -6.098      | 54.000         | 30.958        | AV   |
| 2  |      | 2390.000        | 47.572                 | 16.721               | -6.428      | 54.000         | 30.850        | AV   |
| 3  |      | 2436.255        | 104.255                | 73.459               | N/A         | N/A            | 30.797        | AV   |
| 4  |      | 2483.500        | 47.578                 | 16.816               | -6.422      | 54.000         | 30.761        | AV   |
| 5  | *    | 2487.840        | 47.915                 | 17.151               | -6.085      | 54.000         | 30.764        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2437MHz     |                       |

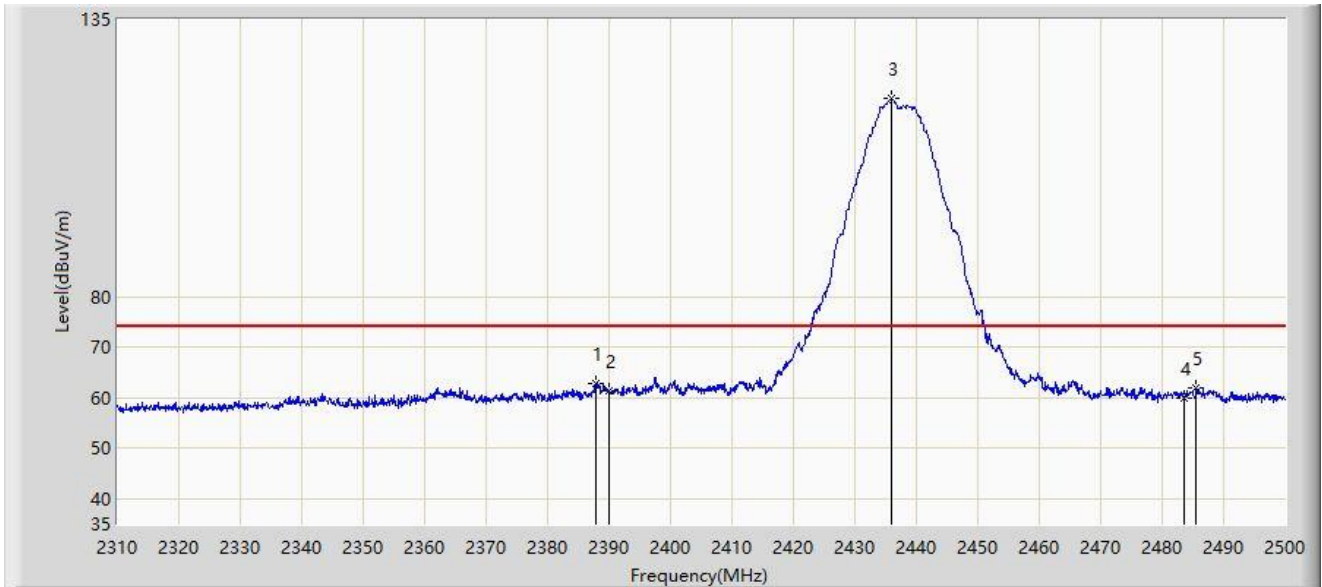


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2387.805        | 62.685                 | 31.815               | -11.315     | 74.000         | 30.870        | PK   |
| 2  |      | 2390.000        | 61.405                 | 30.554               | -12.595     | 74.000         | 30.850        | PK   |
| 3  |      | 2436.065        | 119.203                | 88.408               | N/A         | N/A            | 30.795        | PK   |
| 4  |      | 2483.500        | 60.010                 | 29.248               | -13.990     | 74.000         | 30.761        | PK   |
| 5  |      | 2485.560        | 61.957                 | 31.194               | -12.043     | 74.000         | 30.763        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2437MHz     |                       |

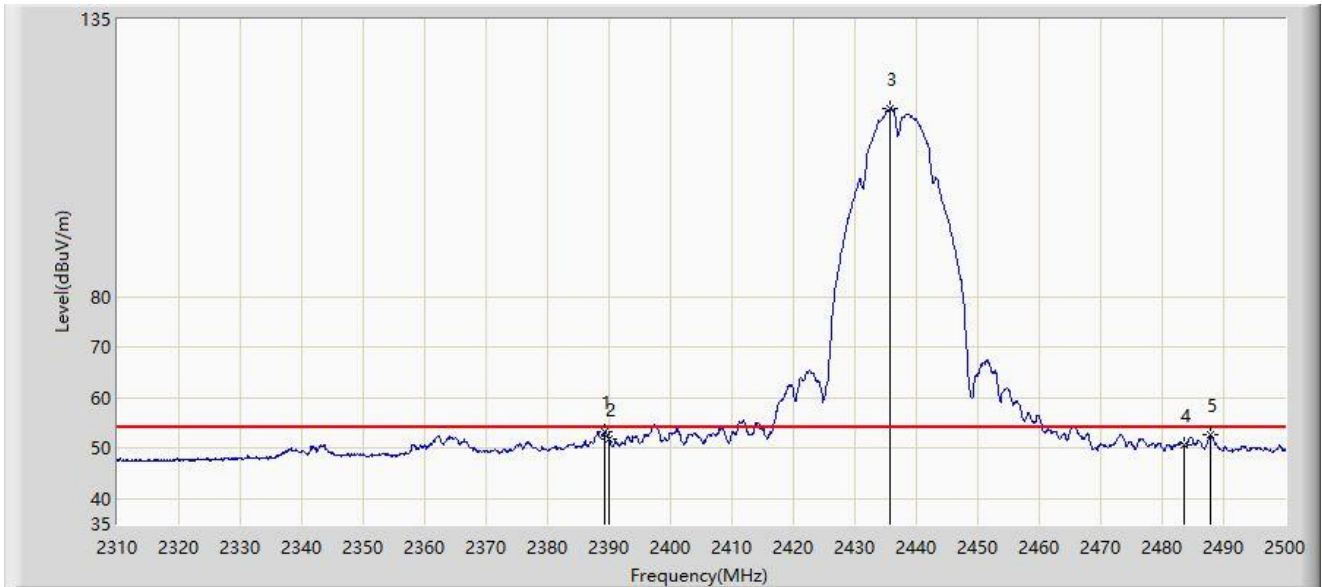


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.325        | 53.174                 | 22.317               | -0.826      | 54.000         | 30.857        | AV   |
| 2  |      | 2390.000        | 51.821                 | 20.970               | -2.179      | 54.000         | 30.850        | AV   |
| 3  |      | 2435.780        | 117.250                | 86.457               | N/A         | N/A            | 30.794        | AV   |
| 4  |      | 2483.500        | 50.611                 | 19.849               | -3.389      | 54.000         | 30.761        | AV   |
| 5  |      | 2487.745        | 52.720                 | 21.956               | -1.280      | 54.000         | 30.764        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2462MHz     |                       |

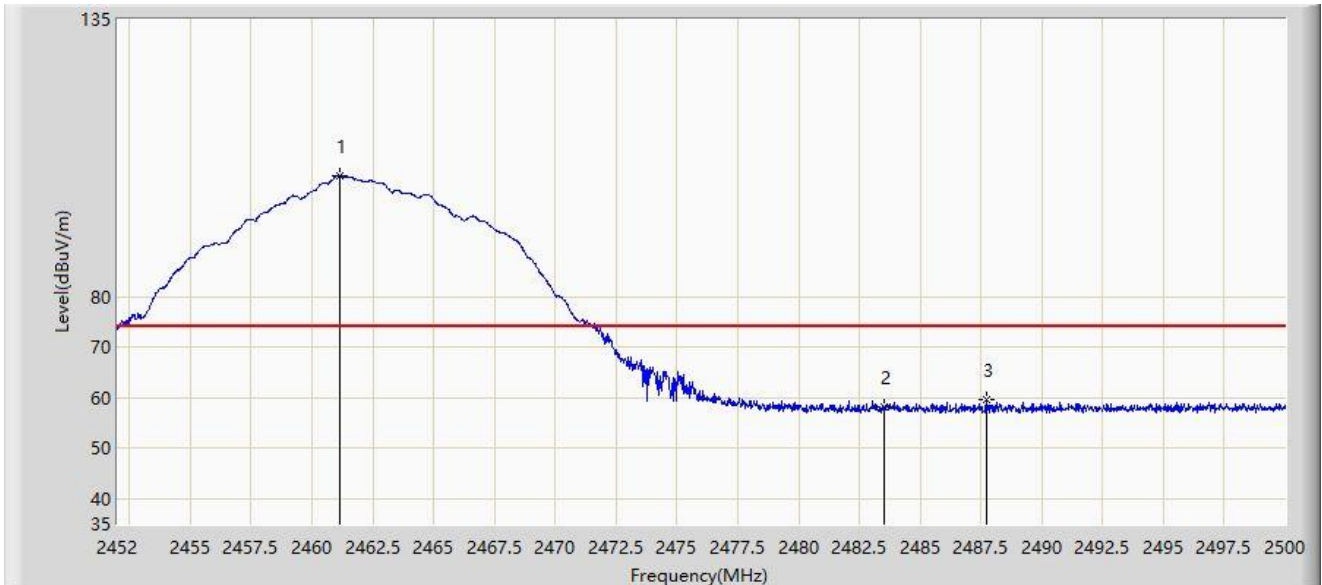


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2461.120        | 104.073                | 73.194               | N/A         | N/A            | 30.878        | PK   |
| 2  |      | 2483.500        | 58.078                 | 27.316               | -15.922     | 74.000         | 30.761        | PK   |
| 3  | *    | 2487.712        | 59.506                 | 28.742               | -14.494     | 74.000         | 30.764        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2462MHz     |                       |

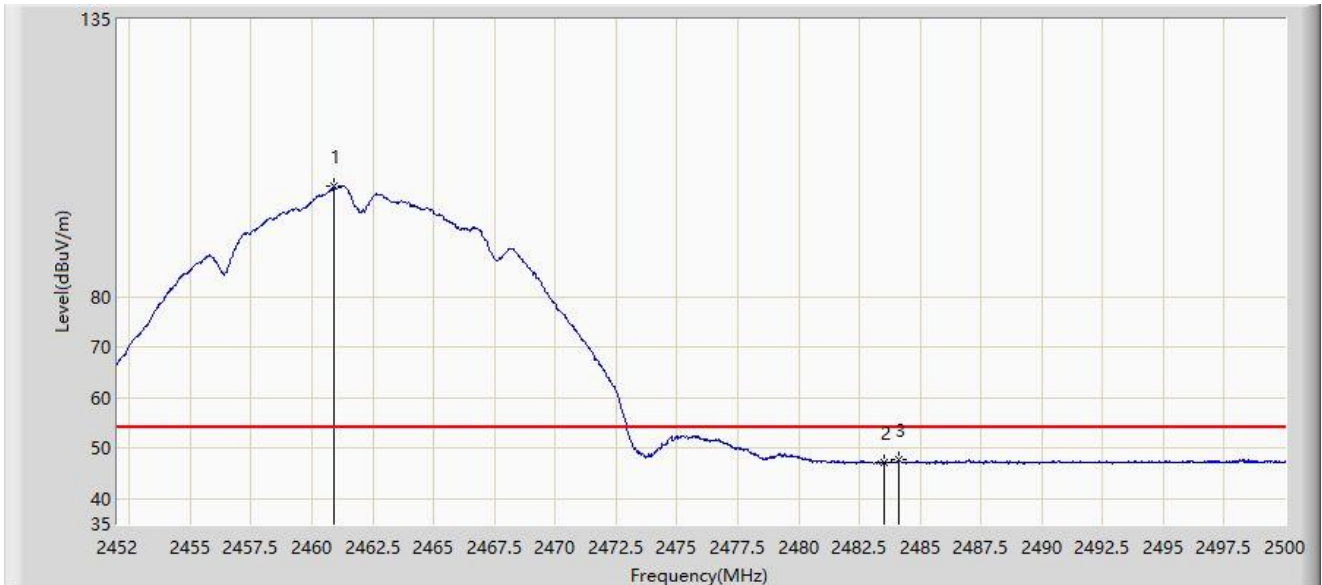


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2460.904        | 102.028                | 71.150               | N/A         | N/A            | 30.878        | AV   |
| 2  |      | 2483.500        | 47.264                 | 16.502               | -6.736      | 54.000         | 30.761        | AV   |
| 3  | *    | 2484.136        | 47.667                 | 16.905               | -6.333      | 54.000         | 30.762        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2462MHz     |                       |

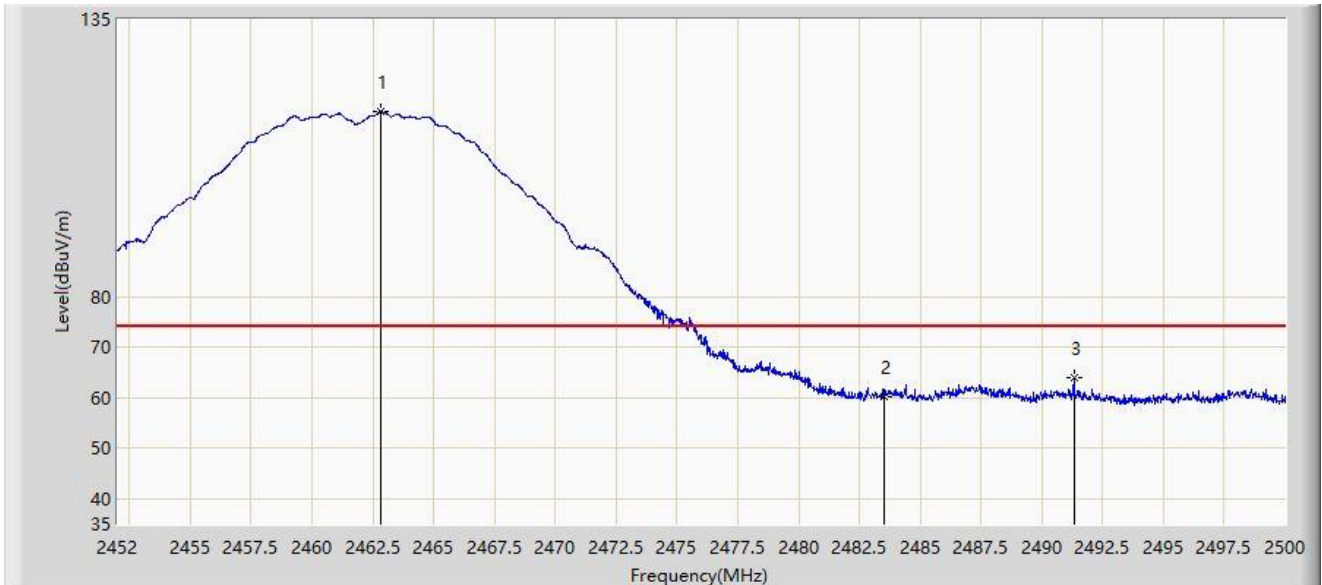

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2462.824        | 116.649                | 85.775               | N/A         | N/A            | 30.874        | PK   |
| 2  |      | 2483.500        | 60.304                 | 29.542               | -13.696     | 74.000         | 30.761        | PK   |
| 3  | *    | 2491.312        | 64.071                 | 33.306               | -9.929      | 74.000         | 30.765        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11b at 2462MHz     |                       |




| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2463.856        | 114.907                | 84.040               | N/A         | N/A            | 30.867        | AV   |
| 2  |      | 2483.500        | 50.865                 | 20.103               | -3.135      | 54.000         | 30.761        | AV   |
| 3  | *    | 2487.688        | 53.839                 | 23.075               | -0.161      | 54.000         | 30.764        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2412MHz     |                       |

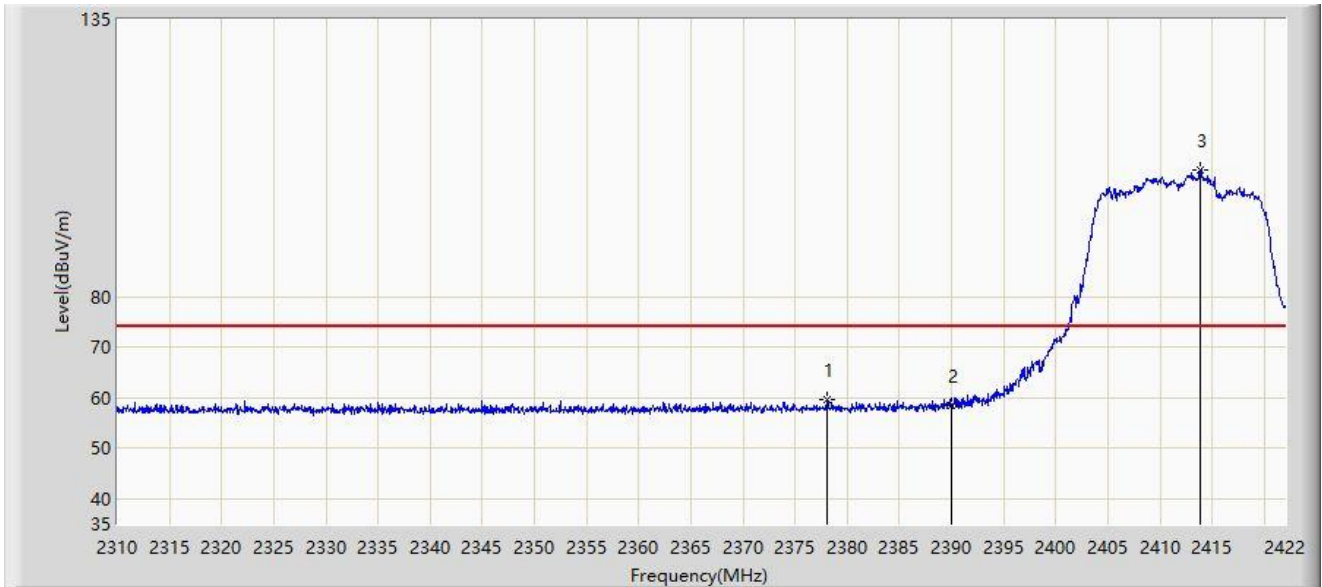


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2378.096        | 59.722                 | 28.768               | -14.278     | 74.000         | 30.955        | PK   |
| 2  |      | 2390.000        | 58.427                 | 27.576               | -15.573     | 74.000         | 30.850        | PK   |
| 3  |      | 2413.880        | 105.094                | 74.250               | N/A         | N/A            | 30.844        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2412MHz     |                       |

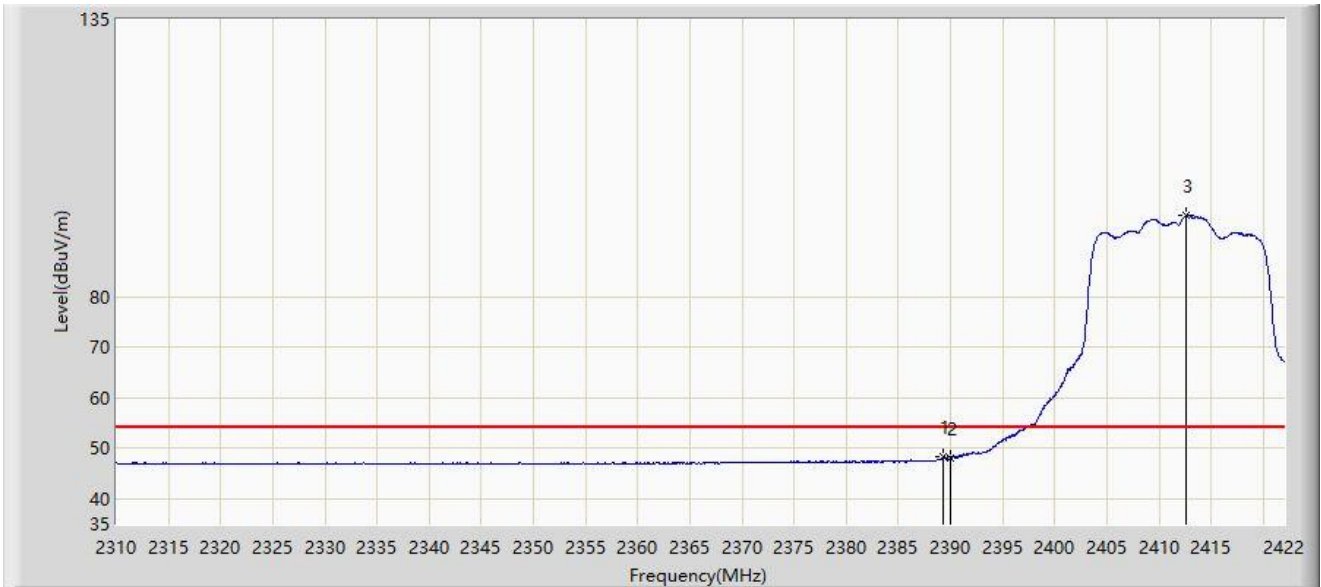


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.352        | 48.275                 | 17.419               | -5.725      | 54.000         | 30.857        | AV   |
| 2  |      | 2390.000        | 47.966                 | 17.115               | -6.034      | 54.000         | 30.850        | AV   |
| 3  |      | 2412.648        | 96.177                 | 65.325               | N/A         | N/A            | 30.852        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2412MHz     |                       |

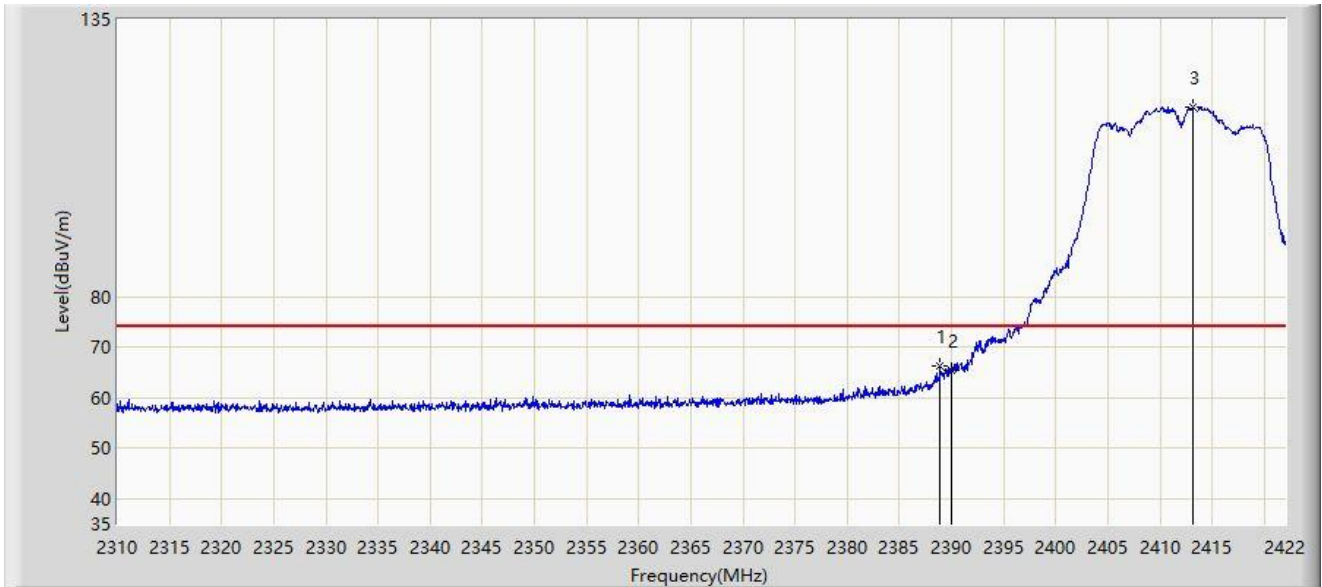


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2388.904        | 66.214                 | 35.354               | -7.786      | 74.000         | 30.861        | PK   |
| 2  |      | 2390.000        | 65.559                 | 34.708               | -8.441      | 74.000         | 30.850        | PK   |
| 3  |      | 2413.152        | 117.648                | 86.799               | N/A         | N/A            | 30.849        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2412MHz     |                       |

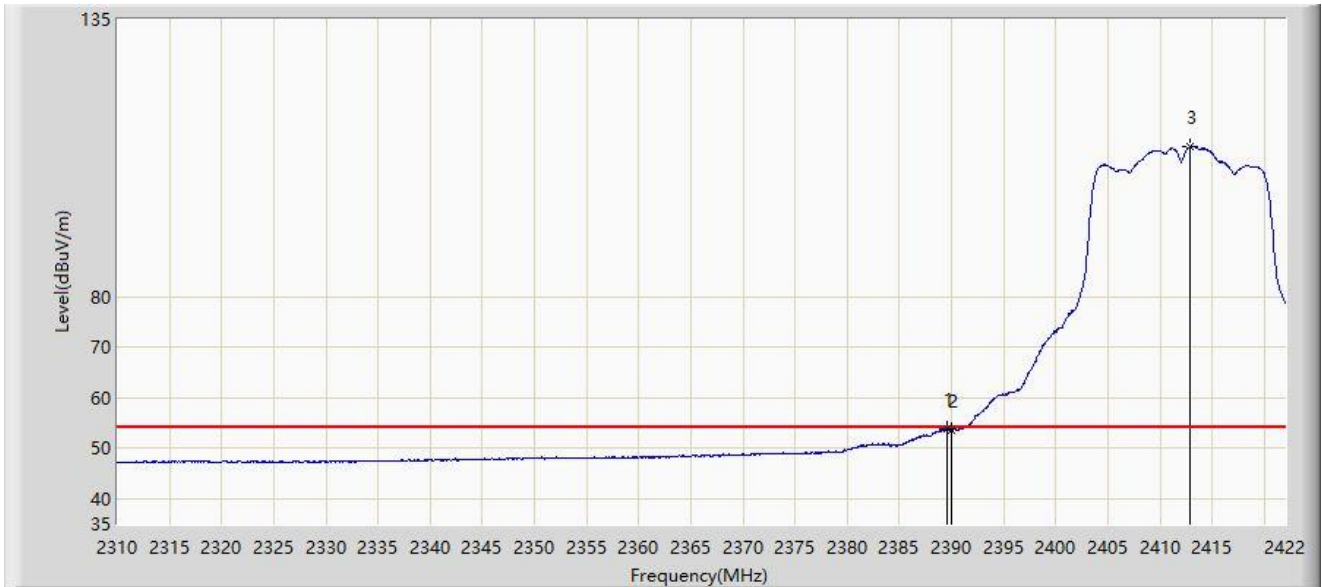


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.576        | 53.843                 | 22.988               | -0.157      | 54.000         | 30.854        | AV   |
| 2  |      | 2390.000        | 53.659                 | 22.808               | -0.341      | 54.000         | 30.850        | AV   |
| 3  |      | 2412.928        | 109.825                | 78.975               | N/A         | N/A            | 30.850        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2417MHz     |                       |

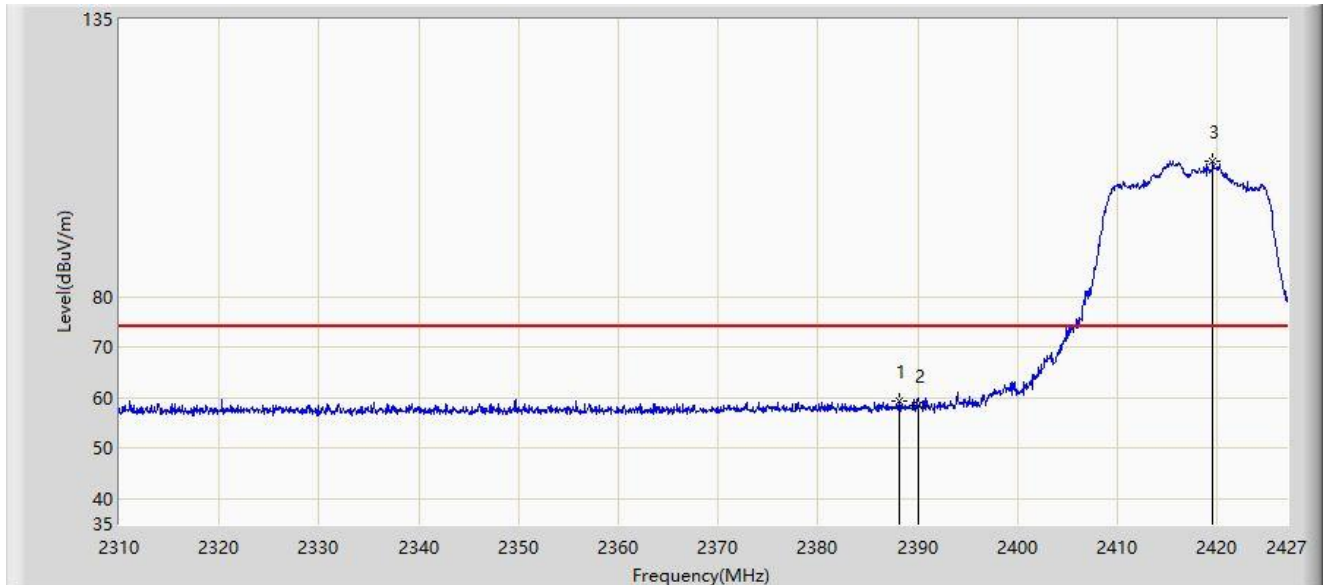


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2388.156        | 59.464                 | 28.597               | -14.536     | 74.000         | 30.867        | PK   |
| 2  |      | 2390.000        | 58.610                 | 27.759               | -15.390     | 74.000         | 30.850        | PK   |
| 3  |      | 2419.571        | 106.939                | 76.136               | N/A         | N/A            | 30.803        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2417MHz     |                       |

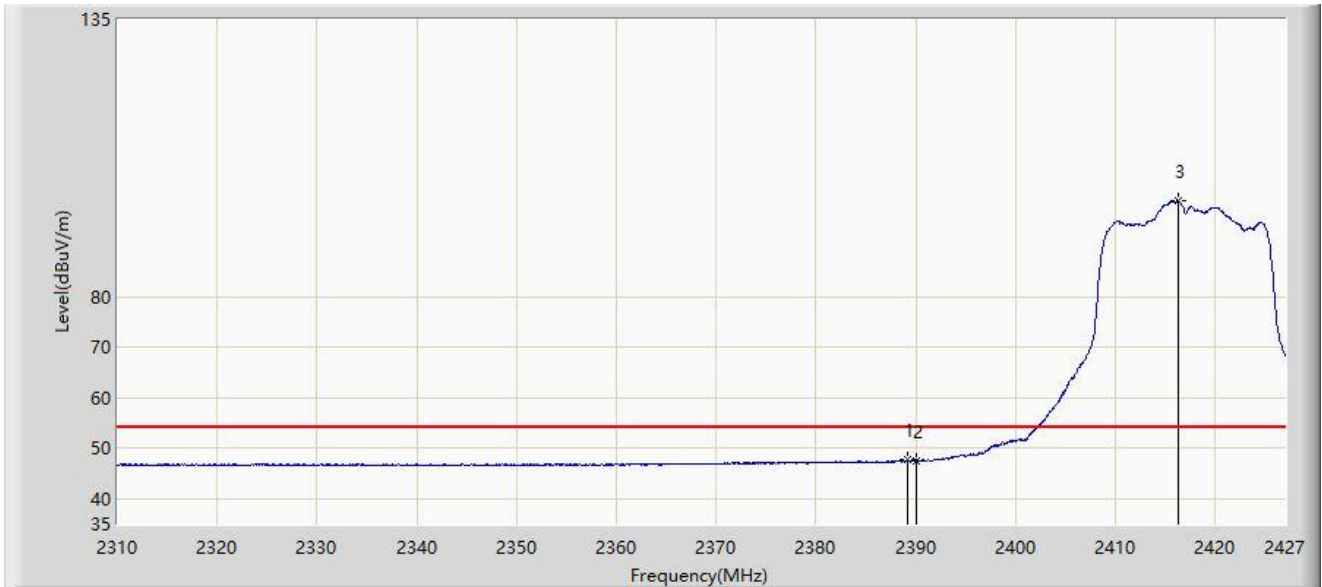


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.150        | 47.642                 | 16.784               | -6.358      | 54.000         | 30.858        | AV   |
| 2  |      | 2390.000        | 47.542                 | 16.691               | -6.458      | 54.000         | 30.850        | AV   |
| 3  |      | 2416.236        | 99.022                 | 68.195               | N/A         | N/A            | 30.827        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2417MHz     |                       |

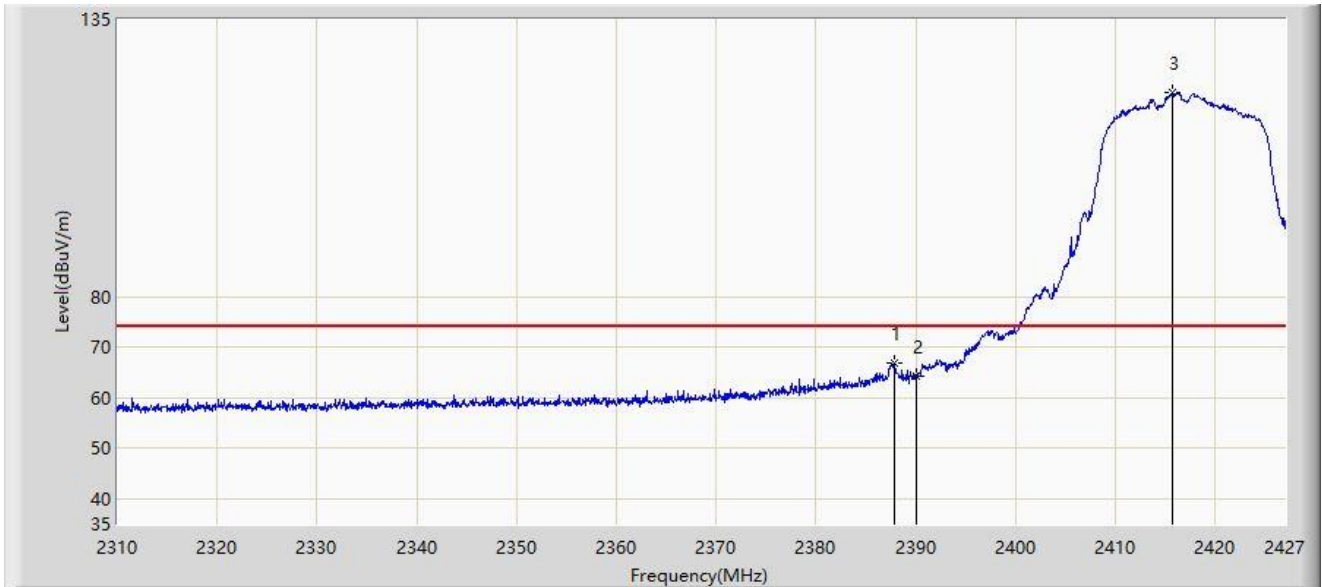


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2387.864        | 66.927                 | 36.058               | -7.073      | 74.000         | 30.869        | PK   |
| 2  |      | 2390.000        | 64.228                 | 33.377               | -9.772      | 74.000         | 30.850        | PK   |
| 3  |      | 2415.768        | 120.495                | 89.665               | N/A         | N/A            | 30.830        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2417MHz     |                       |

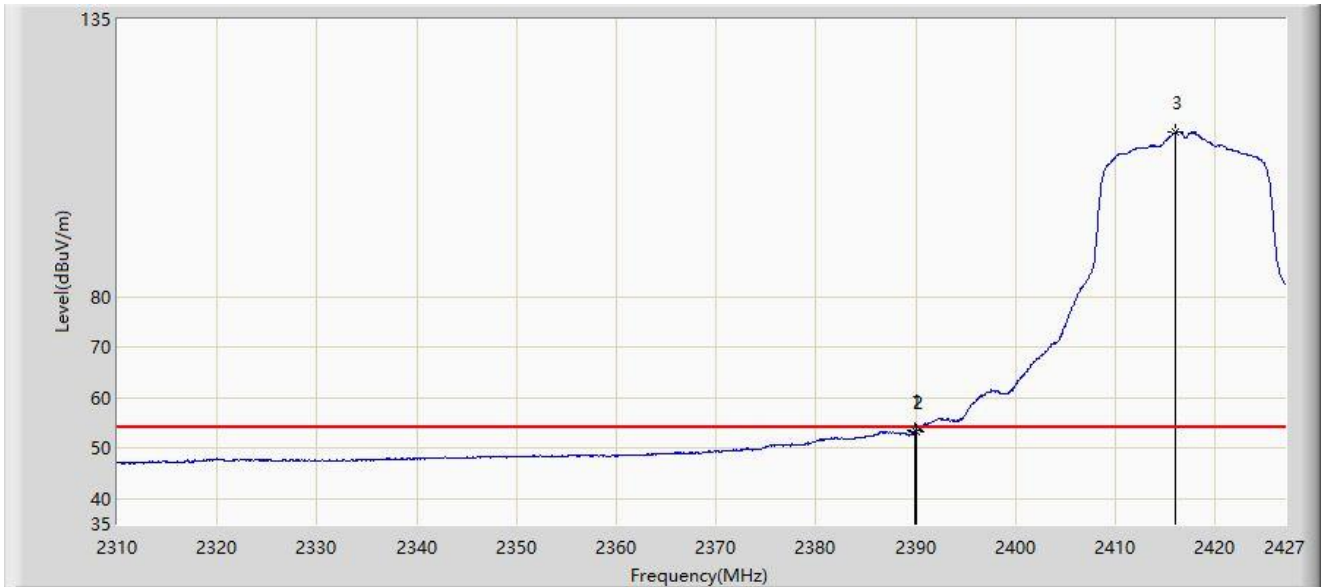


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.853        | 53.418                 | 22.566               | -0.582      | 54.000         | 30.852        | AV   |
| 2  |      | 2390.000        | 53.302                 | 22.451               | -0.698      | 54.000         | 30.850        | AV   |
| 3  |      | 2416.061        | 112.791                | 81.963               | N/A         | N/A            | 30.828        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2437MHz     |                       |

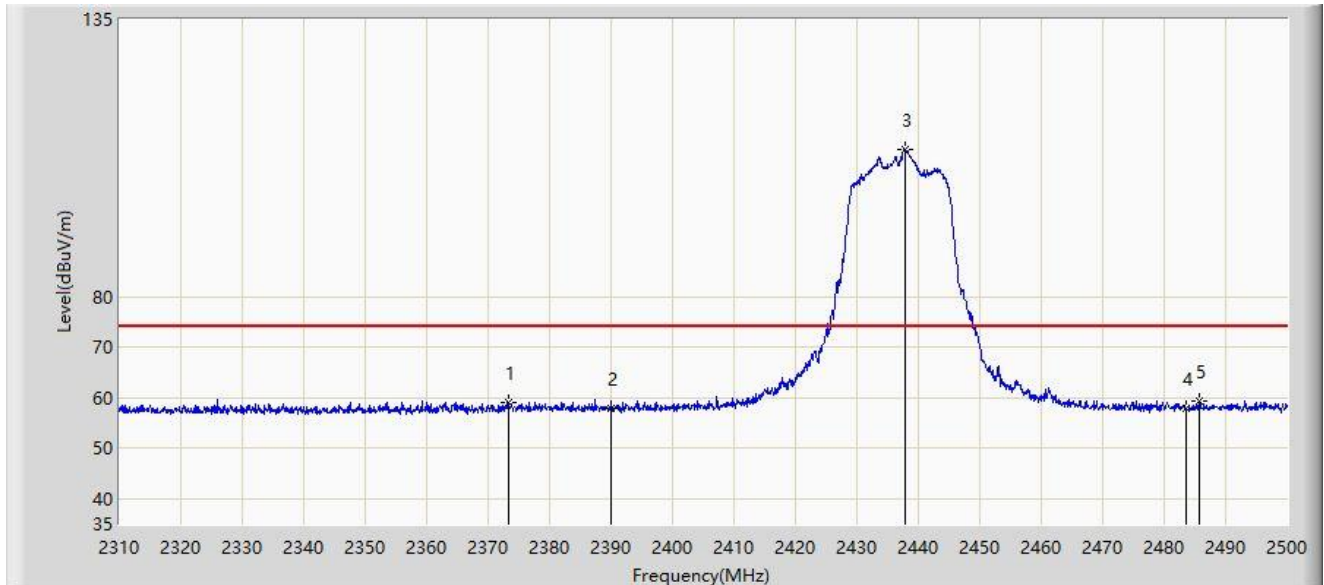


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2373.270        | 59.152                 | 28.217               | -14.848     | 74.000         | 30.936        | PK   |
| 2  |      | 2390.000        | 58.032                 | 27.181               | -15.968     | 74.000         | 30.850        | PK   |
| 3  |      | 2437.775        | 109.262                | 78.456               | N/A         | N/A            | 30.807        | PK   |
| 4  |      | 2483.500        | 57.756                 | 26.994               | -16.244     | 74.000         | 30.761        | PK   |
| 5  | *    | 2485.655        | 59.398                 | 28.635               | -14.602     | 74.000         | 30.763        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2437MHz     |                       |

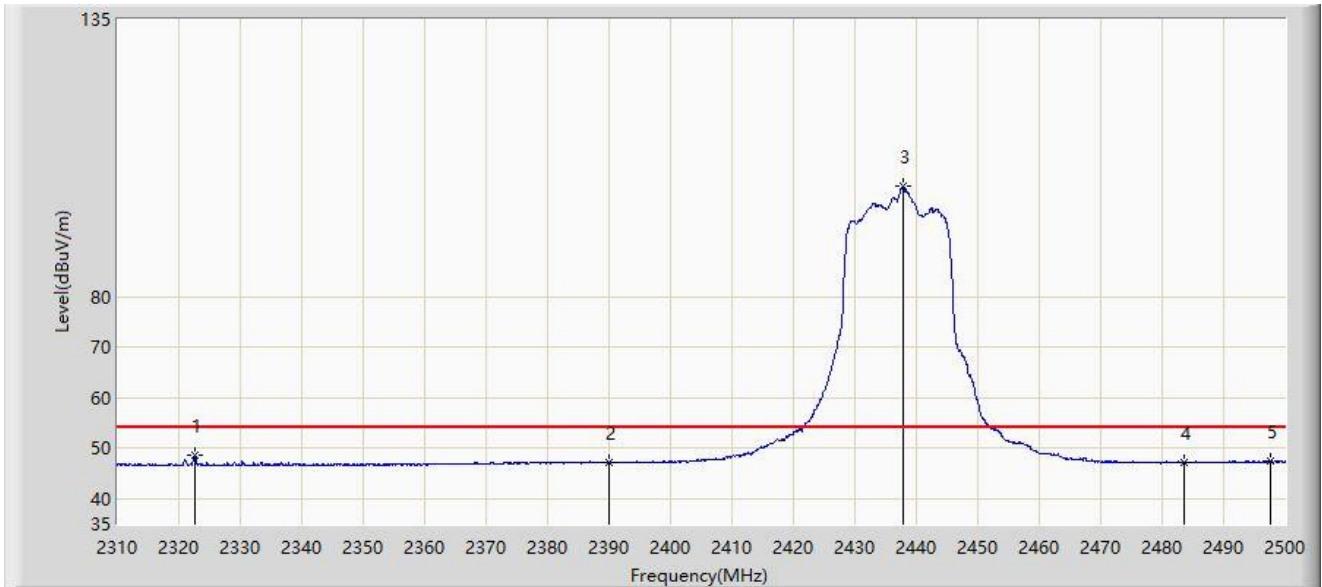


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2322.635        | 48.688                 | 17.680               | -5.312      | 54.000         | 31.009        | AV   |
| 2  |      | 2390.000        | 47.127                 | 16.276               | -6.873      | 54.000         | 30.850        | AV   |
| 3  |      | 2437.870        | 101.843                | 71.036               | N/A         | N/A            | 30.806        | AV   |
| 4  |      | 2483.500        | 47.178                 | 16.416               | -6.822      | 54.000         | 30.761        | AV   |
| 5  |      | 2497.530        | 47.351                 | 16.584               | -6.649      | 54.000         | 30.767        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2437MHz     |                       |

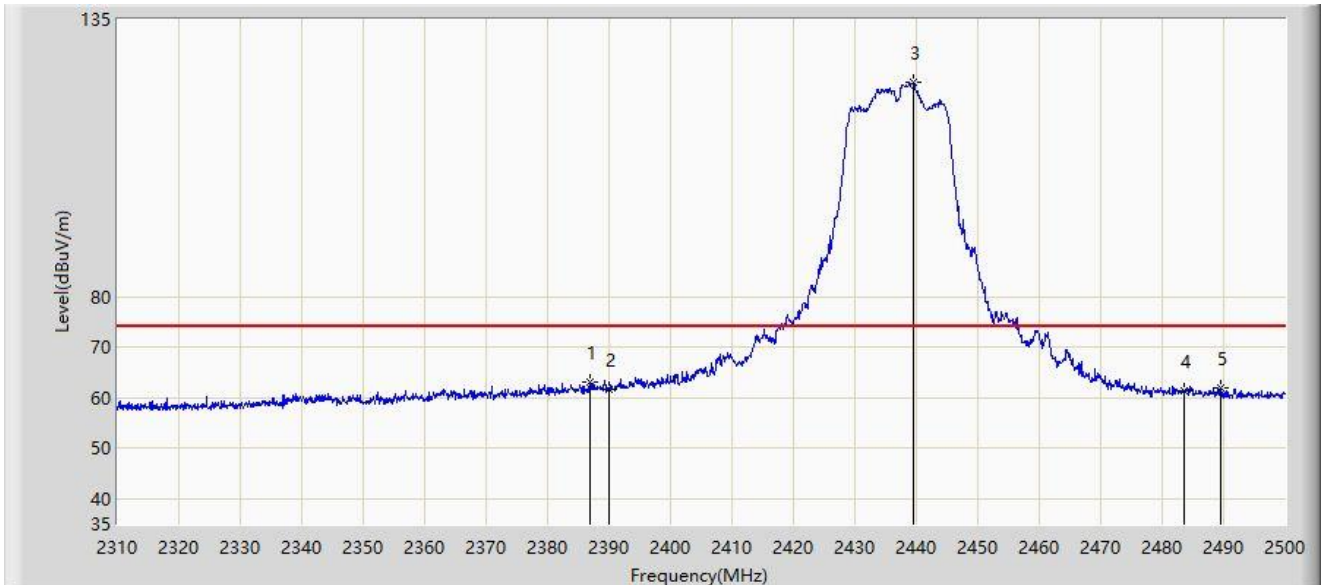


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2386.855        | 63.211                 | 32.333               | -10.789     | 74.000         | 30.878        | PK   |
| 2  |      | 2390.000        | 61.546                 | 30.695               | -12.454     | 74.000         | 30.850        | PK   |
| 3  |      | 2439.580        | 122.468                | 91.650               | N/A         | N/A            | 30.818        | PK   |
| 4  |      | 2483.500        | 61.235                 | 30.473               | -12.765     | 74.000         | 30.761        | PK   |
| 5  |      | 2489.455        | 62.024                 | 31.260               | -11.976     | 74.000         | 30.764        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2437MHz     |                       |

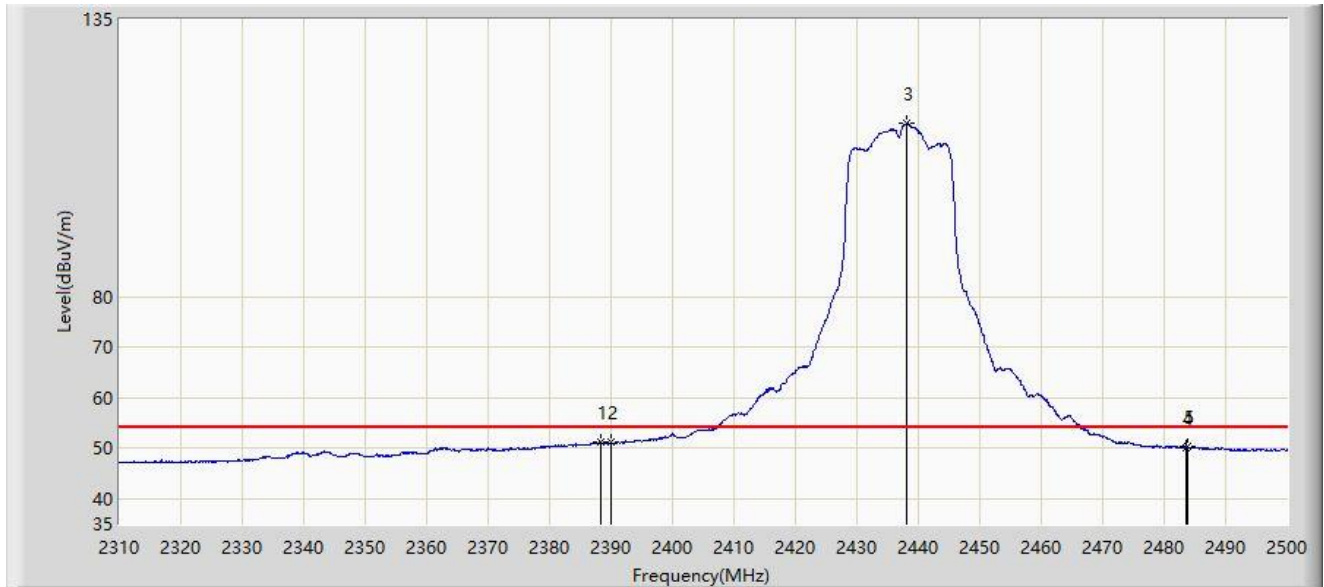


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2388.375        | 51.139                 | 20.274               | -2.861      | 54.000         | 30.865        | AV   |
| 2  |      | 2390.000        | 51.115                 | 20.264               | -2.885      | 54.000         | 30.850        | AV   |
| 3  |      | 2438.155        | 114.374                | 83.565               | N/A         | N/A            | 30.809        | AV   |
| 4  |      | 2483.500        | 50.126                 | 19.364               | -3.874      | 54.000         | 30.761        | AV   |
| 5  |      | 2483.850        | 50.263                 | 19.501               | -3.737      | 54.000         | 30.762        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2457MHz     |                       |

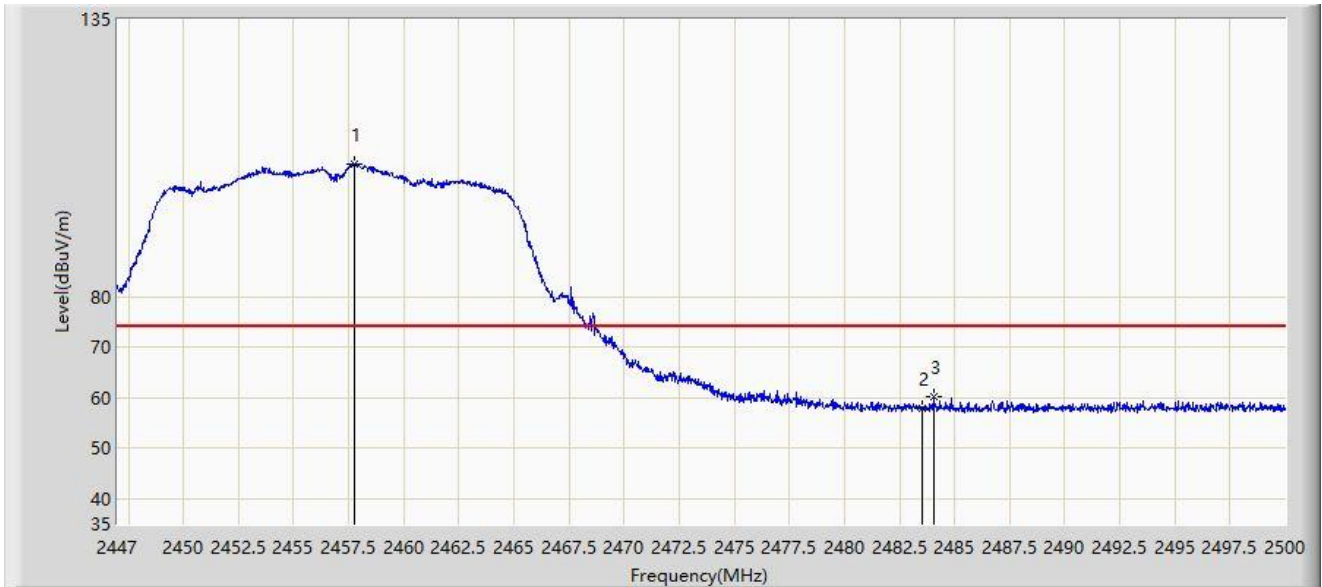


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2457.785        | 106.411                | 75.538               | N/A         | N/A            | 30.873        | PK   |
| 2  |      | 2483.500        | 57.796                 | 27.034               | -16.204     | 74.000         | 30.761        | PK   |
| 3  | *    | 2484.047        | 60.092                 | 29.330               | -13.908     | 74.000         | 30.762        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2457MHz     |                       |

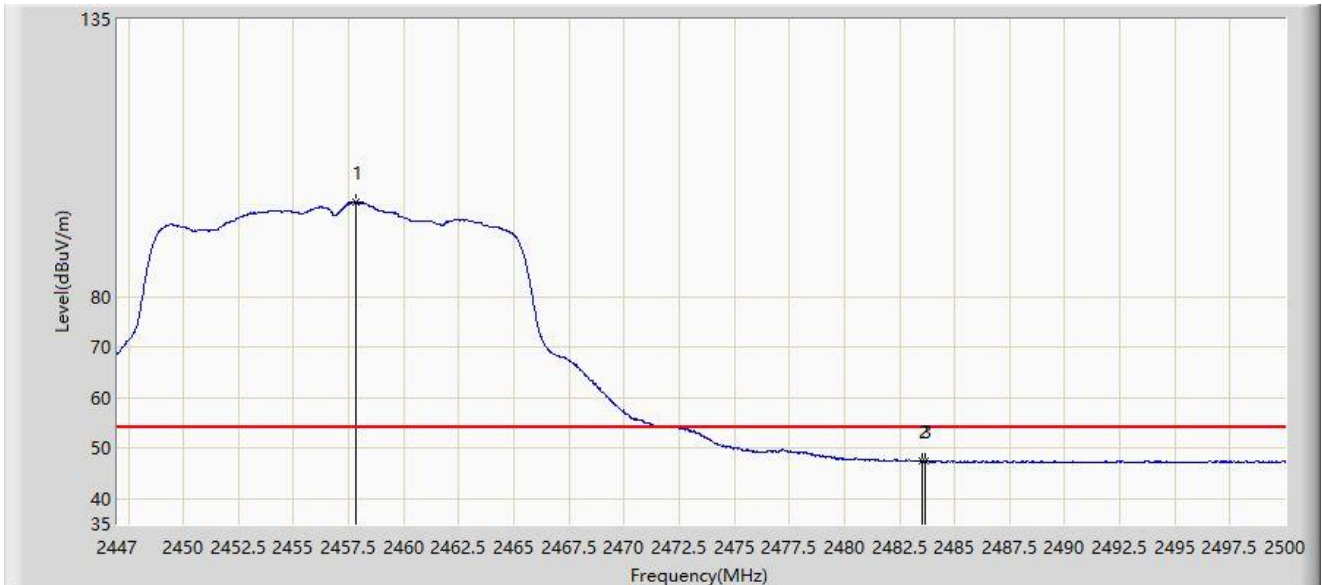


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2457.812        | 98.739                 | 67.866               | N/A         | N/A            | 30.873        | AV   |
| 2  |      | 2483.500        | 47.416                 | 16.654               | -6.584      | 54.000         | 30.761        | AV   |
| 3  | *    | 2483.649        | 47.605                 | 16.843               | -6.395      | 54.000         | 30.762        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2457MHz     |                       |

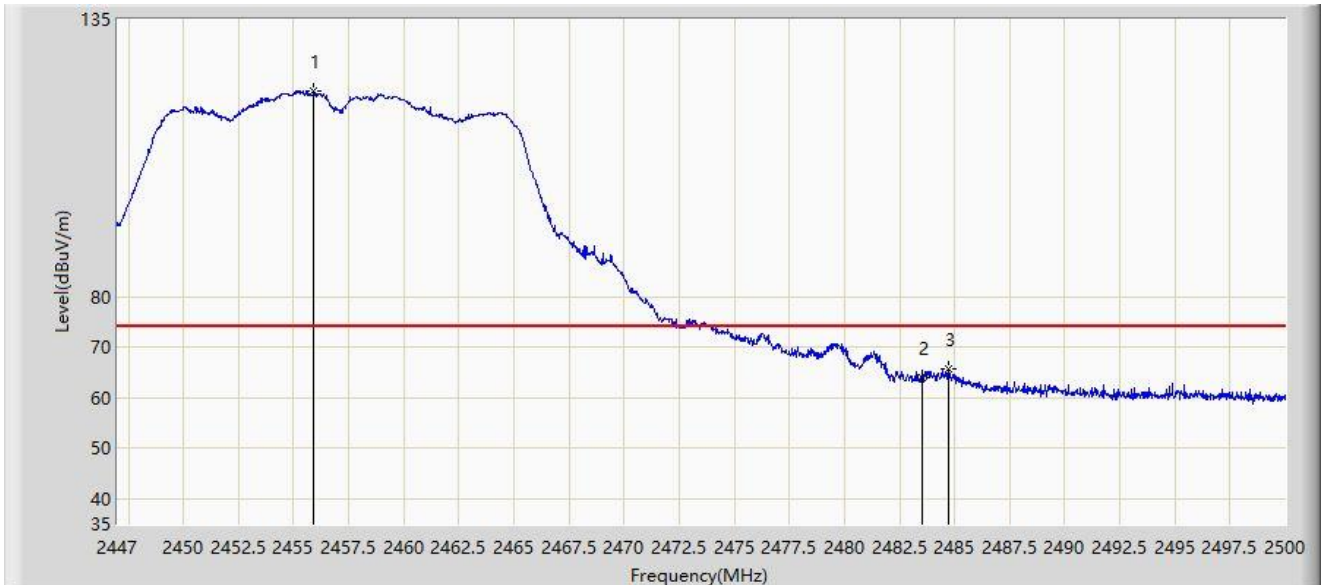


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2455.930        | 120.915                | 90.045               | N/A         | N/A            | 30.871        | PK   |
| 2  |      | 2483.500        | 63.990                 | 33.228               | -10.010     | 74.000         | 30.761        | PK   |
| 3  | *    | 2484.736        | 65.658                 | 34.896               | -8.342      | 74.000         | 30.763        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2457MHz     |                       |

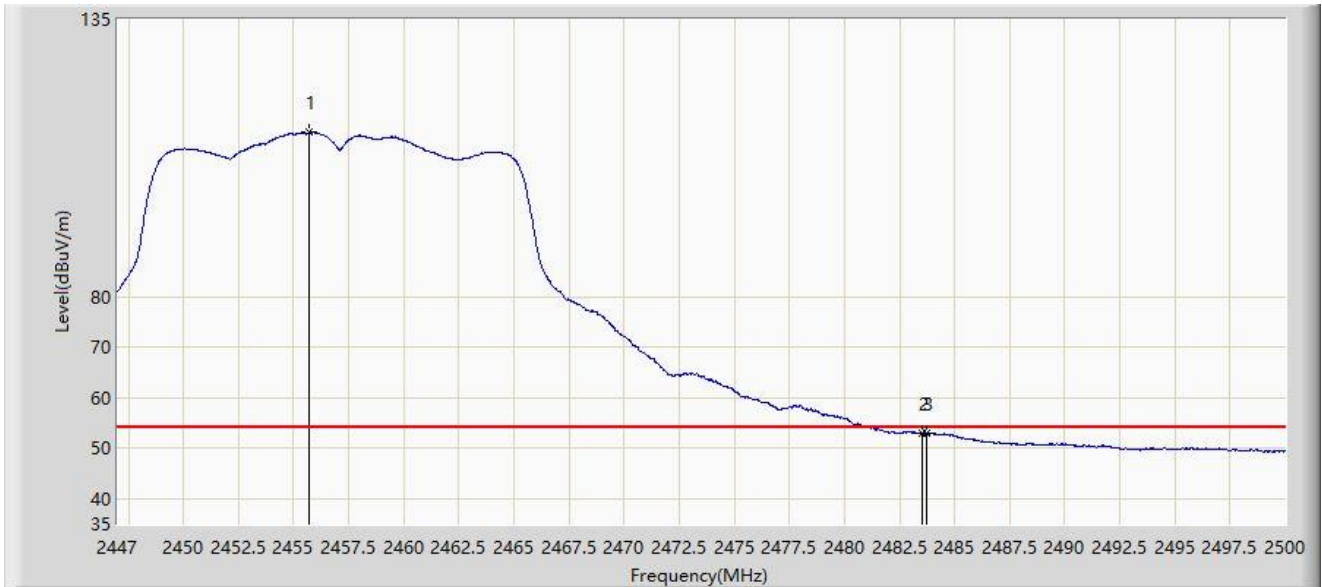


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2455.719        | 112.650                | 81.780               | N/A         | N/A            | 30.870        | AV   |
| 2  |      | 2483.500        | 52.962                 | 22.200               | -1.038      | 54.000         | 30.761        | AV   |
| 3  | *    | 2483.702        | 53.088                 | 22.326               | -0.912      | 54.000         | 30.762        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2462MHz     |                       |

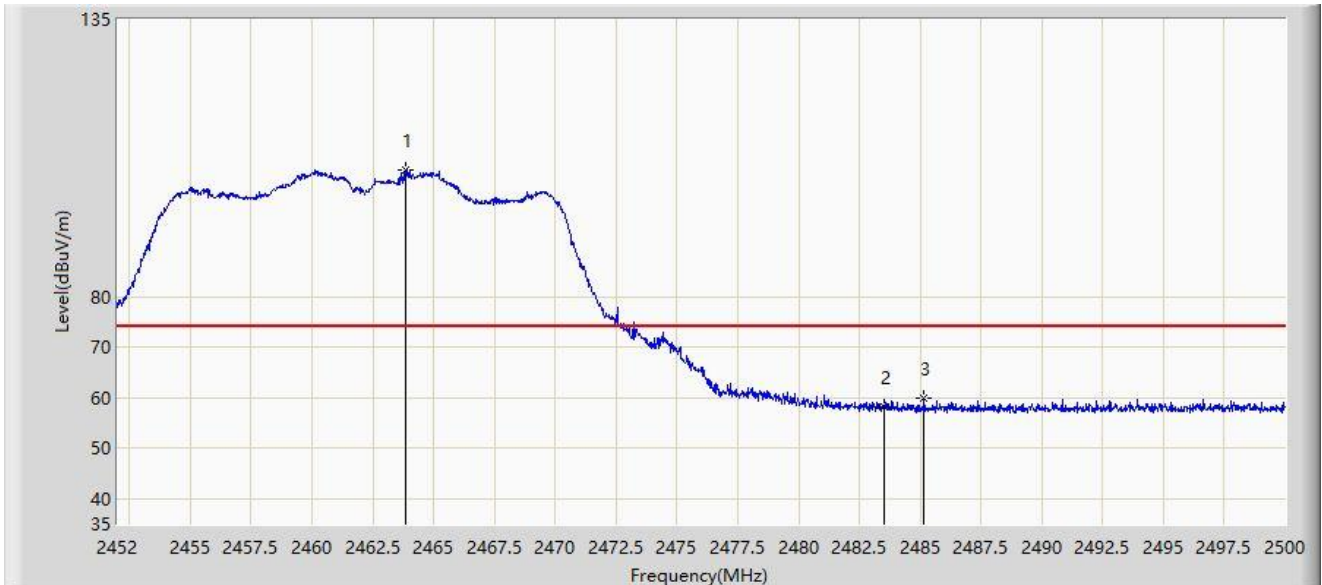


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2463.832        | 105.171                | 74.304               | N/A         | N/A            | 30.867        | PK   |
| 2  |      | 2483.500        | 58.083                 | 27.321               | -15.917     | 74.000         | 30.761        | PK   |
| 3  | *    | 2485.144        | 59.839                 | 29.076               | -14.161     | 74.000         | 30.762        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2462MHz     |                       |

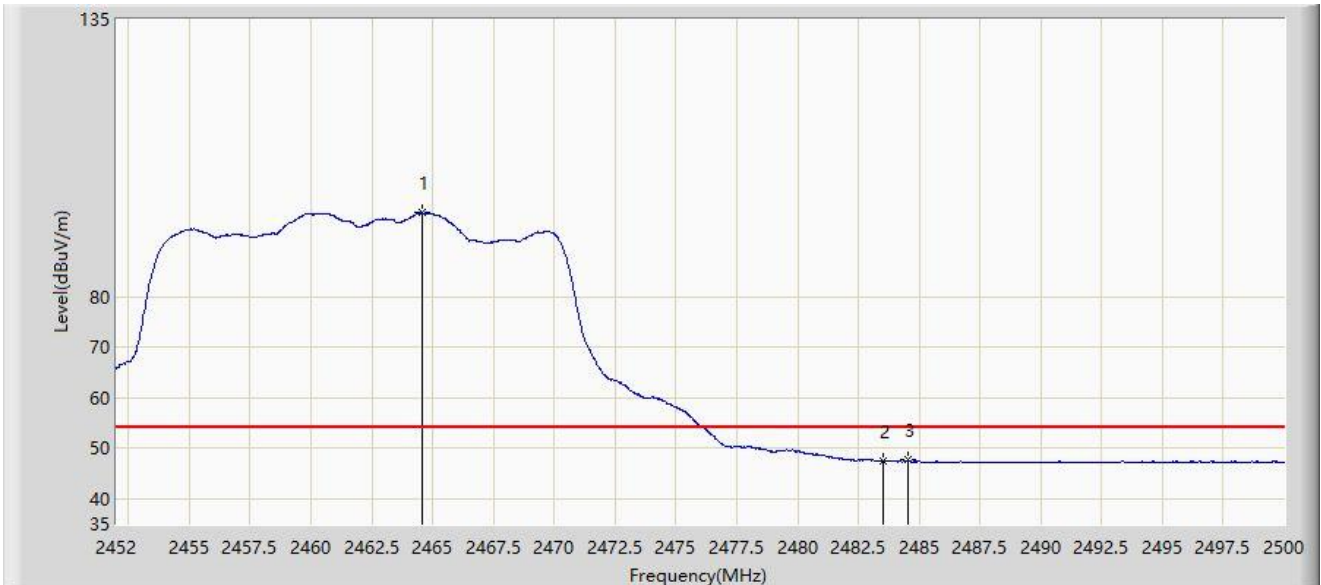


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2464.552        | 96.612                 | 65.750               | N/A         | N/A            | 30.862        | AV   |
| 2  |      | 2483.500        | 47.469                 | 16.707               | -6.531      | 54.000         | 30.761        | AV   |
| 3  | *    | 2484.568        | 47.639                 | 16.877               | -6.361      | 54.000         | 30.763        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2462MHz     |                       |

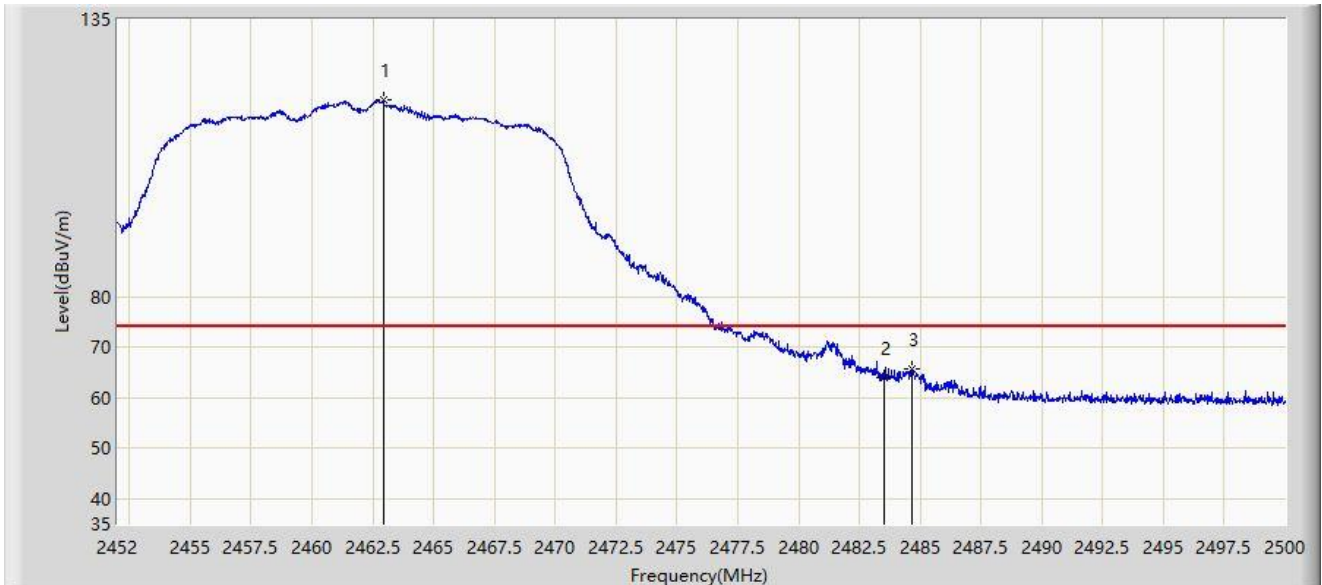


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2462.944        | 118.960                | 88.087               | N/A         | N/A            | 30.873        | PK   |
| 2  |      | 2483.500        | 64.117                 | 33.355               | -9.883      | 74.000         | 30.761        | PK   |
| 3  | *    | 2484.640        | 65.652                 | 34.890               | -8.348      | 74.000         | 30.763        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Site: NS-AC1                                  | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                        | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz          | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11g at 2462MHz     |                       |

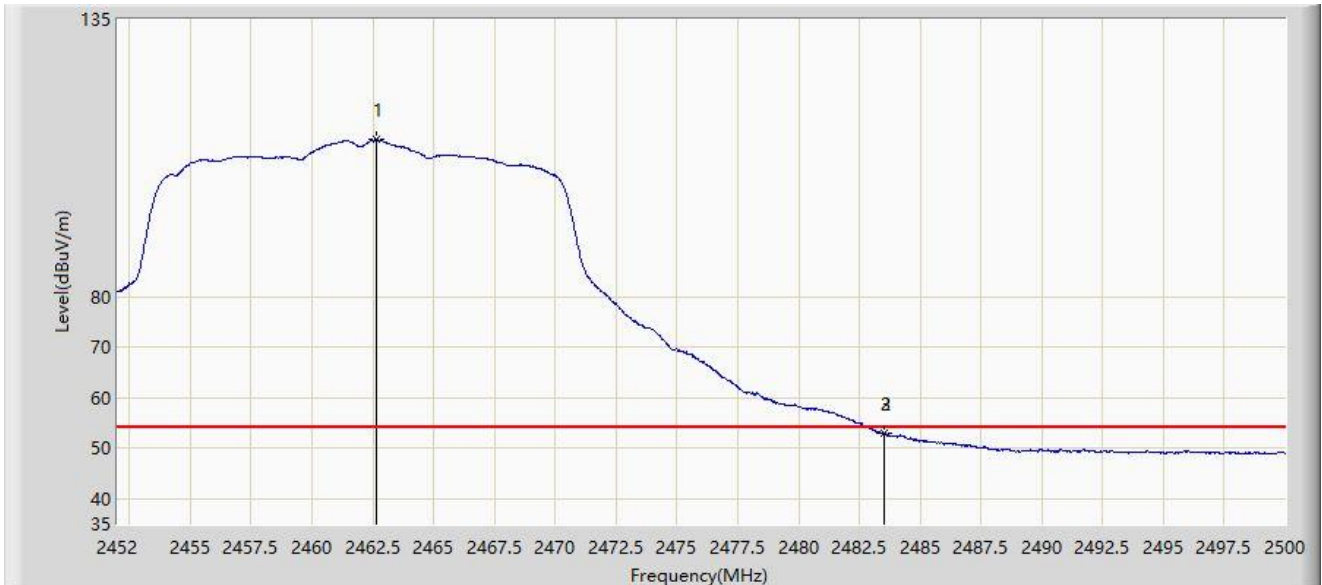


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2462.632        | 111.171                | 80.295               | N/A         | N/A            | 30.875        | AV   |
| 2  |      | 2483.500        | 52.843                 | 22.081               | -1.157      | 54.000         | 30.761        | AV   |
| 3  | *    | 2483.536        | 52.877                 | 22.115               | -1.123      | 54.000         | 30.762        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                       |
|------------------------------------------------|-----------------------|
| Site: NS-AC1                                   | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz           | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender  | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11n-HT20 at 2412MHz |                       |

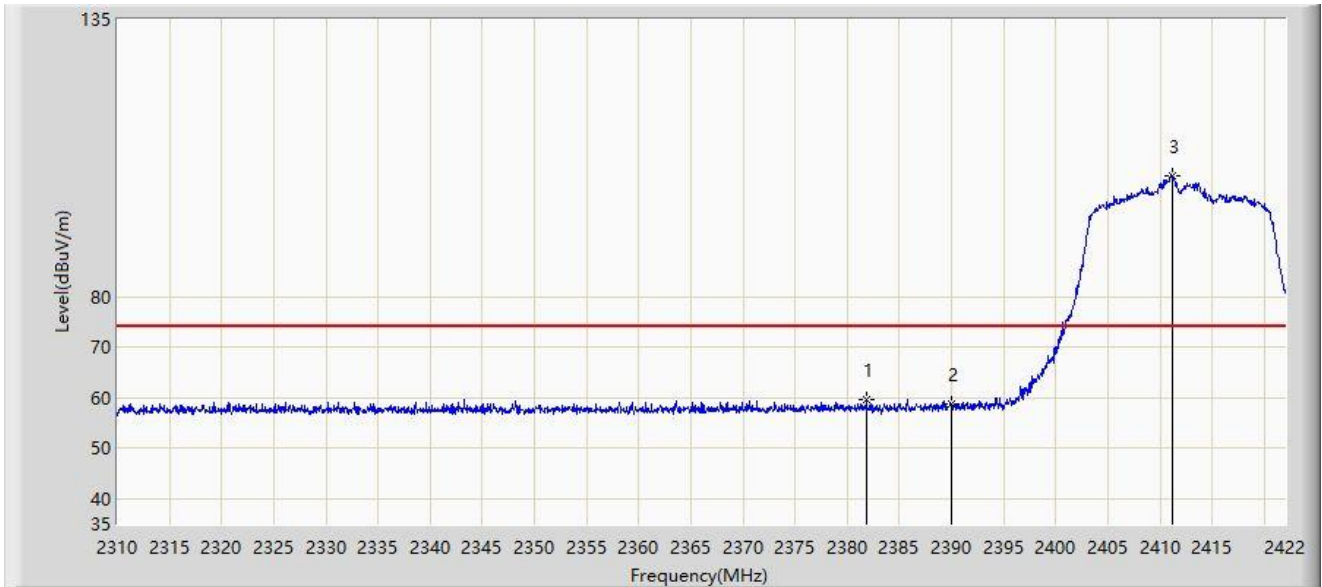


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2381.848        | 59.760                 | 28.838               | -14.240     | 74.000         | 30.922        | PK   |
| 2  |      | 2390.000        | 58.721                 | 27.870               | -15.279     | 74.000         | 30.850        | PK   |
| 3  |      | 2411.136        | 104.024                | 73.161               | N/A         | N/A            | 30.863        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                       |
|------------------------------------------------|-----------------------|
| Site: NS-AC1                                   | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz           | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender  | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11n-HT20 at 2412MHz |                       |

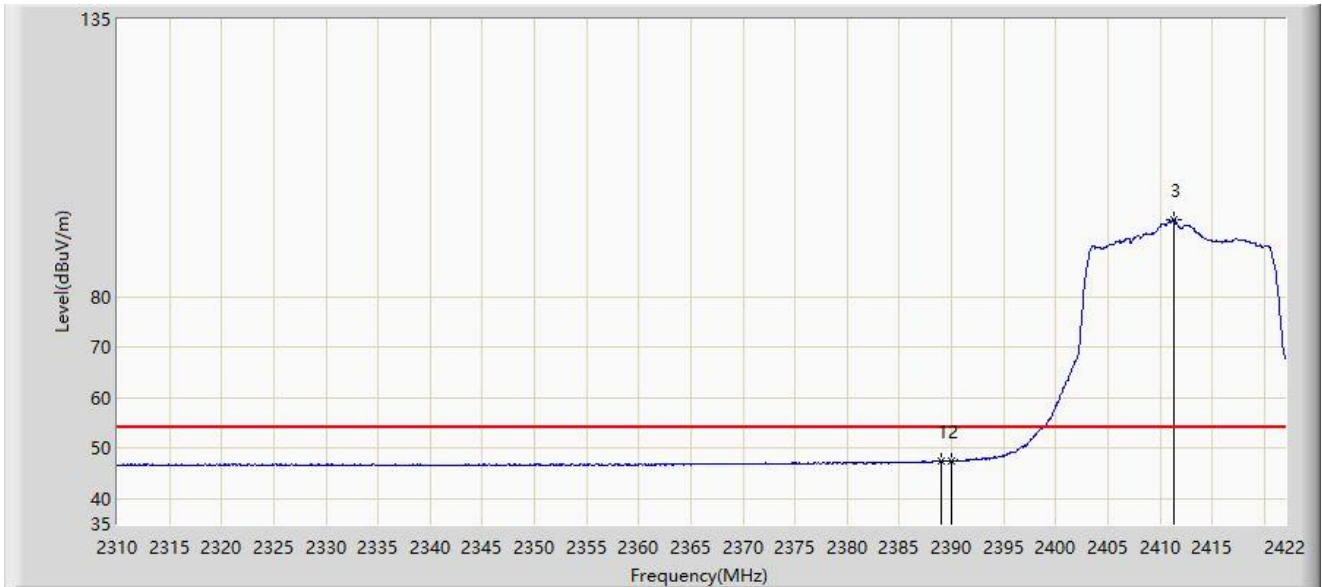


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2388.960        | 47.511                 | 16.651               | -6.489      | 54.000         | 30.860        | AV   |
| 2  |      | 2390.000        | 47.390                 | 16.539               | -6.610      | 54.000         | 30.850        | AV   |
| 3  |      | 2411.360        | 95.280                 | 64.419               | N/A         | N/A            | 30.862        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                       |
|------------------------------------------------|-----------------------|
| Site: NS-AC1                                   | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz           | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender  | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11n-HT20 at 2412MHz |                       |

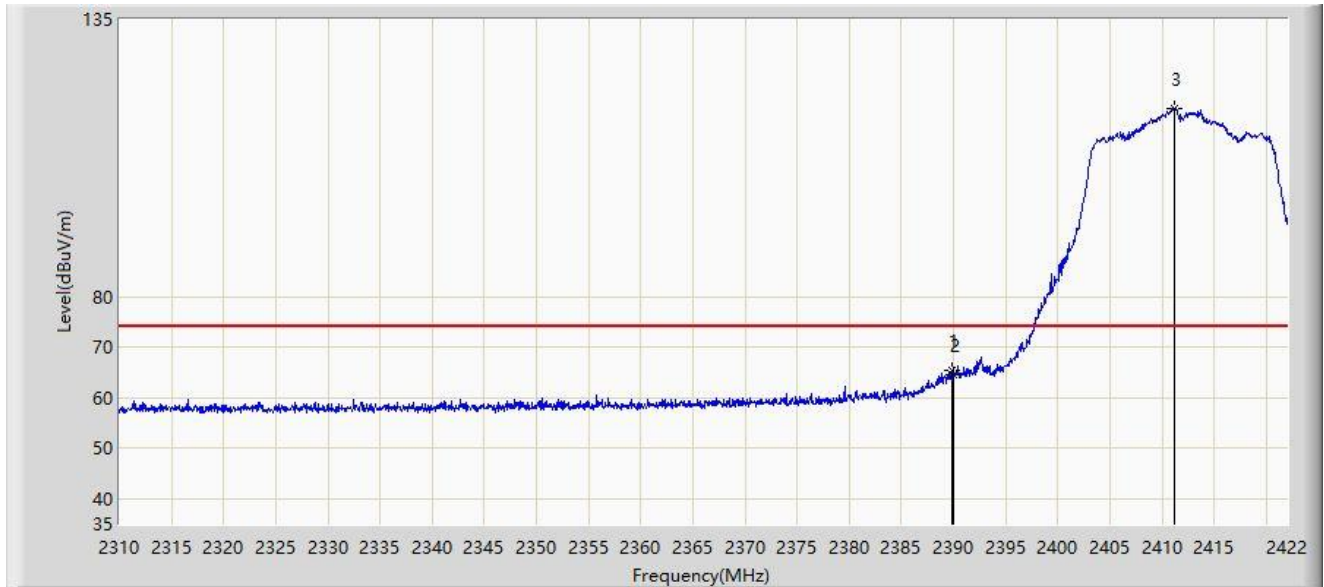


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.800        | 65.560                 | 34.707               | -8.440      | 74.000         | 30.853        | PK   |
| 2  |      | 2390.000        | 64.626                 | 33.775               | -9.374      | 74.000         | 30.850        | PK   |
| 3  |      | 2411.136        | 117.442                | 86.579               | N/A         | N/A            | 30.863        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                       |
|------------------------------------------------|-----------------------|
| Site: NS-AC1                                   | Test Date: 2023-07-28 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz           | Polarity: Vertical    |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender  | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11n-HT20 at 2412MHz |                       |

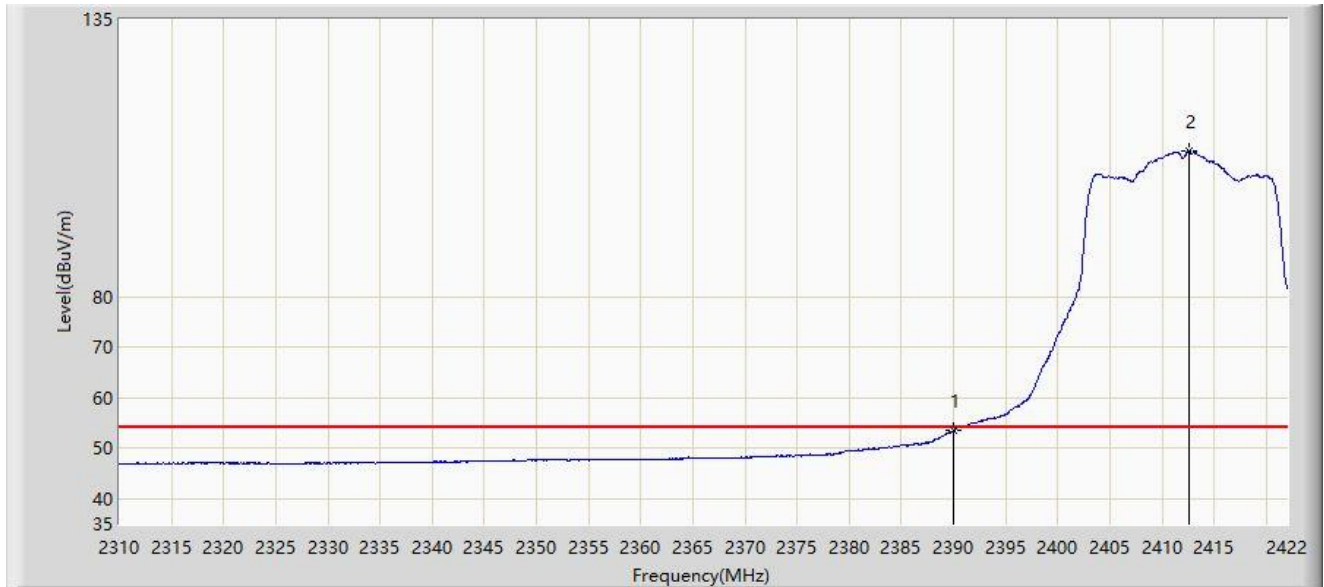


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2390.000        | 53.494                 | 22.643               | -0.506      | 54.000         | 30.850        | AV   |
| 2  |      | 2412.536        | 108.880                | 78.027               | N/A         | N/A            | 30.853        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                       |
|------------------------------------------------|-----------------------|
| Site: NS-AC1                                   | Test Date: 2023-07-31 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Flag Yang   |
| Probe: NS-AC1_BBHA9120D_2111_1-18GHz           | Polarity: Horizontal  |
| EUT: AXE5400 Tri-Band Wi-Fi 6E Range Extender  | Power: AC 120V/60Hz   |
| Test Mode: Transmit by 802.11n-HT20 at 2417MHz |                       |

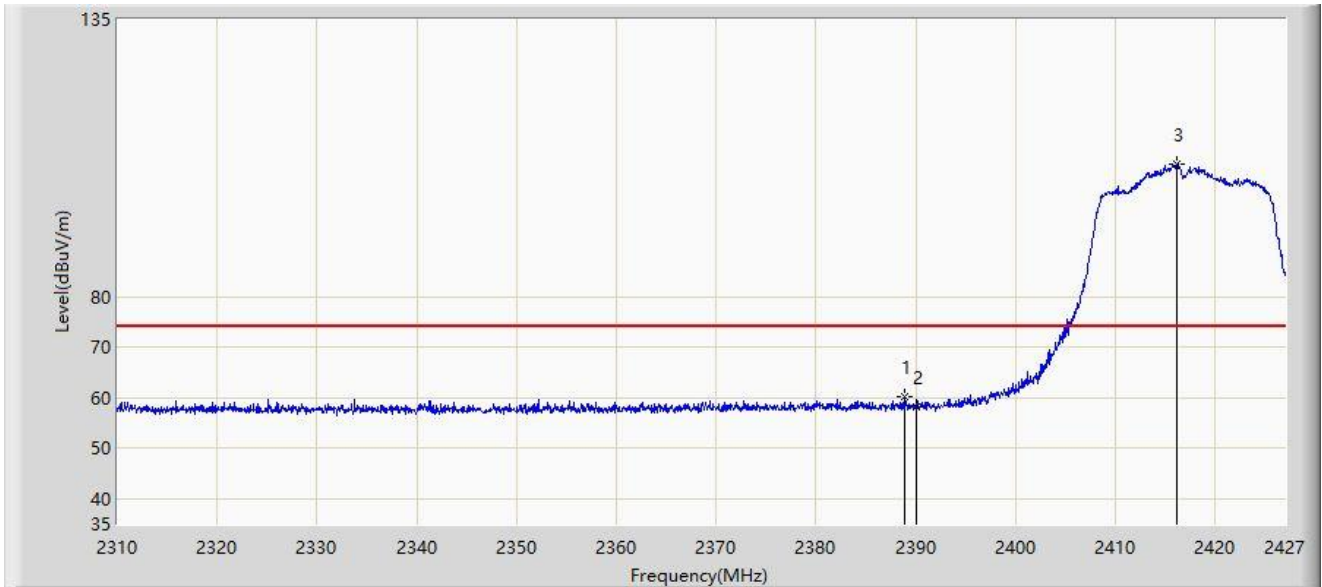

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2388.858        | 60.297                 | 29.436               | -13.703     | 74.000         | 30.861        | PK   |
| 2  |      | 2390.000        | 58.083                 | 27.232               | -15.917     | 74.000         | 30.850        | PK   |
| 3  |      | 2416.177        | 106.225                | 75.398               | N/A         | N/A            | 30.827        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).