

FCC Radio Test Report

FCC ID: 2BCGWTBE552E

Report No. : BTL-FCCP-2-2403G002
Equipment : BE9300 Wi-Fi 7 Bluetooth PCIe Adapter
Model Name : Archer TBE552E
Brand Name : tp-link
Applicant : TP-LINK CORPORATION PTE. LTD.
Address : 7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987


Radio Function : Bluetooth EDR

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart C (15.247)
Measurement Procedure(s) : ANSI C63.10-2013

Date of Receipt : 2024/4/19
Date of Test : 2024/4/19 ~ 2024/5/8
Issued Date : 2024/7/24

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : 
Poken Huang, Engineer

Approved by : 
Peter Chen, Manager

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	6
1.1	TEST FACILITY	7
1.2	MEASUREMENT UNCERTAINTY	7
1.3	TEST ENVIRONMENT CONDITIONS	8
1.4	TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
2	GENERAL INFORMATION	9
2.1	DESCRIPTION OF EUT	9
2.2	TEST MODES	11
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.4	SUPPORT UNITS	13
3	AC POWER LINE CONDUCTED EMISSIONS TEST	14
3.1	LIMIT	14
3.2	TEST PROCEDURE	14
3.3	DEVIATION FROM TEST STANDARD	14
3.4	TEST SETUP	15
3.5	TEST RESULT	15
4	RADIATED EMISSIONS TEST	16
4.1	LIMIT	16
4.2	TEST PROCEDURE	17
4.3	DEVIATION FROM TEST STANDARD	17
4.4	TEST SETUP	17
4.5	EUT OPERATING CONDITIONS	18
4.6	TEST RESULT – BELOW 30 MHZ	19
4.7	TEST RESULT – 30 MHZ TO 1 GHZ	19
4.8	TEST RESULT – ABOVE 1 GHZ	19
5	NUMBER OF HOPPING CHANNEL	20
5.1	APPLIED PROCEDURES	20
5.2	TEST PROCEDURE	20
5.3	DEVIATION FROM STANDARD	20
5.4	TEST SETUP	20
5.5	EUT OPERATION CONDITIONS	20
5.6	TEST RESULTS	20
6	AVERAGE TIME OF OCCUPANCY	21
6.1	APPLIED PROCEDURES / LIMIT	21
6.2	TEST PROCEDURE	21
6.3	DEVIATION FROM STANDARD	21
6.4	TEST SETUP	21
6.5	EUT OPERATION CONDITIONS	21
6.6	TEST RESULTS	21
7	HOPPING CHANNEL SEPARATION MEASUREMENT	22
7.1	APPLIED PROCEDURES / LIMIT	22
7.2	TEST PROCEDURE	22
7.3	DEVIATION FROM STANDARD	22
7.4	TEST SETUP	22
7.5	TEST RESULTS	22
8	BANDWIDTH TEST	23
8.1	APPLIED PROCEDURES	23

8.2	TEST PROCEDURE	23
8.3	DEVIATION FROM STANDARD	23
8.4	TEST SETUP	23
8.5	EUT OPERATION CONDITIONS	23
8.6	TEST RESULTS	23
9	OUTPUT POWER TEST	24
9.1	APPLIED PROCEDURES / LIMIT	24
9.2	TEST PROCEDURE	24
9.3	DEVIATION FROM STANDARD	24
9.4	TEST SETUP	24
9.5	EUT OPERATION CONDITIONS	24
9.6	TEST RESULTS	24
10	ANTENNA CONDUCTED SPURIOUS EMISSION	25
10.1	APPLIED PROCEDURES / LIMIT	25
10.2	TEST PROCEDURE	25
10.3	DEVIATION FROM STANDARD	25
10.4	TEST SETUP	25
10.5	EUT OPERATION CONDITIONS	25
10.6	TEST RESULTS	25
11	LIST OF MEASURING EQUIPMENTS	26
12	EUT TEST PHOTO	28
13	EUT PHOTOS	28
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	29
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	34
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	37
APPENDIX D	NUMBER OF HOPPING CHANNEL	54
APPENDIX E	AVERAGE TIME OF OCCUPANCY	56
APPENDIX F	HOPPING CHANNEL SEPARATION MEASUREMENT	59
APPENDIX G	BANDWIDTH	61
APPENDIX H	OUTPUT POWER	63
APPENDIX I	ANTENNA CONDUCTED SPURIOUS EMISSION	65

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2403G002	R00	Original Report.	Jul. 01, 2024	Invalid
BTL-FCCP-2-2403G002	R01	Revised report to address comments.	Jul. 24, 2024	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.247(d)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	-----
15.247 (a)(1)(iii)	Number of Hopping Frequency	APPENDIX D	Pass	-----
15.247 (a)(1)(iii)	Average Time of Occupancy	APPENDIX E	Pass	-----
15.247 (a)(1)	Hopping Channel Separation	APPENDIX F	Pass	-----
15.247 (a)(1)	Bandwidth	APPENDIX G	Pass	-----
15.247 (b)(1)	Output Power	APPENDIX H	Pass	-----
15.247(d)	Antenna conducted Spurious Emission	APPENDIX I	Pass	-----
15.203	Antenna Requirement	-----	Pass	NOTE (3)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) The device what use replaceable antennas with non-standard interfaces are considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

(FCC DN: TW0659)

No.64, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

☒ CB20 ☒ TR01 ☒ C20

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C20	CISPR	150 kHz ~ 30MHz	2.4498

B. Radiated emissions test:

Test Site	Measurement Frequency Range	U,(dB)
CB20	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.20
	6 GHz ~ 18 GHz	5.50
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test:

Test Item	U,(dB)
Occupied Bandwidth	0.53
Output power	0.37
Conducted Spurious emissions	0.53
Conducted Band edges	0.53
Dwell time	0.66
Channel separation	0.66
Channel numbers	0.66

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	25°C, 45%	AC 120 V	Ken Lu
Radiated emissions below 1 GHz	25°C, 65%	AC 120 V	Barry Tsui
Radiated emissions above 1 GHz	25°C, 65%	AC 120 V	Ken Lu
Number of Hopping Frequency	24°C, 50%	AC 120 V	Cheng Tsai
Average Time of Occupancy	24°C, 50%	AC 120 V	Cheng Tsai
Hopping Channel Separation	24°C, 50%	AC 120 V	Cheng Tsai
Bandwidth	24°C, 50%	AC 120 V	Cheng Tsai
Output Power	24°C, 50%	AC 120 V	Cheng Tsai
Antenna conducted Spurious Emission	24°C, 50%	AC 120 V	Cheng Tsai

1.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

Test Software	WCN_Combo_Tool #1			
Modulation Mode	2402 MHz	2441 MHz	2480 MHz	Data Rate
GFSK	1.5	1.5	1.5	1 Mbps
$\pi/4$ -DQPSK	4	4	4	2 Mbps
8DPSK	4	4	4	3 Mbps

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	BE9300 Wi-Fi 7 Bluetooth PCIe Adapter
Brand Name	tp-link
Model Name	Archer TBE552E
Model Difference(s)	N/A
Hardware Version	1.0
Software Version	1.0
Power Source	Supplied from PCIe Slot.
Power Rating	DC 3.3V
Operation Band	2400 MHz ~ 2483.5 MHz
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	1 Mbps, 2 Mbps, 3Mbps
Output Power Max.	3Mbps: 13.47 dBm (0.0222 W)
Test Model	Archer TBE552E
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

- (1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

(3) Table for Filed Antenna:

Ant.	Brand Name	Model Name	Type	Connector	Gain (dBi)
1	TP-LINK CORPORATION PTE. LTD.	3101504215	Dipole	N/A	1.00

- (4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	3 Mbps	00	-
Transmitter Radiated Emissions (above 1GHz)	1/3 Mbps	00/78	Bandedge
	1/3 Mbps	00/39/78	Harmonic
Number of Hopping Frequency	1/3 Mbps	00~78	-
Average Time of Occupancy	1/3 Mbps	00/39/78	-
Hopping Channel Separation	1/3 Mbps	00/39/78	-
Bandwidth	1/3 Mbps	00/39/78	-
Peak Output Power	1/2/3 Mbps	00/39/78	-
Antenna conducted Spurious Emission	1/3 Mbps	00/39/78	-


Note:

- (1) The measurements for Output Power were tested with DH1/3/5 during 1Mbps, 2Mbps and 3Mbps, the worst case were 1Mbps (DH5) and 3Mbps (3DH5), only worst case were documented for other test items except Average Time of Occupancy.
- (2) This product has the mode of BT AFH, which was considered during testing. 800/20/X(X = 2 of DH1, X = 4 of DH3 or X = 6 of DH5) with 20, 10 or 6.67 hops per second in a channel, and then multiply 0.4*20 (20 # of hopping). But this mode is not the worst case mode as duration of the packet is same, and this report only shows the worst case mode.
- (3) For AC power line conducted emissions and radiated spurious emissions below 1 GHz test, the 3 Mbps channel 00 are found to be the worst case and recorded.
- (4) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC power line conducted emissions

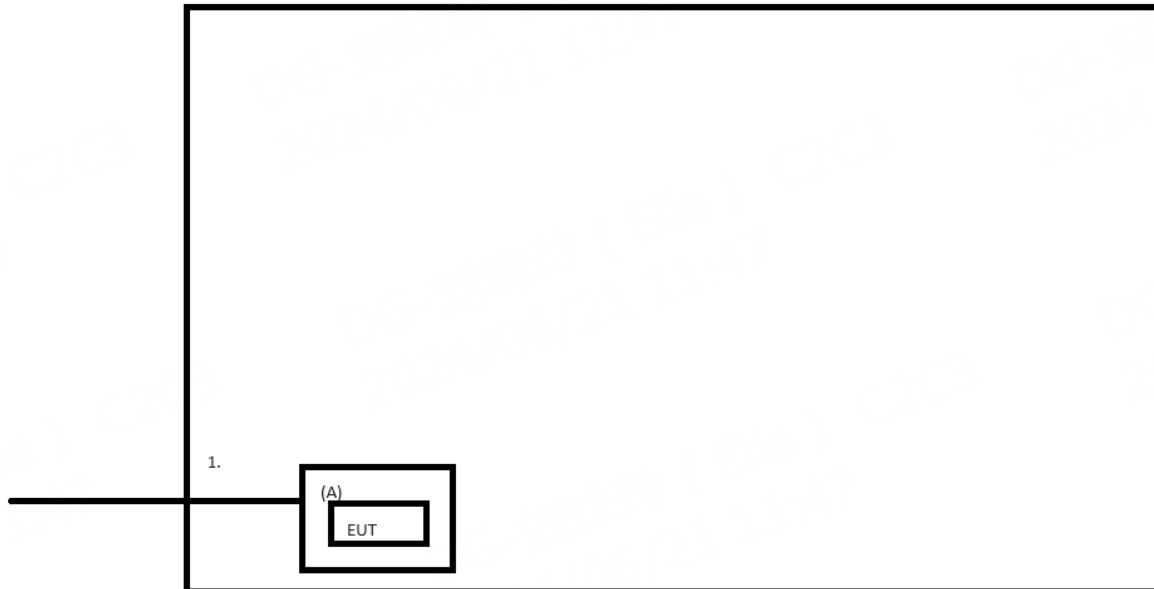

Radiated Emissions

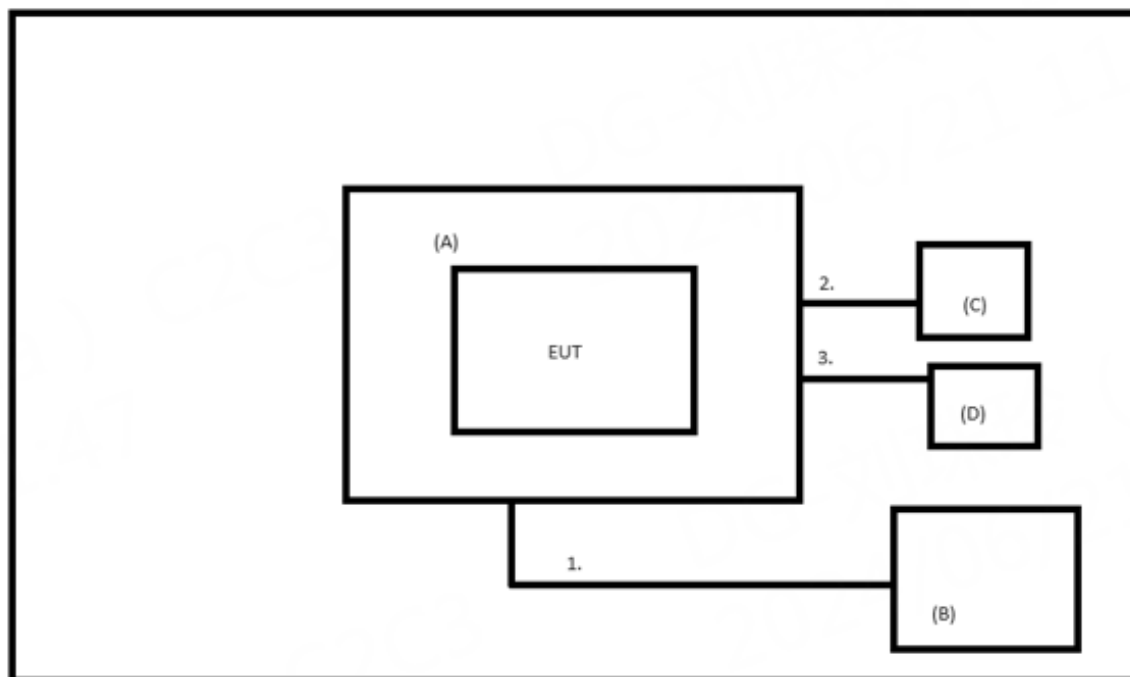

2.4 SUPPORT UNITS

AC power line conducted emissions

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Host computer	HP	DESKTOP-TBTO665	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	Power cable	N	N	0.5m	Supplied by test requester.

Radiated Emissions

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Host computer	HP	DESKTOP-TBT O665	N/A	Furnished by test lab.
B	Computer screen	PHILIPS	221S8LDAB22" LED	N/A	Furnished by test lab.
C	Mouse	Lenovo	Moiuuo	8SSM50L24505A VLC25M019Z	Furnished by test lab.
D	Keyboard	Lenovo	SK-8823	8SSD51B37225A VLC25JOMX4	

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	VGA toVGA	N	N	1m	Furnished by test lab.
2	Power cable	N	N	1.8m	Furnished by test lab.
3	Power cable	N	N	1.8m	Furnished by test lab.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

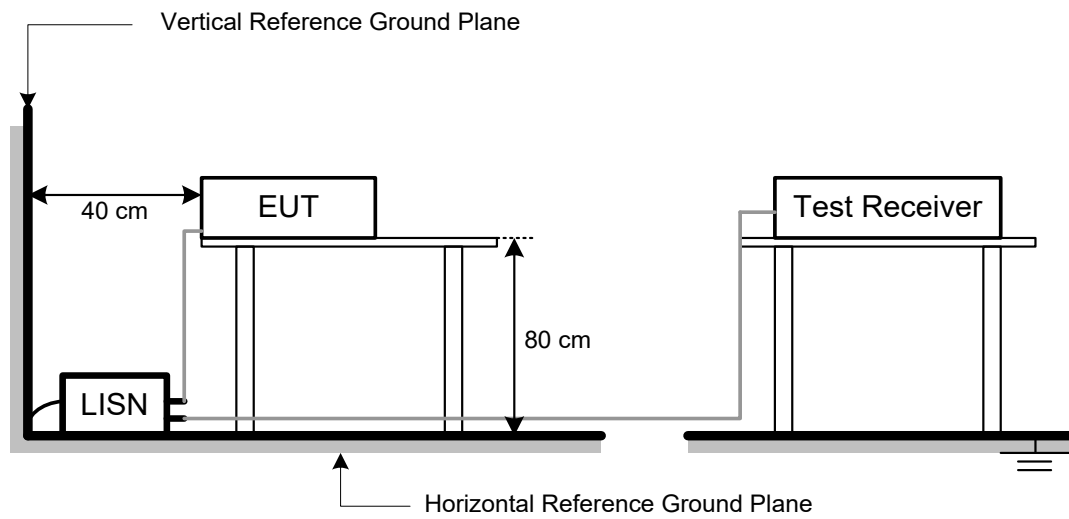

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSIONS MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Radiated Emissions (dBuV/m)		Measurement Distance (meters)
	Peak	Average	
Above 1000	74	54	3

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
35.45	+	-11.37	=	24.08

Measurement Value		Limit Value		Margin Level
24.08	-	40	=	-15.92

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector


4.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


4.3 DEVIATION FROM TEST STANDARD

No deviation.


4.4 TEST SETUP

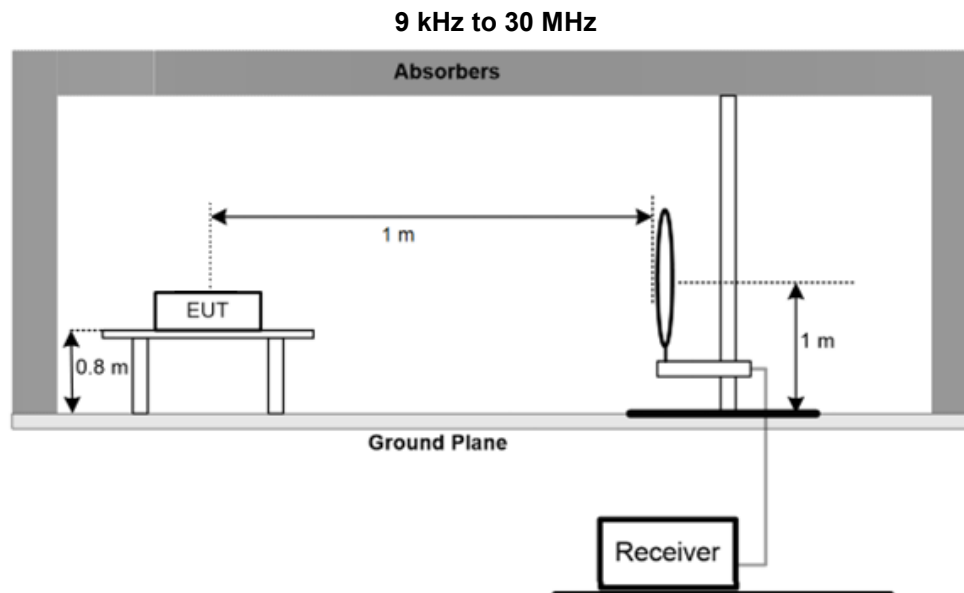

30 MHz to 1 GHz

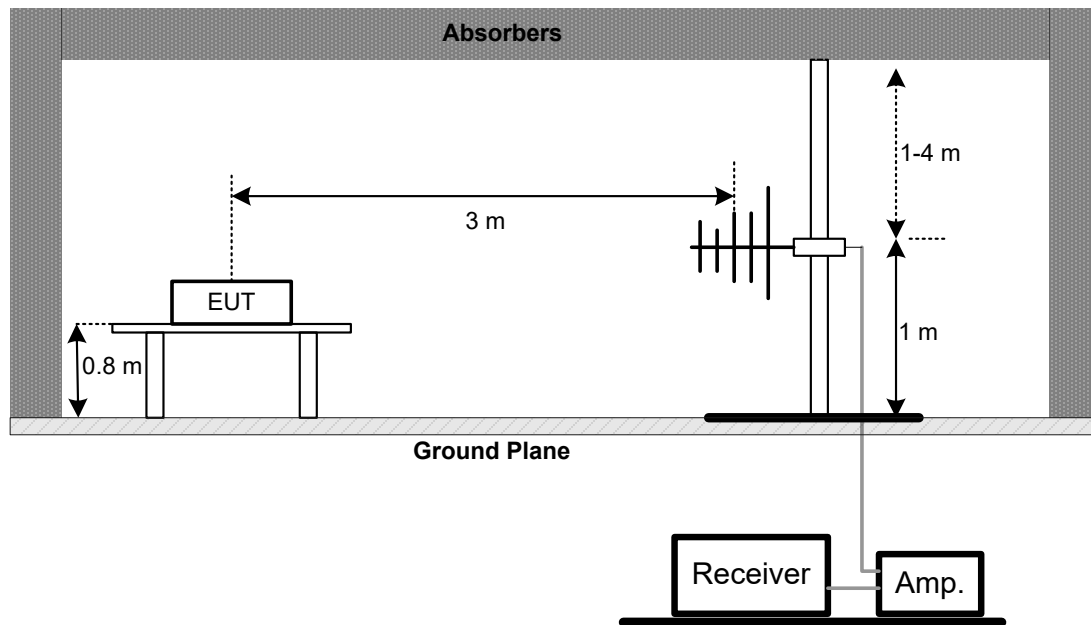

Above 1 GHz

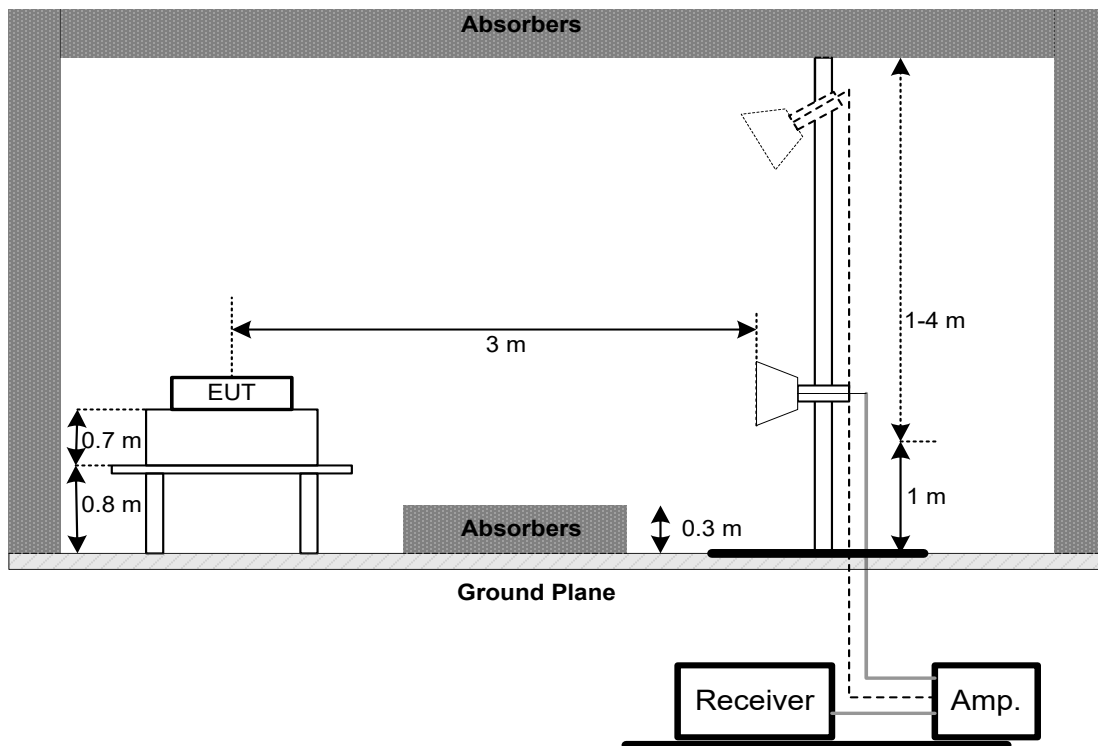

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Number of Hopping Channel	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX D.

6 AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

6.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- Measure the maximum time duration of one single pulse.
A Period Time = (channel number) * 0.4

For Non-AFH Mode (79 Channel):

DH1 Time Solt: Reading * (1600/2)/79 * (0.4 * 79)

DH3 Time Solt: Reading * (1600/4)/79 * (0.4 * 79)

DH5 Time Solt: Reading * (1600/6)/79 * (0.4 * 79)

For AFH Mode (20 Channel):

DH1 Time Solt: Reading * (800/2)/20 * (0.4 * 20)


DH3 Time Solt: Reading * (800/4)/20 * (0.4 * 20)

DH5 Time Solt: Reading * (800/6)/20 * (0.4 * 20)

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

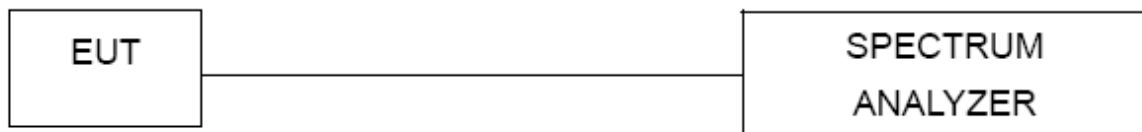

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7 HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.2 TEST PROCEDURE

- The EUT must have its hopping function enabled
- Span = wide enough to capture the peaks of two adjacent channels
Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span
Video (or Average) Bandwidth (VBW) $\geq$ RBW
Sweep = Auto
Detector function = Peak
Trace = Max Hold

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

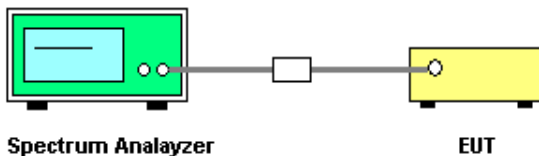

7.5 TEST RESULTS

Please refer to the APPENDIX F.

8 BANDWIDTH TEST

8.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C		
Section	Test Item	Frequency Range (MHz)
15.247(a)(1)	Bandwidth	2400-2483.5

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep Time = Auto.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9 OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	0.125Watt or 21dBm	2400-2483.5	PASS


9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 3MHz, VBW= 3MHz, Sweep time = Auto.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10 ANTENNA CONDUCTED SPURIOUS EMISSION

10.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


10.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.
- Offset=antenna gain+cable loss

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP

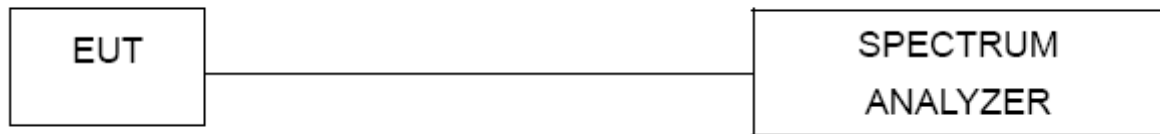

10.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

10.6 TEST RESULTS

Please refer to the APPENDIX I.

11 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Two-Line V-Network	R&S	ENV216	101051	2023/7/21	2024/7/20
2	Test Cable	EMCI	EMCRG58-BM-B M-9000	210501	2023/12/11	2024/12/10
3	EXA Spectrum Analyzer	keysight	N9038A	MY54130009	2023/6/26	2024/6/25
4	Measurement Software	Farad	EZ EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Broad-Band Horn Antenna	RFSPIN	DRH18-E	210109A18E	2024/1/10	2025/1/9
2	Pre-Amplifier	EMCI	EMC051845SE	980779	2023/12/11	2024/12/10
3	Test Cable	EMCI	EMC105-SM-SM-1000	210119	2023/12/11	2024/12/10
4	Test Cable	EMCI	EMC105-SM-SM-3000	210118	2023/12/11	2024/12/10
5	Test Cable	EMCI	EMC105-SM-SM-7000	210117	2023/12/11	2024/12/10
6	EXA Spectrum Analyzer	keysight	N9010A	MY56480554	2023/9/12	2024/9/11
7	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01207	2023/12/18	2024/12/17
8	EMI Test Receiver	Keysight	N9038A	MY54130009	2023/6/26	2024/6/25
9	Pre-Amplifier	EMCI	EMC001330-202 01222	980807	2023/12/11	2024/12/10
10	Test Cable	EMCI	EMC-8D-NM-NM-5000	150106	2023/12/11	2024/12/10
11	Test Cable	EMCI	EMC-CFD-400-N M-NM-8000	200348	2023/12/11	2024/12/10
12	Measurement Software	Farad	EZ EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Number of Hopping Frequency

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2023/6/26	2024/6/25

Average Time of Occupancy

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2023/6/26	2024/6/25

Hopping Channel Separation

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2023/6/26	2024/6/25

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2023/6/26	2024/6/25

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2023/6/26	2024/6/25

Antenna conducted Spurious Emission						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2023/6/26	2024/6/25

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

12 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2403G002-FCCP-1 (APPENDIX-TEST PHOTOS).

13 EUT PHOTOS

Please refer to document Appendix No.: EP-2403G002-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2024/5/3
Test Frequency	-	Phase	Line

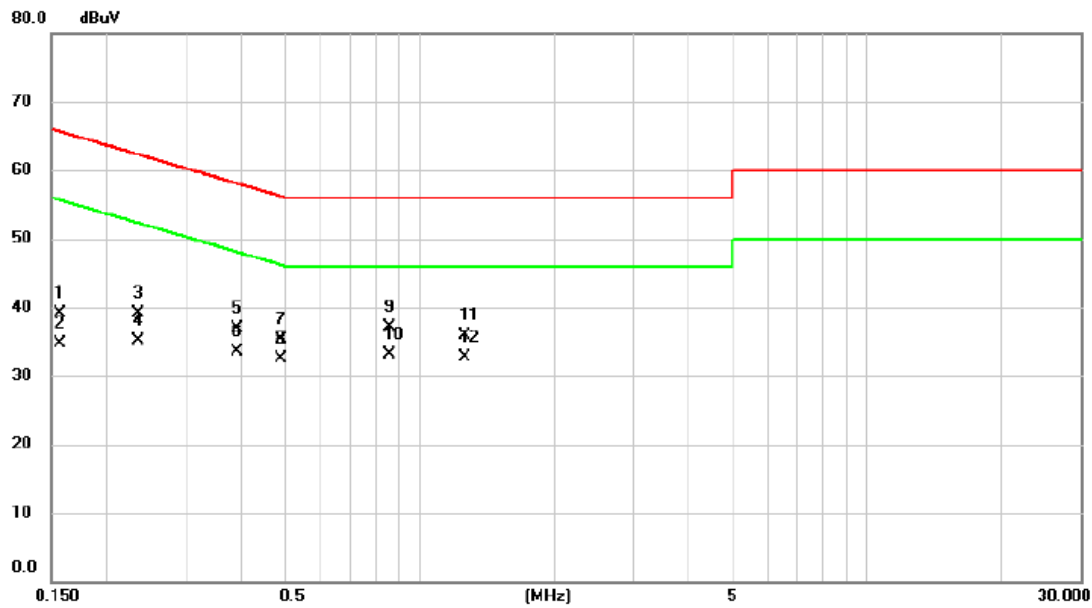


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1566	29.46	9.65	39.11	65.64	-26.53	QP	
2		0.1566	25.06	9.65	34.71	55.64	-20.93	AVG	
3		0.2343	29.39	9.64	39.03	62.30	-23.27	QP	
4		0.2343	25.44	9.64	35.08	52.30	-17.22	AVG	
5		0.3908	27.27	9.65	36.92	58.05	-21.13	QP	
6		0.3908	23.76	9.65	33.41	48.05	-14.64	AVG	
7		0.4910	25.64	9.66	35.30	56.15	-20.85	QP	
8		0.4910	22.75	9.66	32.41	46.15	-13.74	AVG	
9		0.8554	27.44	9.69	37.13	56.00	-18.87	QP	
10	*	0.8554	23.43	9.69	33.12	46.00	-12.88	AVG	
11		1.2604	26.14	9.72	35.86	56.00	-20.14	QP	
12		1.2604	22.92	9.72	32.64	46.00	-13.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2024/5/3
Test Frequency	-	Phase	Neutral

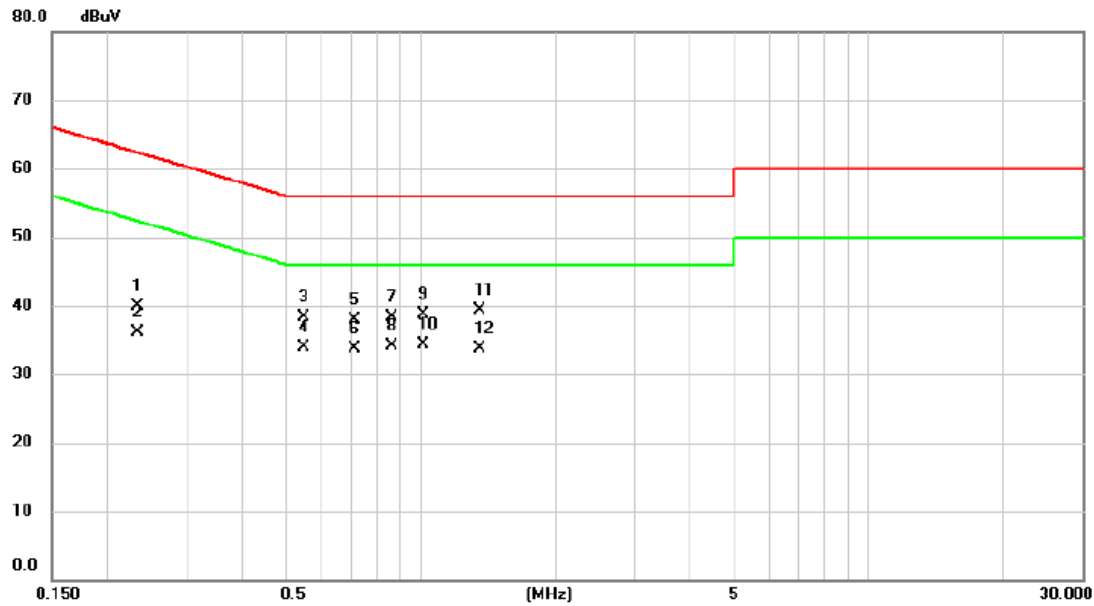


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2340	30.31	9.63	39.94	62.31	-22.37	QP	
2		0.2340	26.43	9.63	36.06	52.31	-16.25	AVG	
3		0.5494	28.58	9.64	38.22	56.00	-17.78	QP	
4		0.5494	24.29	9.64	33.93	46.00	-12.07	AVG	
5		0.7114	28.29	9.67	37.96	56.00	-18.04	QP	
6		0.7114	24.02	9.67	33.69	46.00	-12.31	AVG	
7		0.8600	28.59	9.68	38.27	56.00	-17.73	QP	
8		0.8600	24.40	9.68	34.08	46.00	-11.92	AVG	
9		1.0174	29.07	9.69	38.76	56.00	-17.24	QP	
10	*	1.0174	24.64	9.69	34.33	46.00	-11.67	AVG	
11		1.3504	29.52	9.72	39.24	56.00	-16.76	QP	
12		1.3504	23.98	9.72	33.70	46.00	-12.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/5/3
Test Frequency	-	Phase	Line

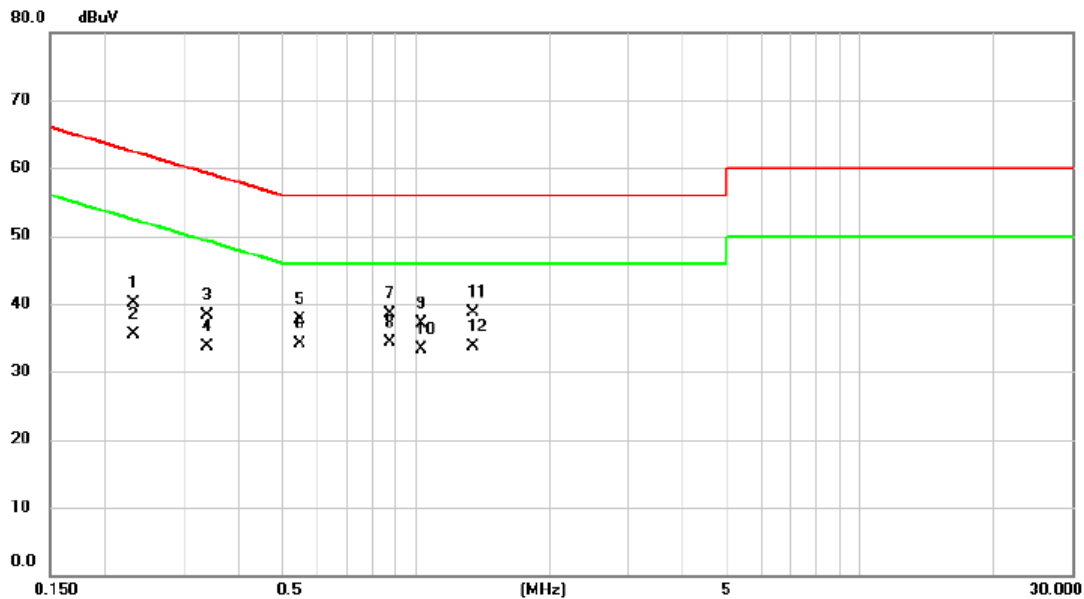


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2315	30.48	9.64	40.12	62.40	-22.28	QP	
2		0.2315	25.92	9.64	35.56	52.40	-16.84	AVG	
3		0.3400	28.56	9.65	38.21	59.20	-20.99	QP	
4		0.3400	24.07	9.65	33.72	49.20	-15.48	AVG	
5		0.5494	28.00	9.66	37.66	56.00	-18.34	QP	
6		0.5494	24.46	9.66	34.12	46.00	-11.88	AVG	
7		0.8734	28.86	9.69	38.55	56.00	-17.45	QP	
8	*	0.8734	24.56	9.69	34.25	46.00	-11.75	AVG	
9		1.0310	27.42	9.70	37.12	56.00	-18.88	QP	
10		1.0310	23.59	9.70	33.29	46.00	-12.71	AVG	
11		1.3414	29.04	9.73	38.77	56.00	-17.23	QP	
12		1.3414	23.97	9.73	33.70	46.00	-12.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/5/3
Test Frequency	-	Phase	Neutral

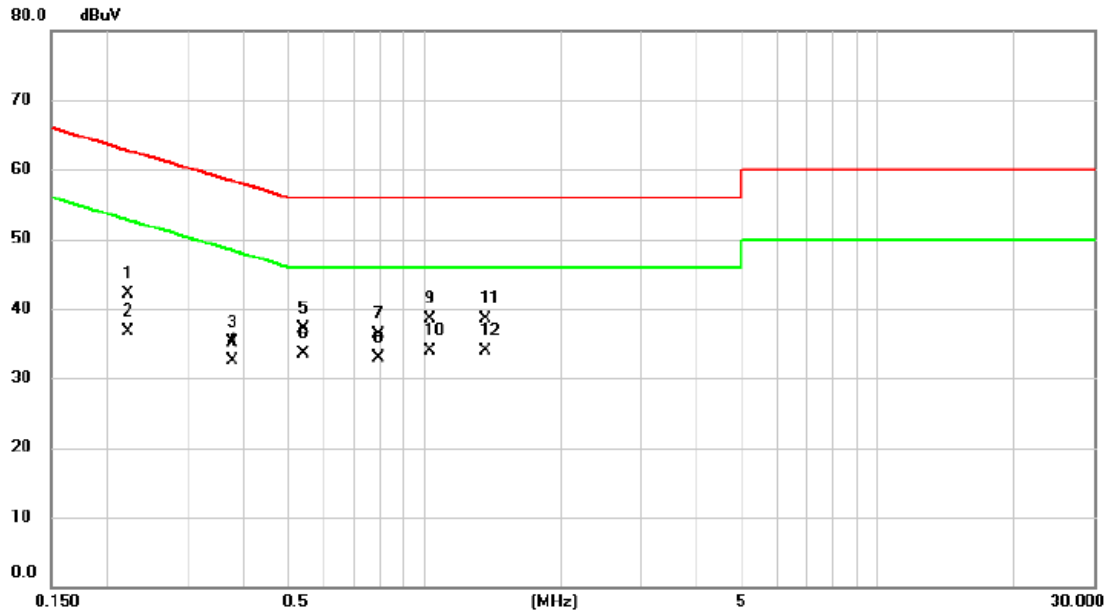


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2224	32.44	9.63	42.07	62.73	-20.66	QP	
2		0.2224	27.08	9.63	36.71	52.73	-16.02	AVG	
3		0.3772	25.57	9.63	35.20	58.34	-23.14	QP	
4		0.3772	22.94	9.63	32.57	48.34	-15.77	AVG	
5		0.5404	27.48	9.64	37.12	56.00	-18.88	QP	
6		0.5404	23.81	9.64	33.45	46.00	-12.55	AVG	
7		0.7925	26.64	9.67	36.31	56.00	-19.69	QP	
8		0.7925	23.15	9.67	32.82	46.00	-13.18	AVG	
9		1.0265	28.78	9.69	38.47	56.00	-17.53	QP	
10		1.0265	24.18	9.69	33.87	46.00	-12.13	AVG	
11		1.3595	28.82	9.72	38.54	56.00	-17.46	QP	
12	*	1.3595	24.18	9.72	33.90	46.00	-12.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	BT(3Mbps)	Test Date	2024/4/29
Test Frequency	2402MHz	Polarization	Vertical

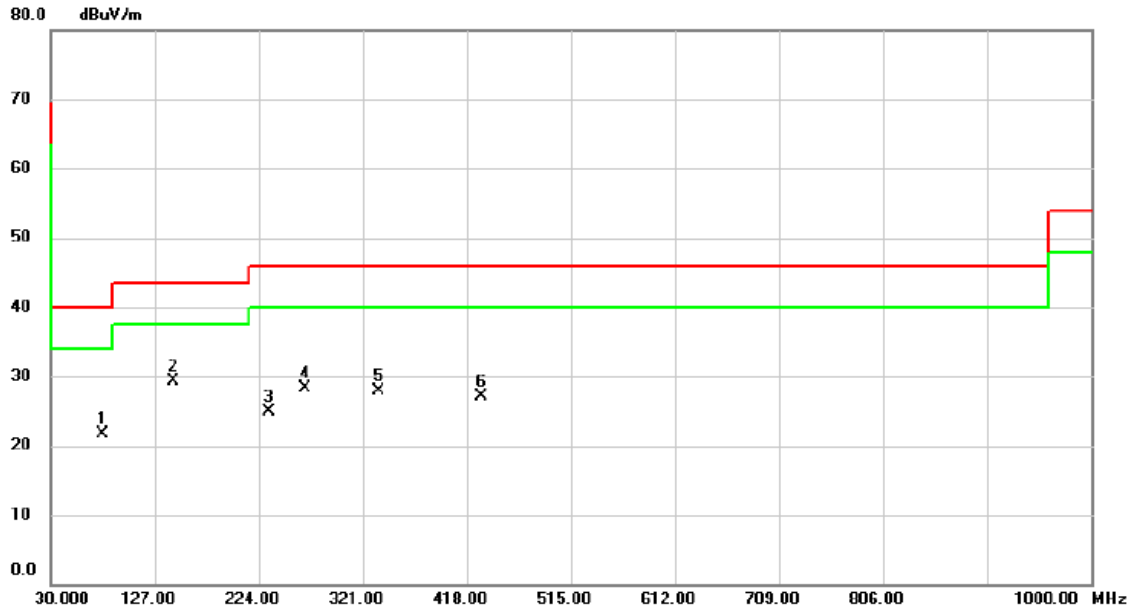


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		78.5000	37.54	-15.78	21.76	40.00	-18.24	peak	200	161
2	*	144.4600	40.98	-11.59	29.39	43.50	-14.11	peak	100	163
3		233.7000	38.13	-13.22	24.91	46.00	-21.09	peak	200	343
4		266.6800	39.67	-11.42	28.25	46.00	-17.75	peak		
5		335.5500	37.13	-9.30	27.83	46.00	-18.17	peak	200	200
6		431.5800	33.69	-6.54	27.15	46.00	-18.85	peak	200	250

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2024/4/29
Test Frequency	2402MHz	Polarization	Horizontal

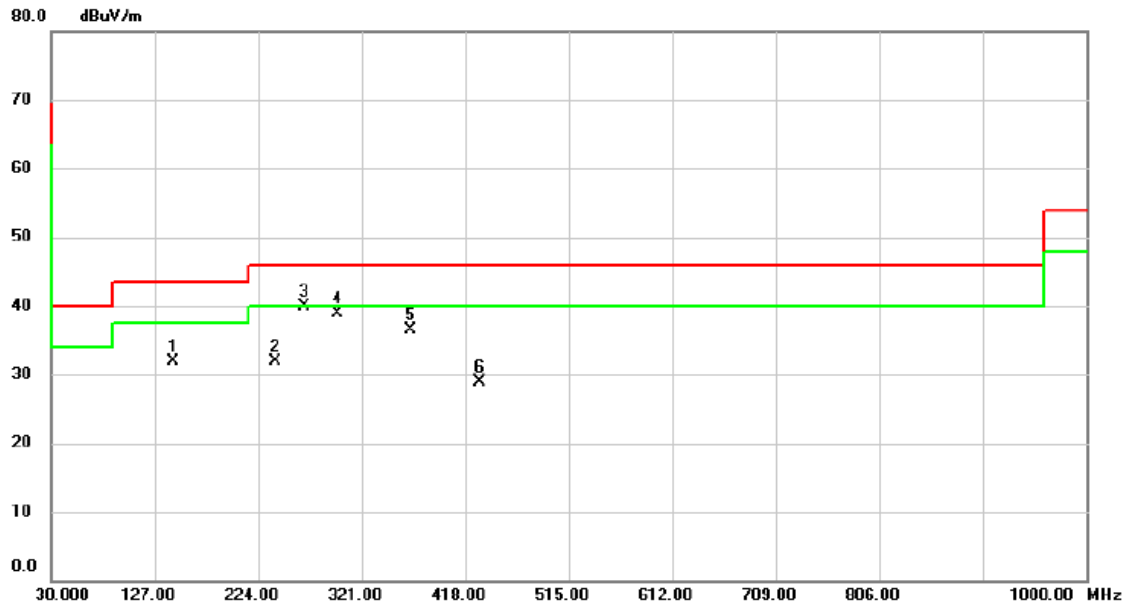


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		144.4600	43.52	-11.59	31.93	43.50	-11.57	peak	200	234
2		240.4900	44.12	-12.25	31.87	46.00	-14.13	peak	100	191
3	*	266.6800	51.33	-11.42	39.91	46.00	-6.09	peak	100	254
4		298.6900	49.23	-10.26	38.97	46.00	-7.03	peak	100	254
5		366.5900	44.90	-8.44	36.46	46.00	-9.54	peak	100	299
6		431.5800	35.54	-6.54	29.00	46.00	-17.00	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	BT(1Mbps)	Test Date	2024/4/26
Test Frequency	2402MHz	Polarization	Horizontal

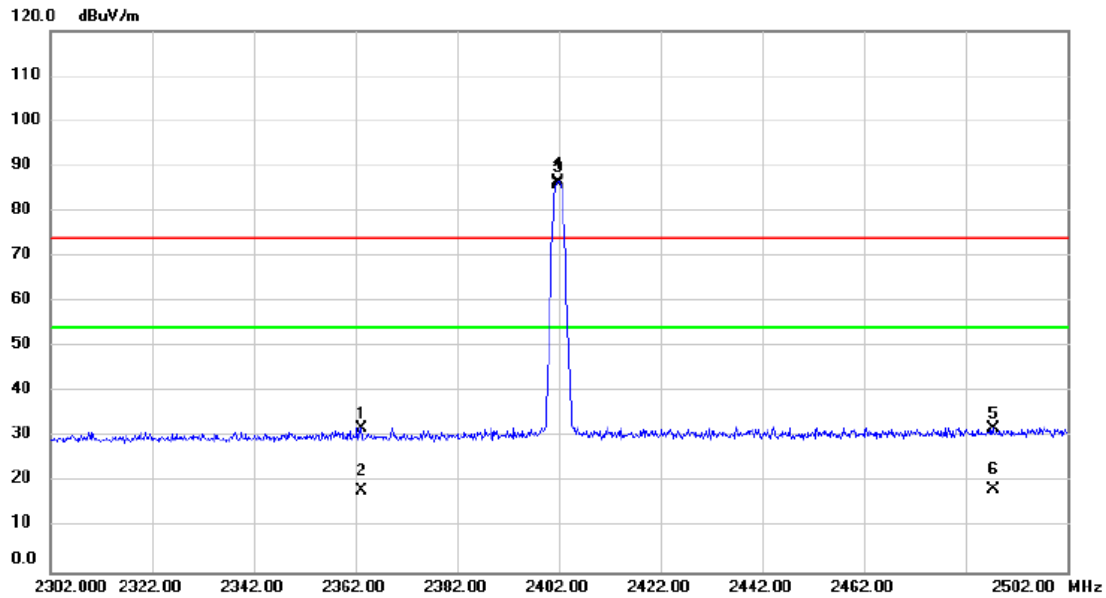


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		2363.200	38.21	-6.17	32.04	74.00	-41.96	peak			
2		2363.200	24.40	-6.17	18.23	54.00	-35.77	AVG			
3	X	2401.800	92.58	-6.09	86.49	74.00	12.49	peak			No Limit
4	*	2401.800	92.15	-6.09	86.06	54.00	32.06	AVG			No Limit
5		2487.400	37.99	-5.91	32.08	74.00	-41.92	peak			
6		2487.400	24.47	-5.91	18.56	54.00	-35.44	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2024/4/26
Test Frequency	2480MHz	Polarization	Horizontal

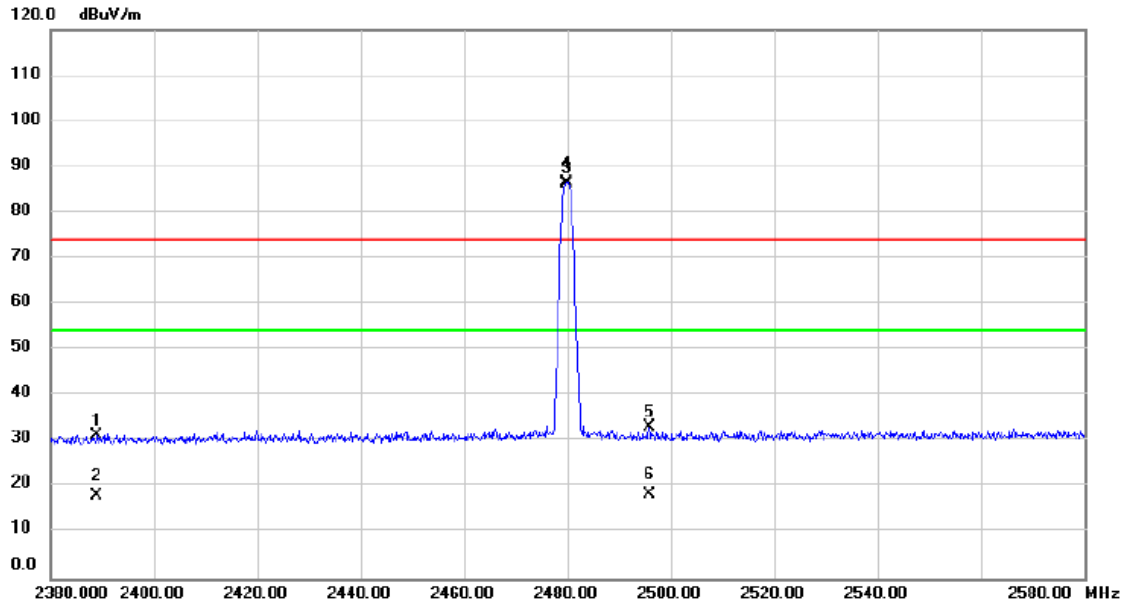


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Detector	Comment
1		2389.000	37.61	-6.12	31.49	74.00	-42.51			peak	
2		2389.000	24.39	-6.12	18.27	54.00	-35.73			AVG	
3	X	2479.800	92.43	-5.92	86.51	74.00	12.51			peak	No Limit
4	*	2479.800	92.07	-5.92	86.15	54.00	32.15			AVG	No Limit
5		2495.800	38.93	-5.89	33.04	74.00	-40.96			peak	
6		2495.800	24.47	-5.89	18.58	54.00	-35.42			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2024/4/26
Test Frequency	2402MHz	Polarization	Horizontal

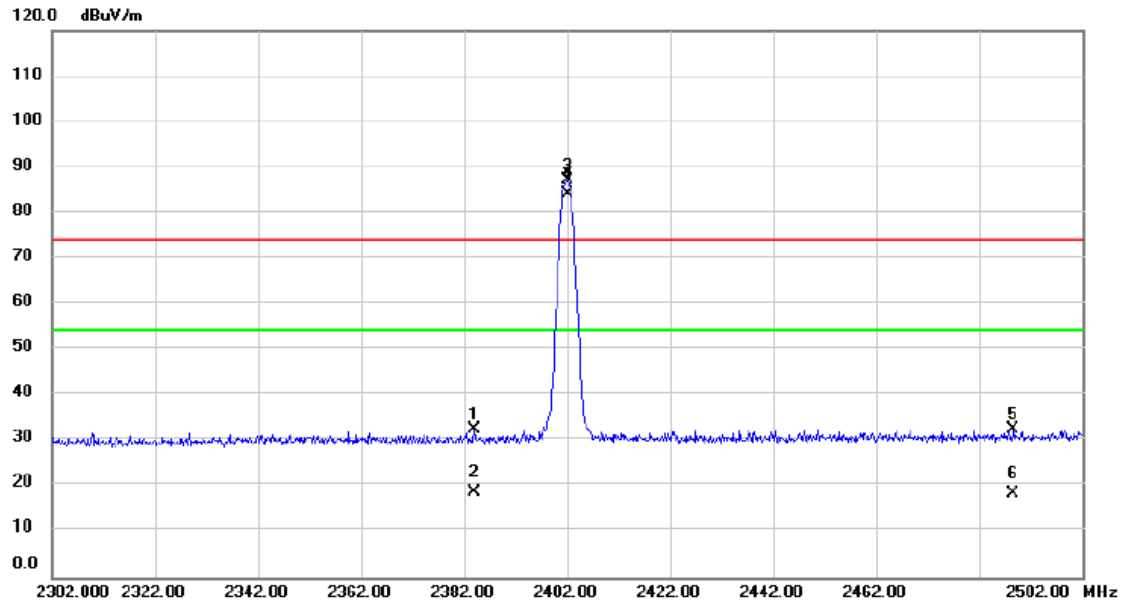


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2384.000	38.56	-6.13	32.43	74.00	-41.57	peak		
2		2384.000	24.76	-6.13	18.63	54.00	-35.37	AVG		
3	X	2402.000	93.18	-6.09	87.09	74.00	13.09	peak		No Limit
4	*	2402.000	90.31	-6.09	84.22	54.00	30.22	AVG		No Limit
5		2488.600	38.51	-5.90	32.61	74.00	-41.39	peak		
6		2488.600	24.40	-5.90	18.50	54.00	-35.50	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2024/4/26
Test Frequency	2480MHz	Polarization	Horizontal

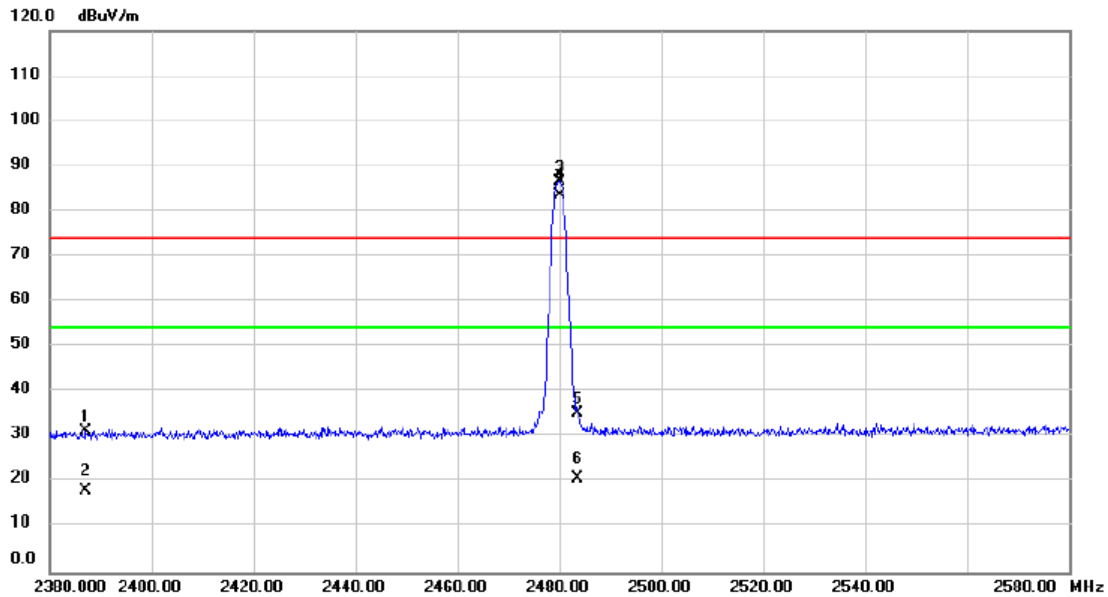


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		2387.200	37.60	-6.13	31.47	74.00	-42.53	peak			
2		2387.200	24.34	-6.13	18.21	54.00	-35.79	AVG			
3	X	2480.000	92.46	-5.92	86.54	74.00	12.54	peak			No Limit
4	*	2480.000	89.54	-5.92	83.62	54.00	29.62	AVG			No Limit
5		2483.500	41.18	-5.92	35.26	74.00	-38.74	peak			
6		2483.500	26.83	-5.92	20.91	54.00	-33.09	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2024/4/26
Test Frequency	2402MHz	Polarization	Vertical

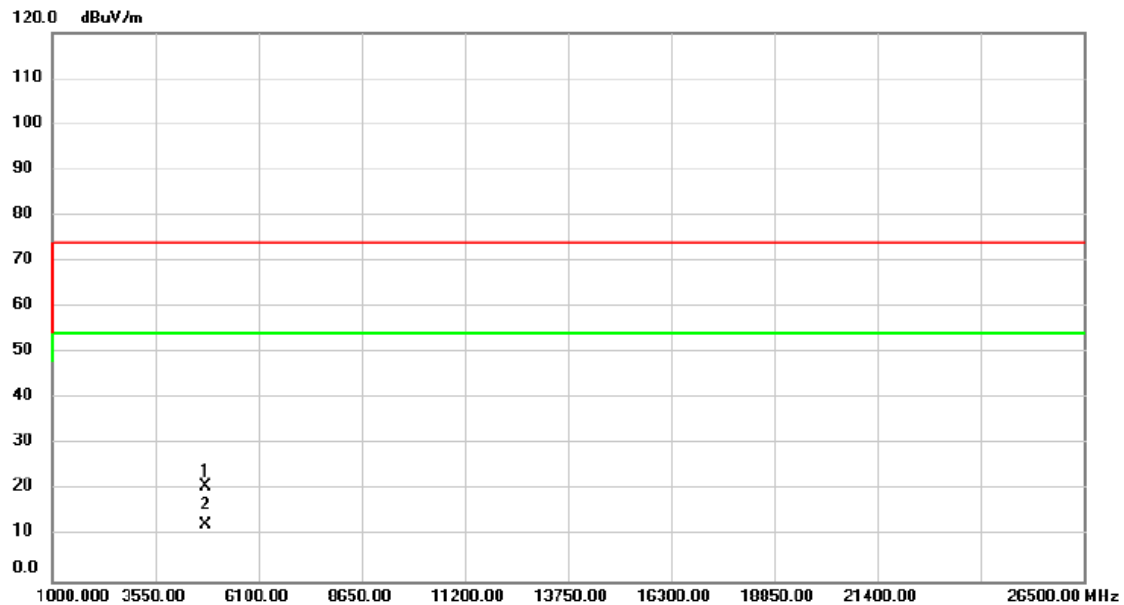


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4804.000	29.44	-8.62	20.82	74.00	-53.18	peak		
2	*	4804.000	21.11	-8.62	12.49	54.00	-41.51	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2024/4/26
Test Frequency	2402MHz	Polarization	Horizontal

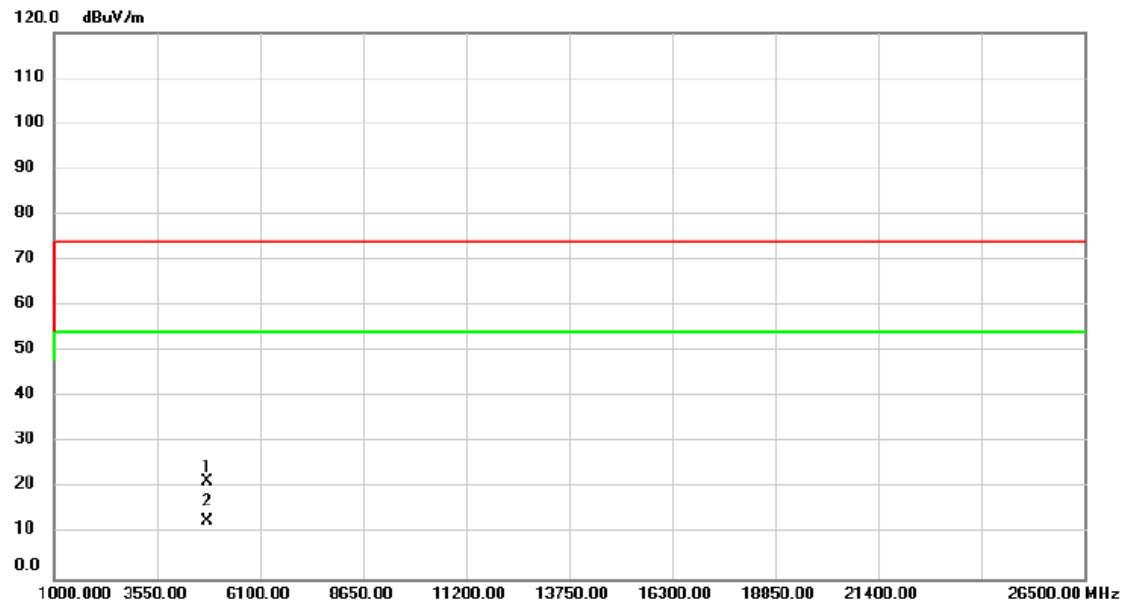


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4804.000	30.00	-8.62	21.38	74.00	-52.62	peak		
2	*	4804.000	21.31	-8.62	12.69	54.00	-41.31	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2024/4/26
Test Frequency	2441MHz	Polarization	Vertical

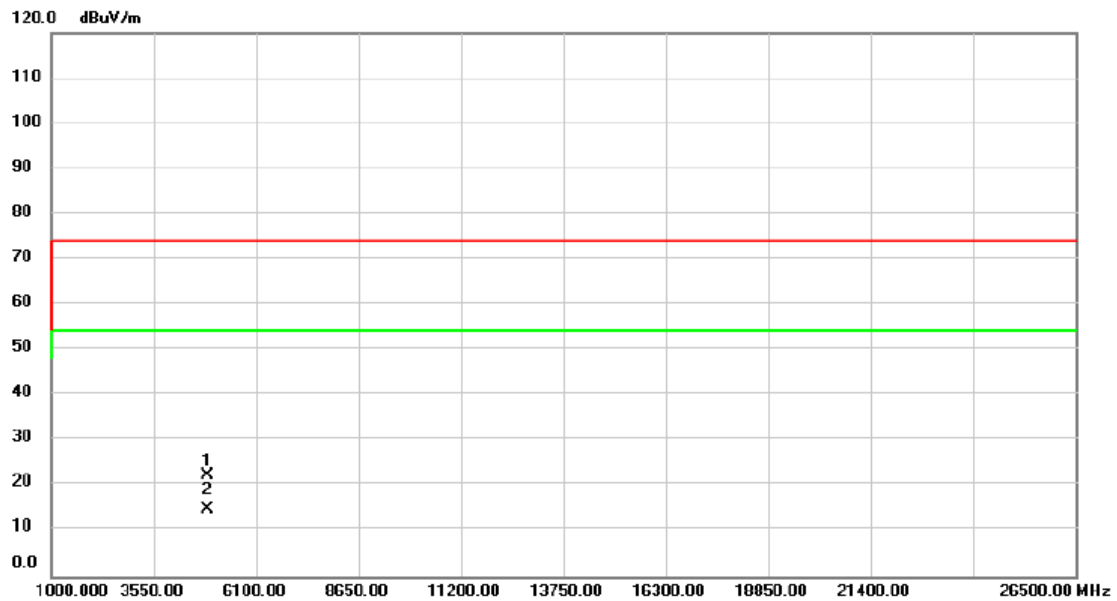


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		4882.000	30.76	-8.42	22.34	74.00	-51.66	peak		
2	*	4882.000	23.28	-8.42	14.86	54.00	-39.14	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2024/4/26
Test Frequency	2441MHz	Polarization	Horizontal

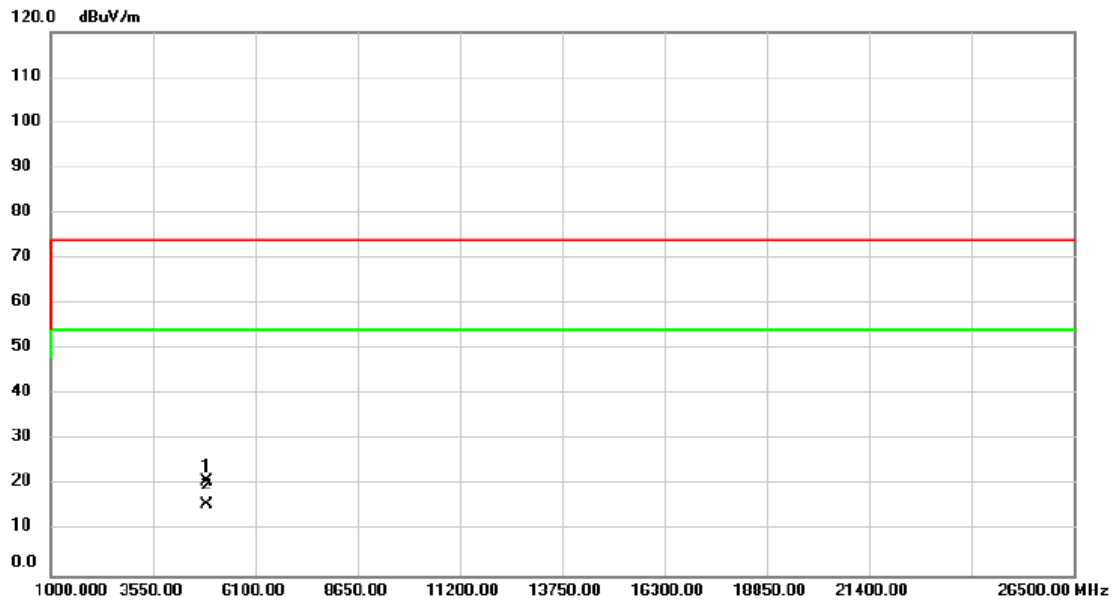


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4882.000	29.14	-8.42	20.72	74.00	-53.28	peak		
2	*	4882.000	24.31	-8.42	15.89	54.00	-38.11	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2024/4/26
Test Frequency	2480MHz	Polarization	Vertical

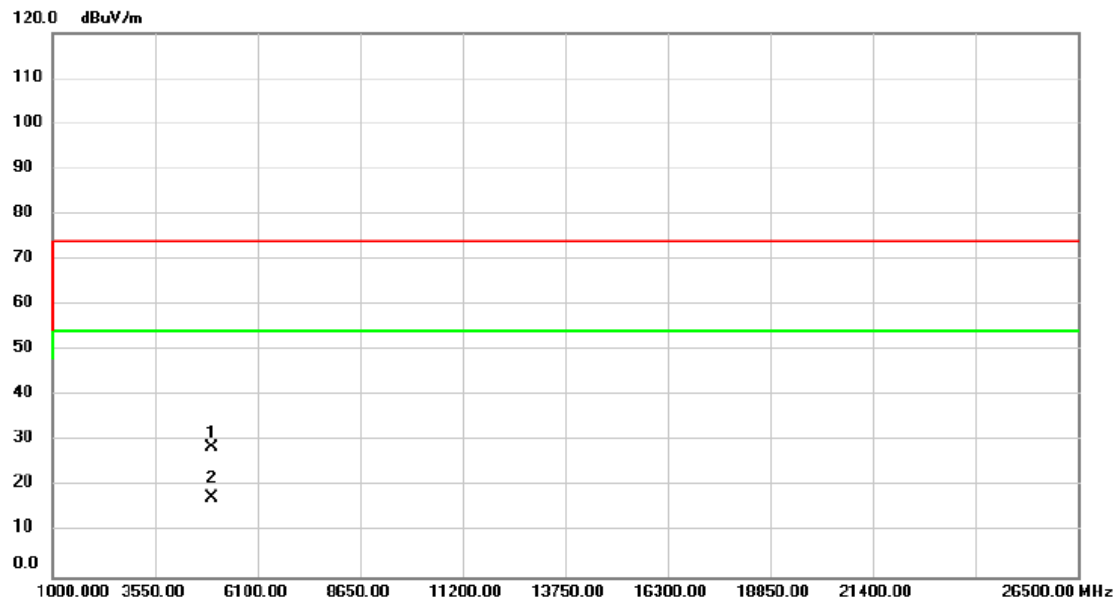


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		4960.000	36.89	-8.23	28.66	74.00	-45.34	peak		
2	*	4960.000	25.77	-8.23	17.54	54.00	-36.46	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(1Mbps)	Test Date	2024/4/26
Test Frequency	2480MHz	Polarization	Horizontal

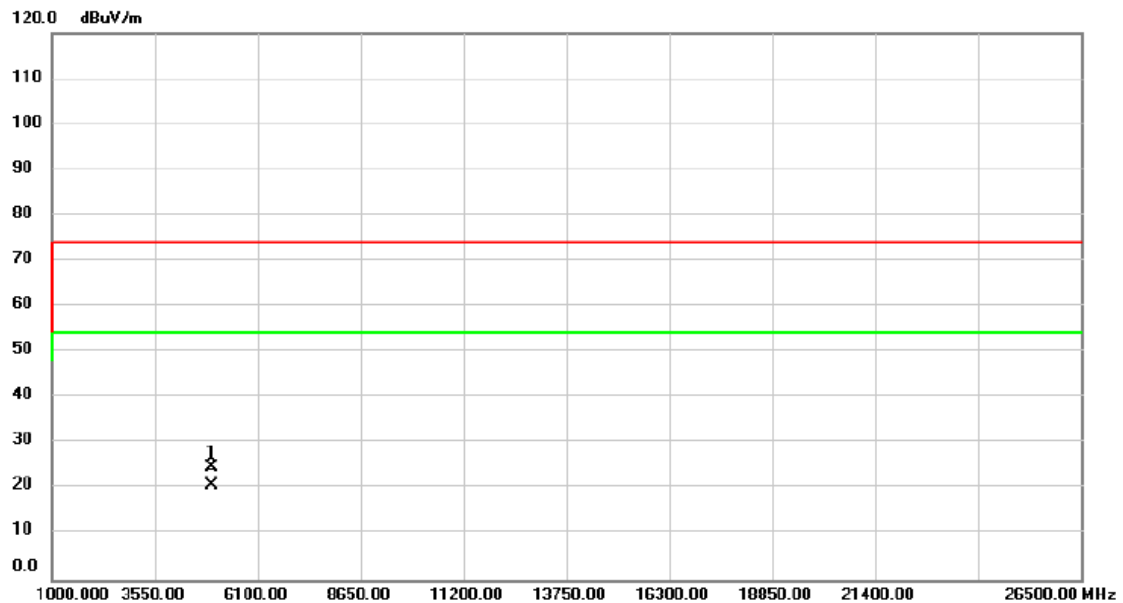


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4944.000	33.09	-8.27	24.82	74.00	-49.18			peak
2	*	4944.000	29.05	-8.27	20.78	54.00	-33.22			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2024/4/26
Test Frequency	2402MHz	Polarization	Vertical

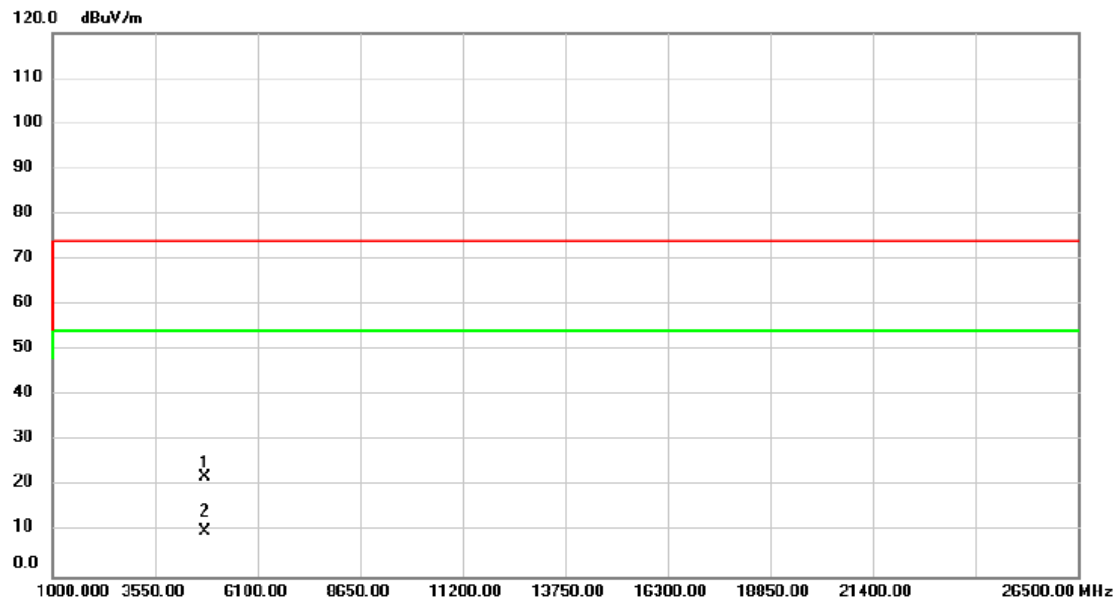


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		4804.000	30.60	-8.62	21.98	74.00	-52.02	peak			
2	*	4804.000	18.75	-8.62	10.13	54.00	-43.87	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2024/4/26
Test Frequency	2402MHz	Polarization	Horizontal

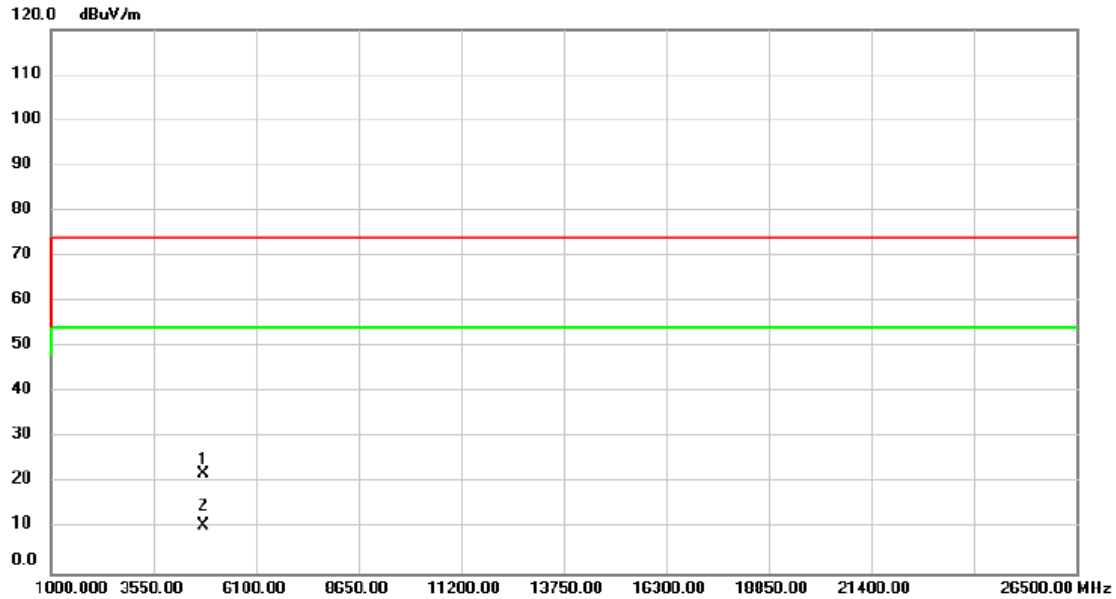


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4804.000	30.81	-8.62	22.19	74.00	-51.81	peak		
2	*	4804.000	19.25	-8.62	10.63	54.00	-43.37	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2024/4/26
Test Frequency	2441MHz	Polarization	Vertical

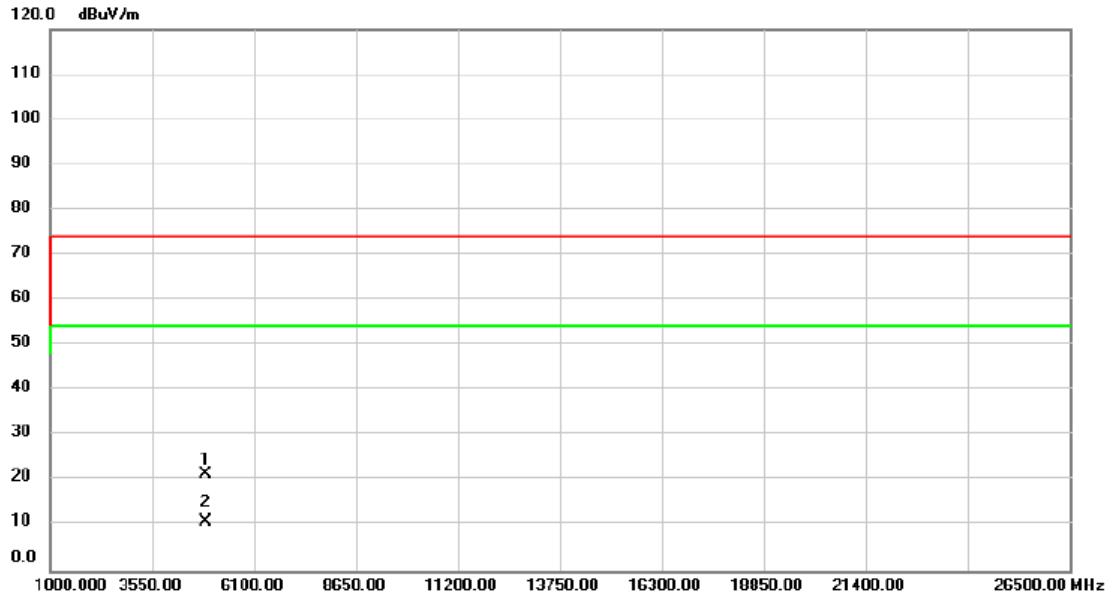


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4882.000	29.85	-8.42	21.43	74.00	-52.57	peak		
2	*	4882.000	19.28	-8.42	10.86	54.00	-43.14	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2024/4/26
Test Frequency	2441MHz	Polarization	Horizontal

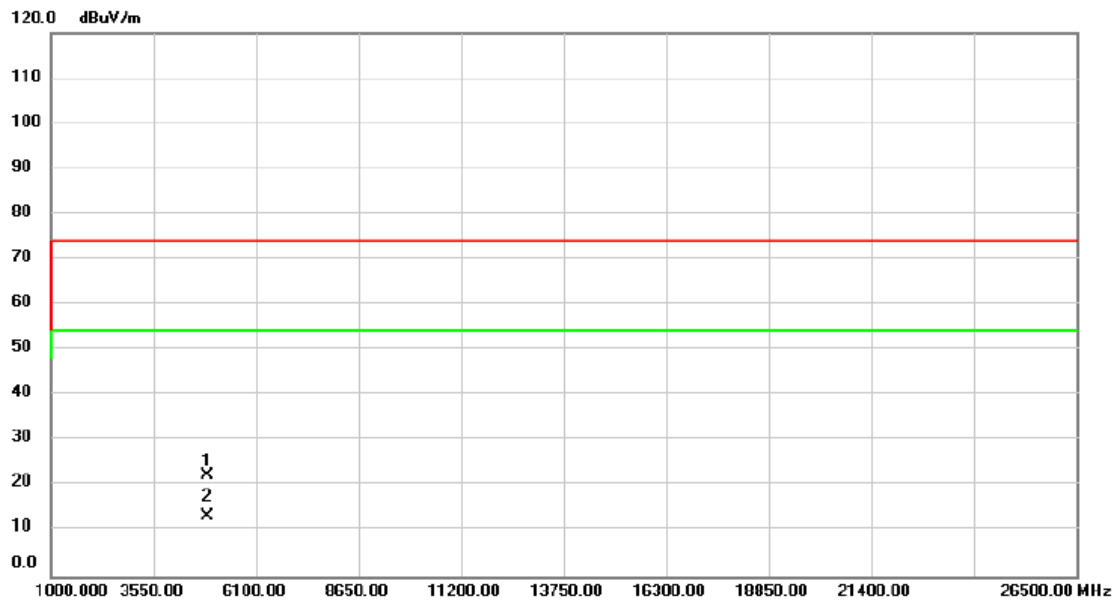


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		4882.000	30.88	-8.42	22.46	74.00	-51.54	peak		
2	*	4882.000	21.90	-8.42	13.48	54.00	-40.52	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2024/4/26
Test Frequency	2480MHz	Polarization	Vertical

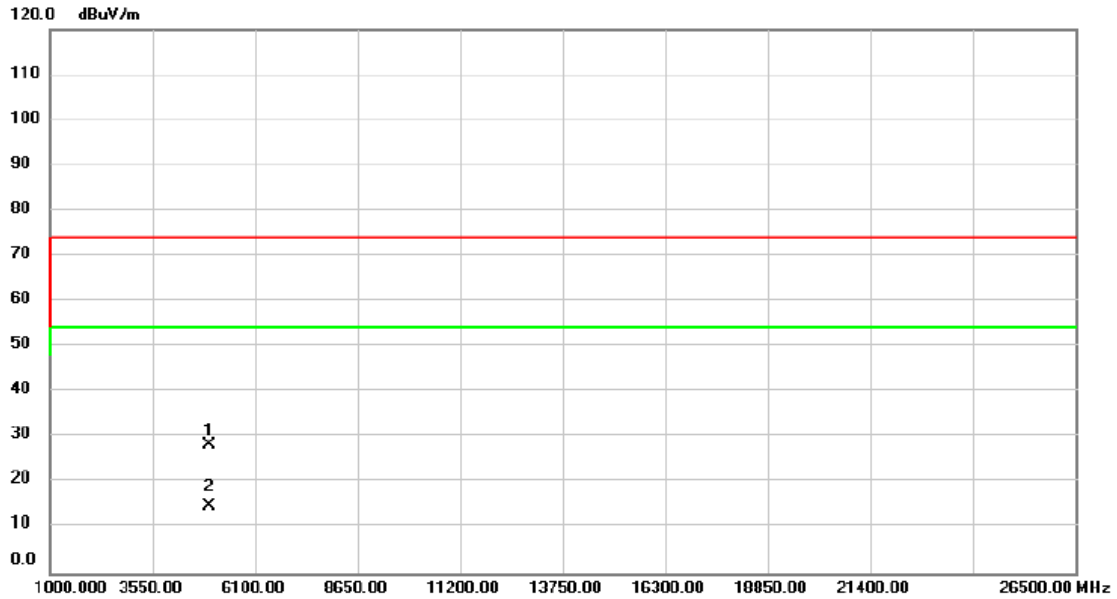


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4960.000	36.57	-8.23	28.34	74.00	-45.66	peak		
2	*	4960.000	22.98	-8.23	14.75	54.00	-39.25	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BT(3Mbps)	Test Date	2024/4/26
Test Frequency	2480MHz	Polarization	Horizontal

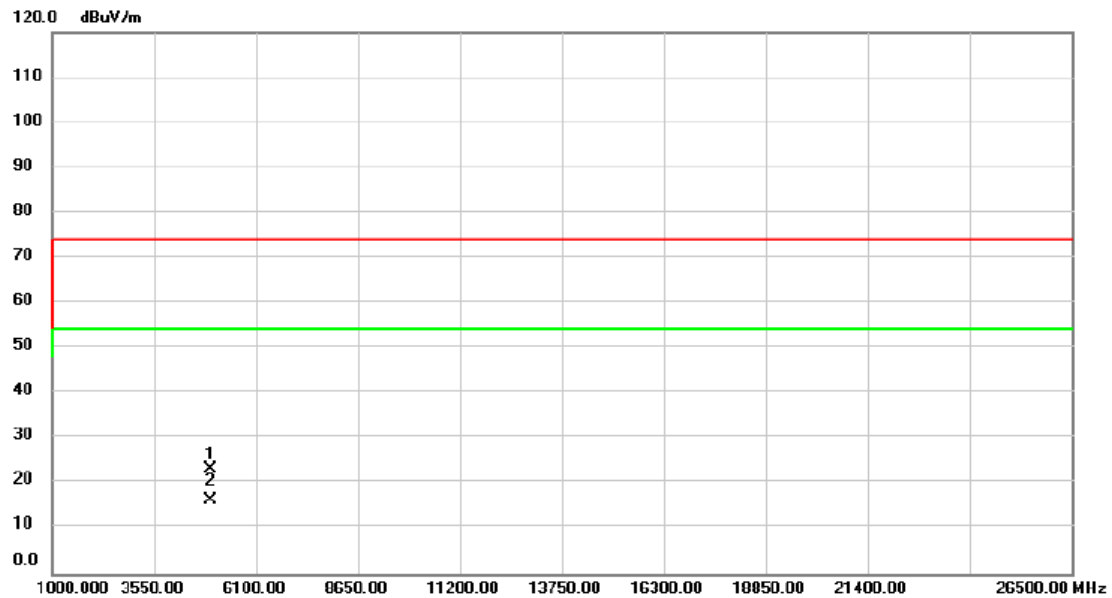

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		4960.000	31.63	-8.23	23.40	74.00	-50.60			peak
2	*	4960.000	24.62	-8.23	16.39	54.00	-37.61			AVG

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D NUMBER OF HOPPING CHANNEL

Test Mode	1/3Mbps
-----------	---------


Test Mode	Number of Hopping Channel	≥ Limit	Test Result
1 Mbps	79	15	Pass
3 Mbps	79	15	Pass

1 Mbps

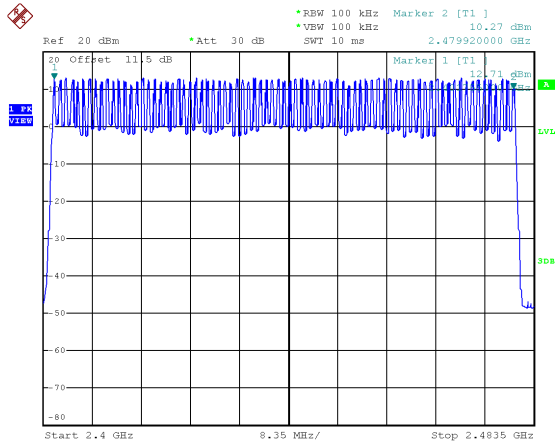

Date: 6.MAY.2024 20:56:51

3 Mbps

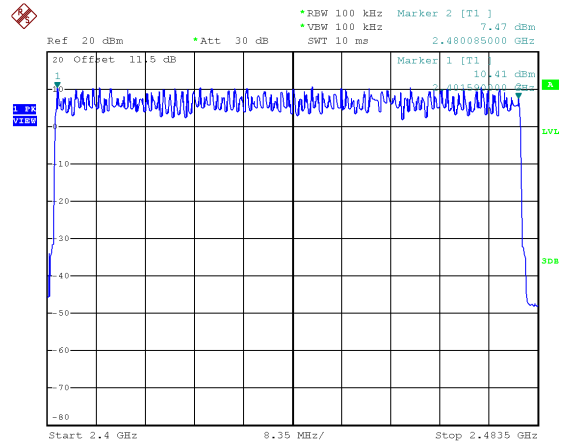


Date: 17.MAY.2024 14:34:58

APPENDIX E AVERAGE TIME OF OCCUPANCY

Test Mode : 1Mbps


Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402	0.3750	0.1200	0.4000	Pass
DH3	2402	1.6400	0.2624	0.4000	Pass
DH1	2402	2.8800	0.3072	0.4000	Pass
DH5	2441	0.3750	0.1200	0.4000	Pass
DH3	2441	1.6400	0.2624	0.4000	Pass
DH1	2441	2.8800	0.3072	0.4000	Pass
DH5	2480	0.3750	0.1200	0.4000	Pass
DH3	2480	1.6400	0.2624	0.4000	Pass
DH1	2480	2.8800	0.3072	0.4000	Pass

CH00-DH1

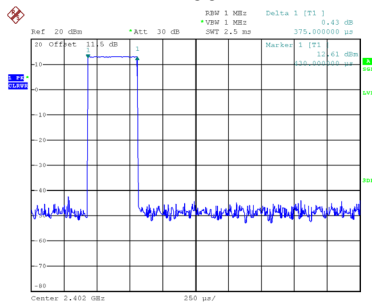


Date: 6.MAY.2024 20:49:04

CH39-DH1

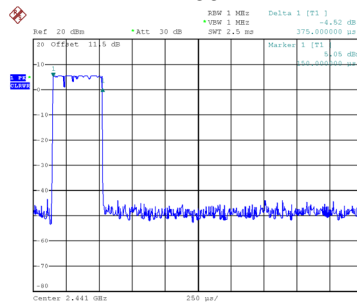


Date: 6.MAY.2024 20:49:10

CH78-DH1

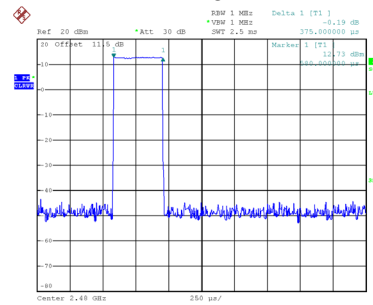


Date: 6.MAY.2024 20:49:16

CH00-DH3

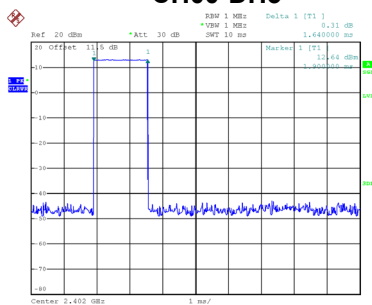


Date: 6.MAY.2024 20:49:56

CH39-DH3

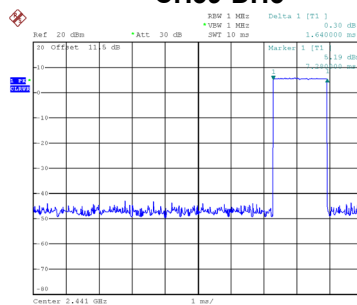


Date: 6.MAY.2024 20:50:03

CH78-DH3

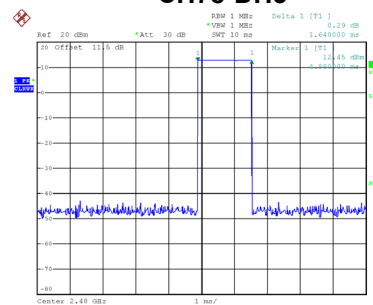


Date: 6.MAY.2024 20:50:10

CH00-DH5

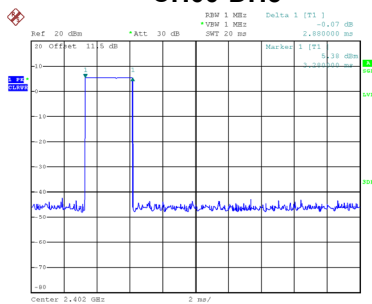


Date: 6.MAY.2024 20:50:34

CH39-DH5

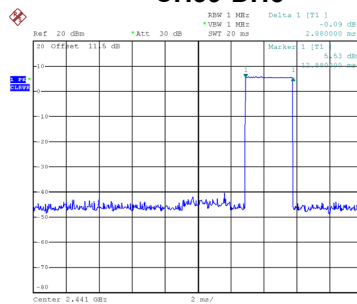

Date: 6.MAY.2024 20:50:39

CH78-DH5

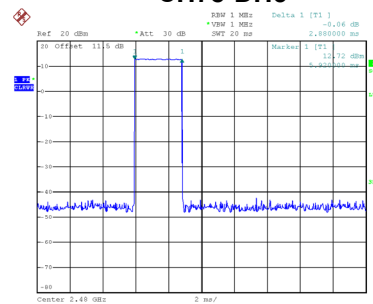


Date: 6.MAY.2024 20:50:46

Test Mode : 3Mbps


Data Packet	Frequency (MHz)	Pulse Duration(ms)	Dwell Time(s)	Limits(s)	Test Result
3DH5	2402	0.3850	0.1232	0.4000	Pass
3DH3	2402	1.6400	0.2624	0.4000	Pass
3DH1	2402	2.8800	0.3072	0.4000	Pass
3DH5	2441	0.3800	0.1216	0.4000	Pass
3DH3	2441	1.6400	0.2624	0.4000	Pass
3DH1	2441	2.9200	0.3115	0.4000	Pass
3DH5	2480	0.3800	0.1216	0.4000	Pass
3DH3	2480	1.6400	0.2624	0.4000	Pass
3DH1	2480	2.8800	0.3072	0.4000	Pass

CH00-3DH1

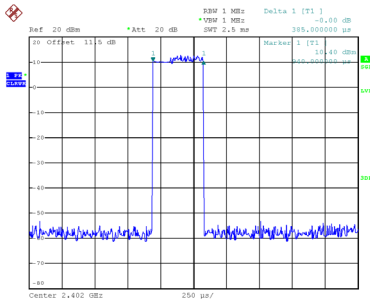


Date: 17.MAY.2024 14:28:18

CH39-3DH1

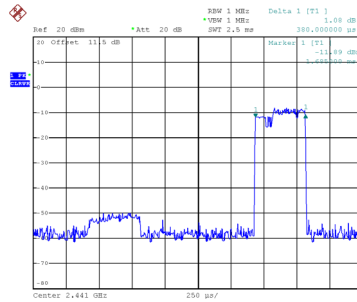


Date: 17.MAY.2024 14:28:24

CH78-3DH1

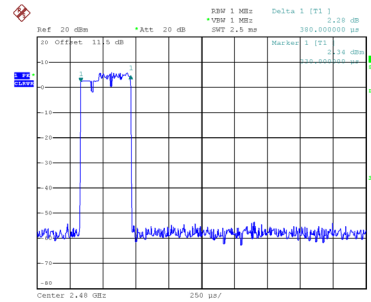


Date: 17.MAY.2024 14:28:29

CH00-3DH3

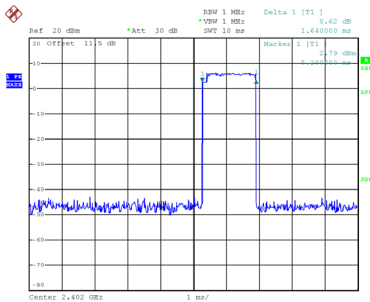


Date: 17.MAY.2024 14:37:15

CH39-3DH3

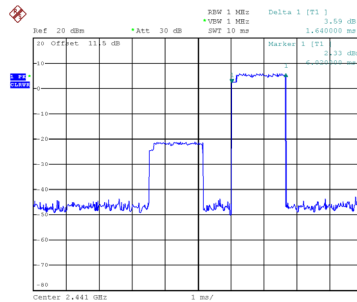


Date: 17.MAY.2024 14:37:21

CH78-3DH3

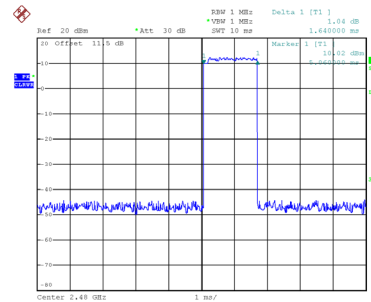


Date: 17.MAY.2024 14:37:33

CH00-3DH5

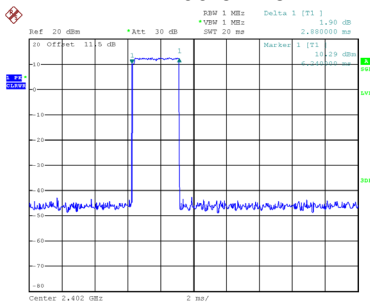


Date: 17.MAY.2024 14:38:56

CH39-3DH5

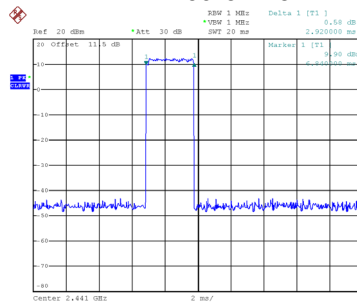

Date: 17.MAY.2024 14:39:03

CH78-3DH5

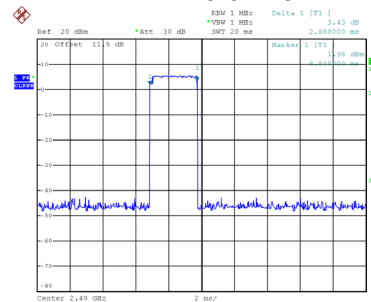


Date: 17.MAY.2024 14:39:09

APPENDIX F HOPPING CHANNEL SEPARATION MEASUREMENT


Test Mode : Hopping on _1Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.296	0.639	Pass
2441	1.002	0.639	Pass
2480	1.302	0.641	Pass

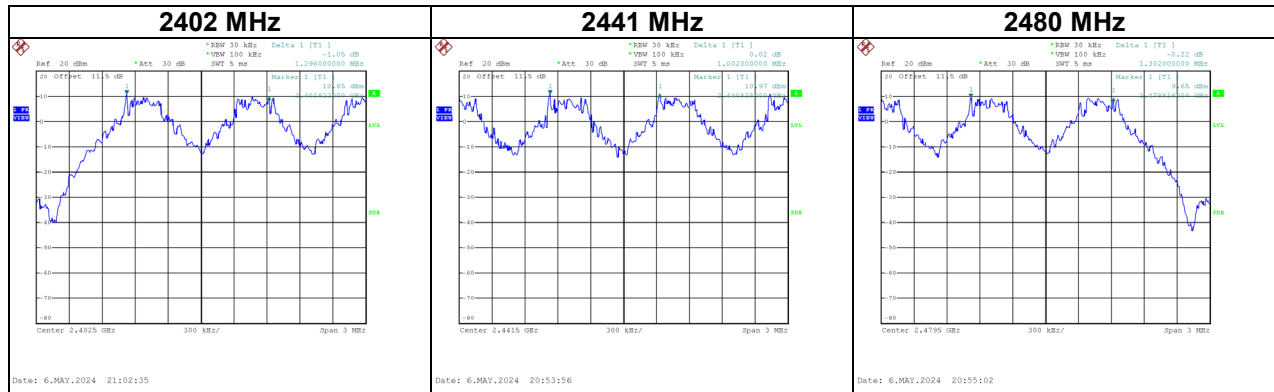

Test Mode : Hopping on _3Mbps


Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	1.002	0.884	Pass
2441	1.189	0.876	Pass
2480	1.182	0.865	Pass

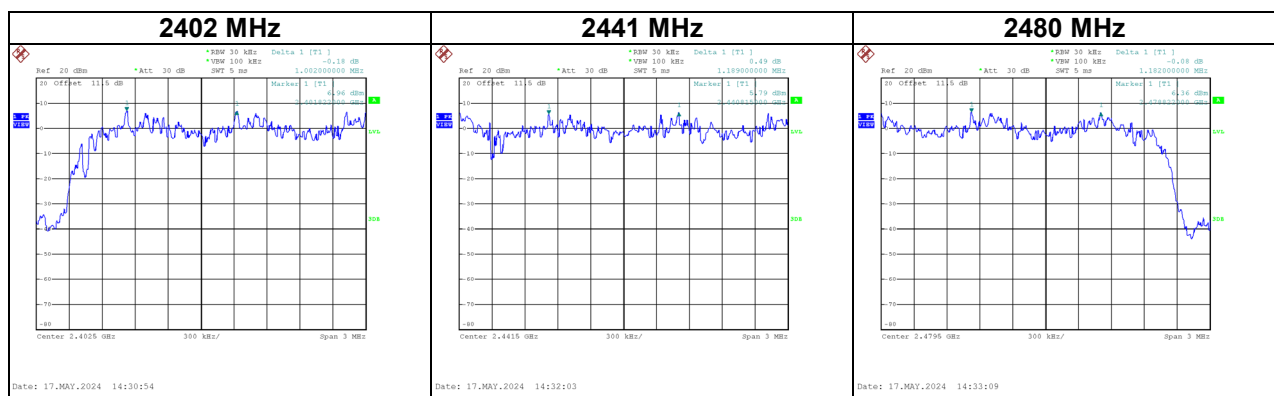

APPENDIX G BANDWIDTH


Test Mode :	1Mbps
-------------	-------

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	0.959	0.880	Pass
2441	0.958	0.888	Pass
2480	0.962	0.876	Pass

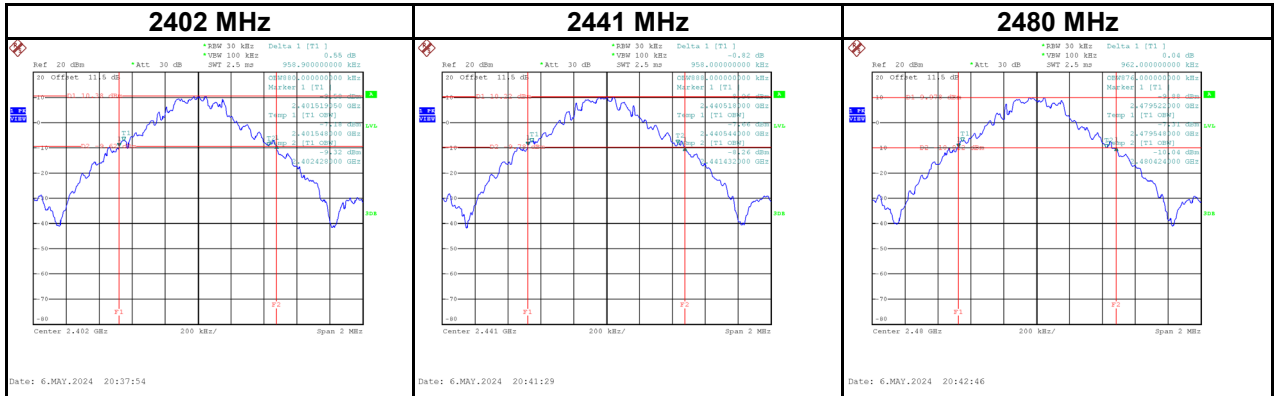

Test Mode :	3Mbps
-------------	-------

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.326	0.880	Pass
2441	1.314	0.880	Pass
2480	1.298	0.880	Pass

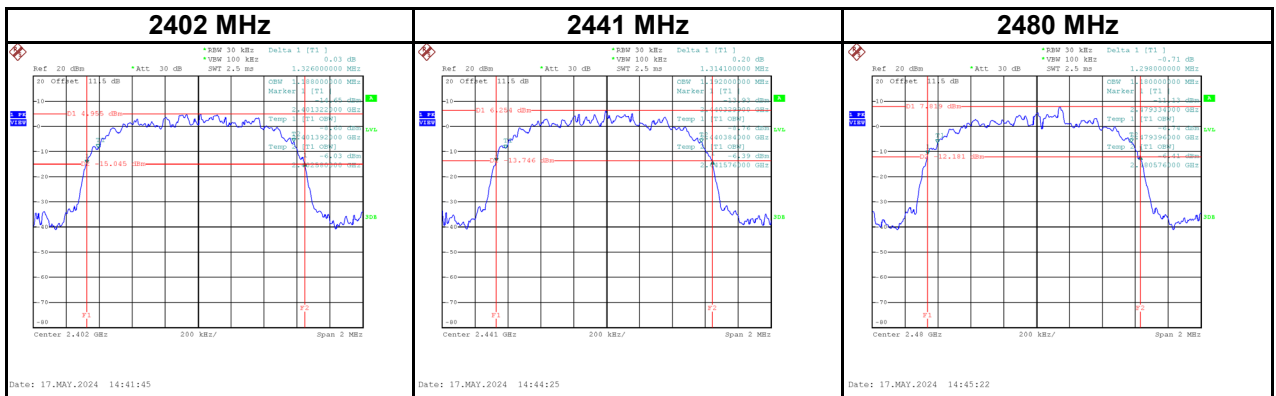

APPENDIX H OUTPUT POWER

Test Mode :	1Mbps	Tested Date	2024/5/6
-------------	-------	-------------	----------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	13.33	0.0215	21.00	0.1250	Pass
2441	13.13	0.0206	21.00	0.1250	Pass
2480	13.04	0.0201	21.00	0.1250	Pass

Test Mode :	2Mbps	Tested Date	2024/5/6
-------------	-------	-------------	----------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	13.36	0.0217	21.00	0.1250	Pass
2441	13.29	0.0213	21.00	0.1250	Pass
2480	12.90	0.0195	21.00	0.1250	Pass

Test Mode :	3Mbps	Tested Date	2024/5/6
-------------	-------	-------------	----------


Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	13.47	0.0222	21.00	0.1250	Pass
2441	13.38	0.0218	21.00	0.1250	Pass
2480	13.02	0.0200	21.00	0.1250	Pass

APPENDIX I ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode

1Mbps


2402 MHz_Lower

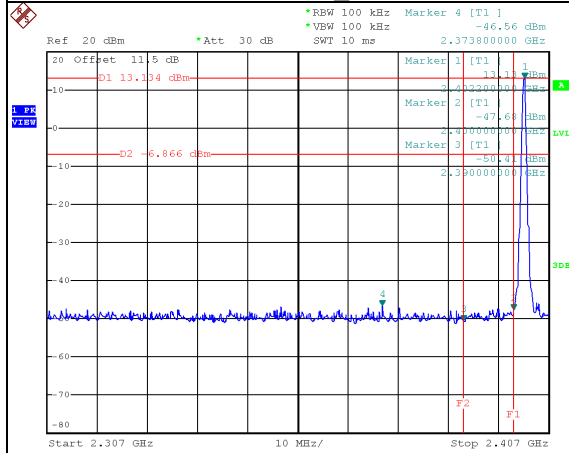


2480 MHz_Upper

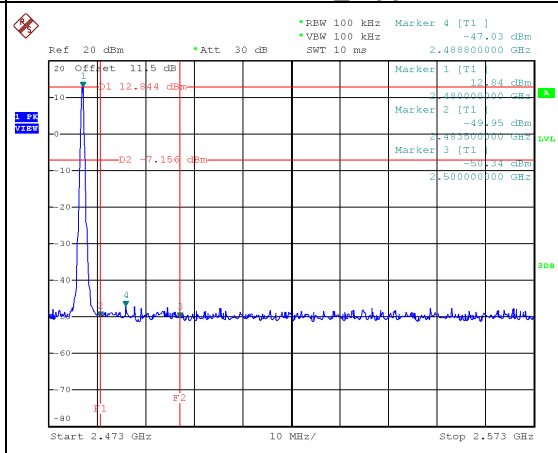


2402 MHz_Hopping on mode (Lower)

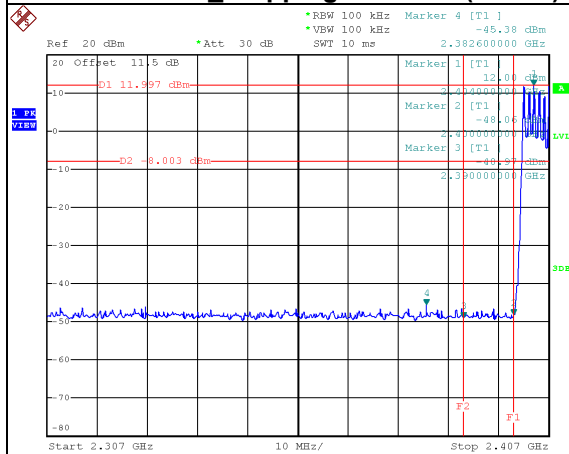


2480 MHz_Hopping on mode (Upper)

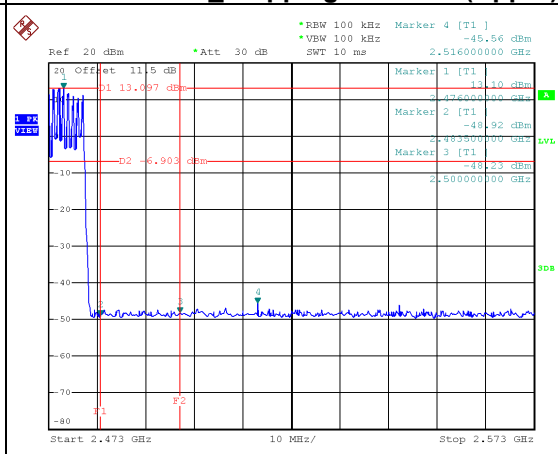


2402 MHz – 10th Harmonics

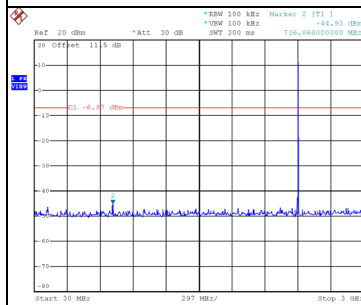

Date: 6.MAY.2024 20:38:09

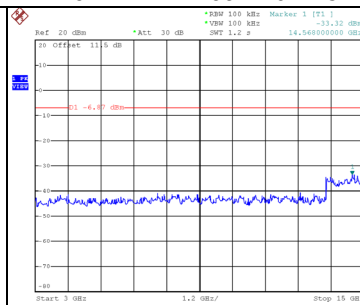


Date: 6.MAY.2024 20:38:19

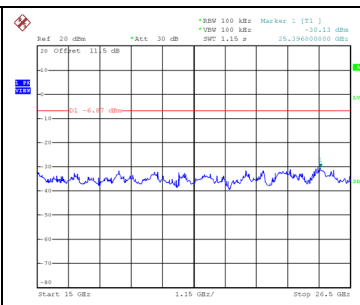


Date: 6.MAY.2024 20:38:28


2441 MHz – 10th Harmonics

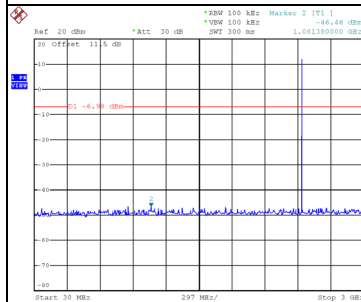

Date: 6.MAY.2024 20:40:38

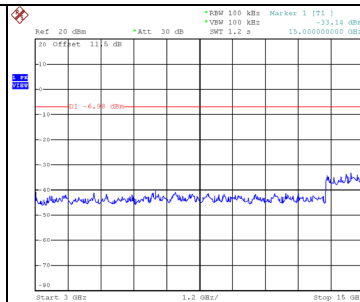


Date: 6.MAY.2024 20:40:47

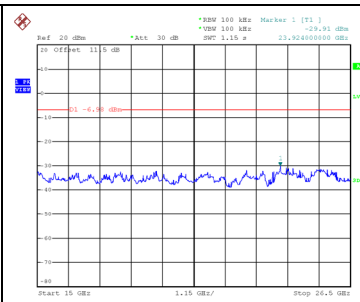


Date: 6.MAY.2024 20:40:56


2480 MHz – 10th Harmonics

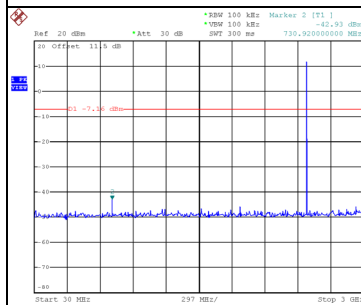

Date: 6.MAY.2024 20:43:01

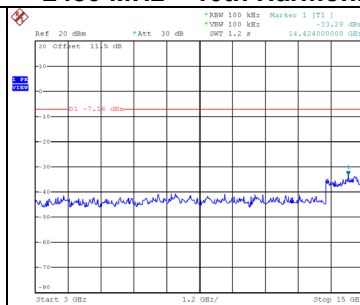

Date: 6.MAY.2024 20:43:10

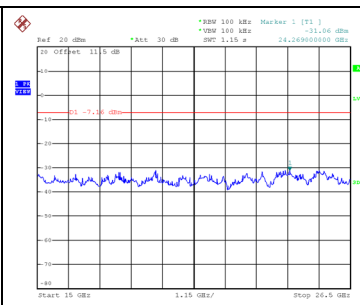


Date: 6.MAY.2024 20:43:19

Test Mode


3Mbps

2402 MHz_Lower

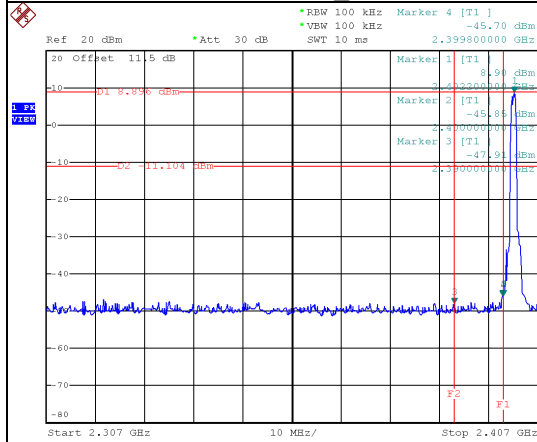


Date: 17.MAY.2024 14:41:22

2480 MHz_Upper

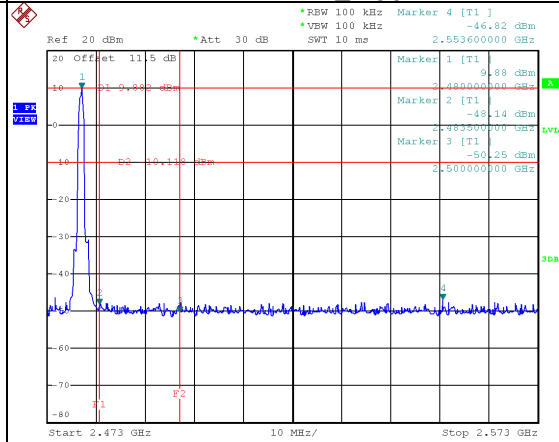


Date: 17.MAY.2024 14:44:58

2402 MHz_Hopping on mode (Lower)

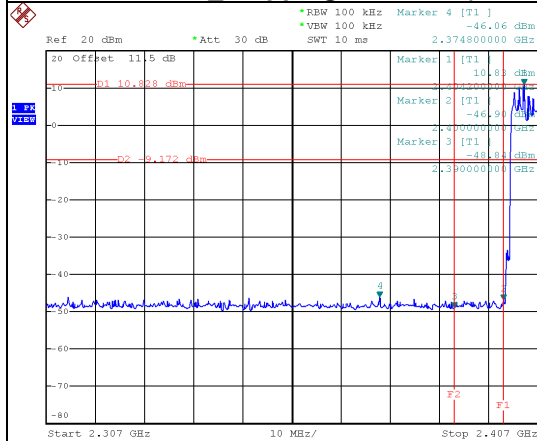


Date: 17.MAY.2024 14:35:34

2480 MHz_Hopping on mode (Upper)

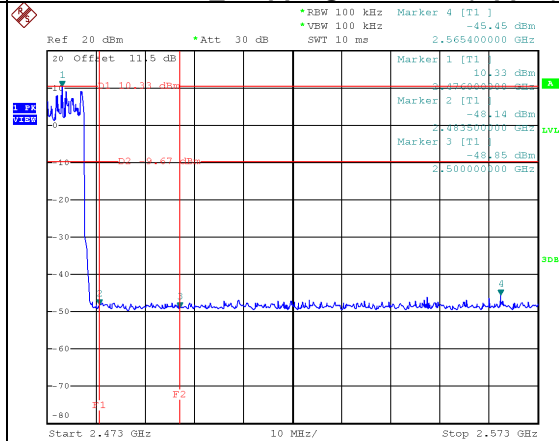


Date: 17.MAY.2024 14:36:11


2402 MHz – 10 Harmonics

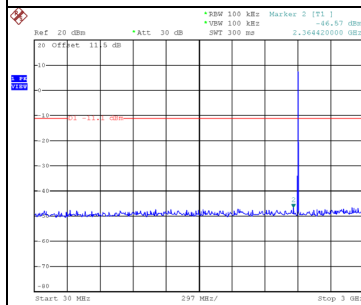

Date: 17.MAY.2024 14:42:00

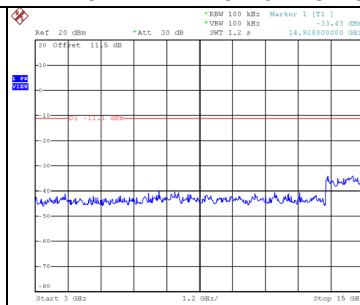


Date: 17.MAY.2024 14:42:09

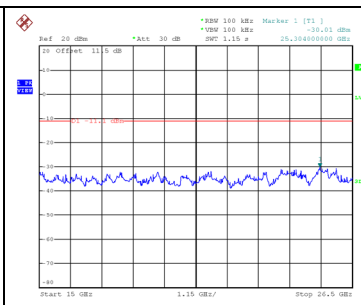


Date: 17.MAY.2024 14:42:18


2441 MHz – 10 Harmonics

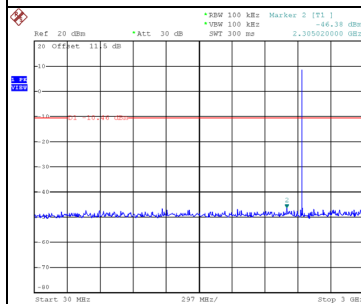

Date: 17.MAY.2024 14:43:44

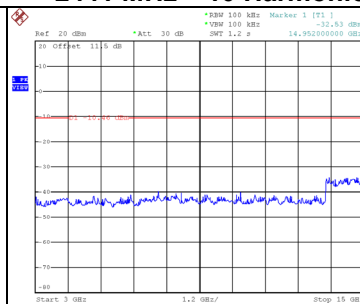


Date: 17.MAY.2024 14:43:53

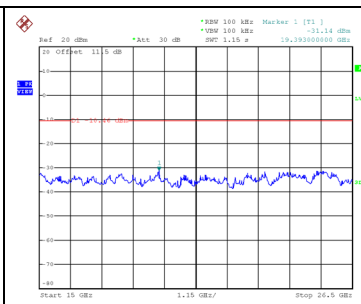


Date: 17.MAY.2024 14:44:02


2480 MHz – 10 Harmonics

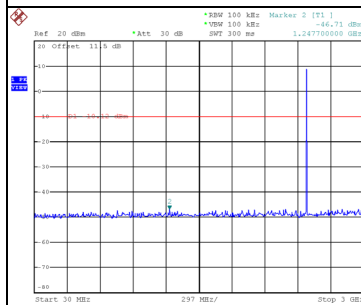

Date: 17.MAY.2024 14:45:37

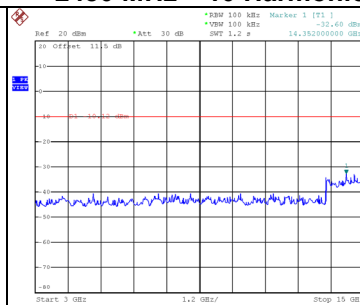

Date: 17.MAY.2024 14:45:47

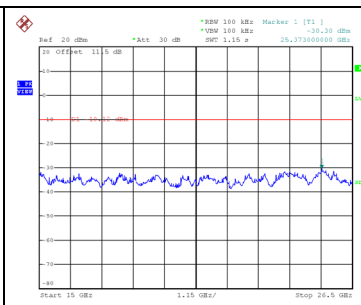

Date: 17.MAY.2024 14:45:56

End of Test Report