

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013**

Product Name : 2 in 1 mini laptop

Trademark : N/A

Model Name : P10

Family Model : N/A

Report No. : N26042811601E

FCC ID : 2BCJ7-P10

Prepared for

Shenzhen Longjunda Technology Co., Ltd.
5th Floor, Building 10, Longjun Industrial Zone, Dalang Street, Longhua District,
Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R.China.
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name Shenzhen Longjunda Technology Co., Ltd.
 Address 5th Floor, Building 10, Longjun Industrial Zone, Dalang Street, Longhua District,
 Shenzhen, China

Manufacturer's Name Shenzhen Longjunda Technology Co., Ltd.
 Address 5th Floor, Building 10, Longjun Industrial Zone, Dalang Street, Longhua District,
 Shenzhen, China

Product description

Product name 2 in 1 mini laptop
 Trademark N/A
 Model Name P10
 Family Model N/A

Standards FCC 47 CFR Part 2(2.1093)
 ANSI/IEEE C95.1-1992
 IEEE Std 1528-2013
 Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Test Sample Number S2605140239-1#

Date of Test

Date (s) of performance of tests ... May. 21, 2026~Jun. 05, 2026

Date of Issue Jun. 02, 2026

Test Result **Pass**

Prepared By : Owen Xiao
 Owen Xiao
 (Project Engineer)

Reviewed By : Aaron Cheng
 Aaron Cheng
 (Supervisor)

Approved By : Alex Li
 Alex Li
 (Manager)

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Jun. 02, 2026	Owen Xiao

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits	6
1.2. Statement of Compliance	7
1.3. EUT Description	7
1.4. Test specification(s)	8
1.5. Ambient Condition	8
2. SAR Measurement System	9
2.1. SATIMO SAR Measurement Set-up Diagram	9
2.2. Robot	10
2.3. E-Field Probe	11
2.3.1. E-Field Probe Calibration	11
2.4. SAM phantoms	12
2.4.1. Technical Data	13
2.5. Device Holder	14
2.6. Test Equipment List	15
3. SAR Measurement Procedures	18
3.1. Power Reference	18
3.2. Area scan & Zoom scan	18
3.3. Description of interpolation/extrapolation scheme	20
3.4. Volumetric Scan	20
3.5. Power Drift	20
4. System Verification Procedure	21
4.1. Tissue Verification	21
4.1.1. Tissue Dielectric Parameter Check Results	22
4.2. System Verification Procedure	23
4.2.1. System Verification Results	24
5. SAR Measurement variability and uncertainty	25
5.1. SAR measurement variability	25
5.2. SAR measurement uncertainty	25
6. RF Exposure Positions	26
6.1. Laptop host platform test requirements	26
7. RF Output Power	27
7.1. WLAN & Bluetooth Output Power	27
7.1.1. Output Power Results Of WLAN	27
7.1.2. Output Power Results Of Bluetooth	29
8. Antenna Location	30
9. Stand-alone SAR test exclusion	32
10. SAR Results	33
10.1. SAR measurement results	33

10.1.1.	SAR measurement Result of WLAN 2.4G	33
10.1.2.	SAR measurement Result of WLAN 5.2G	35
10.1.3.	SAR measurement Result of WLAN 5.8G	37
10.2.	Simultaneous Transmission Analysis	38
11.	Appendix A. Photo documentation	38
12.	Appendix B. System Check Plots	39
13.	Appendix C. Plots of High SAR Measurement	46
14.	Appendix D. Calibration Certificate	71

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
 TRUNK LIMIT
 1.6 W/kg
 APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for P10 are as follows.

Band	Max Reported SAR Value(W/kg)
	1-g Body (Separation distance of 0mm)
WLAN 2.4G	0.670
WLAN 5.2G	1.062
WLAN 5.8G	0.545

Note: This device is in compliance with Specific Absorption Rate (SAR) for general population / uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information			
Product Name	2 in 1 mini laptop		
Trade Name	N/A		
Model Name	P10		
Family Model	N/A		
FCC ID	2BCJ7-P10		
Device Phase	Identical Prototype		
Exposure Category	General population / Uncontrolled environment		
Antenna	FPC Antenna		
Power supply	Input: 20V==3.25A Battery: DC 13.2V		
Hardware version	NP109		
Software version	P10.25102800		
Device Operating Configurations			
Supporting Mode(s)	WLAN2.4G/5G, Bluetooth		
Test Modulation	WLAN(DSSS/OFDM),Bluetooth(GFSK,π/4-DQPSK,8DPSK)		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	WLAN 2.4G	2412-2462	
	WLAN 5.2G	5180-5240	
	WLAN 5.8G	5745-5825	
	Bluetooth	2402-2480	

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02 RF Exposure Reporting v01r02;
KDB 447498 D01 General RF Exposure Guidance v06;
KDB 248227 D01 802.11 Wi-Fi SAR v02r02;
KDB 616217 D04 SAR for laptop and tablets

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

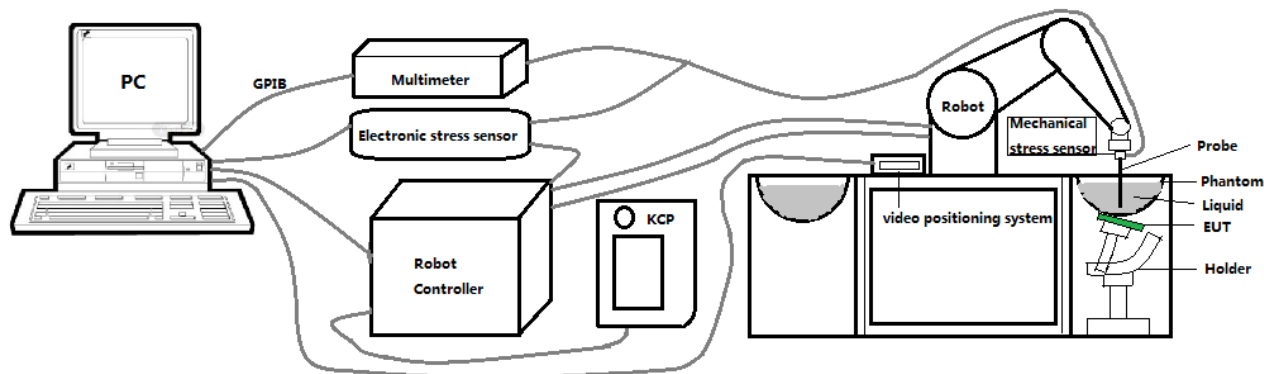

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe 4024-EPGO-442 with following specifications is used



- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 2.5 mm
- Distance between probe tip and sensor center: 1 mm
- Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
- Probe linearity: ± 0.08 dB
- Axial isotropy: ± 0.01 dB
- Hemispherical Isotropy: ± 0.01 dB
- Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
- Lower detection limit: 8mW/kg

Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm $\pm$ 0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

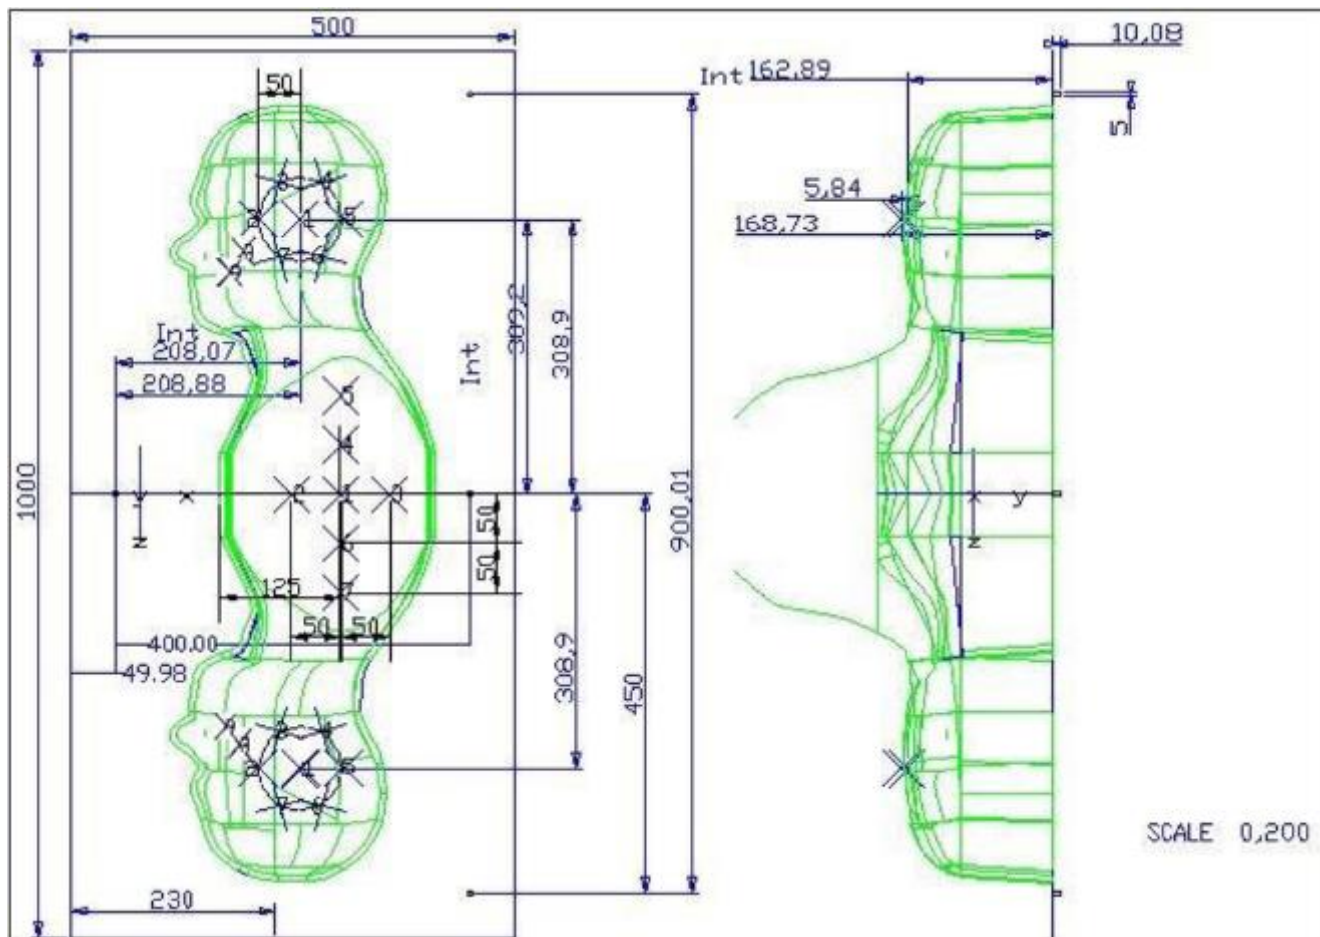


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μ m.

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

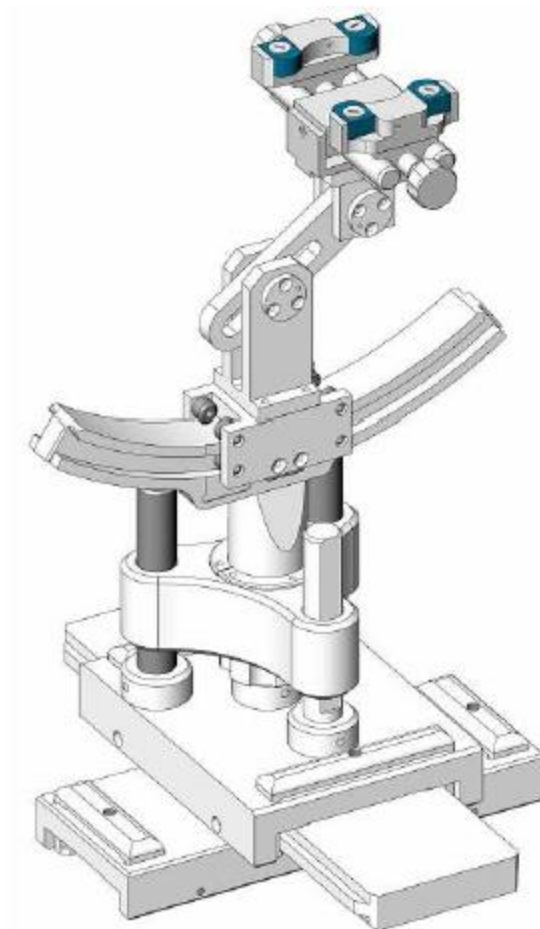

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.


Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	4024-EPGO-442	Jun. 20, 2025	Jun. 19, 2026
☐	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	2300 MHz Dipole	SID2300	SN 03/16 DIP 2G300-358	Feb. 22, 2024	Feb. 21, 2027
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Feb. 21, 2024	Feb. 20, 2027
☐	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Feb. 21, 2024	Feb. 20, 2027
☒	MVG	Liquid	SCLMP	SN 21/15 OCPG 72	NCR	NCR

		measurement Kit				
☒	MVG	Power Amplifier	N/A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	May. 7, 2026	May. 6, 2027
☐	R&S	Universal radio communication tester	CMU200	105747	Apr. 8, 2026	Apr. 7, 2027
☐	R&S	Wideband radio communication tester	CMW500	103917	Apr.27, 2026	Apr.26, 2027
☐	Anritsu	4G LTE comprehensive tester	MT8821C	6262192315	Apr.8 2026	Apr.7 2027
☐	Anritsu	5G NR comprehensive tester	MT8000A	6262186364	Apr.8 2026	Apr.7 2027
☒	Hp/Agilent	Network Analyzer	8753D	3410J01136	Apr.15, 2026	Apr.14, 2027
☒	Agilent	Calibration Kit	85033E	N/A	May. 31, 2024	May. 30, 2027
☒	Agilent	MXG Vector Signal Generator	N5182A	MY47070317	Apr.8 2026	Apr.7 2027
☒	Agilent	Power sensor	E4419B	MY45102538	Apr.8 2026	Apr.7 2027
☒	Agilent	Power sensor	E9301A	US39212148	Apr.8 2026	Apr.7 2027
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Apr. 26, 2024	Apr. 25, 2027
☒	N/A	Thermometer	N/A	LES-085	Mar. 15, 2026	Mar. 14, 2027
☒	MVG	SAM Phantom	SSM2	SN 16/15 SAM119	NCR	NCR
☒	MVG	Device Holder	SMPPD	SN 16/15 MSH100	NCR	NCR

Measurement Software

Manufacturer	Software Name	Software Version
SATIMO	OpenSAR	V5.3.15.11



3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/Bluetooth power measurement, use engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/Bluetooth output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan

above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful form multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scan to calculate the SAR value of the combined measurement as it is define in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.

4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23
Ingredients (% of weight)	Body Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	50.30	50.30	50.30	69.91	69.91	71.88	71.88	71.88	79.54	79.54
NaCl	0.60	0.60	0.60	0.13	0.13	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	49.10	49.10	49.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	9.99	9.99	19.97	19.97	19.97	11.24	11.24
DGBE	0.00	0.00	0.00	19.97	19.97	7.99	7.99	7.99	9.22	9.22

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

Photo of Liquid depth for Head Position	Photo of Liquid depth for Body Position
	

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Delta(%)		Liquid Temp.	Test Date
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)		
Head 2450	2450	39.20	1.80	40.56	1.84	3.47	2.22	21.2 °C	May. 14, 2026
Head 5200	5200	36.00	4.66	37.38	4.57	3.83	-1.93	21.3 °C	May. 19, 2026
Head 5800	5800	35.30	5.27	36.51	5.13	3.43	-2.66	21.5 °C	May. 23, 2026

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 63mW (below 5GHz) or 63mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

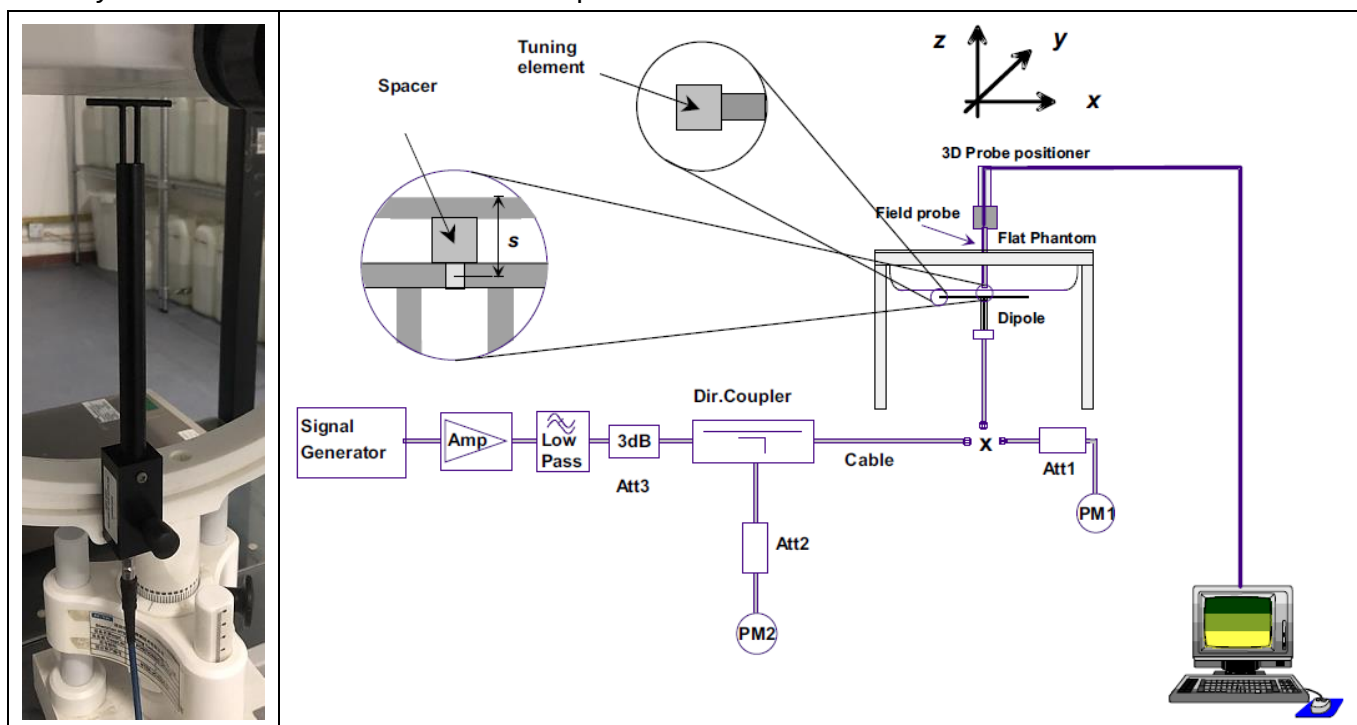

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W)		Measured SAR			Measured SAR		Delta (%)		Liquid Temp.	Test Date
						(Normalized to 1W)					
	1-g (W/Kg)	10-g (W/Kg)	Input Power (mW)	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)	1-g (%)	10-g (%)		
2450MHz	50.05	23.80	100.00	4.90	2.29	48.97	22.87	-2.16	-3.91	21.2 °C	May. 14, 2026
5200MHz	162.59	56.21	10.00	1.46	0.53	146.40	52.60	-9.96	-6.42	21.3 °C	May. 19, 2026
5800MHz	182.20	61.32	10.00	1.69	0.62	169.20	61.70	-7.14	0.62	21.5 °C	May. 23, 2026

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Laptop host platform test requirements

The required minimum test separation distance for incorporating transmitters and antennas into laptop, notebook and netbook computer displays is determined with the display screen opened at an angle of 90° to the keyboard compartment. When antennas are incorporated in the keyboard section of a laptop computer, SAR is required for the bottom surface of the keyboard. Provided tablet use conditions are not supported by the laptop computer, SAR tests for bystander exposure from the edges of the keyboard and display screen of laptop computers are generally not required.

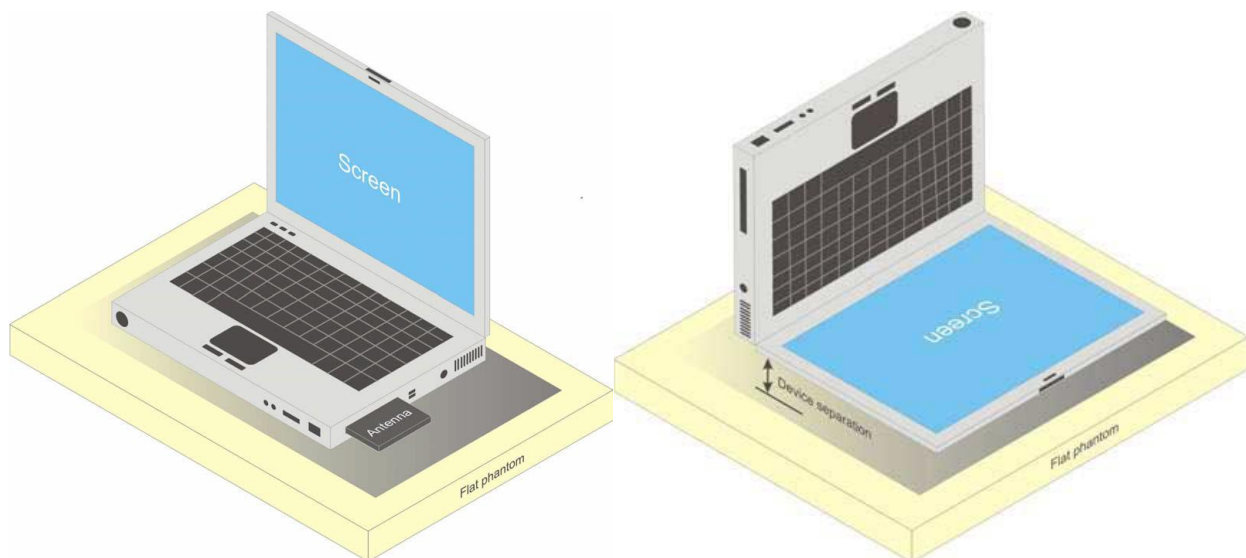


Figure 6.1 – Test positions for Laptop

7. RF Output Power

7.1. WLAN & Bluetooth Output Power

7.1.1. Output Power Results Of WLAN

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)	Tune-up	Output Power (dBm)
			ANT1		ANT2	
802.11b	1	2412	18.00	17.59	13.00	12.52
	6	2437	18.00	17.66	13.00	12.36
	11	2462	18.00	17.15	13.00	12.18
802.11g	1	2412	12.50	12.42	11.50	11.39
	6	2437	12.50	11.77	11.50	11.20
	11	2462	12.50	11.09	11.50	10.62
802.11n HT20	1	2412	12.50	11.91	12.00	11.51
	6	2437	12.50	12.23	12.00	11.28
	11	2462	12.50	11.67	12.00	10.91
802.11n HT40	3	2422	13.00	12.51	12.00	11.00
	6	2437	13.00	12.50	12.00	11.94
	9	2452	13.00	12.57	12.00	11.99
802.11ax 20	1	2412	13.50	13.43	12.50	12.13
	6	2437	13.50	13.40	12.50	11.94
	11	2462	13.50	13.07	12.50	11.87
802.11ax 40	3	2422	12.50	12.32	12.50	12.41
	6	2437	12.50	12.34	12.50	11.89
	9	2452	12.50	12.44	12.50	12.43

NOTE: Power measurement results of WLAN 2.4G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)	Tune-up	Output Power (dBm)
			ANT1		ANT2	
802.11a	36	5180	11.00	10.76	6.00	5.76
	40	5200	11.00	10.51	6.00	5.77
	48	5240	11.00	10.76	6.00	5.60
802.11n HT20	36	5180	11.00	10.87	6.00	5.58
	40	5200	11.00	10.44	6.00	5.76
	48	5240	11.00	10.64	6.00	5.62
802.11n HT40	38	5190	11.00	10.95	6.50	5.99
	46	5230	11.00	10.86	6.50	6.04

802.11ac VHT20	36	5180	11.00	10.81	6.00	5.66
	40	5200	11.00	10.57	6.00	5.62
	48	5240	11.00	10.64	6.00	5.60
802.11ac VHT40	38	5190	11.00	10.94	6.00	6.09
	46	5230	11.00	10.91	6.00	5.94
802.11ac VHT80	42	5210	11.50	11.22	6.50	6.17
802.11ax 20	36	5180	11.00	10.61	6.00	5.37
	40	5200	11.00	10.41	6.00	5.50
	48	5240	11.00	10.40	6.00	5.32
802.11ax 40	38	5190	11.00	10.77	6.00	5.74
	46	5230	11.00	10.68	6.00	5.69
802.11ax 80	42	5210	11.00	10.77	6.00	5.80

NOTE: Power measurement results of WLAN 5.2G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)	Tune-up	Output Power (dBm)
			ANT1		ANT2	
802.11a	149	5745	13.00	12.49	13.50	12.83
	157	5785	13.00	13.15	13.50	12.90
	165	5825	13.00	12.31	13.50	13.00
802.11n HT20	149	5745	13.00	12.22	13.00	12.45
	157	5785	13.00	12.79	13.00	12.88
	165	5825	13.00	12.27	13.00	12.71
802.11n HT40	151	5755	13.50	12.78	13.50	12.93
	159	5795	13.50	13.12	13.50	13.31
802.11ac VHT20	149	5745	13.00	12.22	13.00	12.48
	157	5785	13.00	12.80	13.00	12.87
	165	5825	13.00	12.27	13.00	12.72
802.11ac VHT40	151	5755	13.00	12.82	13.50	12.97
	159	5795	13.00	13.17	13.50	13.18
802.11ac VHT80	155	5775	13.50	13.20	13.50	13.23
802.11ax 20	149	5745	13.00	12.08	13.00	12.30
	157	5785	13.00	12.65	13.00	12.62

	165	5825	13.00	12.13	13.00	12.58
802.11ax 40	151	5755	13.00	12.51	13.00	12.65
	159	5795	13.00	12.73	13.00	12.91
802.11ax 80	155	5775	13.00	12.88	13.00	12.96

NOTE: Power measurement results of WLAN 5.8G.

7.1.2. Output Power Results Of Bluetooth


Ant1 BLE	Output Power (dBm)				
	Data Rates	Tune-up (dBm)	Channe		
			0CH	19CH	39CH
	1M	7.00	6.62	6.76	5.47
	2M	6.50	5.41	6.09	5.45

Ant 1 BR+EDR	Output Power (dBm)				
	Data Rates	Tune-up (dBm)	Channel		
			0CH	39CH	78CH
	1M	3.50	2.21	3.26	2.30
	2M	4.50	3.37	4.41	3.48
	3M	5.00	3.46	4.50	3.65

NOTE: Power measurement results of Bluetooth.

8. Antenna Location

Note: The minimum physical distance from each radiating antenna to the corresponding accessible outer housing-surface is equal to or greater than 25 mm (2.5 cm). Those housing surfaces located 2.5 cm or further away from the antenna do not require SAR testing

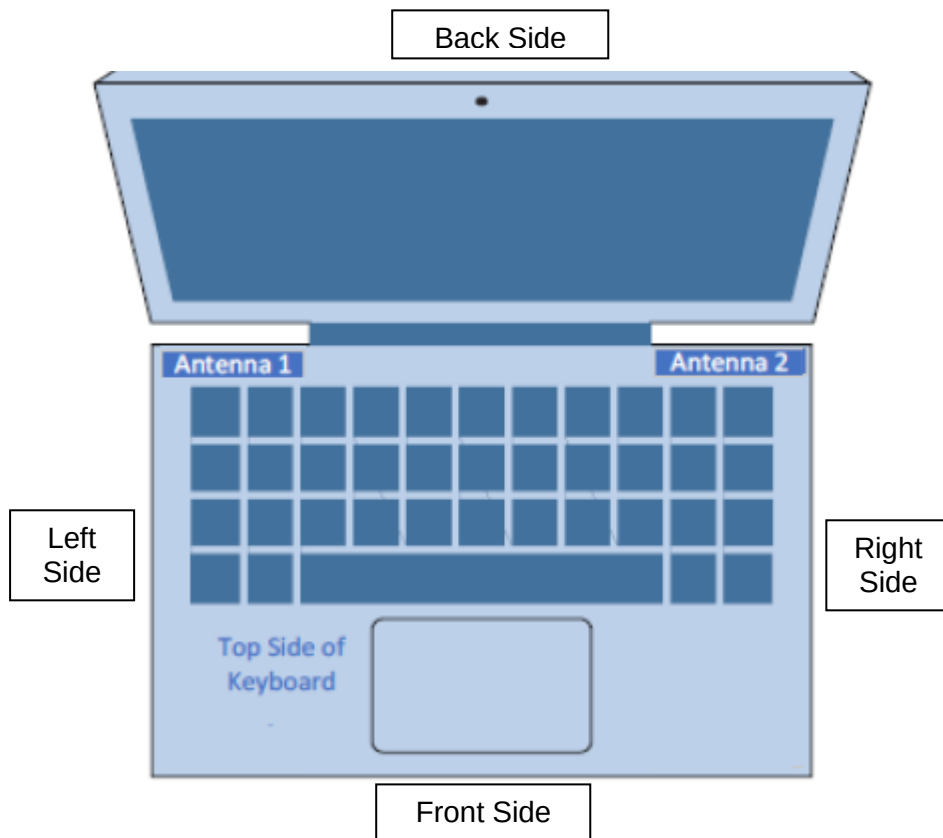


Note :Since the confidentiality request of EUT , the antenna location example diagram see as above.

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Ant1 WLAN& Bluetooth	>25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
Ant2 WLAN	>25mm	≤ 25mm	>25mm	≤ 25mm	>25mm	≤ 25mm

EUT side for SAR Testing						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Ant1 WLAN& Bluetooth	No	Yes	Yes	No	No	Yes
Ant2 WLAN	No	Yes	No	Yes	No	Yes

Note 1: Per KDB Publication 616217 D04: For tablet-type portable transmitting equipment with overall display diagonal dimension greater than 20 cm, SAR testing on the front (display) surface is not required.

Note 2: The minimum physical distance from each radiating antenna to the corresponding accessible outer housing-surface is equal to or greater than 25 mm (2.5 cm). Those housing surfaces located 2.5 cm or further away from the antenna do not require SAR testing

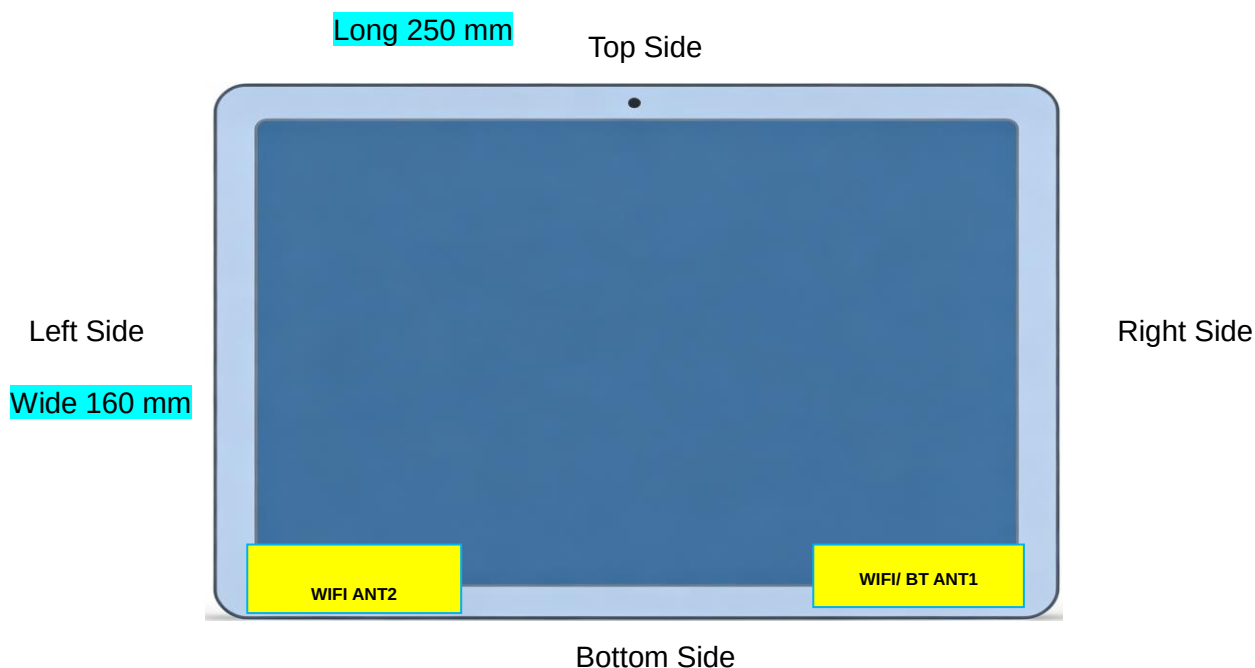

Distance of the Antenna to the EUT surface/edge					
Antennas	Back Side	Left Side	Right Side	Top Side	Bottom Side
Ant1 WLAN& Bluetooth	≤ 25mm	> 25mm	≤ 25mm	>25mm	≤ 25mm
Ant2 WLAN	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

EUT side for SAR Testing					
Antennas	Back Side	Left Side	Right Side	Top Side	Bottom Side
Ant1 WLAN& Bluetooth	Yes	No	Yes	No	Yes
Ant2 WLAN	Yes	Yes	No	No	Yes

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR exclusion threshold (mW)	SAR test exclusion
Bluetooth	7.00	5.012	5	2.480	1.579	3	Yes

NOTE: Standalone SAR test exclusion for Bluetooth.

10. SAR Results

10.1. SAR measurement results

10.1.1. SAR measurement Result of WLAN 2.4G

Tablet mode

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
ANT 1										
Back Side	6/2437	802.11b	0.030	0.010	1.97	17.66	18.00	0.032	2026/5/14	
Right Side	6/2437	802.11b	0.261	0.087	-2.00	17.66	18.00	0.282	2026/5/14	5#
Bottom Side	6/2437	802.11b	0.193	0.064	2.90	17.66	18.00	0.209	2026/5/14	
ANT 2										
Back Side	1/2412	802.11b	0.033	0.011	1.81	12.52	13.00	0.037	2026/5/14	
Left Side	1/2412	802.11b	0.088	0.029	0.74	12.52	13.00	0.098	2026/5/14	
Bottom Side	1/2412	802.11b	0.600	0.196	-1.31	12.52	13.00	0.670	2026/5/14	6#

NOTE: Body SAR test results of WLAN 2.4G

Laptop mode

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
ANT 1										
Back Side	6/2437	802.11b	0.198	0.083	-1.54	17.66	18.00	0.214	2026/5/14	
Left Side	6/2437	802.11b	0.333	0.159	0.93	17.66	18.00	0.360	2026/5/14	12#
Bottom Side	6/2437	802.11b	0.035	0.012	-1.62	17.66	18.00	0.038	2026/5/14	
ANT 2										
Back Side	6/2437	802.11b	0.561	0.250	-3.68	12.52	13.00	0.627	2026/5/14	11#
Right Side	6/2437	802.11b	0.098	0.041	-2.81	12.52	13.00	0.109	2026/5/14	
Bottom Side	6/2437	802.11b	0.051	0.022	-1.54	12.52	13.00	0.057	2026/5/14	

NOTE: Body SAR test results of WLAN 2.4G

10.1.2. SAR measurement Result of WLAN 5.2G

Tablet mode

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
ANT 1										
Back Side	42/5210	802.11ac VHT80	0.030	0.025	0.44	11.22	11.50	0.032	2026/5/19	
Right Side	42/5210	802.11ac VHT80	0.064	0.024	-2.71	11.22	11.50	0.068	2026/5/19	
Bottom Side	42/5210	802.11ac VHT80	0.077	0.025	1.17	11.22	11.50	0.082	2026/5/19	1#
ANT 2										
Back Side	42/5210	802.11ac VHT80	0.037	0.009	-2.27	6.17	6.50	0.040	2026/5/19	
Left Side	42/5210	802.11ac VHT80	0.019	0.017	3.92	6.17	6.50	0.020	2026/5/19	
Bottom Side	42/5210	802.11ac VHT80	0.984	0.226	2.70	6.17	6.50	1.062	2026/5/19	2#
Bottom Repeated	42/5210	802.11ac VHT80	0.974	0.213	0.15	6.17	6.50	1.051	2026/5/19	

NOTE: Body SAR test results of WLAN 5.2G

Laptop mode

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
ANT 1										
Back Side	42/5210	802.11ac VHT80	0.119	0.053	0.12	11.22	11.50	0.127	2026/5/19	7#
Left Side	42/5210	802.11ac VHT80	0.072	0.029	-0.94	11.22	11.50	0.077	2026/5/19	
Bottom Side	42/5210	802.11ac VHT80	0.041	0.020	-1.27	11.22	11.50	0.044	2026/5/19	
ANT 2										
Back Side	42/5210	802.11ac VHT80	1.026	0.310	0.29	6.17	6.50	1.107	2026/5/19	8#
Right Side	42/5210	802.11ac VHT80	0.084	0.021	-1.21	6.17	6.50	0.091	2026/5/19	
Bottom Side	42/5210	802.11ac VHT80	0.049	0.012	-2.84	6.17	6.50	0.053	2026/5/19	
Back Side Repeated	42/5210	802.11ac VHT80	0.981	0.284	0.87	6.17	6.50	1.058	2026/5/19	

NOTE: Body SAR test results of WLAN 5.2G

10.1.3. SAR measurement Result of WLAN 5.8G Tablet mode

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
ANT 1										
Back Side	155/5775	802.11ac VHT80	0.018	0.016	-3.47	13.20	13.50	0.019	2026/5/23	
Right Side	155/5775	802.11ac VHT80	0.037	0.008	-0.24	13.20	13.50	0.040	2026/5/23	
Bottom Side	155/5775	802.11ac VHT80	0.042	0.009	-1.85	13.20	13.50	0.045	2026/5/23	3#
ANT 2										
Back Side	155/5775	802.11ac VHT80	0.020	0.018	-1.79	13.23	13.50	0.021	2026/5/23	
Left Side	155/5775	802.11ac VHT80	0.010	0.008	1.69	13.23	13.50	0.011	2026/5/23	
Bottom Side	155/5775	802.11ac VHT80	0.512	0.134	-1.53	13.23	13.50	0.545	2026/5/23	4#

NOTE: Body SAR test results of WLAN 5.8G

Laptop mode

Test Position	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
ANT 1										
Back Side	155/5775	802.11ac VHT80	0.089	0.041	0.21	13.20	13.50	0.095	2026/5/23	10#
Left Side	155/5775	802.11ac VHT80	0.057	0.019	-2.54	13.20	13.50	0.061	2026/5/23	
Bottom Side	155/5775	802.11ac VHT80	0.029	0.011	-1.54	13.20	13.50	0.031	2026/5/23	
ANT 2										
Back Side	155/5775	802.11ac VHT80	0.615	0.169	0.11	13.23	13.50	0.654	2026/5/23	9#
Right Side	155/5775	802.11ac VHT80	0.019	0.009	-1.95	13.23	13.50	0.020	2026/5/23	
Bottom Side	155/5775	802.11ac VHT80	0.039	0.012	2.54	13.23	13.50	0.042	2026/5/23	

NOTE: Body SAR test results of WLAN 5.8G

10.2. Simultaneous Transmission Analysis

NO simultaneous transmissions are possible for this device of Bluetooth and 2.4G/5G.

11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

12. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 2450MHz
MEASUREMENT 2 System Performance Check - 5200MHz
MEASUREMENT 5 System Performance Check - 5800MHz

1# System check at 2450 MHz
Date of measurement: 14/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.74
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	2450.00
Relative permittivity (real part)	40.56
Relative permittivity (imaginary part)	13.52
Conductivity (S/m)	1.84

C. SAR Surface and Volume

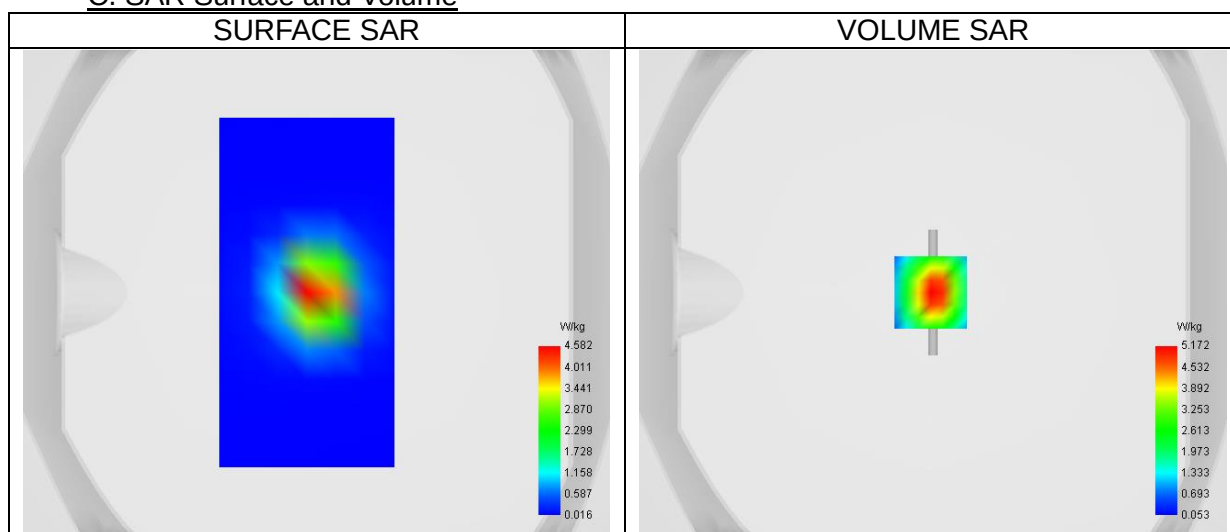


Maximum location: X=-1.00, Y=0.00 ; SAR Peak: 8.52 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.287
SAR 1g (W/Kg)	4.897
Variation (%)	0.21
Horizontal validation criteria: minimum distance (mm)	10.00
Vertical validation criteria: SAR ratio M2/M1 (%)	51.64

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	8.482	5.172	2.671	1.392	0.741	0.396	0.216

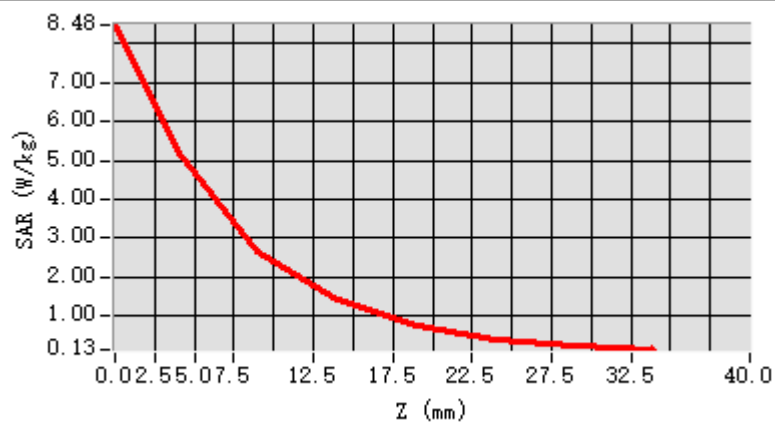

F. 3D Image

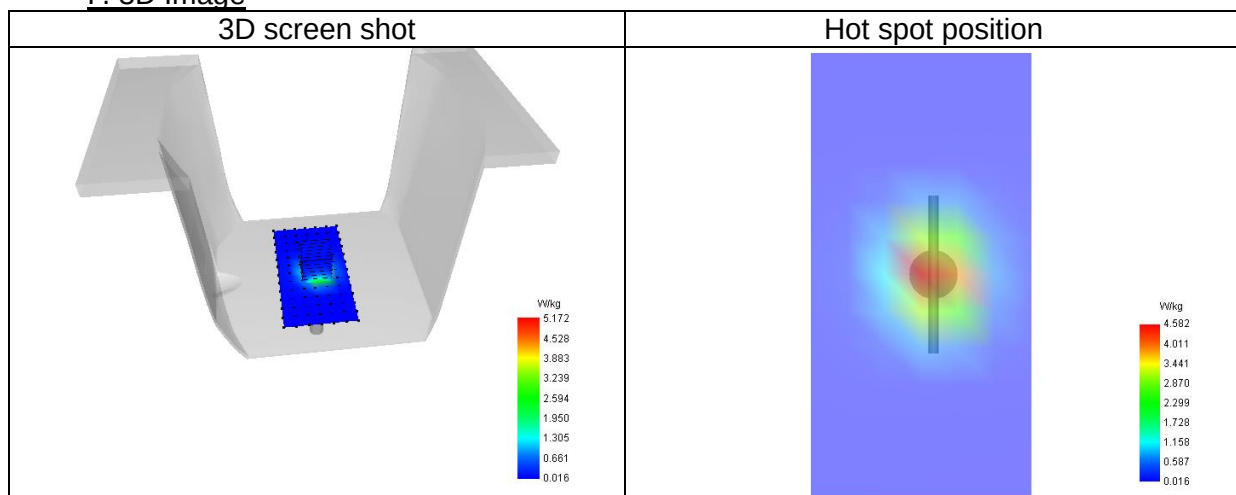

2# System check at 5200 MHz
Date of measurement: 19/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.89
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	5200.00
Relative permittivity (real part)	37.38
Relative permittivity (imaginary part)	15.81
Conductivity (S/m)	4.57

C. SAR Surface and Volume

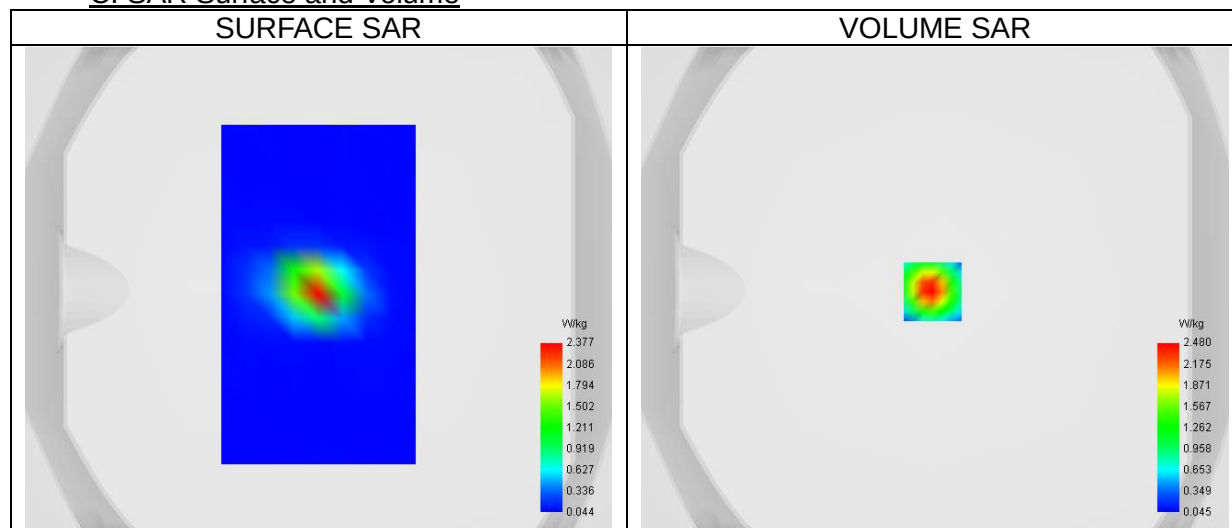


Maximum location: X=-1.00, Y=-1.00 ; SAR Peak: 4.00 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.526
SAR 1g (W/Kg)	1.464
Variation (%)	0.49
Horizontal validation criteria: minimum distance (mm)	11.31
Vertical validation criteria: SAR ratio M2/M1 (%)	58.70

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/Kg)	3.93 5	2.48 0	1.45 6	0.83 8	0.48 7	0.29 6	0.19 0	0.12 8	0.09 4	0.07 2	0.06 8	0.06 0

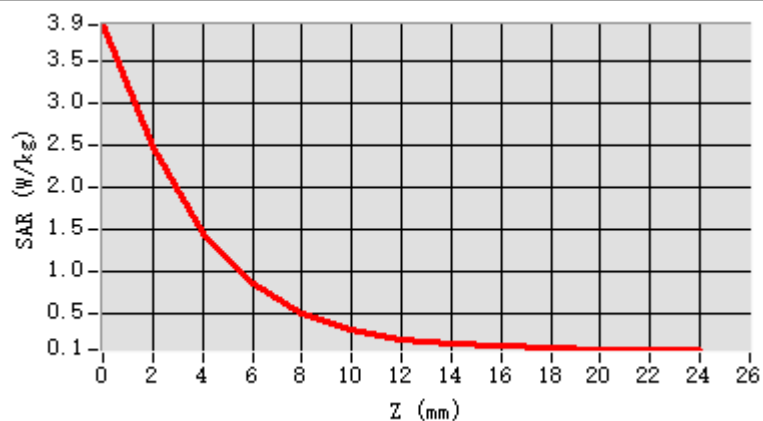

F. 3D Image

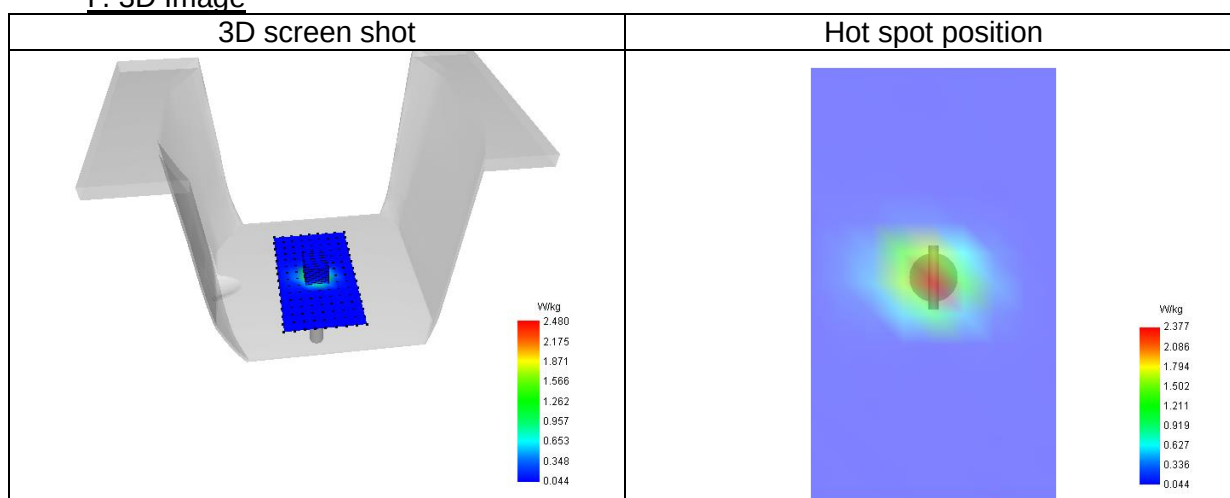

3# System check at 5800 MHz
 Date of measurement: 23/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.90
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	5800.00
Relative permittivity (real part)	36.51
Relative permittivity (imaginary part)	15.92
Conductivity (S/m)	5.13

C. SAR Surface and Volume

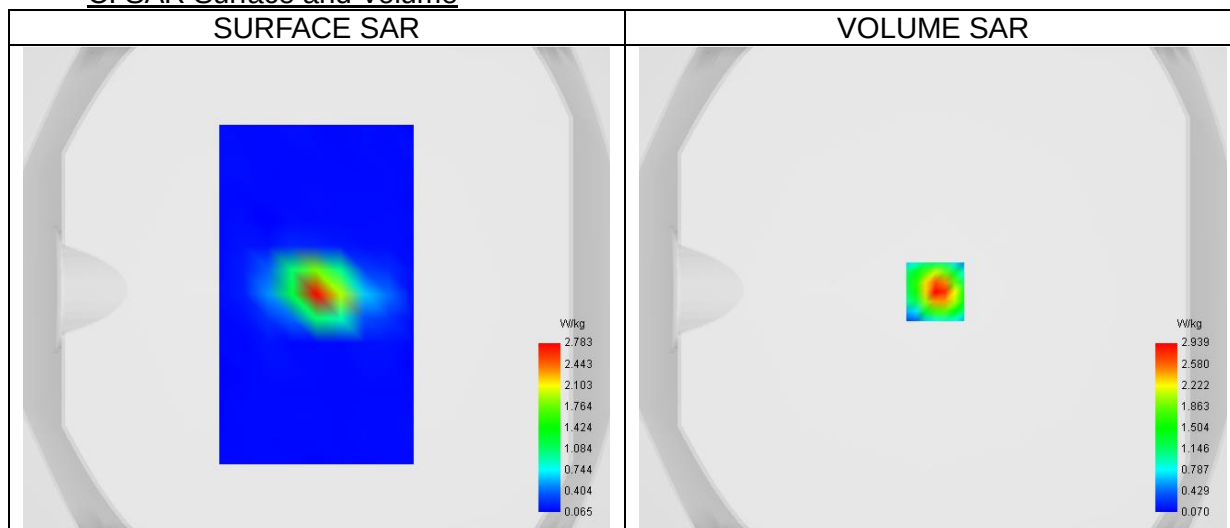


Maximum location: X=1.00, Y=-1.00 ; SAR Peak: 5.50 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.617
SAR 1g (W/Kg)	1.692
Variation (%)	0.36
Horizontal validation criteria: minimum distance (mm)	8.94
Vertical validation criteria: SAR ratio M2/M1 (%)	48.02

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
SAR (W/Kg)	5.09 0	2.93 9	1.41 1	0.70 4	0.40 2	0.23 6	0.19 1	0.14 7	0.12 8	0.10 8	0.09 0	0.11 0

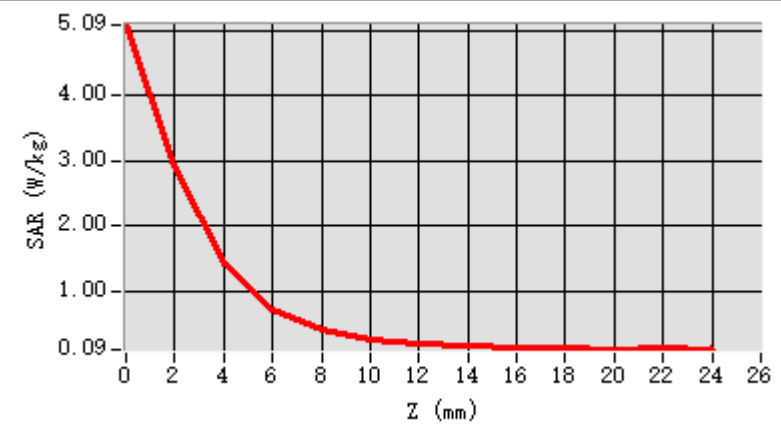

F. 3D Image

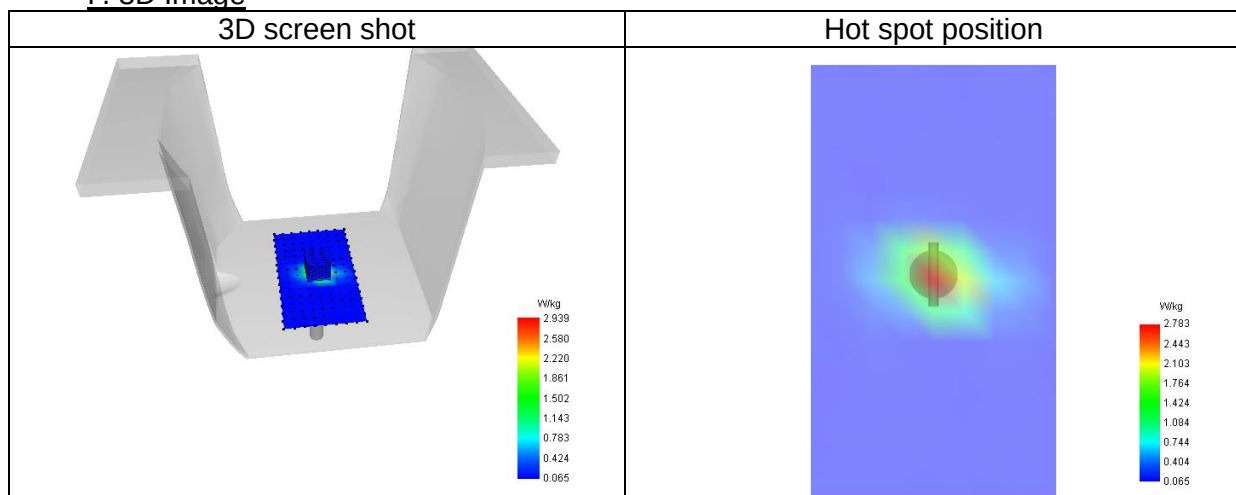

13. Appendix C. Plots of High SAR Measurement

Table of contents
1# SAR Measurement at U-NII-1 (Body, Validation Plane)
2# SAR Measurement at U-NII-1 (Body, Validation Plane)
3# SAR Measurement at U-NII-3 (Body, Validation Plane)
4# SAR Measurement at U-NII-3 (Body, Validation Plane)
5# SAR Measurement at ISM (Body, Validation Plane)
6# SAR Measurement at ISM (Body, Validation Plane)
7# SAR Measurement at U-NII-1 (Body, Validation Plane)
8# SAR Measurement at U-NII-1 (Body, Validation Plane)
9# SAR Measurement at U-NII-3 (Body, Validation Plane)
10# SAR Measurement at U-NII-3 (Body, Validation Plane)
11# SAR Measurement at ISM (Body, Validation Plane)
12# SAR Measurement at ISM (Body, Validation Plane)

1# SAR Measurement at U-NII-1 (Body, Validation Plane)

Date of measurement: 19/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.89
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-1
Signal	IEEE 802.11 ac
Channels/Frequency	Middle (42)/ frequency 5210.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5210.00
Relative permittivity (real part)	37.31
Relative permittivity (imaginary part)	15.79
Conductivity (S/m)	4.57

C. SAR Surface and Volume

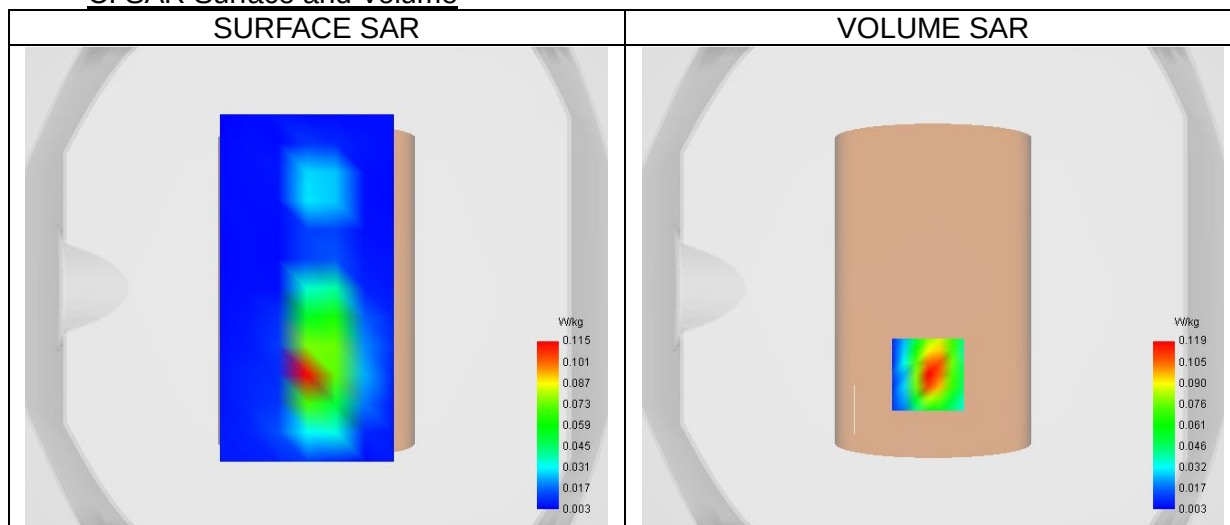


Maximum location: X=0.00, Y=-42.00 ; SAR Peak: 0.71 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.025
SAR 1g (W/Kg)	0.077
Variation (%)	1.17
Horizontal validation criteria: minimum distance (mm)	10.00
Vertical validation criteria: SAR ratio M2/M1 (%)	52.31

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.187	0.119	0.062	0.028	0.011	0.009	0.006

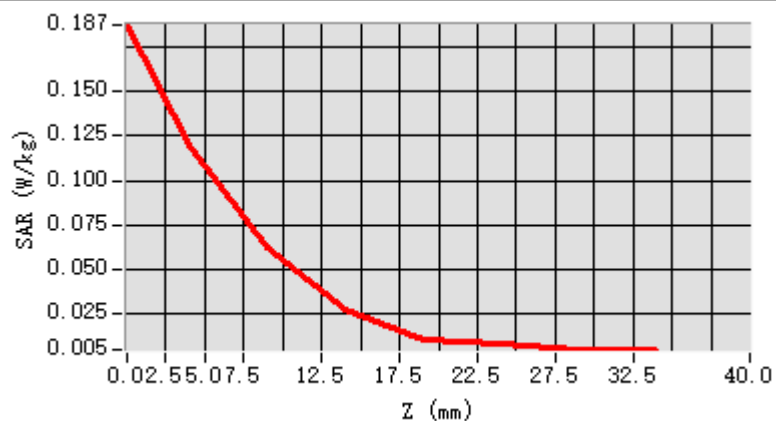

F. 3D Image

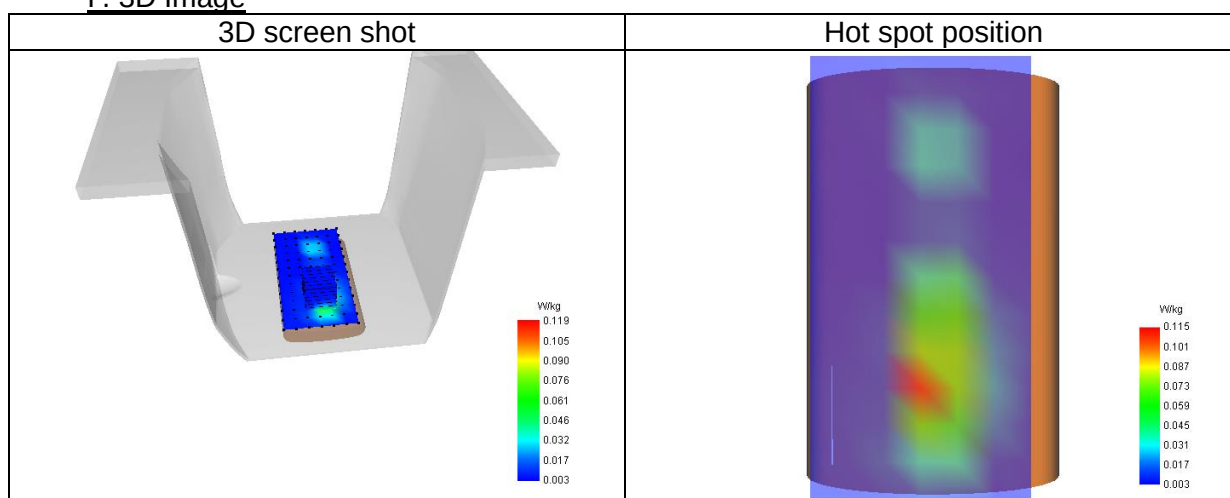

2# SAR Measurement at U-NII-1 (Body, Validation Plane)

Date of measurement: 19/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.89
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-1
Signal	IEEE 802.11 ac
Channels/Frequency	Middle (42)/ frequency 5210.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5210.00
Relative permittivity (real part)	37.31
Relative permittivity (imaginary part)	15.79
Conductivity (S/m)	4.57

C. SAR Surface and Volume

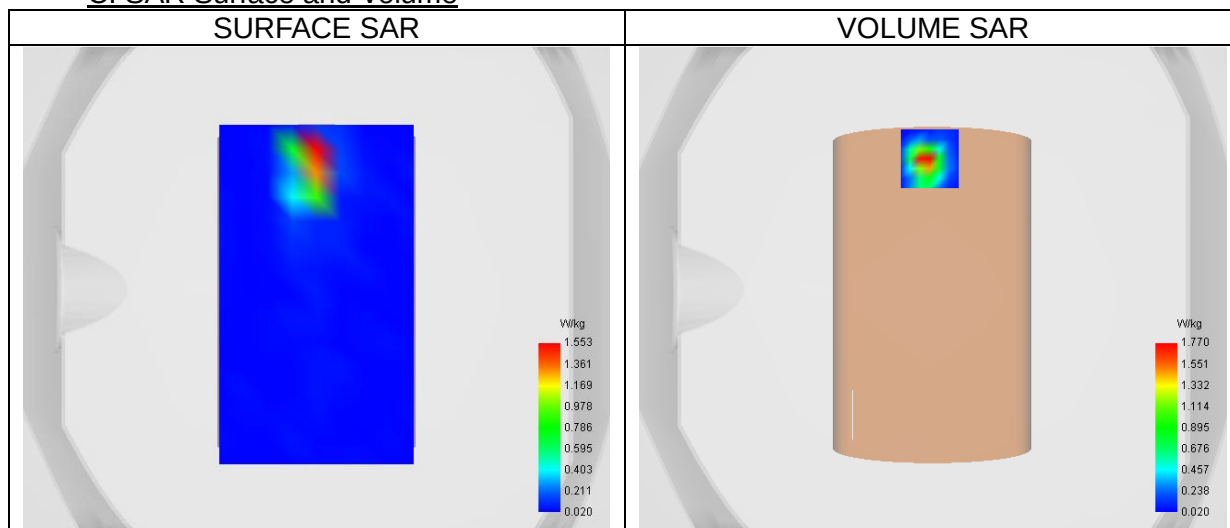


Maximum location: X=-1.00, Y=55.00 ; SAR Peak: 4.25 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.226
SAR 1g (W/Kg)	0.984
Variation (%)	2.70
Horizontal validation criteria: minimum distance (mm)	4.00
Vertical validation criteria: SAR ratio M2/M1 (%)	52.50

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
						0	0	0	0	0	0	0
SAR (W/Kg)	2.81	1.77	1.01	0.59	0.35	0.21	0.13	0.08	0.04	0.04	0.03	0.02
	5	0	0	0	0	1	9	4	6	7	8	7

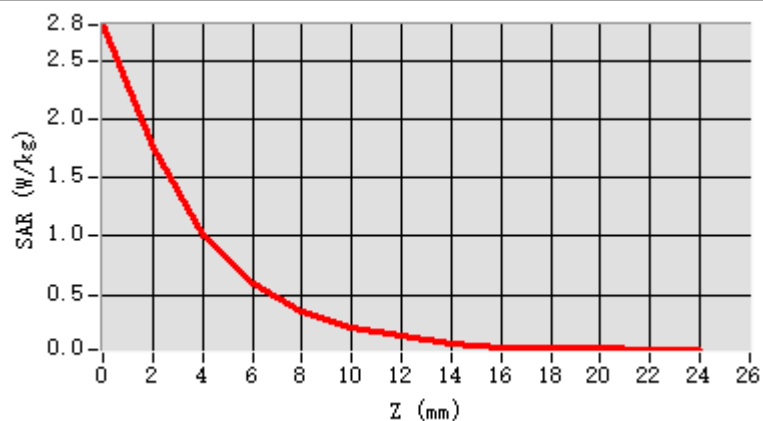

F. 3D Image

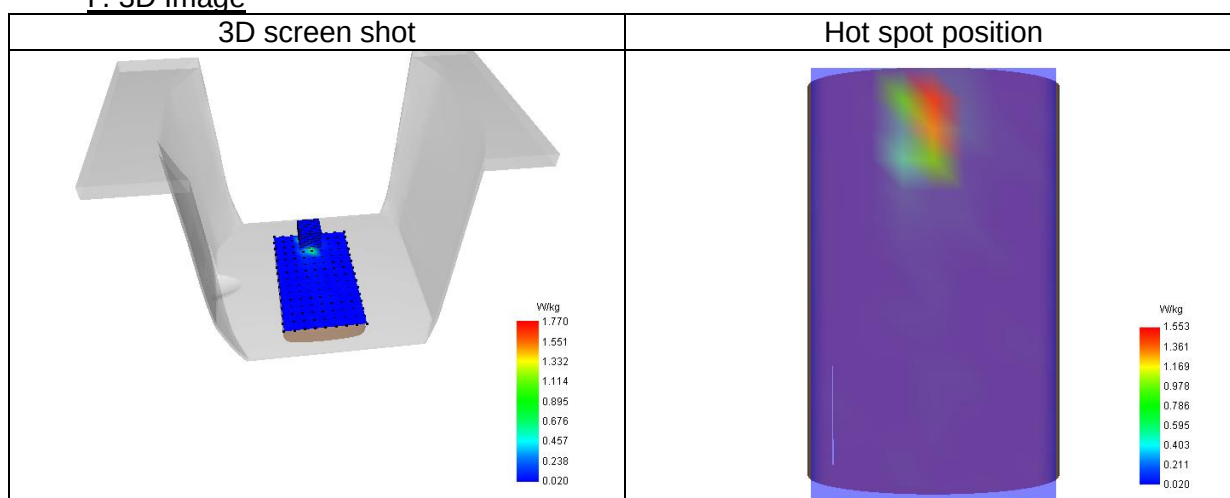

3# SAR Measurement at U-NII-3 (Body, Validation Plane)

Date of measurement: 23/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.90
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-3
Signal	IEEE 802.11 ac
Channels/Frequency	Middle (155)/ frequency 5775.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5775.00
Relative permittivity (real part)	36.60
Relative permittivity (imaginary part)	15.94
Conductivity (S/m)	5.11

C. SAR Surface and Volume

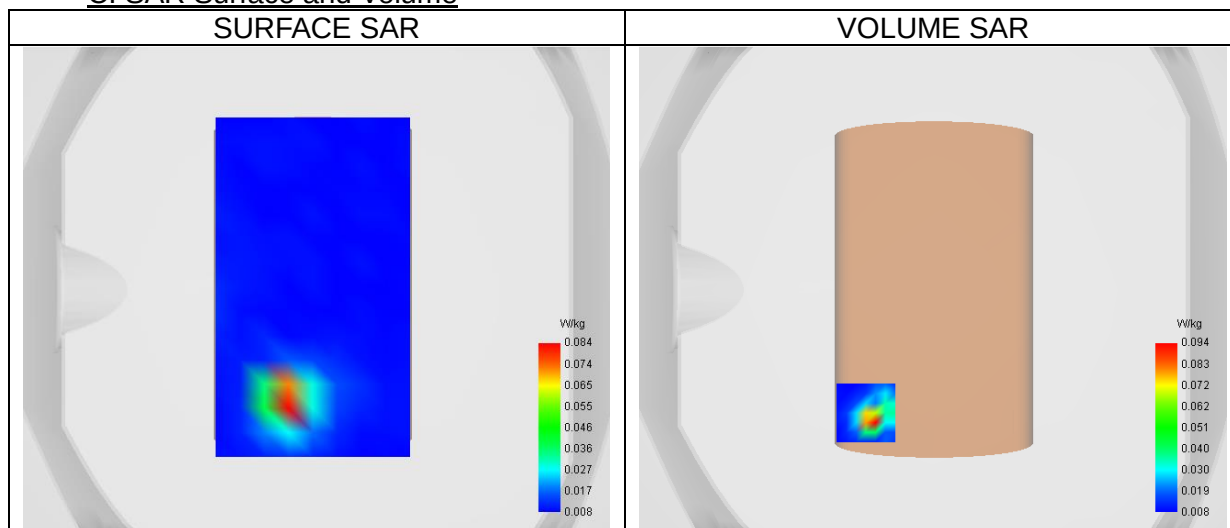


Maximum location: X=-28.00, Y=-52.00 ; SAR Peak: 0.17 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.009
SAR 1g (W/Kg)	0.042
Variation (%)	-1.85
Horizontal validation criteria: minimum distance (mm)	7.07
Vertical validation criteria: SAR ratio M2/M1 (%)	51.04

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.208	0.094	0.029	0.028	0.017	0.016	0.012

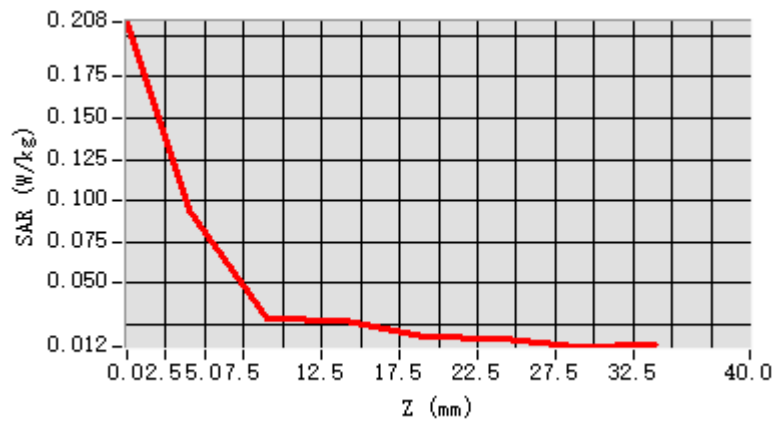

F. 3D Image

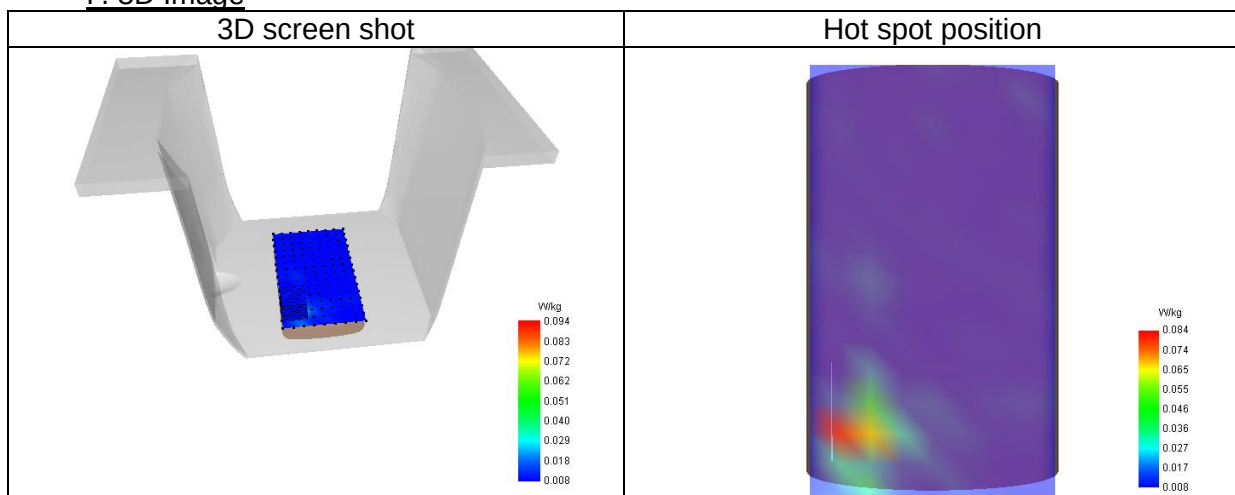

4# SAR Measurement at U-NII-3 (Body, Validation Plane)

Date of measurement: 23/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.90
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-3
Signal	IEEE 802.11 ac
Channels/Frequency	Middle (155)/ frequency 5775.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5775.00
Relative permittivity (real part)	36.60
Relative permittivity (imaginary part)	15.94
Conductivity (S/m)	5.11

C. SAR Surface and Volume

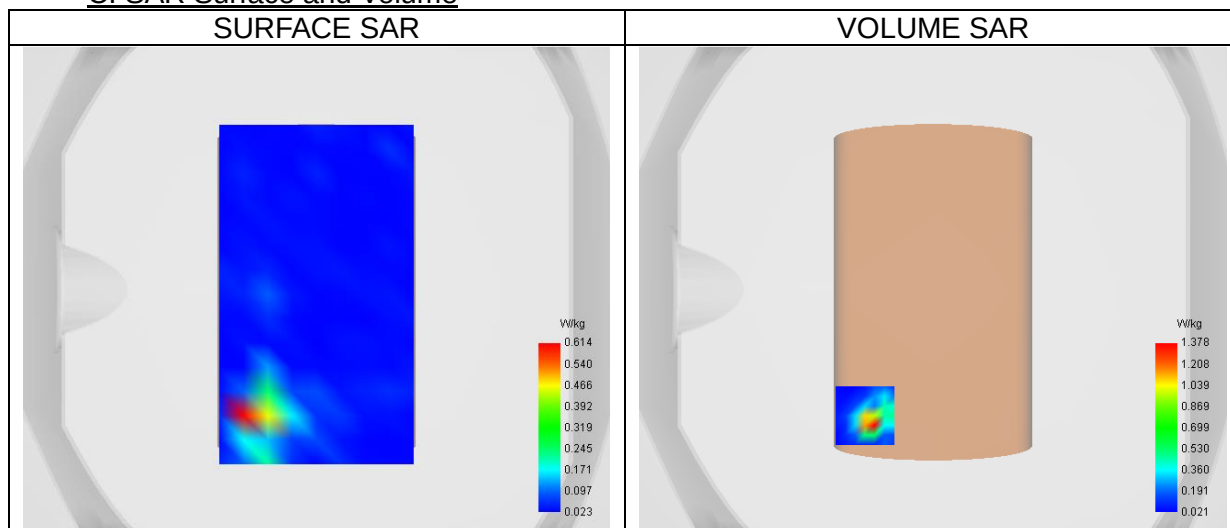


Maximum location: X=-28.00, Y=-52.00 ; SAR Peak: 3.05 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.134
SAR 1g (W/Kg)	0.512
Variation (%)	-1.53
Horizontal validation criteria: minimum distance (mm)	4.00
Vertical validation criteria: SAR ratio M2/M1 (%)	41.05

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
						0	0	0	0	0	0	0
SAR (W/Kg)	2.62	1.37	0.08	0.27	0.03	0.07	0.03	0.04	0.02	0.02	0.03	0.03
	8	8	2	0	5	3	0	8	8	8	0	9

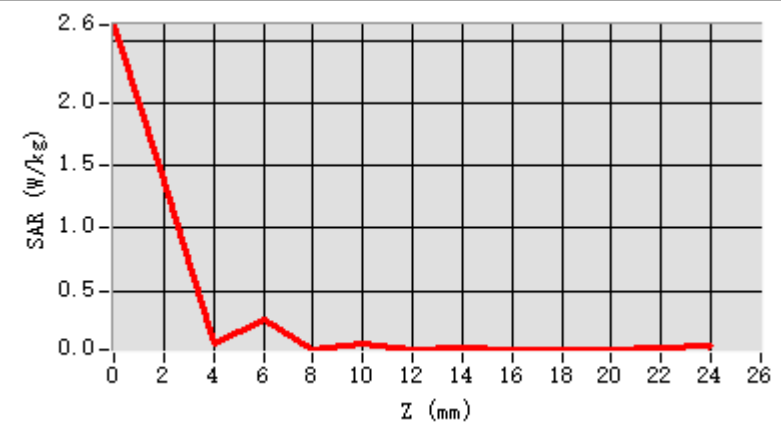

F. 3D Image

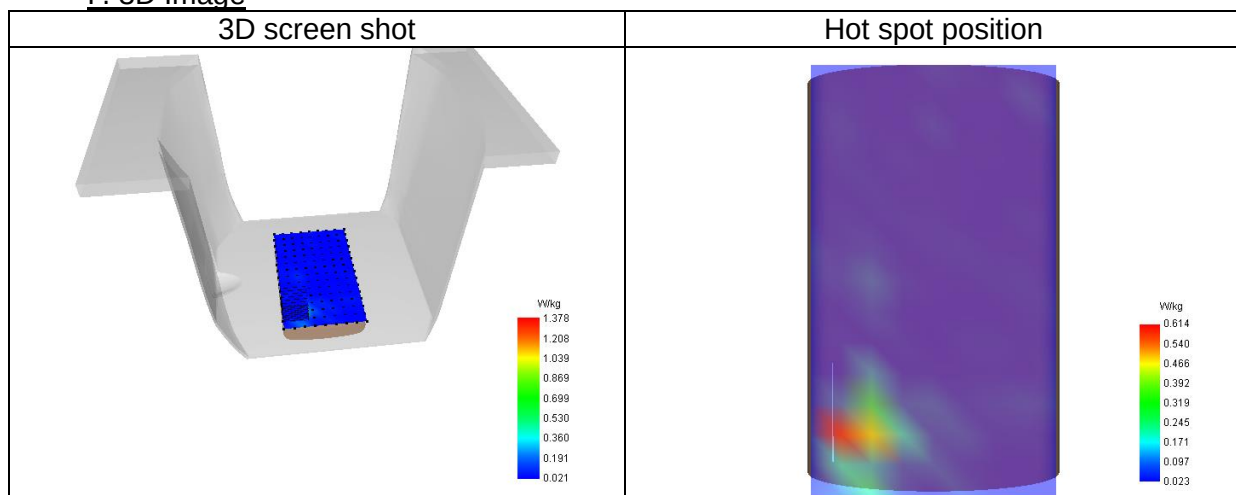

5# SAR Measurement at ISM (Body, Validation Plane)

Date of measurement: 14/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.74
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	ISM
Signal	IEEE 802.11 b
Channels/Frequency	Middle (6)/ frequency 2437.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	2437.00
Relative permittivity (real part)	40.62
Relative permittivity (imaginary part)	13.44
Conductivity (S/m)	1.82

C. SAR Surface and Volume

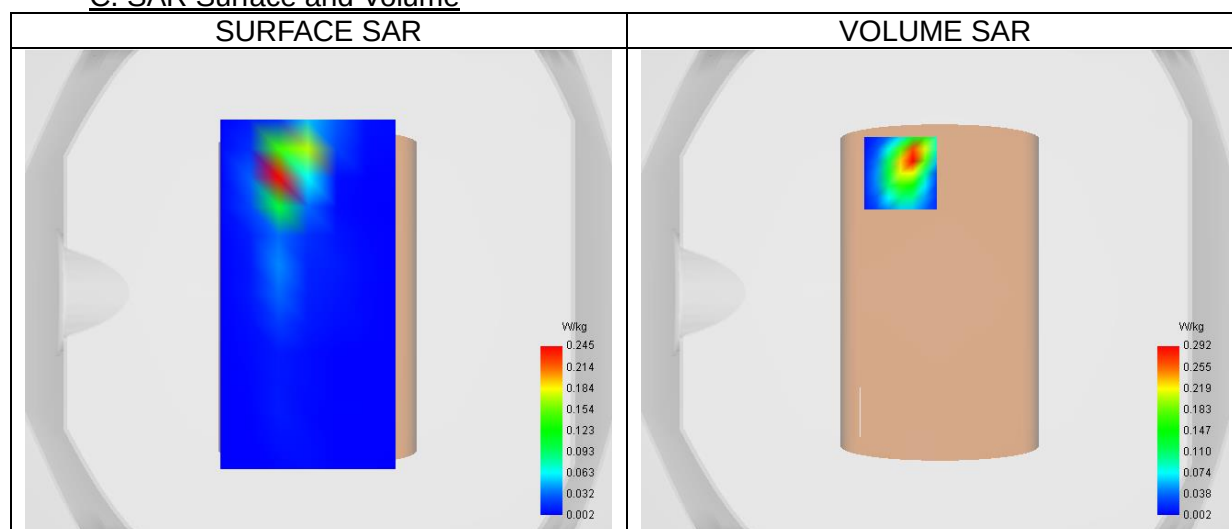


Maximum location: X=-16.00, Y=48.00 ; SAR Peak: 0.29 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.087
SAR 1g (W/Kg)	0.261
Variation (%)	-2.00
Horizontal validation criteria: minimum distance (mm)	7.07
Vertical validation criteria: SAR ratio M2/M1 (%)	42.68


E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.281	0.234	0.187	0.149	0.121	0.096	0.079

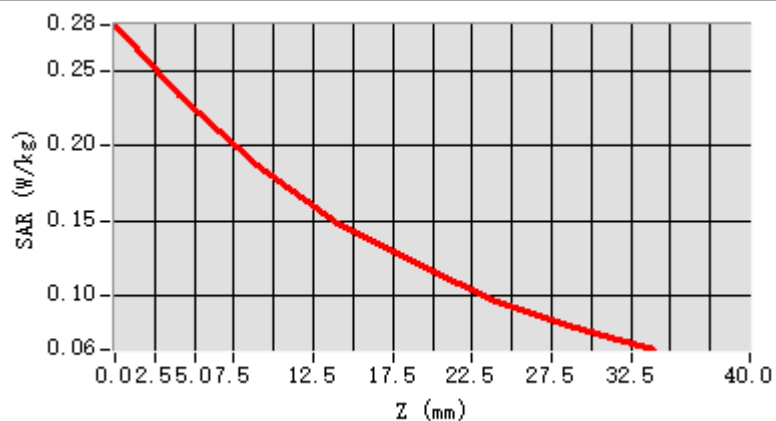


F. 3D Image

3D screen shot

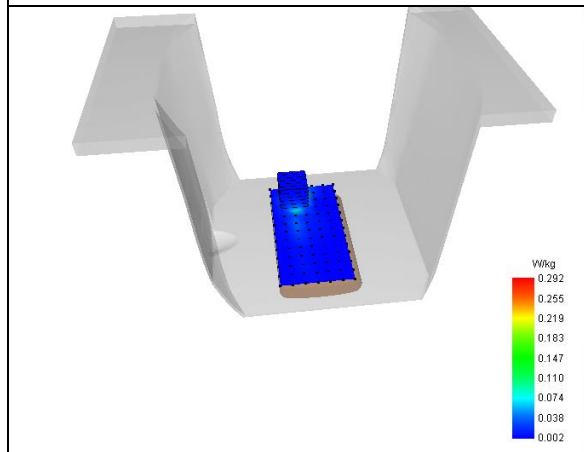

Hot spot position

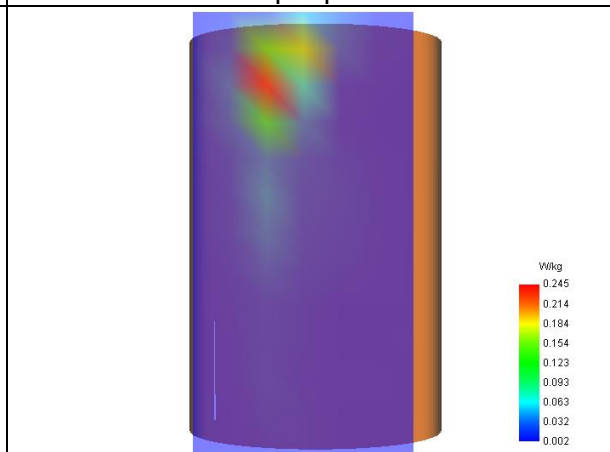

6# SAR Measurement at ISM (Body, Validation Plane)

Date of measurement: 14/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.74
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	ISM
Signal	IEEE 802.11 b
Channels/Frequency	Lower (1)/ frequency 2412.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	2412.00
Relative permittivity (real part)	40.66
Relative permittivity (imaginary part)	13.48
Conductivity (S/m)	1.81

C. SAR Surface and Volume

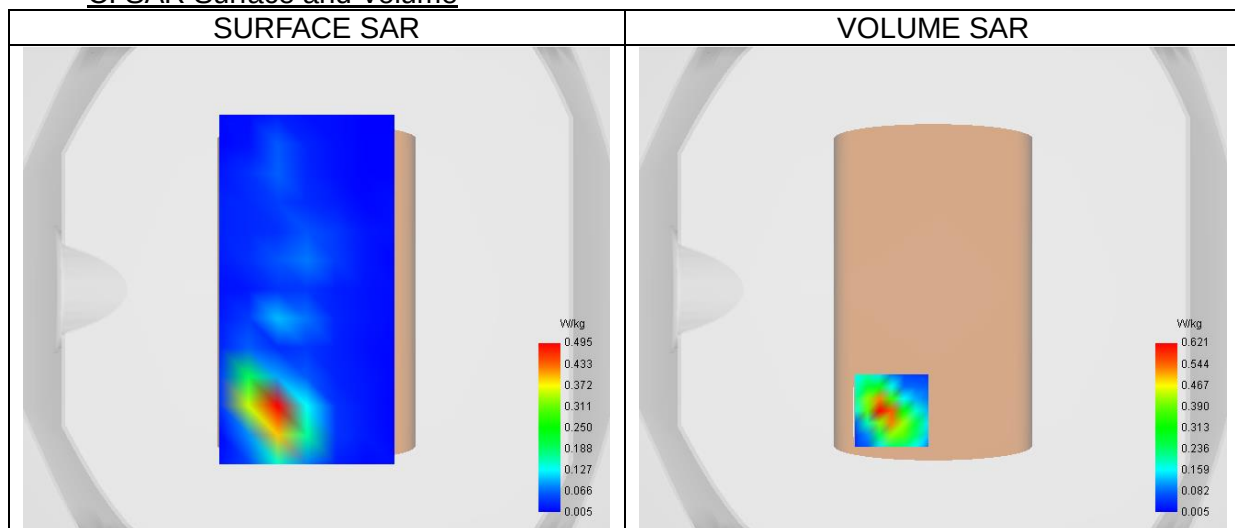


Maximum location: X=-17.00, Y=-50.00 ; SAR Peak: 1.14 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.196
SAR 1g (W/Kg)	0.600
Variation (%)	-1.31
Horizontal validation criteria: minimum distance (mm)	7.07
Vertical validation criteria: SAR ratio M2/M1 (%)	37.21

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.382	0.620	0.156	0.093	0.032	0.025	0.018

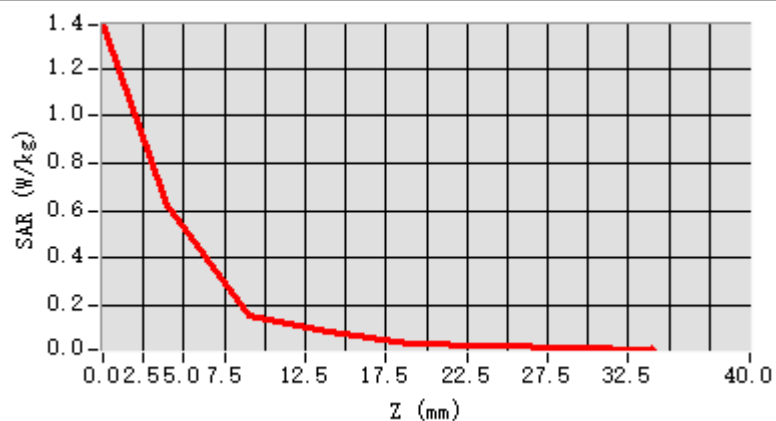

F. 3D Image

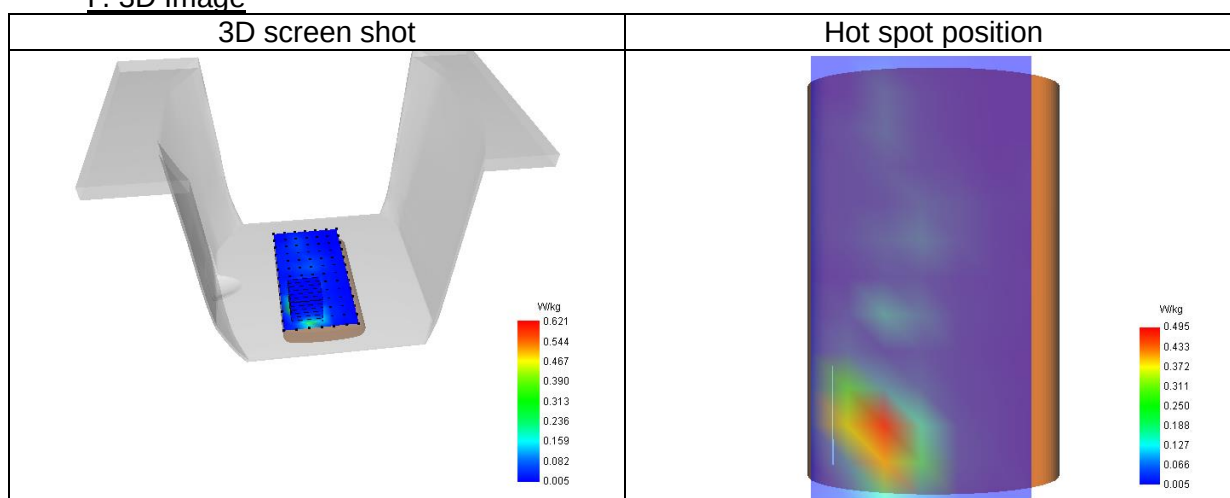

7# SAR Measurement at U-NII-1 (Body, Validation Plane)

Date of measurement: 19/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.89
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-1
Signal	IEEE 802.11 ac
Channels/Frequency	Middle (42)/ frequency 5210.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5210.00
Relative permittivity (real part)	37.31
Relative permittivity (imaginary part)	15.79
Conductivity (S/m)	4.57

C. SAR Surface and Volume

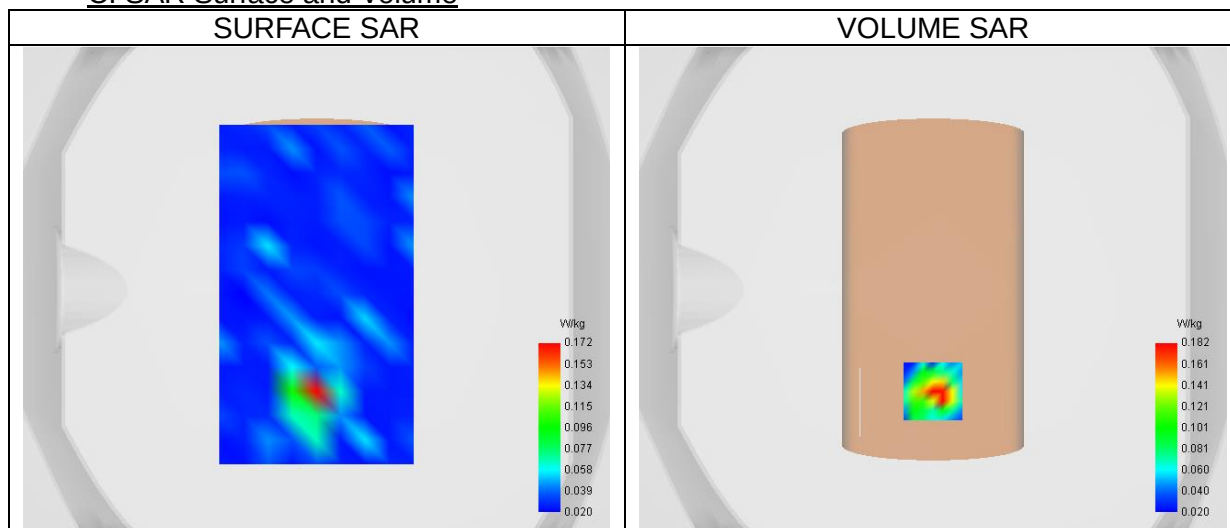


Maximum location: X=0.00, Y=-42.00 ; SAR Peak: 0.46 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.053
SAR 1g (W/Kg)	0.119
Variation (%)	0.12
Horizontal validation criteria: minimum distance (mm)	5.66
Vertical validation criteria: SAR ratio M2/M1 (%)	65.64

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
						0	0	0	0	0	0	0
SAR (W/Kg)	0.28	0.18	0.09	0.06	0.04	0.04	0.02	0.02	0.02	0.05	0.04	0.02
	2	2	5	2	5	6	7	6	7	3	5	5

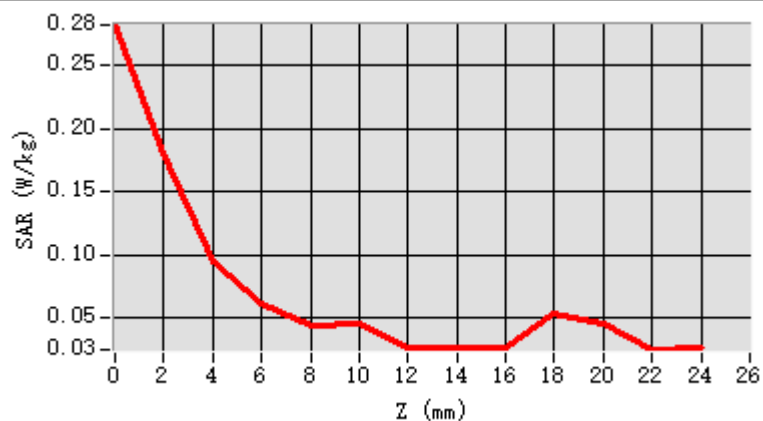

F. 3D Image

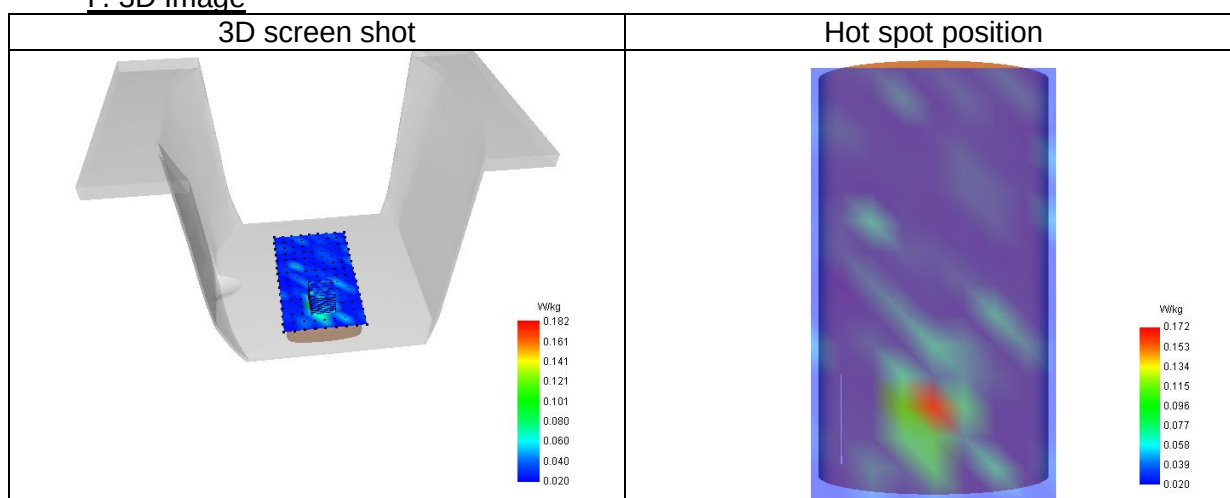

8# SAR Measurement at U-NII-1 (Body, Validation Plane)

Date of measurement: 19/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.89
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-1
Signal	IEEE 802.11 ac
Channels/Frequency	Middle (42)/ frequency 5210.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5210.00
Relative permittivity (real part)	37.31
Relative permittivity (imaginary part)	15.79
Conductivity (S/m)	4.57

C. SAR Surface and Volume

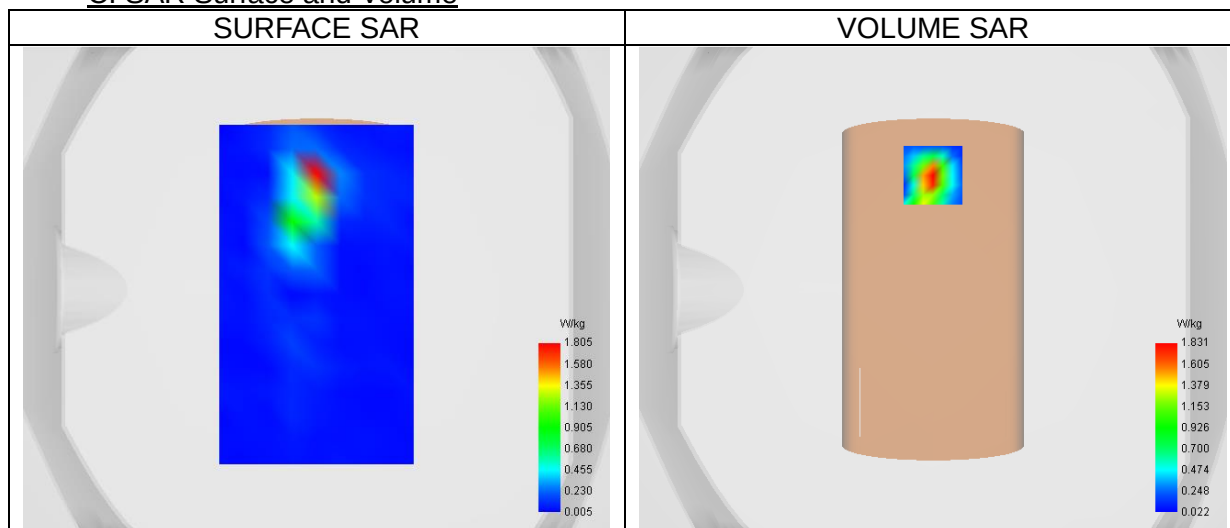


Maximum location: X=0.00, Y=47.00 ; SAR Peak: 3.34 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.310
SAR 1g (W/Kg)	1.026
Variation (%)	0.29
Horizontal validation criteria: minimum distance (mm)	8.00
Vertical validation criteria: SAR ratio M2/M1 (%)	58.17

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
						0	0	0	0	0	0	0
SAR (W/Kg)	2.87	1.83	1.06	0.62	0.41	0.23	0.15	0.11	0.08	0.05	0.05	0.05
	4	1	5	6	2	9	8	0	9	7	9	3

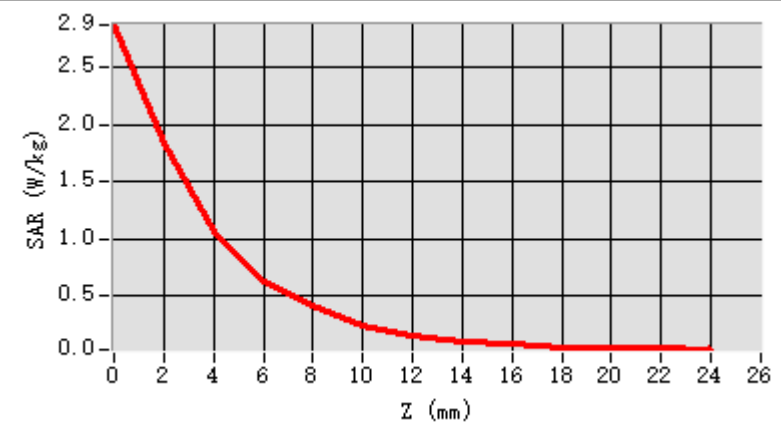

F. 3D Image

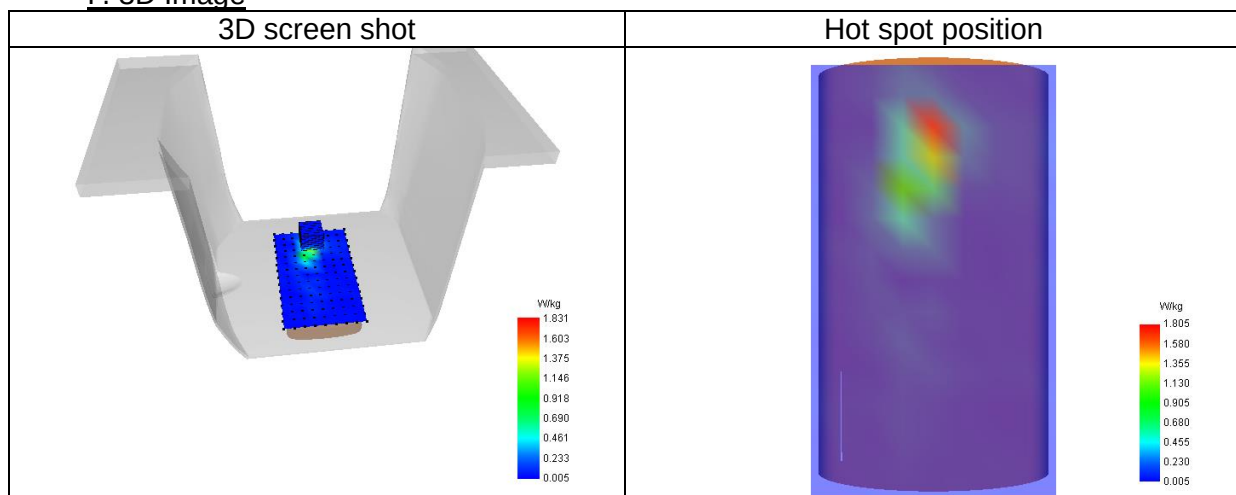

9# SAR Measurement at U-NII-3 (Body, Validation Plane)

Date of measurement: 23/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.90
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-3
Signal	IEEE 802.11 ac
Channels/Frequency	Middle (155)/ frequency 5775.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5775.00
Relative permittivity (real part)	36.60
Relative permittivity (imaginary part)	15.94
Conductivity (S/m)	5.11

C. SAR Surface and Volume

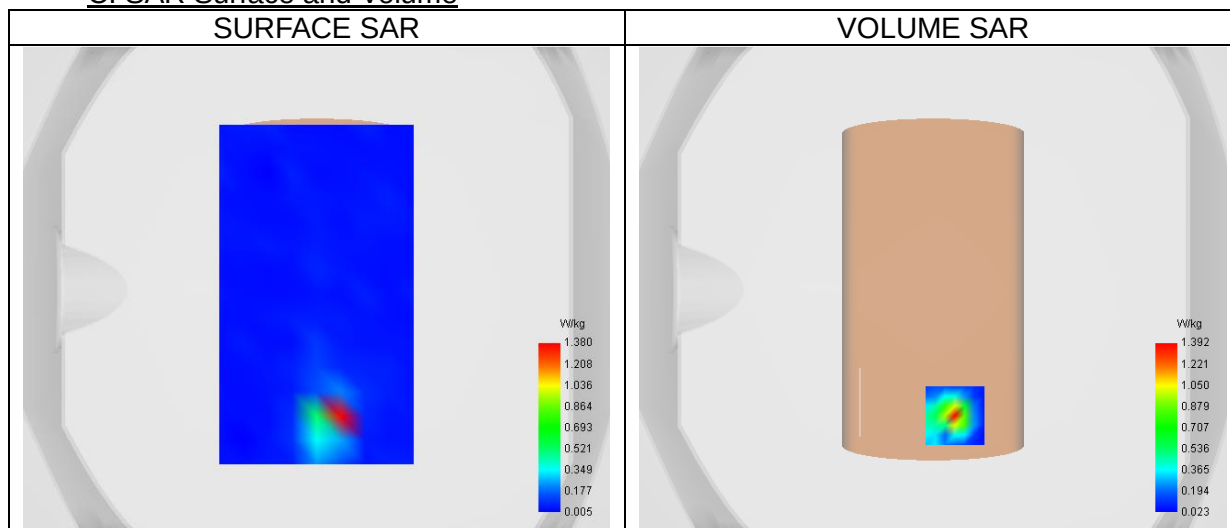


Maximum location: X=9.00, Y=-52.00 ; SAR Peak: 2.23 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.169
SAR 1g (W/Kg)	0.615
Variation (%)	0.11
Horizontal validation criteria: minimum distance (mm)	5.66
Vertical validation criteria: SAR ratio M2/M1 (%)	55.35

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
						0	0	0	0	0	0	0
SAR (W/Kg)	2.33	1.39	0.77	0.36	0.22	0.09	0.09	0.07	0.07	0.03	0.04	0.06
	6	2	0	6	6	9	3	3	4	8	4	0

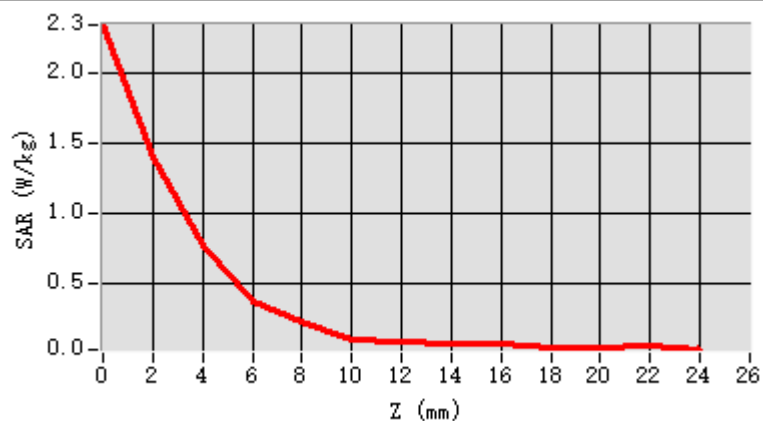

F. 3D Image

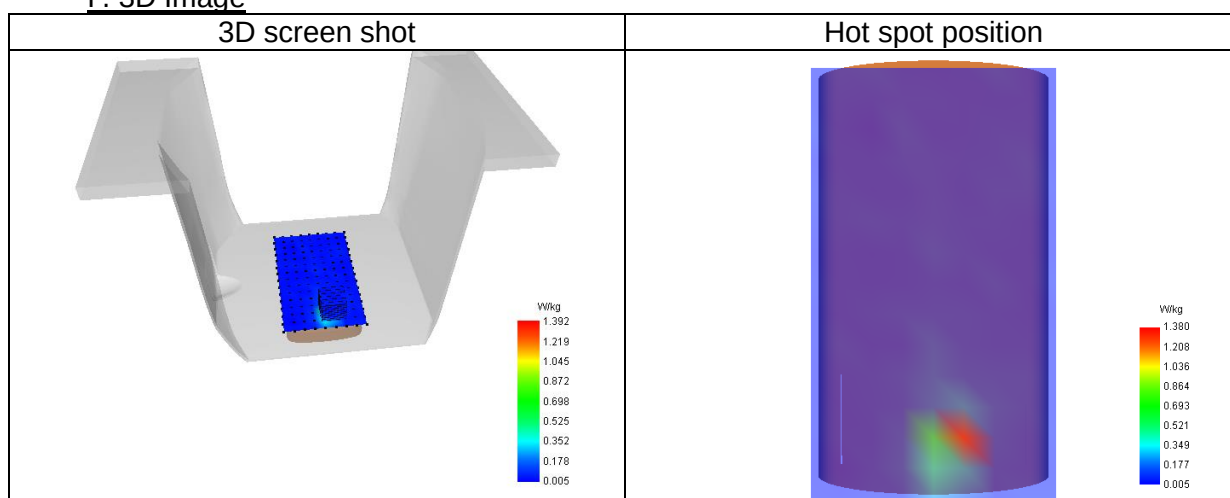

10# SAR Measurement at U-NII-3 (Body, Validation Plane)

Date of measurement: 23/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.90
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-3
Signal	IEEE 802.11 ac
Channels/Frequency	Middle (155)/ frequency 5775.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5775.00
Relative permittivity (real part)	36.60
Relative permittivity (imaginary part)	15.94
Conductivity (S/m)	5.11

C. SAR Surface and Volume

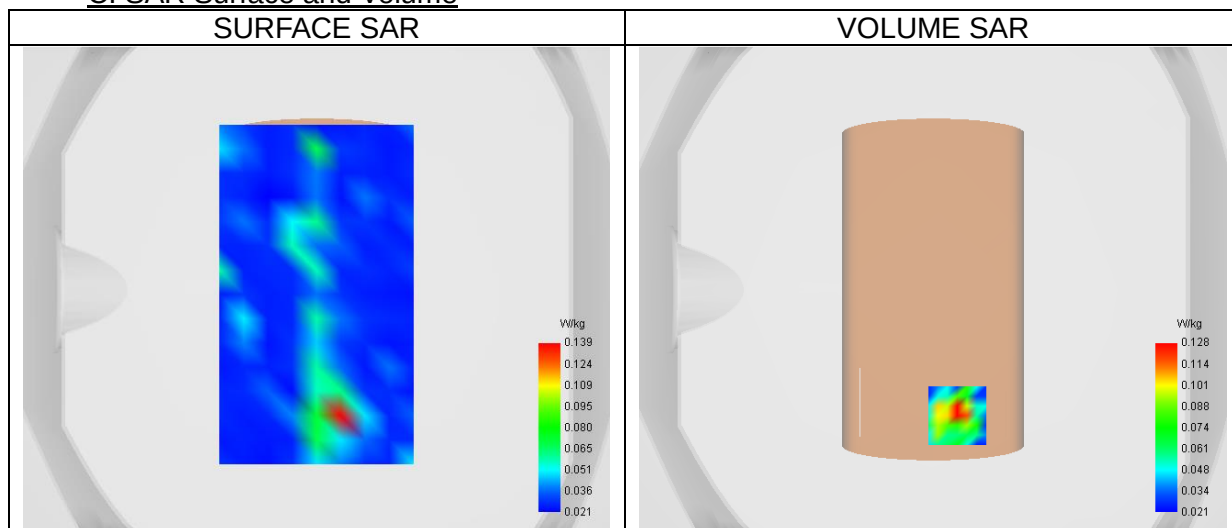


Maximum location: X=10.00, Y=-52.00 ; SAR Peak: 0.27 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.041
SAR 1g (W/Kg)	0.089
Variation (%)	0.21
Horizontal validation criteria: minimum distance (mm)	8.00
Vertical validation criteria: SAR ratio M2/M1 (%)	74.78

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
						0	0	0	0	0	0	0
SAR (W/Kg)	0.185	0.128	0.079	0.059	0.060	0.026	0.028	0.027	0.048	0.027	0.028	0.028

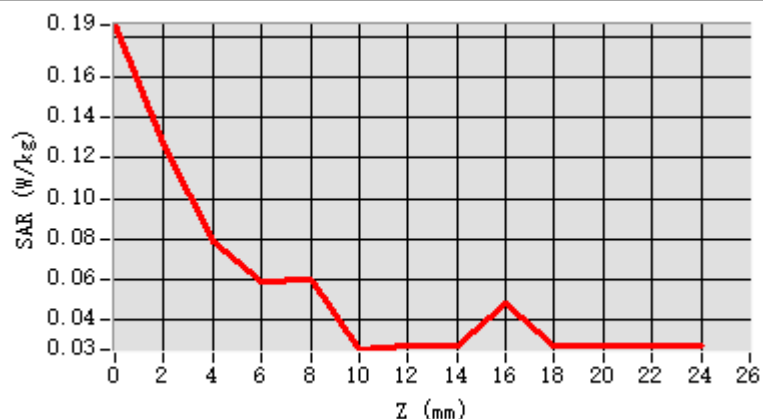

F. 3D Image

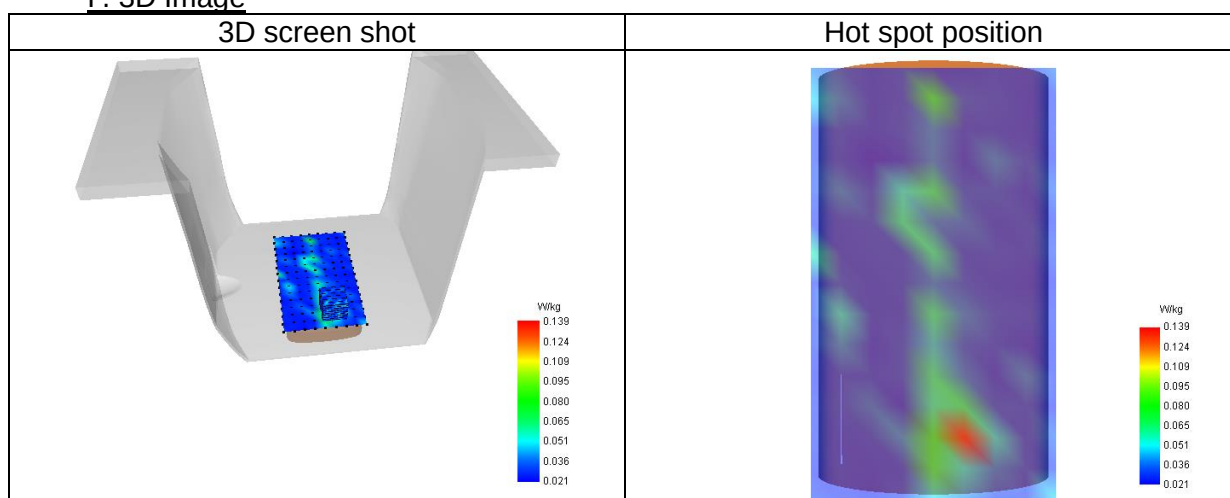

11# SAR Measurement at ISM (Body, Validation Plane)

Date of measurement: 14/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.74
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	ISM
Signal	IEEE 802.11 b
Channels/Frequency	Lower (1)/ frequency 2412.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	2412.00
Relative permittivity (real part)	40.66
Relative permittivity (imaginary part)	13.48
Conductivity (S/m)	1.81

C. SAR Surface and Volume

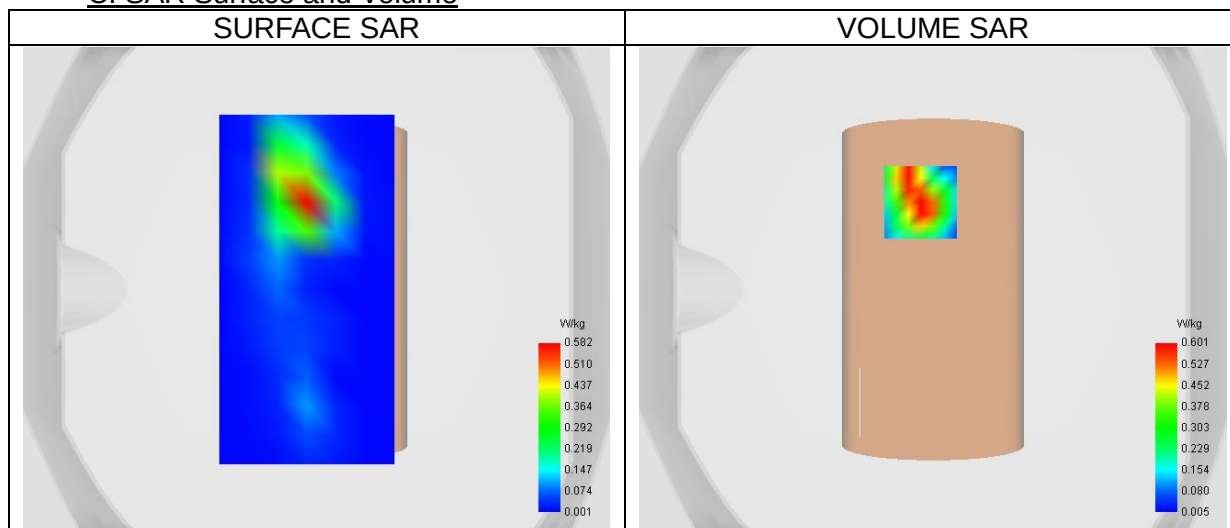


Maximum location: X=-5.00, Y=36.00 ; SAR Peak: 1.09 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.250
SAR 1g (W/Kg)	0.561
Variation (%)	-3.68
Horizontal validation criteria: minimum distance (mm)	11.18
Vertical validation criteria: SAR ratio M2/M1 (%)	51.41

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.073	0.601	0.274	0.145	0.076	0.042	0.024

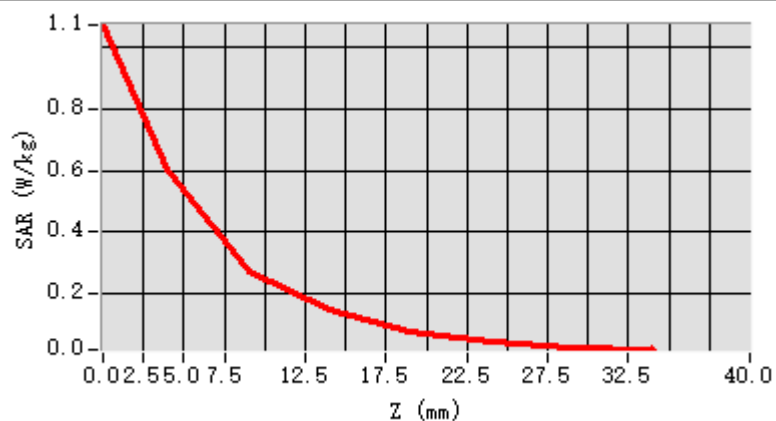

F. 3D Image

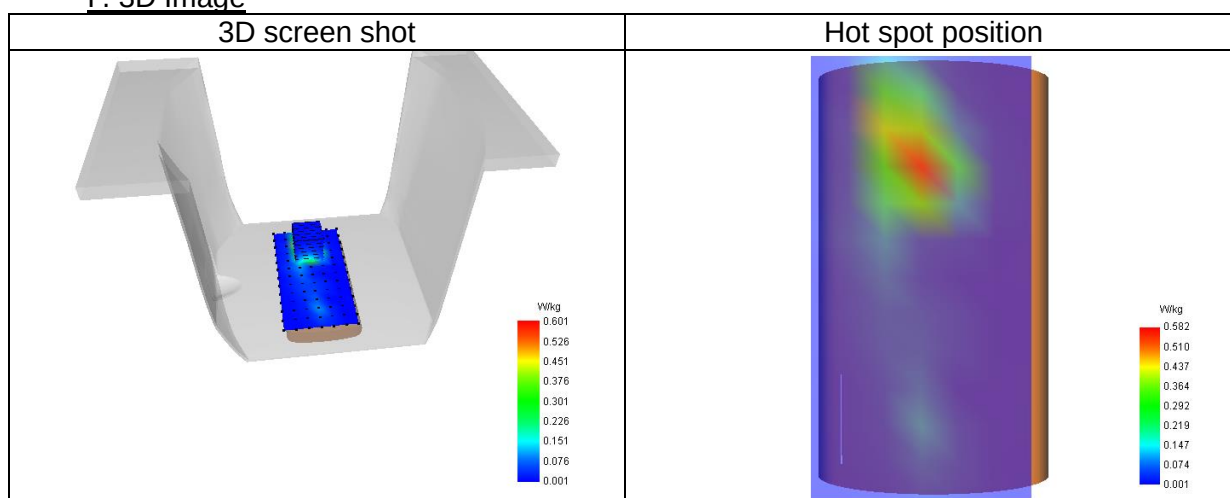

12# SAR Measurement at ISM (Body, Validation Plane)

Date of measurement: 14/5/2026


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.74
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	ISM
Signal	IEEE 802.11 b
Channels/Frequency	Middle (6)/ frequency 2437.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	2437.00
Relative permittivity (real part)	40.62
Relative permittivity (imaginary part)	13.44
Conductivity (S/m)	1.82

C. SAR Surface and Volume

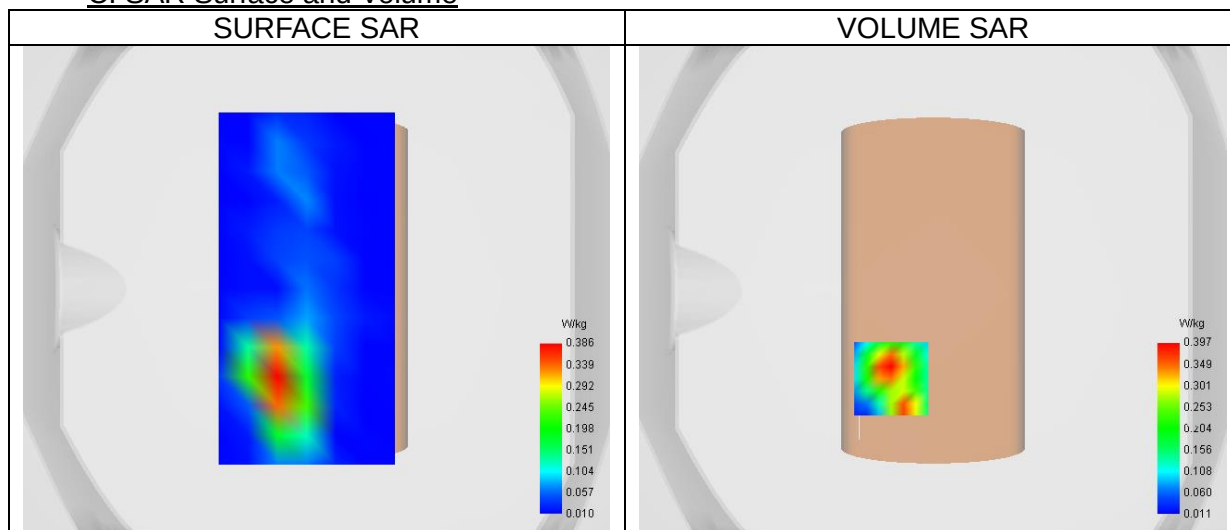


Maximum location: X=-17.00, Y=-36.00 ; SAR Peak: 0.40 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.159
SAR 1g (W/Kg)	0.333
Variation (%)	0.93
Horizontal validation criteria: minimum distance (mm)	11.18
Vertical validation criteria: SAR ratio M2/M1 (%)	54.04

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.479	0.226	0.071	0.058	0.020	0.024	0.006

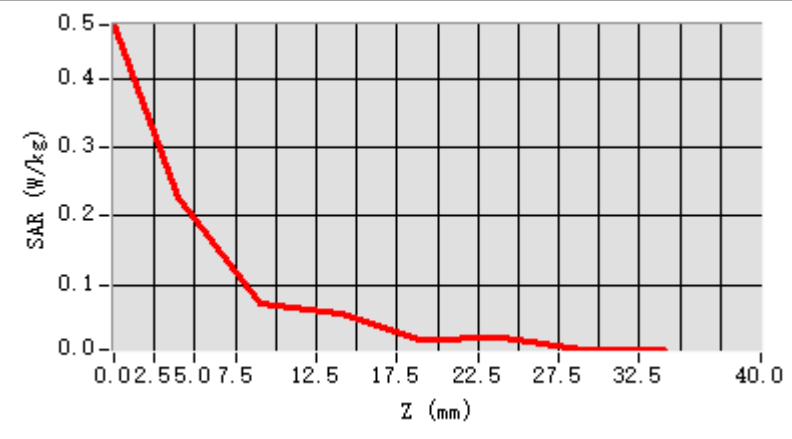

F. 3D Image

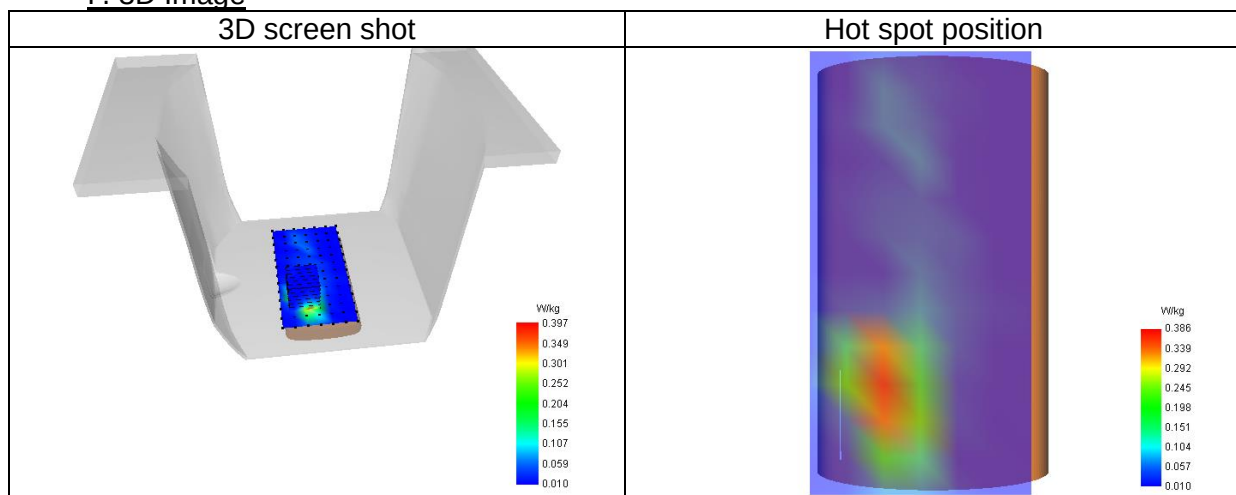

14. Appendix D. Calibration Certificate

Table of contents
E Field Probe - 4024-EPGO-442
2450 MHz Dipole - SN 03/15 DIP 2G450-352
5000-6000 MHz Dipole - SN 13/14 WGA 33
<Justification of the extended calibration>

Docusign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-Field Probe Calibration Report

Ref : ACR.278.12.24.BES.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: 4024-EPGO-442

Calibrated at MVG
Z.I. de la pointe du diable
Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 10/04/2024



Accreditations #2-6789
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).

Docusign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR 278.12.24.BES.A

	Name	Function	Date	Signature
Prepared by :	Cyrille ONNEE	Measurement Responsible	10/4/2024	
Checked & approved by:	Pedro Ruiz	Technical Manager	10/4/2024	
Authorized by:	Pedro Ruiz	Laboratory Director	10/4/2024	

Assinado por:

Pedro RUIZ

29093B31C46F428...

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Cyrille ONNEE	10/4/2024	Initial release

DocuSign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR 278.12.24.BES.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Sensitivity	4
3.2	Linearity	5
3.3	Isotropy	5
3.4	Boundary Effect	5
3.5	Probe Modulation Response	6
4	Measurement Uncertainty	6
5	Calibration Results	6
5.1	Calibration in air	6
5.2	Calibration in liquid	7
6	Verification Results	9
7	List of Equipment	9

DocuSign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR 278.12.24.BES.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	4024-EPGO-442
Product Condition (new / used)	New
Frequency Range of Probe	0.15 GHz-7.5GHz
Resistance of Three Dipoles at Connector	Dipole 1: $R_1=0.206 \text{ M}\Omega$ Dipole 2: $R_2=0.223 \text{ M}\Omega$ Dipole 3: $R_3=0.235 \text{ M}\Omega$

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Probe

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their effect. All calibrations / measurements performed meet the fore-mentioned standards.

3.1 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards for frequency range 600-7500MHz and using the calorimeter cell method (transfer method) as outlined in the standards for frequency 150-450 MHz.

DocuSign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR 278.12.24.BES.A

3.2 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

3.3 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.4 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and $d_{be} + d_{step}$ along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \Delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/\delta})^2}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

$SAR_{uncertainty}$	is the uncertainty in percent of the probe boundary effect
d_{be}	is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre
Δ_{step}	is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
δ	is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14 \text{ mm}$ at 3 GHz;
ΔSAR_{be}	in percent of SAR is the deviation between the measured SAR value, at the distance d_{be} from the boundary, and the analytical SAR value.

The measured worst case boundary effect $SAR_{uncertainty}[\%]$ for scanning distances larger than 4mm is 1.0% Limit, 2%).

DocuSign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR 278.12.24.BES.A

3.5 PROBE MODULATION RESPONSE

MVG's probe were evaluated experimentally with various modulated signal and the deviation from CW response were found neglectable in the used power range of the probe. So the correction to taking into account the linearization parameters for different modulation is null, therefore the CW factor given in this report can be used whatever the measured modulation

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty associated with a SAR probe calibration using the waveguide or calorimetric cell technique depending on the frequency.

The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-11% for the frequency range 150-450MHz.


The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-14% for the frequency range 600-7500MHz.

5 CALIBRATION RESULTS

Ambient condition	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

5.1 CALIBRATION IN AIR

The following curve represents the measurement in waveguide of the voltage picked up by the probe toward the E-field generated inside the waveguide.

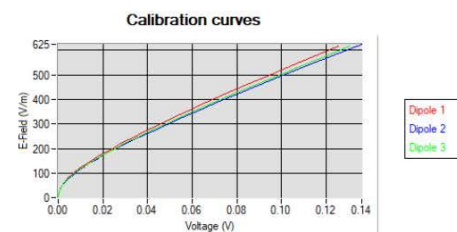

From this curve, the sensitivity in air is calculated using the below formula.

$$E^2 = \sum_{i=1}^3 \frac{V_i (1 + V_i / DCP_i)}{Norm_i}$$

Page: 6/10

Template: ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vM

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.