

# Test Report

**Product:** Wireless headset

**Trade Mark:** N/A

**Model Number:** MD

**FCC ID:** 2BCJE-MD558

**Prepared for**

Shenzhen Xinke Meida Communication Co., Ltd.  
Room 301, Building 1, Zone 6, Lianhe Industrial Zone, Nanyue Community,  
Baolong Street, Longgang District, Shenzhen

**Prepared by**

Shenzhen HongBiao Certification& Testing Co., Ltd  
Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan  
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,  
China  
Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110  
Website: <http://www.sz-hongbiao.com>

## Table of Contents

|          |                                                 |           |
|----------|-------------------------------------------------|-----------|
| <b>1</b> | <b>GENERAL DESCRIPTION .....</b>                | <b>6</b>  |
| 1.1      | DESCRIPTION OF EUT .....                        | 6         |
| 1.2      | TEST MODE.....                                  | 6         |
| 1.3      | OPERATION CHANNEL LIST .....                    | 7         |
| 1.4      | TEST SETUP .....                                | 7         |
| 1.5      | POWER SETTING CONFIGURATION PARAMETERS .....    | 7         |
| 1.6      | ANCILLARY EQUIPMENT .....                       | 8         |
| <b>2</b> | <b>SUMMARY OF TEST RESULT.....</b>              | <b>9</b>  |
| <b>3</b> | <b>TEST FACILITIES AND ACCREDITATIONS .....</b> | <b>10</b> |
| 3.1      | TEST LABORATORY .....                           | 10        |
| 3.2      | ENVIRONMENTAL CONDITIONS .....                  | 10        |
| 3.3      | MEASUREMENT UNCERTAINTY .....                   | 10        |
| 3.4      | TEST SOFTWARE .....                             | 11        |
| <b>4</b> | <b>LIST OF TEST EQUIPMENT.....</b>              | <b>12</b> |
| <b>5</b> | <b>TEST ITEM AND RESULTS .....</b>              | <b>14</b> |
| 5.1      | ANTENNA REQUIREMENT .....                       | 14        |
| 5.1.1    | <i>Standard Requirement</i> .....               | 14        |
| 5.1.2    | <i>Test Result</i> .....                        | 14        |
| 5.2      | CONDUCTED EMISSION .....                        | 15        |
| 5.2.1    | <i>Limits</i> .....                             | 15        |
| 5.2.2    | <i>Test Procedures</i> .....                    | 15        |
| 5.2.3    | <i>Test Setup</i> .....                         | 16        |
| 5.2.4    | <i>Test Result</i> .....                        | 16        |
| 5.3      | RADIATED EMISSION .....                         | 19        |
| 5.3.1    | <i>Limits</i> .....                             | 19        |
| 5.3.2    | <i>Test Procedures</i> .....                    | 19        |
| 5.3.3    | <i>Test Setup</i> .....                         | 19        |
| 5.3.4    | <i>Test Result</i> .....                        | 20        |
| 5.3.5    | <i>Radiated Band Edge</i> .....                 | 25        |
| 5.4      | PEAK OUTPUT POWER .....                         | 26        |
| 5.4.1    | <i>Limit</i> .....                              | 26        |
| 5.4.2    | <i>Test Procedure</i> .....                     | 26        |
| 5.4.3    | <i>Test Setup</i> .....                         | 26        |
| 5.4.4    | <i>Test Results</i> .....                       | 26        |
| 5.5      | 20dB OCCUPIED CHANNEL BANDWIDTH.....            | 33        |
| 5.5.1    | <i>Limit</i> .....                              | 33        |
| 5.5.2    | <i>Test Procedure</i> .....                     | 33        |
| 5.5.3    | <i>Test Setup</i> .....                         | 33        |
| 5.5.4    | <i>Test results</i> .....                       | 33        |
| 5.6      | CARRIER FREQUENCY SEPARATION .....              | 45        |
| 5.6.1    | <i>Limit</i> .....                              | 45        |
| 5.6.2    | <i>Test Procedure</i> .....                     | 45        |
| 5.6.3    | <i>Test Setup</i> .....                         | 45        |
| 5.6.4    | <i>Test Results</i> .....                       | 45        |
| 5.7      | HOPPING CHANNEL NUMBER .....                    | 51        |
| 5.7.1    | <i>Limit</i> .....                              | 51        |
| 5.7.2    | <i>Test Procedure</i> .....                     | 51        |
| 5.7.3    | <i>Test Setup</i> .....                         | 51        |
| 5.7.4    | <i>Test Results</i> .....                       | 51        |
| 5.8      | DWELL TIME.....                                 | 54        |
| 5.8.1    | <i>Limit</i> .....                              | 54        |

---

|        |                                      |    |
|--------|--------------------------------------|----|
| 5.8.2  | Test Procedure .....                 | 54 |
| 5.8.3  | Test Setup.....                      | 54 |
| 5.8.4  | Test Results .....                   | 54 |
| 5.9    | CONDUCTED BAND EDGE .....            | 59 |
| 5.9.1  | Limit .....                          | 59 |
| 5.9.2  | Test Procedure .....                 | 59 |
| 5.9.3  | Test Setup.....                      | 59 |
| 5.9.4  | Test Results .....                   | 59 |
| 5.10   | SPURIOUS RF CONDUCTED EMISSIONS..... | 66 |
| 5.10.1 | Limit .....                          | 66 |
| 5.10.2 | Test Procedure.....                  | 66 |
| 5.10.3 | Test Setup.....                      | 66 |
| 5.10.4 | Test Results .....                   | 66 |
| 6      | PHOTOGRAPHS OF THE TEST SETUP.....   | 70 |
| 7      | PHOTOGRAPHS OF THE EUT .....         | 72 |

## TEST RESULT CERTIFICATION

**Applicant's Name**..... : Shenzhen Xinke Meida Communication Co., Ltd.  
**Address** ..... : Room 301, Building 1, Zone 6, Lianhe Industrial Zone, Nanyue  
Community, Baolong Street, Longgang District, Shenzhen  
**Manufacturer's Name** ..... : Shenzhen Xinke Meida Communication Co., Ltd.  
**Address** ..... : Room 301, Building 1, Zone 6, Lianhe Industrial Zone, Nanyue  
Community, Baolong Street, Longgang District, Shenzhen

**Product description**

**Product name** ..... : Wireless headset

**Model Number** ..... : MD

**Standards** ..... : FCC Part 15.247

**Test procedure** ..... : IEEE/ANSI C63.10-2020

KDB 558074 D01 15.247 Meas Guidance v05r02

This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

**Date of Test**

**Date (s) of performance of tests** ..... : June 20, 2025~ June 30, 2025

**Test Result**..... : **Pass**

**Testing Engineer** :




( Z o e S u )

**Technical Manager** :



( G a r y L u )

**Authorized Signatory** :



( L e o S u )

[illegible]

# 1 General Description

## 1.1 Description of EUT

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product name:              | Wireless headset                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Model name:                | MD                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Series Model:              | MINI, RD, MD03, MD04, MD05, MD06, MD26, MD41, MD118, MD128, MD138, MD158, MD168, MD188, MD198, MD618, MD638, MD528, MD538, MD558, MD568, MD38, MD36, MD37, MD598, MD558, MD558A, MD558B, MD558D, MD558N, RD, RD03, RD20, RD21, RD23, RD31, RD36, RD38, RD39, RD40, RD40B, MD, RD57, M100, MINI, MINI12, MINI13, MINI12S, MINI13T, MINI25, MINI13N, MINI13X, MINI13I, MINI24, BT, BT600, BT700, Y29, Y99, P90, S100, S101, S105, S103, S104, S106, S108, S109 |
| Different of series model: | Except for differences in color, model, and appearance, the circuits and modules of all models are the same.                                                                                                                                                                                                                                                                                                                                                 |
| Operation frequency:       | 2402-2480MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Modulation type:           | GFSK, $\pi/4$ -DQPSK, 8DPSK                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Bit Rate of transmitter:   | 1Mbps, 2Mbps, 3Mbps                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Antenna type:              | Ceramic Antenna                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Antenna gain:              | 1.5dBi                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Max. output power:         | 3.23dBm                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Hardware version:          | V1.0                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Software version:          | V1.0                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Battery:                   | The Charging case: DC 3.7V, 200mAh, 0.74Wh<br>The Earphone: DC 3.7V, 25mAh, 0.0925Wh                                                                                                                                                                                                                                                                                                                                                                         |
| Power supply:              | For earphone: Powered by internal battery<br>For charging case: Input DC 5V/1A<br>Battery for earphone: DC 3.7V, 25mAh, 0.0925Wh<br>Battery for charging case: DC 3.7V, 200mAh, 0.74Wh                                                                                                                                                                                                                                                                       |
| Adapter information:       | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

Note: There are differences in the position of some components on the left and right ears of the models listed in the report. Therefore, a difference test was conducted for the Spurious Emission and Band Edge projects to address this difference. The final report only reflects the test data for the worst left ear.

## 1.2 Test Mode

| Test Mode | Channel | Frequency (MHz) |
|-----------|---------|-----------------|
| 1         | 00      | 2402            |

|   |    |      |
|---|----|------|
| 2 | 39 | 2441 |
| 3 | 78 | 2480 |

### 1.3 Operation Channel List

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 00      | 2402            | 27      | 2429            | 54      | 2456            |
| 01      | 2403            | 28      | 2430            | 55      | 2457            |
| 02      | 2404            | 29      | 2431            | 56      | 2458            |
| 03      | 2405            | 30      | 2432            | 57      | 2459            |
| 04      | 2406            | 31      | 2433            | 58      | 2460            |
| 05      | 2407            | 32      | 2434            | 59      | 2461            |
| 06      | 2408            | 33      | 2435            | 60      | 2462            |
| 07      | 2409            | 34      | 2436            | 61      | 2463            |
| 08      | 2410            | 35      | 2437            | 62      | 2464            |
| 09      | 2411            | 36      | 2438            | 63      | 2465            |
| 10      | 2412            | 37      | 2439            | 64      | 2466            |
| 11      | 2413            | 38      | 2440            | 65      | 2467            |
| 12      | 2414            | 39      | 2441            | 66      | 2468            |
| 13      | 2415            | 40      | 2442            | 67      | 2469            |
| 14      | 2416            | 41      | 2443            | 68      | 2470            |
| 15      | 2417            | 42      | 2444            | 69      | 2471            |
| 16      | 2418            | 43      | 2445            | 70      | 2472            |
| 17      | 2419            | 44      | 2446            | 71      | 2473            |
| 18      | 2420            | 45      | 2447            | 72      | 2474            |
| 19      | 2421            | 46      | 2448            | 73      | 2475            |
| 20      | 2422            | 47      | 2449            | 74      | 2476            |
| 21      | 2423            | 48      | 2450            | 75      | 2477            |
| 22      | 2424            | 49      | 2451            | 76      | 2478            |
| 23      | 2425            | 50      | 2452            | 77      | 2479            |
| 24      | 2426            | 51      | 2453            | 78      | 2480            |
| 25      | 2427            | 52      | 2454            | --      | --              |
| 26      | 2428            | 53      | 2455            | --      | --              |

### 1.4 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

### 1.5 Power setting configuration parameters

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the

setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters.

| Test software Version |           | BT_Tool V1.0.9 |             |
|-----------------------|-----------|----------------|-------------|
| Frequency             | 2402 MHz  | 2441 MHz       | 2480 MHz    |
| Parameters            | Default   | Default        | Default     |
| RF cable              |           |                |             |
| Description           | Connector | Length         | Supplied by |
| Antenna Cable         | SMA       | 10cm           | Applicant   |

Note: Disclaimer: the loss of RF cable is too small and can be ignored.

## 1.6 Ancillary Equipment

| Equipment | Model     | S/N   | Manufacturer         |
|-----------|-----------|-------|----------------------|
| Laptop    | NbDE-WFH9 | /     | HUAWEI               |
| Adapter   | CD289     | 35810 | Ugreen Group Limited |
|           |           |       |                      |
|           |           |       |                      |
|           |           |       |                      |

Note: The laptop is used to assist the RF test. In order to prevent the laptop from causing unnecessary impact on the test, the laptop will be removed from the test environment after the EUT successfully transmits at a fixed frequency using the laptop.

## 2 Summary of Test Result

| No. | Standard Section | Test Item                       | Result | Remark |
|-----|------------------|---------------------------------|--------|--------|
| 1   | 15.203           | Antenna requirement             | Pass   |        |
| 2   | 15.207           | Conducted emission              | Pass   |        |
| 3   | 15.247(d)        | Band edge                       | Pass   |        |
| 4   | 15.205/15.209    | Spurious emission               | Pass   |        |
| 5   | 15.247(b)(1)     | Peak output power               | Pass   |        |
| 6   | 15.247(a)(1)     | 20dB occupied bandwidth         | Pass   |        |
| 7   | 15.247(a)(1)     | Carrier Frequencies Separation  | Pass   |        |
| 8   | 15.247(a)(1)     | Hopping channel number          | Pass   |        |
| 9   | 15.247(a)(1)     | Dwell time                      | Pass   |        |
| 10  | 15.247(d)        | Spurious RF Conducted Emissions | Pass   |        |

### 3 Test Facilities and Accreditations

#### 3.1 Test Laboratory

|                       |                                                                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Site             | Shenzhen HongBiao Certification& Testing Co., Ltd                                                                                                 |
| Test Site Location    | Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China |
| Telephone:            | (86-755) 2998 9321                                                                                                                                |
| Fax:                  | (86-755) 2998 5110                                                                                                                                |
| FCC Registration No.: | CN1341                                                                                                                                            |
| A2LA Certificate No.: | 6765.01                                                                                                                                           |

#### 3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

|                    |              |
|--------------------|--------------|
| Temperature:       | 15°C~35°C    |
| Relative Humidity: | 20%~75%      |
| Air Pressure:      | 98kPa~101kPa |

#### 3.3 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

The data and results quoted in this document are true and accurate values, and uncertainties are not involved in the calculations.

In addition, components and mass production processes that are similar to testing equipment may introduce additional deviations, and the manufacturer is solely responsible for the continued compliance of the equipment.

| Measurement Frequency Range      | U, (dB)            | Note |
|----------------------------------|--------------------|------|
| RF frequency                     | $2 \times 10^{-5}$ |      |
| RF power, conducted              | $\pm 0.57$ dB      |      |
| Conducted emission(150kHz~30MHz) | $\pm 2.5$ dB       |      |
| Radiated emission(9kHz-30MHz)    | $\pm 2.5$ dB       |      |
| Radiated emission(30MHz~1GHz)    | $\pm 4.2$ dB       |      |
| Radiated emission (above 1GHz)   | $\pm 4.7$ dB       |      |
| Occupied Bandwidth               | $\pm 3\%$          |      |
| Temperature                      | $\pm 1$ degree     |      |
| Humidity                         | $\pm 5$ %          |      |

### 3.4 Test Software

| Software name                    | Manufacturer | Model    | Version           |
|----------------------------------|--------------|----------|-------------------|
| Conducted Emission test Software | Farad        | EZ-EMC   | EMC-CON<br>3A1.1+ |
| Radiated Emission test Software  | Farad        | EZ-EMC   | FA-03A2           |
| RF Test System                   | MWRF         | MTS 8310 | 2.0.0.0           |

## 4 List of Test Equipment

| Radiation emission  |               |                                          |                 |             |              |                  |            |
|---------------------|---------------|------------------------------------------|-----------------|-------------|--------------|------------------|------------|
| Item                | Equipment No. | Equipment name                           | Manufacturer    | Model       | Serial No.   | Calibration date | Due date   |
| 1                   | HB-E001       | Horn Antenna                             | Schwarzbeck     | BBHA 9120D  | 02592        | 2024-05-18       | 2026-05-17 |
| 2                   | HB-E002       | Biconical log-periodic composite antenna | Schwarzbeck     | VULB 9168   | 01340        | 2024-05-18       | 2026-05-17 |
| 3                   | HB-E003       | SHF-EHF Horn                             | Schwarzbeck     | BBHA 91270  | 01193        | 2024-05-18       | 2026-05-17 |
| 4                   | HB-E005       | Preamplifier                             | Noyetec         | LAN-0118    | NYCM1420102  | 2025-05-07       | 2026-05-06 |
| 5                   | HB-E006       | Preamplifier                             | Noyetec         | LAN-1840    | NYCM1420103  | 2025-05-07       | 2026-05-06 |
| 6                   | HB-E007       | EMI TEST RECEIVER                        | R&S             | ESR7        | 102520       | 2025-05-07       | 2026-05-06 |
| 7                   | HB-E009       | POSITINAL COTROLLE R                     | Noyetec         | N/A         | N/A          | /                | /          |
| 8                   | HB-E013       | RF switch                                | Noyetec         | NY-RF4      | NY0CM1420204 | /                | /          |
| 9                   | HB-E066       | Illuminance Tester                       | TASI            | TA8121      | N/A          | 2025-05-13       | 2026-05-12 |
| 10                  | HB-E075       | Active loop antenna                      | Schwarzbeck     | FMZB 1519B  | 1519B-245    | 2024-05-18       | 2026-05-17 |
| 11                  | HB-E076       | Preamplifier                             | Hewlett Packard | 8447D       | 1937A02278   | 2025-05-07       | 2026-05-06 |
| Conduction emission |               |                                          |                 |             |              |                  |            |
| Item                | Equipment No. | Equipment name                           | Manufacturer    | Model       | Serial No.   | Calibration date | Due date   |
| 1                   | HB-E014       | 4 Path V-LISN                            | Schwarzbeck     | NNLK 8121   | 00770        | 2025-05-07       | 2026-05-06 |
| 2                   | HB-E015       | Pulse Limiter                            | Schwarzbeck     | VTSD 9561-F | 00949        | 2025-05-07       | 2026-05-06 |
| 3                   | HB-E016       | ZN23201                                  | Noyetec         | ZN23201     | N/A          | 2025-05-10       | 2026-05-09 |
| 4                   | HB-E059       | Attenuator                               | Xianghua        | TS2-6-1     | 220215166    | 2025-05-10       | 2026-05-09 |
| 5                   | HB-E069       | EMI TEST RECEIVER                        | R&S             | ESCI        | N/A          | 2025-05-07       | 2026-05-06 |
| RF                  |               |                                          |                 |             |              |                  |            |
| Item                | Equipment No. | Equipment name                           | Manufacturer    | Model       | Serial No.   | Calibration date | Due date   |
| 1                   | HB-E041       | MXG Anaioq Signal Generator              | Agilent         | N5181A      | MY47070421   | 2025-05-07       | 2026-05-06 |
| 2                   | HB-E042       | WIDEBAND RADIO COMMUNICATION TESTER      | R&S             | CMW500      | 132108       | 2025-05-08       | 2026-05-07 |

|   |         |                                          |         |                |            |            |            |
|---|---------|------------------------------------------|---------|----------------|------------|------------|------------|
| 3 | HB-E043 | MXG Anaio<br>Signal<br>Generator         | Agilent | N5182A         | US46240335 | 2025-05-08 | 2026-05-07 |
| 4 | HB-E044 | Signal&<br>spectrum<br>Analyzer          | R&S     | FSV3044        | 101264     | 2025-05-07 | 2026-05-06 |
| 5 | HB-E045 | RF Control<br>Box                        | Noyetec | NY100-R<br>FCB | N/A        | 2025-05-08 | 2026-05-07 |
| 6 | HB-E058 | Thermometer<br>Clock Humidity<br>Monitor | N/A     | HTC-1S         | N/A        | 2025-05-09 | 2026-05-08 |

Note: the calibration interval of the above test instruments is 12&24 months and the calibrations are traceable to international system unit (SI).

## **5 Test Item And Results**

### **5.1 Antenna Requirement**

#### **5.1.1 Standard Requirement**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

#### **5.1.2 Test Result**

The EUT antenna is Ceramic Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

## 5.2 Conducted Emission

### 5.2.1 Limits

| Limits – Class B                                                                                                                                                                        |              |           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Frequency (MHz)                                                                                                                                                                         | Limit (dBμV) |           |
|                                                                                                                                                                                         | Quasi-Peak   | Average   |
| 0.15 to 0.5                                                                                                                                                                             | 66 to 56*    | 56 to 46* |
| 0.5 to 5                                                                                                                                                                                | 56           | 46        |
| 5 to 30                                                                                                                                                                                 | 60           | 50        |
| Note:<br>1. the tighter limit applies at the band edges.<br>2. the limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range. |              |           |

### 5.2.2 Test Procedures

#### a) EUT Operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### b) The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


- c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f) LISN is at least 80 cm from nearest part of EUT chassis.
- g) For the actual test configuration, please refer to the related Item – photographs of the test setup.

### 5.2.3 Test Setup

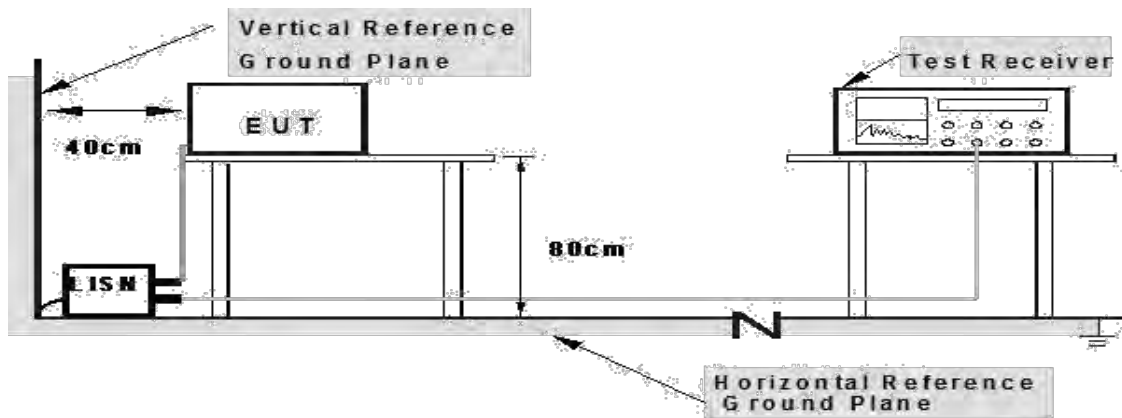


### 5.2.4 Test Result

|               |                                 |             |    |
|---------------|---------------------------------|-------------|----|
| EUT:          | Wireless headset                | Model Name: | MD |
| Test Mode:    | Charging                        | Phase:      | L  |
| Test Voltage: | DC 5V from adapter AC 120V/60Hz |             |    |

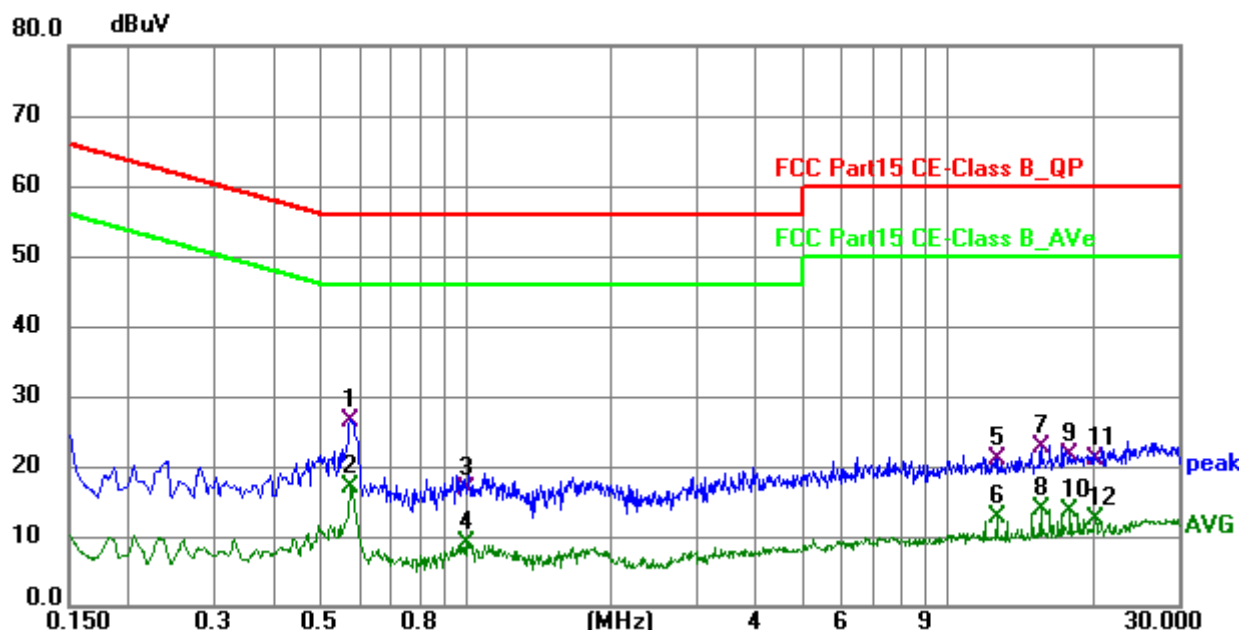

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|
| 1   | 0.578           | 16.38          | 10.11       | 26.49        | 56.00        | -29.51      | QP       |
| 2 * | 0.578           | 6.97           | 10.11       | 17.08        | 46.00        | -28.92      | AVG      |
| 3   | 1.005           | 6.46           | 10.13       | 16.59        | 56.00        | -39.41      | QP       |
| 4   | 1.005           | -1.20          | 10.13       | 8.93         | 46.00        | -37.07      | AVG      |
| 5   | 12.588          | 7.29           | 13.84       | 21.13        | 60.00        | -38.87      | QP       |
| 6   | 12.588          | -1.07          | 13.84       | 12.77        | 50.00        | -37.23      | AVG      |
| 7   | 15.576          | 8.58           | 14.17       | 22.75        | 60.00        | -37.25      | QP       |
| 8   | 15.576          | -0.19          | 14.17       | 13.98        | 50.00        | -36.02      | AVG      |
| 9   | 17.898          | 7.20           | 14.42       | 21.62        | 60.00        | -38.38      | QP       |
| 10  | 17.898          | -0.83          | 14.42       | 13.59        | 50.00        | -36.41      | AVG      |
| 11  | 20.215          | 6.39           | 14.68       | 21.07        | 60.00        | -38.93      | QP       |
| 12  | 20.215          | -2.11          | 14.68       | 12.57        | 50.00        | -37.43      | AVG      |

|               |                                 |             |    |
|---------------|---------------------------------|-------------|----|
| EUT:          | Wireless headset                | Model Name: | MD |
| Test Mode:    | Charging                        | Phase:      | N  |
| Test Voltage: | DC 5V from adapter AC 120V/60Hz |             |    |

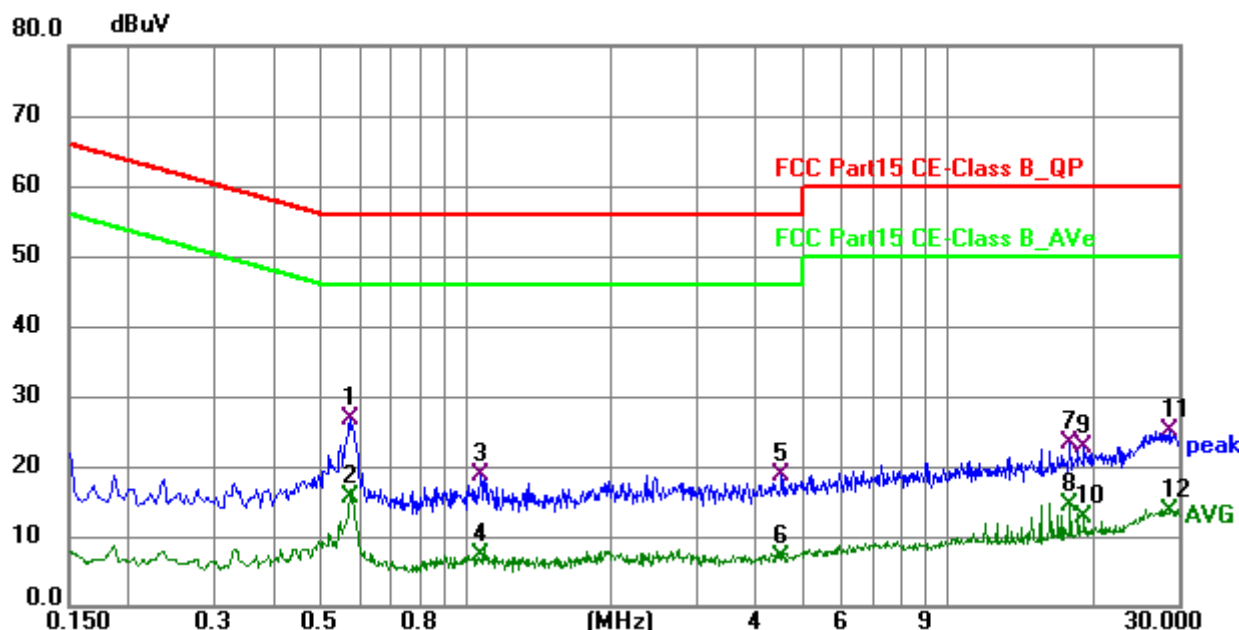

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|
| 1 * | 0.573           | 16.65          | 10.12       | 26.77        | 56.00        | -29.23      | QP       |
| 2   | 0.573           | 5.48           | 10.12       | 15.60        | 46.00        | -30.40      | AVG      |
| 3   | 1.073           | 8.68           | 10.15       | 18.83        | 56.00        | -37.17      | QP       |
| 4   | 1.073           | -2.95          | 10.15       | 7.20         | 46.00        | -38.80      | AVG      |
| 5   | 4.515           | 7.49           | 11.17       | 18.66        | 56.00        | -37.34      | QP       |
| 6   | 4.515           | -4.31          | 11.17       | 6.86         | 46.00        | -39.14      | AVG      |
| 7   | 17.889          | 8.74           | 14.42       | 23.16        | 60.00        | -36.84      | QP       |
| 8   | 17.889          | 0.02           | 14.42       | 14.44        | 50.00        | -35.56      | AVG      |
| 9   | 19.212          | 8.30           | 14.55       | 22.85        | 60.00        | -37.15      | QP       |
| 10  | 19.212          | -1.77          | 14.55       | 12.78        | 50.00        | -37.22      | AVG      |
| 11  | 28.788          | 9.17           | 15.90       | 25.07        | 60.00        | -34.93      | QP       |
| 12  | 28.788          | -2.47          | 15.90       | 13.43        | 50.00        | -36.57      | AVG      |

## 5.3 Radiated Emission

### 5.3.1 Limits

| Frequencies (MHz) | Field Strength (micровolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |


| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

### 5.3.2 Test Procedures


- The radiated emission tests were performed in the 3 meters.
- The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- If the peak mode measured value compliance with and lower than quasi peak mode limit, the EUT shall be deemed to meet QP limits and then no additional QP mode measurement performed.
- If the peak mode measured value compliance with and lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.
- For the actual test configuration, please refer to the related item – EUT test photos.

### 5.3.3 Test Setup


#### Radiated Emission Test-Up Frequency Below 30MHz

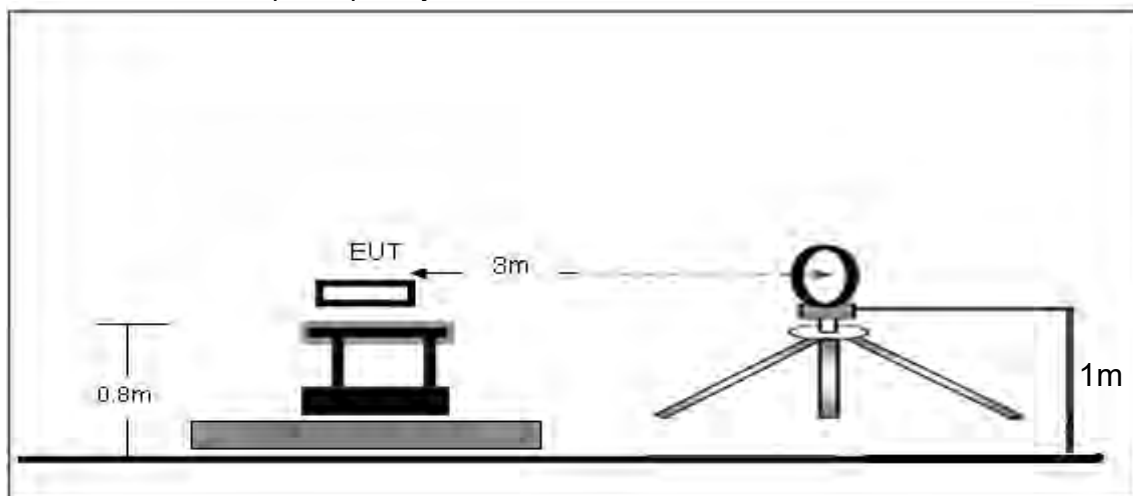

#### Radiated Emission Test-Up Frequency 30MHz~1GHz

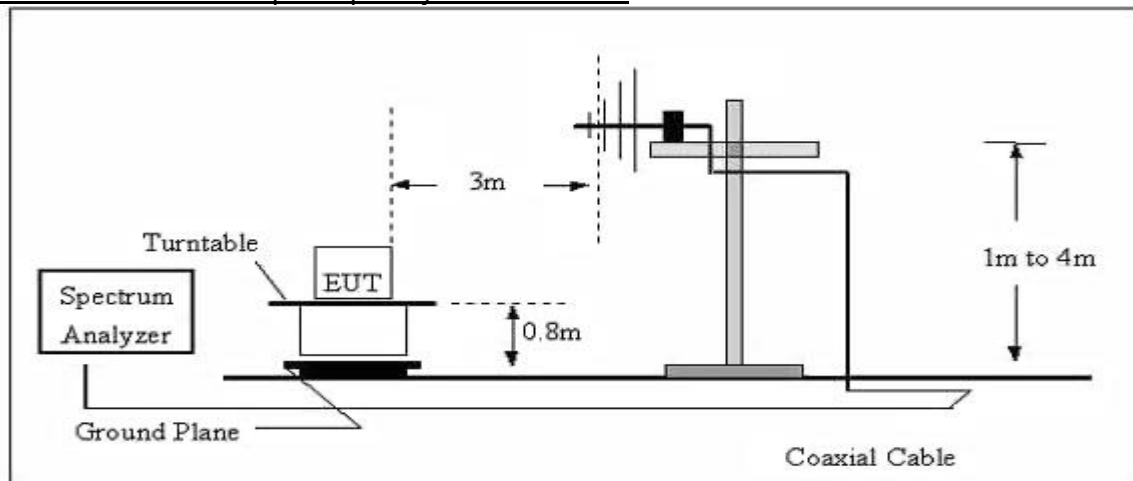

#### Radiated emission test-up frequency above 1GHz

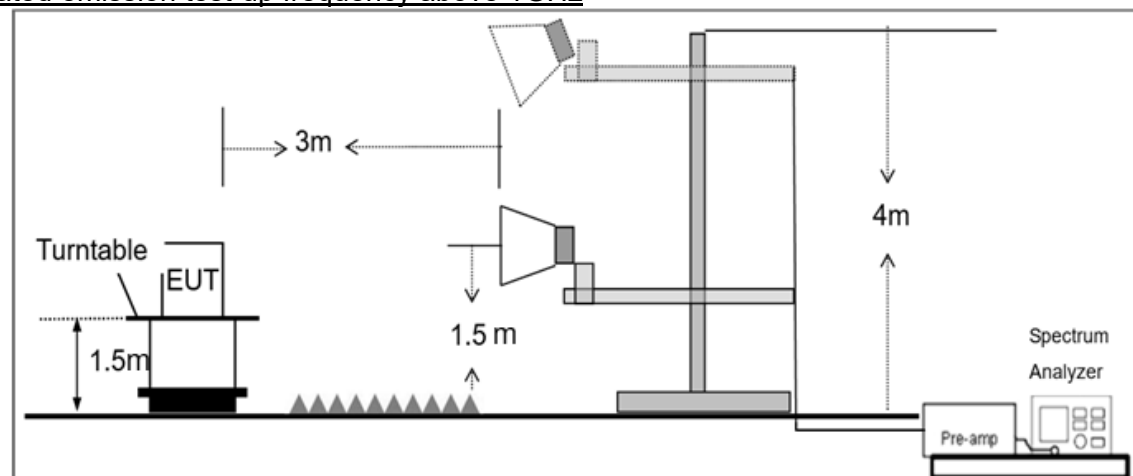

#### 5.3.4 Test Result

Below 30MHz

|            |                  |               |                      |
|------------|------------------|---------------|----------------------|
| EUT:       | Wireless headset | Model Name:   | MD                   |
| Pressure:  | 1010 hPa         | Test Voltage: | DC 3.7V from battery |
| Test Mode: | TX               | Polarization: | --                   |


| Freq. | Reading  | Limit    | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |
| --    | --       | --       | --     | Pass  |
| --    | --       | --       | --     | Pass  |

Note:

1. For 9kHz-30MHz, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})$ (dB);
3. Limit line = specific limits (dBuV) + distance extrapolation factor.


30MHz – 1GHz

|               |                      |             |          |
|---------------|----------------------|-------------|----------|
| EUT:          | Wireless headset     | Model Name: | MD       |
| Test Mode:    | TX                   | Phase:      | Vertical |
| Test Voltage: | DC 3.7V from battery |             |          |

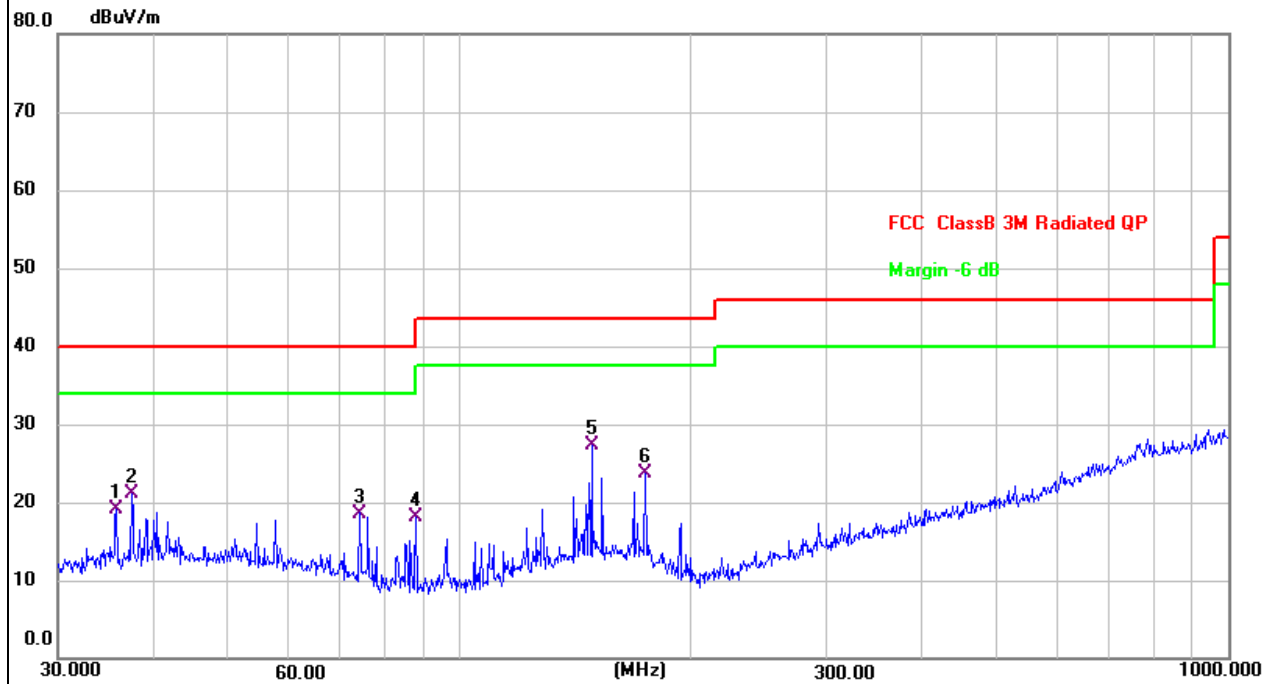

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 35.7490         | 33.69          | -14.52        | 19.17          | 40.00          | -20.83      | QP       |
| 2   | 37.4165         | 35.27          | -14.18        | 21.09          | 40.00          | -18.91      | QP       |
| 3   | 74.1351         | 35.28          | -16.68        | 18.60          | 40.00          | -21.40      | QP       |
| 4   | 87.7248         | 36.27          | -18.23        | 18.04          | 40.00          | -21.96      | QP       |
| 5 * | 148.4410        | 40.73          | -13.51        | 27.22          | 43.50          | -16.28      | QP       |
| 6   | 174.4241        | 37.84          | -14.12        | 23.72          | 43.50          | -19.78      | QP       |

|               |                      |             |            |
|---------------|----------------------|-------------|------------|
| EUT:          | Wireless headset     | Model Name: | MD         |
| Test Mode:    | TX                   | Phase:      | Horizontal |
| Test Voltage: | DC 3.7V from battery |             |            |

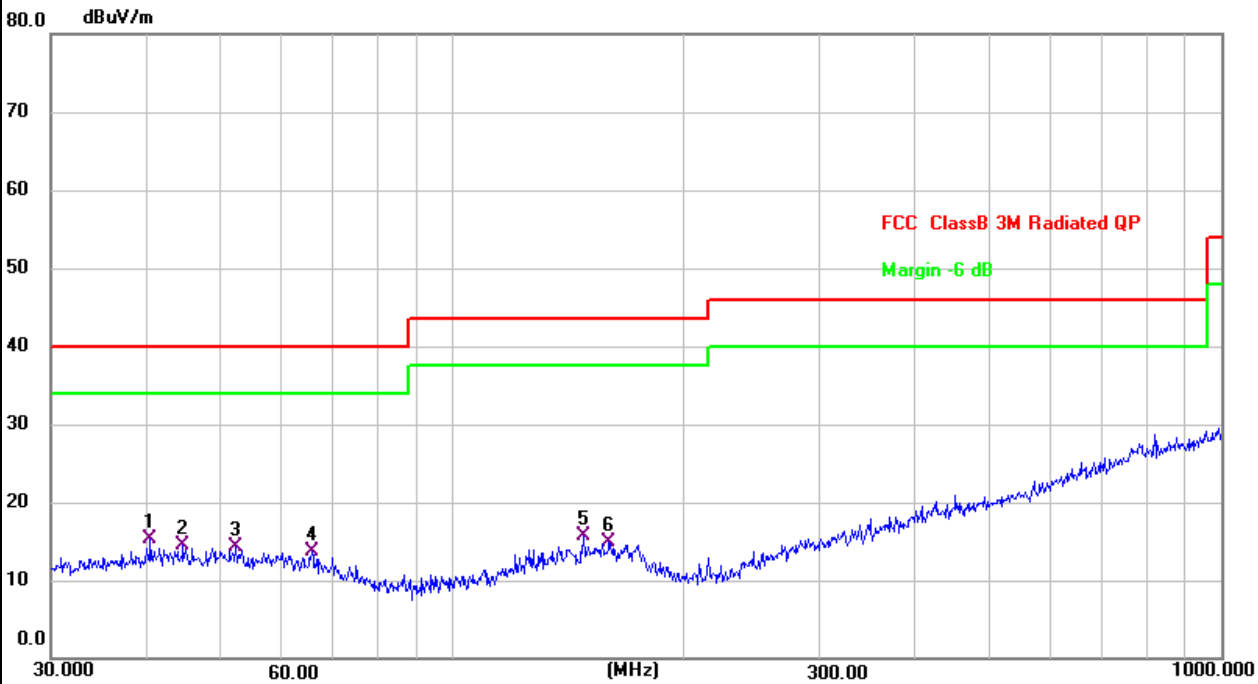

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 * | 40.4172         | 29.11          | -13.82        | 15.29          | 40.00          | -24.71      | QP       |
| 2   | 44.5868         | 28.51          | -13.98        | 14.53          | 40.00          | -25.47      | QP       |
| 3   | 52.2079         | 28.46          | -14.14        | 14.32          | 40.00          | -25.68      | QP       |
| 4   | 65.5727         | 28.99          | -15.34        | 13.65          | 40.00          | -26.35      | QP       |
| 5   | 147.9214        | 29.34          | -13.56        | 15.78          | 43.50          | -27.72      | QP       |
| 6   | 159.7844        | 28.19          | -13.27        | 14.92          | 43.50          | -28.58      | QP       |

1GHz-25GHz

| Frequency (MHz)                          | Read Level (dBμV) | Cable loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type | Comment    |
|------------------------------------------|-------------------|-----------------|-----------------------|--------------------|-------------------------|-----------------|-------------|---------------|------------|
| Low Channel (2402 MHz)(GFSK)--Above 1G   |                   |                 |                       |                    |                         |                 |             |               |            |
| 4804.125                                 | 42.76             | 4.83            | 33.5                  | 30.80              | 50.29                   | 74.00           | -23.71      | Pk            | Vertical   |
| 4804.125                                 | 31.89             | 4.83            | 33.5                  | 30.80              | 39.42                   | 54.00           | -14.58      | AV            | Vertical   |
| 7206.261                                 | 42.90             | 5.83            | 37.79                 | 31.40              | 55.12                   | 74.00           | -18.88      | Pk            | Vertical   |
| 7206.261                                 | 32.06             | 5.83            | 37.79                 | 31.40              | 44.28                   | 54.00           | -9.72       | AV            | Vertical   |
| 4804.194                                 | 42.79             | 4.83            | 33.5                  | 30.80              | 50.32                   | 74.00           | -23.68      | Pk            | Horizontal |
| 4804.194                                 | 31.85             | 4.83            | 33.5                  | 30.80              | 39.38                   | 54.00           | -14.62      | AV            | Horizontal |
| 7206.274                                 | 42.88             | 5.83            | 37.79                 | 31.40              | 55.10                   | 74.00           | -18.90      | Pk            | Horizontal |
| 7206.274                                 | 32.06             | 5.83            | 37.79                 | 31.40              | 44.28                   | 54.00           | -9.72       | AV            | Horizontal |
| Mid Channel (2441 MHz)(GFSK)--Above 1G   |                   |                 |                       |                    |                         |                 |             |               |            |
| 4882.139                                 | 44.06             | 4.89            | 33.76                 | 30.80              | 51.91                   | 74.00           | -22.09      | Pk            | Vertical   |
| 4882.139                                 | 31.78             | 4.89            | 33.76                 | 30.80              | 39.63                   | 54.00           | -14.37      | AV            | Vertical   |
| 7323.284                                 | 44.35             | 5.95            | 38.25                 | 31.70              | 56.85                   | 74.00           | -17.15      | Pk            | Vertical   |
| 7323.284                                 | 32.83             | 5.95            | 38.25                 | 31.70              | 45.33                   | 54.00           | -8.67       | AV            | Vertical   |
| 4882.215                                 | 43.86             | 4.89            | 33.76                 | 30.80              | 51.71                   | 74.00           | -22.29      | Pk            | Horizontal |
| 4882.215                                 | 31.85             | 4.89            | 33.76                 | 30.80              | 39.70                   | 54.00           | -14.30      | AV            | Horizontal |
| 7323.299                                 | 44.08             | 5.95            | 38.25                 | 31.70              | 56.58                   | 74.00           | -17.42      | Pk            | Horizontal |
| 7323.299                                 | 32.95             | 5.95            | 38.25                 | 31.70              | 45.45                   | 54.00           | -8.55       | AV            | Horizontal |
| High Channel (2480 MHz)(GFSK)-- Above 1G |                   |                 |                       |                    |                         |                 |             |               |            |
| 4960.143                                 | 42.64             | 4.95            | 34.33                 | 30.80              | 51.12                   | 74.00           | -22.88      | Pk            | Vertical   |
| 4960.143                                 | 31.95             | 4.95            | 34.33                 | 30.80              | 40.43                   | 54.00           | -13.57      | AV            | Vertical   |
| 7440.296                                 | 43.25             | 6.11            | 37.60                 | 31.74              | 55.22                   | 74.00           | -18.78      | Pk            | Vertical   |
| 7440.296                                 | 32.12             | 6.11            | 37.60                 | 31.74              | 44.09                   | 54.00           | -9.91       | AV            | Vertical   |
| 4960.245                                 | 42.88             | 4.95            | 34.33                 | 30.80              | 51.36                   | 74.00           | -22.64      | Pk            | Horizontal |
| 4960.245                                 | 32.18             | 4.95            | 34.33                 | 30.80              | 40.66                   | 54.00           | -13.34      | AV            | Horizontal |
| 7440.304                                 | 43.08             | 6.11            | 37.60                 | 31.74              | 55.05                   | 74.00           | -18.95      | Pk            | Horizontal |
| 7440.304                                 | 32.19             | 6.11            | 37.60                 | 31.74              | 44.16                   | 54.00           | -9.84       | AV            | Horizontal |

Note:

1. All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
2. Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor.
3. All the modulation modes have been tested, and only the worst results are reflected in the report.

### 5.3.5 Radiated Band Edge

| Frequency (MHz)          | Read Level (dBμV) | Cable loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detection Type | Comment    |
|--------------------------|-------------------|-----------------|-----------------------|--------------------|-------------------------|-----------------|-------------|----------------|------------|
| 1Mbps(GFSK)- Non-hopping |                   |                 |                       |                    |                         |                 |             |                |            |
| 2310.00                  | 45.94             | 3.40            | 27.80                 | 32.41              | 44.73                   | 74              | -29.27      | Pk             | Horizontal |
| 2310.00                  | 33.32             | 3.40            | 27.80                 | 32.41              | 32.11                   | 54              | -21.89      | AV             | Horizontal |
| 2310.00                  | 44.95             | 3.40            | 27.80                 | 32.41              | 43.74                   | 74              | -30.26      | Pk             | Vertical   |
| 2310.00                  | 33.62             | 3.40            | 27.80                 | 32.41              | 32.41                   | 54              | -21.59      | AV             | Vertical   |
| 2390.00                  | 45.63             | 3.45            | 27.70                 | 32.49              | 44.29                   | 74              | -29.71      | Pk             | Vertical   |
| 2390.00                  | 34.37             | 3.45            | 27.70                 | 32.49              | 33.03                   | 54              | -20.97      | AV             | Vertical   |
| 2390.00                  | 46.41             | 3.45            | 27.70                 | 32.49              | 45.07                   | 74              | -28.93      | Pk             | Horizontal |
| 2390.00                  | 34.38             | 3.45            | 27.70                 | 32.49              | 33.04                   | 54              | -20.96      | AV             | Horizontal |
| 2400.00                  | 46.62             | 3.46            | 27.80                 | 32.54              | 45.34                   | 74              | -28.66      | Pk             | Vertical   |
| 2400.00                  | 34.56             | 3.46            | 27.80                 | 32.54              | 33.28                   | 54              | -20.72      | AV             | Vertical   |
| 2400.00                  | 45.92             | 3.46            | 27.80                 | 32.54              | 44.64                   | 74              | -29.36      | Pk             | Horizontal |
| 2400.00                  | 34.31             | 3.46            | 27.80                 | 32.54              | 33.03                   | 54              | -20.97      | AV             | Horizontal |
| 2483.50                  | 47.25             | 3.48            | 28.53                 | 32.55              | 46.71                   | 74              | -27.29      | Pk             | Vertical   |
| 2483.50                  | 33.97             | 3.48            | 28.53                 | 32.55              | 33.43                   | 54              | -20.57      | AV             | Vertical   |
| 2483.50                  | 46.28             | 3.48            | 28.53                 | 32.55              | 45.74                   | 74              | -28.26      | Pk             | Horizontal |
| 2483.50                  | 33.98             | 3.48            | 28.53                 | 32.55              | 33.44                   | 54              | -20.56      | AV             | Horizontal |
| 2500.00                  | 45.30             | 3.49            | 29.20                 | 32.66              | 45.33                   | 74              | -28.67      | Pk             | Vertical   |
| 2500.00                  | 33.89             | 3.49            | 29.20                 | 32.66              | 33.92                   | 54              | -20.08      | AV             | Vertical   |
| 2500.00                  | 45.35             | 3.49            | 29.20                 | 32.66              | 45.38                   | 74              | -28.62      | Pk             | Horizontal |
| 2500.00                  | 33.74             | 3.49            | 29.20                 | 32.66              | 33.77                   | 54              | -20.23      | AV             | Horizontal |
| 1Mbps (GFSK)- hopping    |                   |                 |                       |                    |                         |                 |             |                |            |
| 2400.00                  | 46.93             | 3.46            | 27.80                 | 32.54              | 45.65                   | 74              | -28.35      | Pk             | Vertical   |
| 2400.00                  | 34.60             | 3.46            | 27.80                 | 32.54              | 33.32                   | 54              | -20.68      | AV             | Vertical   |
| 2400.00                  | 46.01             | 3.46            | 27.80                 | 32.54              | 44.73                   | 74              | -29.27      | Pk             | Horizontal |
| 2400.00                  | 34.76             | 3.46            | 27.80                 | 32.54              | 33.48                   | 54              | -20.52      | AV             | Horizontal |
| 2483.50                  | 47.25             | 3.48            | 28.53                 | 32.55              | 46.71                   | 74              | -27.29      | Pk             | Vertical   |
| 2483.50                  | 34.20             | 3.48            | 28.53                 | 32.55              | 33.66                   | 54              | -20.34      | AV             | Vertical   |
| 2483.50                  | 46.32             | 3.48            | 28.53                 | 32.55              | 45.78                   | 74              | -28.22      | Pk             | Horizontal |
| 2483.50                  | 33.88             | 3.48            | 28.53                 | 32.55              | 33.34                   | 54              | -20.66      | AV             | Horizontal |

Note:

1. All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
2. Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor.
3. All the modulation modes have been tested, and only the worst results are reflected in the report.

## 5.4 Peak Output Power


### 5.4.1 Limit

| FCC Part15 Subpart C |                   |                         |                       |
|----------------------|-------------------|-------------------------|-----------------------|
| Section              | Test Item         | Limit                   | Frequency Range (MHz) |
| 15.247(b)(1)         | Peak output power | Power<0.125W<br>(21dBm) | 2400-2483.5           |

### 5.4.2 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
RBW=2MHz, VBW=10MHz, Detector=Peak
- (3) The EUT was set to continuously transmitting in the max power during the test.

### 5.4.3 Test Setup



### 5.4.4 Test Results

Left ear:

|            |                                               |               |                      |
|------------|-----------------------------------------------|---------------|----------------------|
| EUT:       | Wireless headset                              | Model Name:   | MD                   |
| Test Mode: | GFSK, $\pi/4$ -DQPSK, 8DPSK /CH00, CH39, CH78 | Test Voltage: | DC 3.7V from battery |

#### GFSK

| Test Channel | Frequency (MHz) | Maximum Peak Output Power(dBm) | Limit (dBm) |
|--------------|-----------------|--------------------------------|-------------|
| CH00         | 2402            | 1.42                           | 21          |
| CH39         | 2441            | 1.78                           | 21          |
| CH78         | 2480            | 1.84                           | 21          |


#### $\pi/4$ -DQPSK



| Test Channel | Frequency (MHz) | Maximum Peak Output Power(dBm) | Limit (dBm) |
|--------------|-----------------|--------------------------------|-------------|
| CH00         | 2402            | 2.39                           | 21          |
| CH39         | 2441            | 2.62                           | 21          |
| CH78         | 2480            | 2.73                           | 21          |

#### 8DPSK

| Test Channel | Frequency (MHz) | Maximum Peak Output Power(dBm) | Limit (dBm) |
|--------------|-----------------|--------------------------------|-------------|
| CH00         | 2402            | 2.87                           | 21          |
| CH39         | 2441            | 3.17                           | 21          |
| CH78         | 2480            | 3.23                           | 21          |

# Test plots

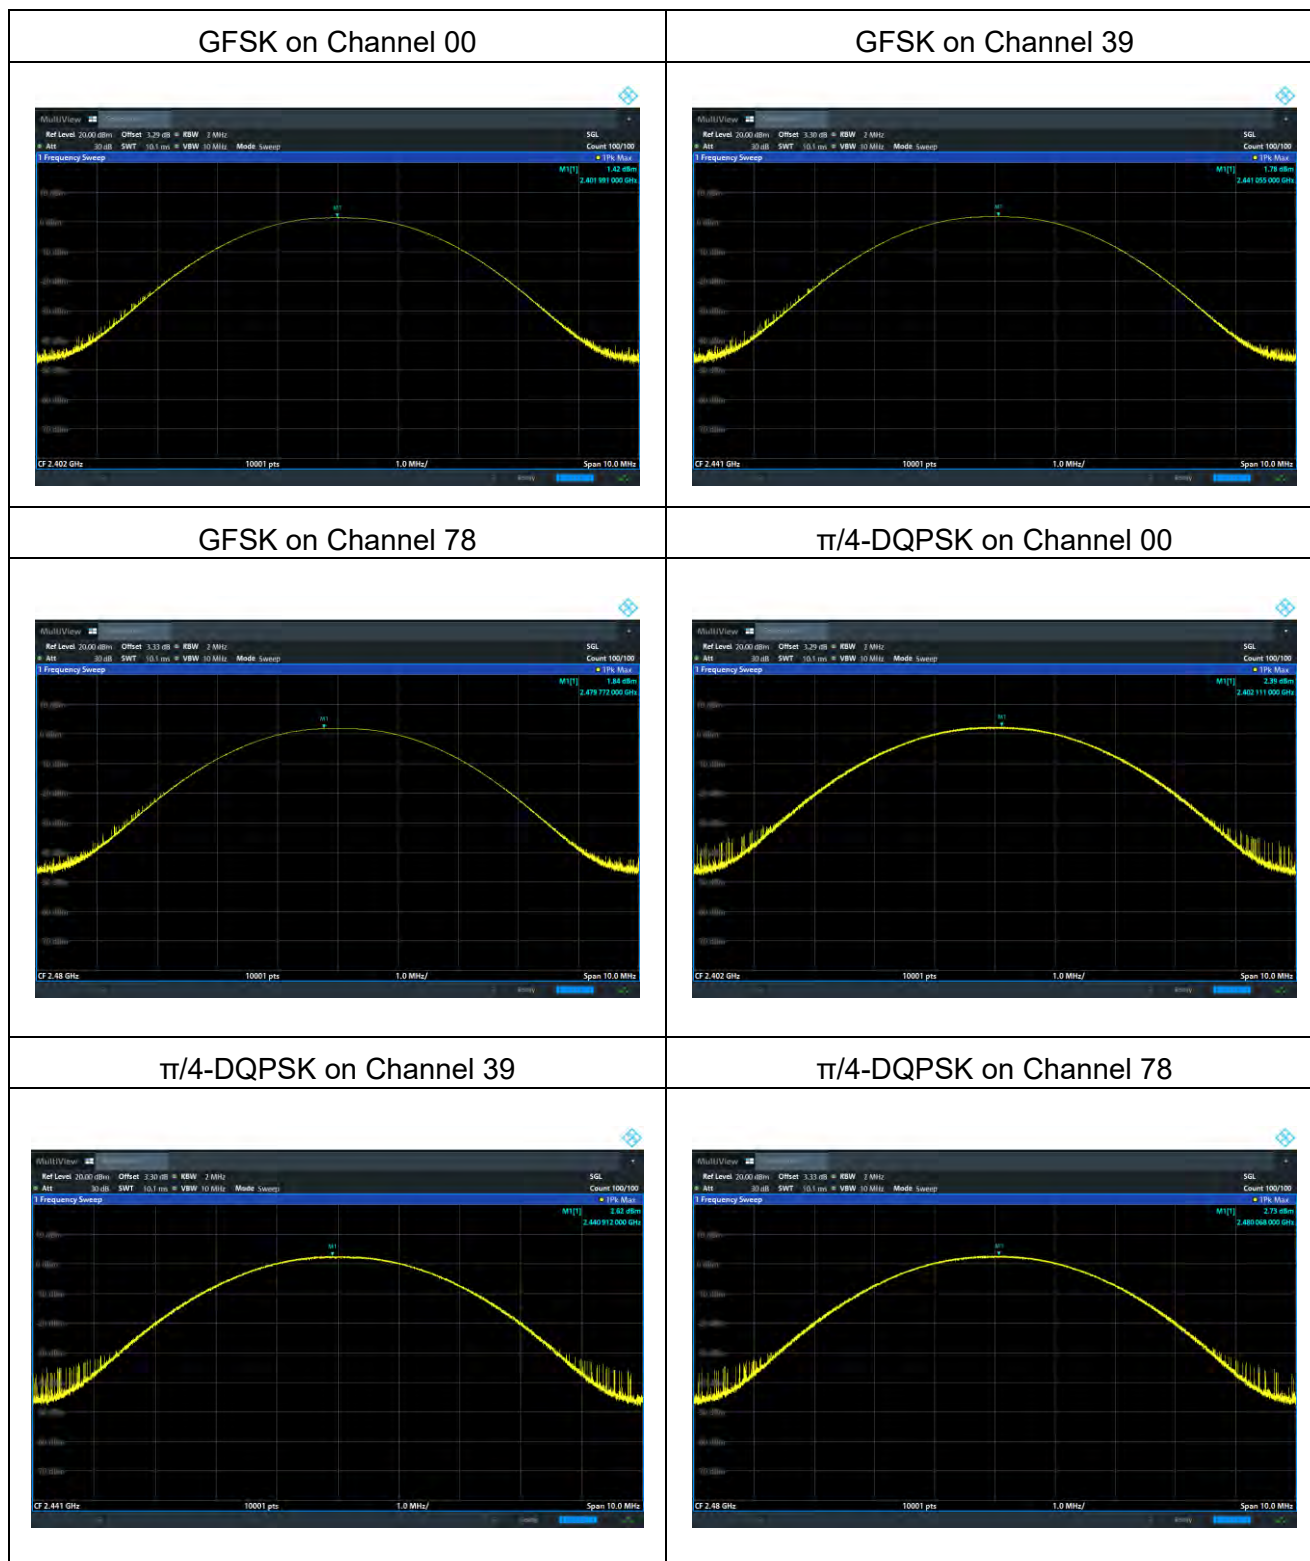
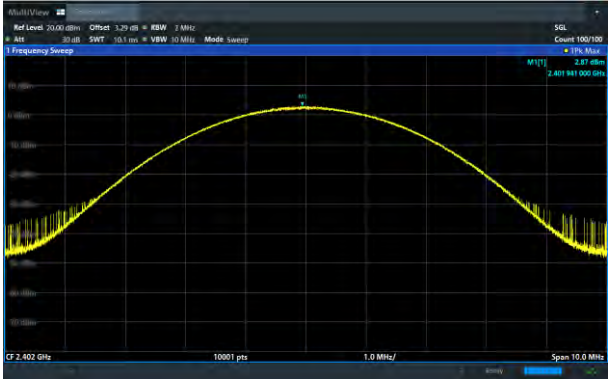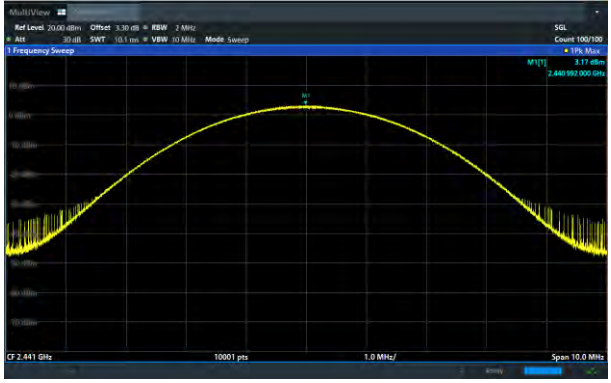
|                                                                                                               |                                                                                                               |
|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| <p>8DPSK on Channel 00</p>   | <p>8DPSK on Channel 39</p>  |
| <p>8DPSK on Channel 78</p>  | <p>/</p> <p>/</p>                                                                                             |

Right ear:

|            |                                               |               |                      |
|------------|-----------------------------------------------|---------------|----------------------|
| EUT:       | Wireless headset                              | Model Name:   | MD                   |
| Test Mode: | GFSK, $\pi/4$ -DQPSK, 8DPSK /CH00, CH39, CH78 | Test Voltage: | DC 3.7V from battery |

GFSK

| Test Channel | Frequency (MHz) | Maximum Peak Output Power(dBm) | Limit (dBm) |
|--------------|-----------------|--------------------------------|-------------|
| CH00         | 2402            | 1.02                           | 21          |
| CH39         | 2441            | 1.23                           | 21          |
| CH78         | 2480            | 1.29                           | 21          |


$\pi/4$ -DQPSK

| Test Channel | Frequency (MHz) | Maximum Peak Output Power(dBm) | Limit (dBm) |
|--------------|-----------------|--------------------------------|-------------|
| CH00         | 2402            | 1.87                           | 21          |
| CH39         | 2441            | 2.1                            | 21          |
| CH78         | 2480            | 2.19                           | 21          |


8DPSK

| Test Channel | Frequency (MHz) | Maximum Peak Output Power(dBm) | Limit (dBm) |
|--------------|-----------------|--------------------------------|-------------|
| CH00         | 2402            | 2.44                           | 21          |
| CH39         | 2441            | 2.64                           | 21          |
| CH78         | 2480            | 2.76                           | 21          |


## Test plots

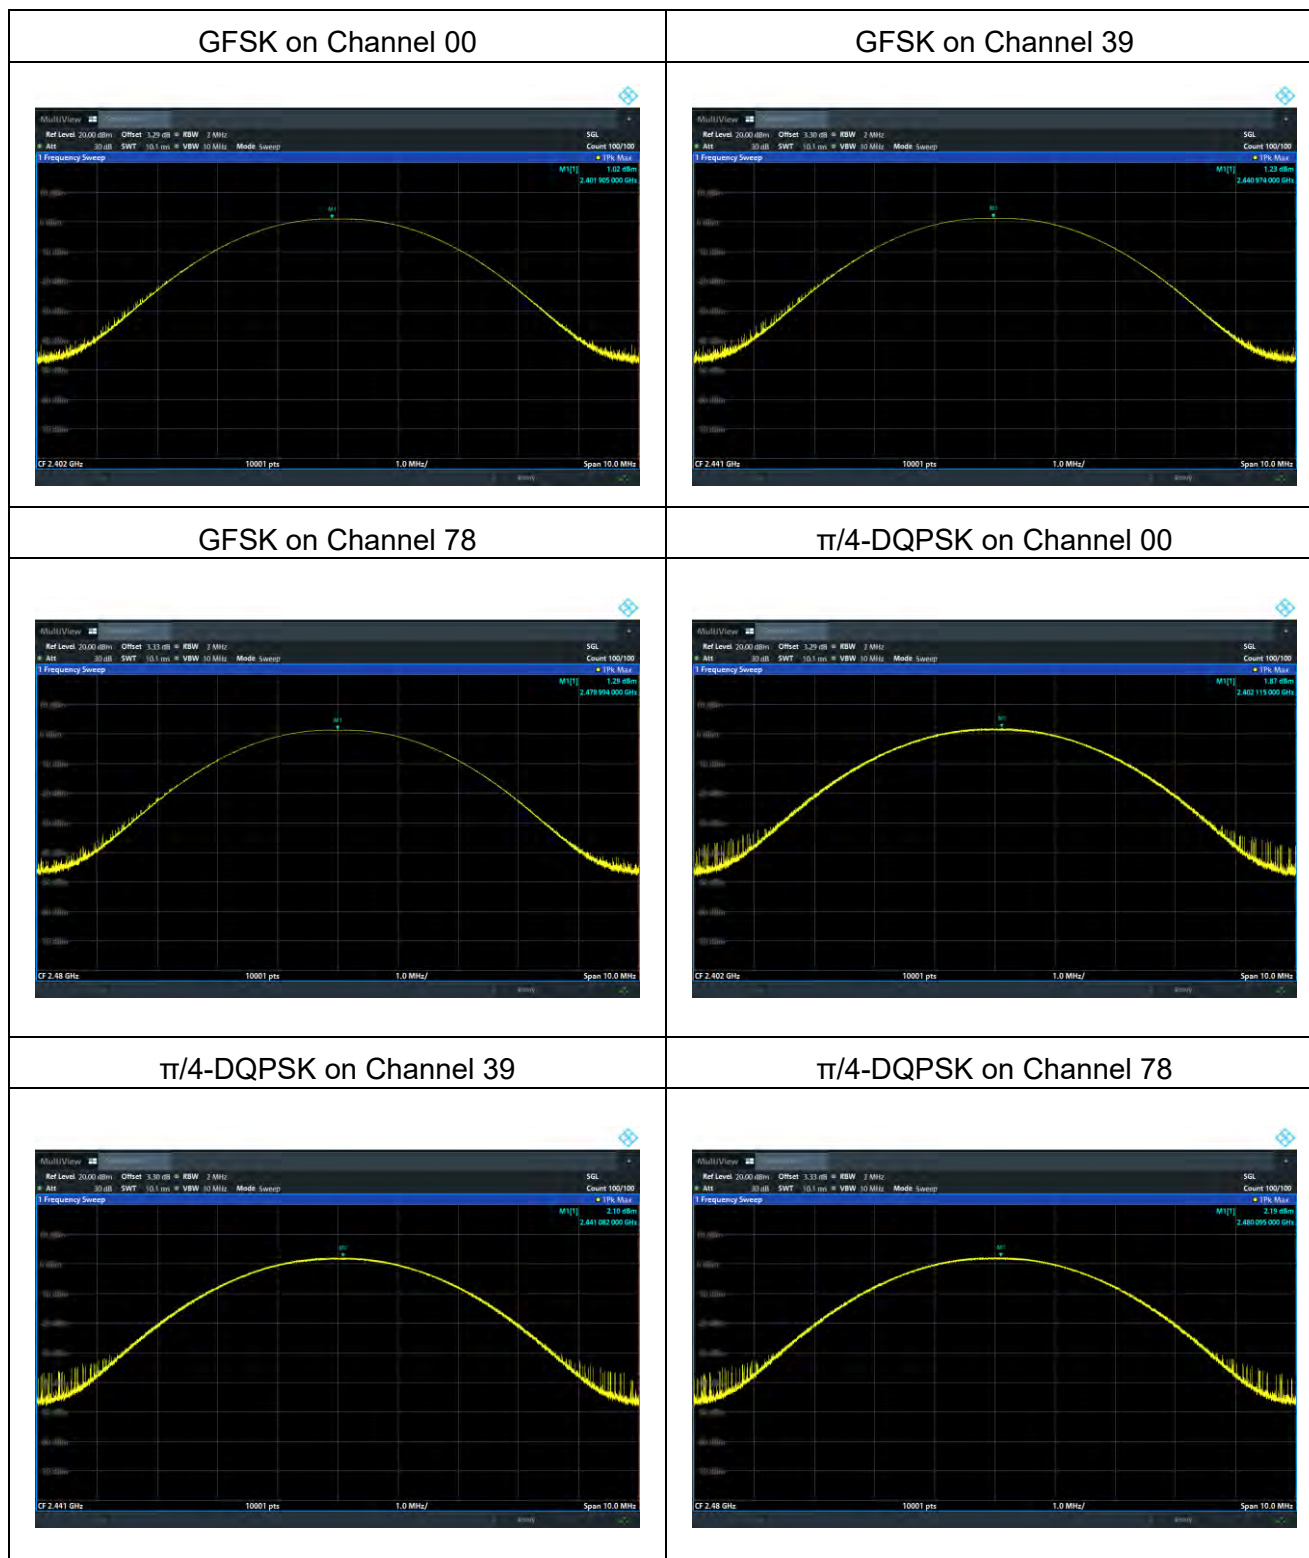


8DPSK on Channel 00

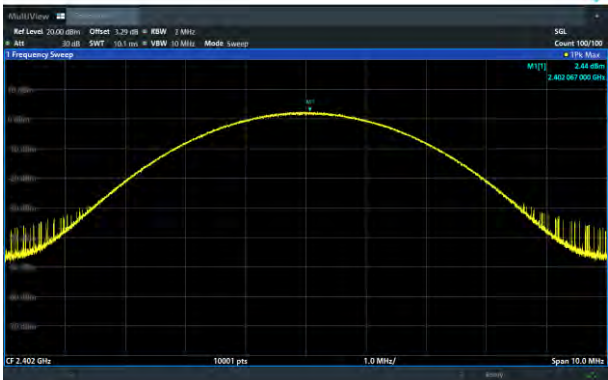

8DPSK on Channel 39

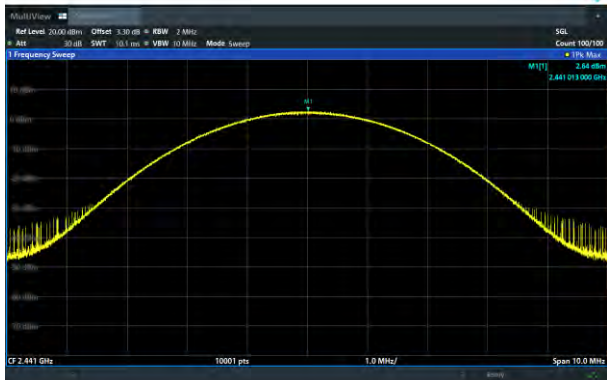

8DPSK on Channel 78

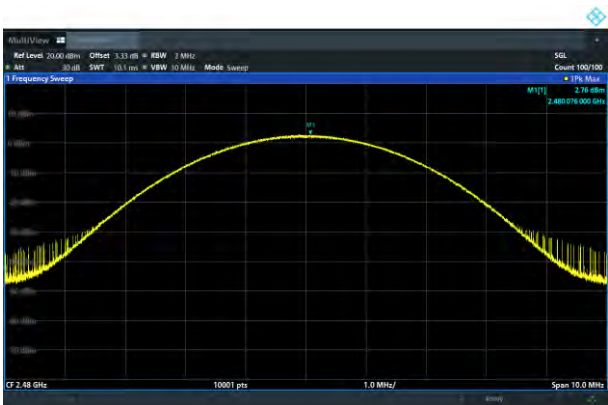

/

/

## 5.5 20dB Occupied Channel Bandwidth

### 5.5.1 Limit

| FCC Part15 (15.247) , Subpart C |                |       |                       |
|---------------------------------|----------------|-------|-----------------------|
| Section                         | Test Item      | Limit | Frequency Range (MHz) |
| 15.247a(1)                      | 20dB bandwidth | N/A   | 2400-2483.5           |


### 5.5.2 Test Procedure

(1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.

(2) Spectrum Setting:

Bandwidth: RBW=30 kHz, VBW=100 kHz, detector= Peak

### 5.5.3 Test Setup



### 5.5.4 Test results

Left ear:

|            |                                               |               |                      |
|------------|-----------------------------------------------|---------------|----------------------|
| EUT:       | Wireless headset                              | Model Name:   | MD                   |
| Test Mode: | GFSK, $\pi/4$ -DQPSK, 8DPSK /CH00, CH39, CH78 | Test Voltage: | DC 3.7V from battery |

| Mode           | Frequency (MHz) | 20dB Bandwidth (MHz) | Limit (kHz) | Result |
|----------------|-----------------|----------------------|-------------|--------|
| GFSK           | 2402            | 0.934                | N/A         | Pass   |
|                | 2441            | 0.934                | N/A         | Pass   |
|                | 2480            | 0.935                | N/A         | Pass   |
| $\pi/4$ -DQPSK | 2402            | 1.247                | N/A         | Pass   |
|                | 2441            | 1.261                | N/A         | Pass   |
|                | 2480            | 1.247                | N/A         | Pass   |
| 8DPSK          | 2402            | 1.249                | N/A         | Pass   |
|                | 2441            | 1.248                | N/A         | Pass   |
|                | 2480            | 1.241                | N/A         | Pass   |

Test plots

GFSK mode

TX CH00



TX CH39



TX CH78



$\pi/4$ -DQPSK

TX CH00



TX CH39



TX CH78




8DPSK mode

TX CH00



TX CH39



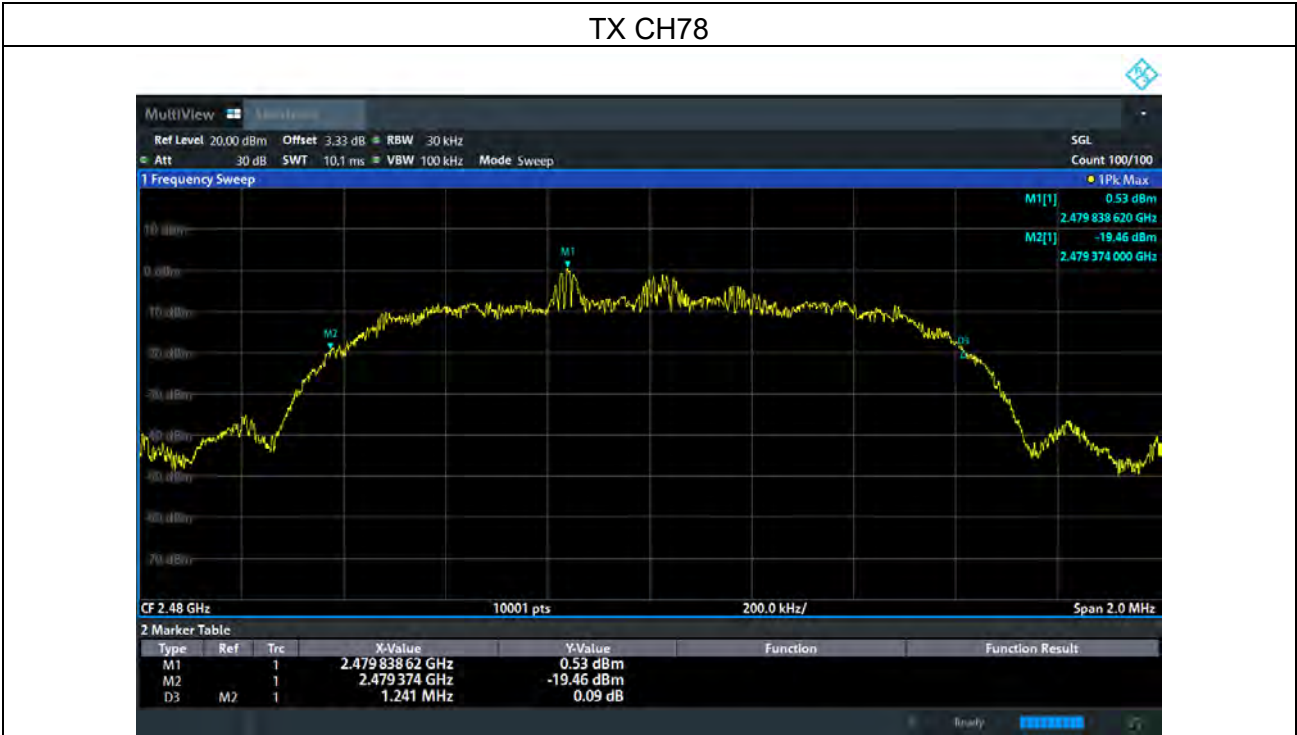

Right ear:

|            |                                                  |               |                      |
|------------|--------------------------------------------------|---------------|----------------------|
| EUT:       | Wireless headset                                 | Model Name:   | MD                   |
| Test Mode: | GFSK, $\pi/4$ -DQPSK, 8DPSK<br>/CH00, CH39, CH78 | Test Voltage: | DC 3.7V from battery |

| Mode           | Frequency<br>(MHz) | 20dB Bandwidth<br>(MHz) | Limit<br>(kHz) | Result |
|----------------|--------------------|-------------------------|----------------|--------|
| GFSK           | 2402               | 0.937                   | N/A            | Pass   |
|                | 2441               | 0.932                   | N/A            | Pass   |
|                | 2480               | 0.933                   | N/A            | Pass   |
| $\pi/4$ -DQPSK | 2402               | 1.261                   | N/A            | Pass   |
|                | 2441               | 1.243                   | N/A            | Pass   |
|                | 2480               | 1.229                   | N/A            | Pass   |
| 8DPSK          | 2402               | 1.238                   | N/A            | Pass   |
|                | 2441               | 1.25                    | N/A            | Pass   |
|                | 2480               | 1.249                   | N/A            | Pass   |

Test plots

GFSK mode

TX CH00



TX CH39



TX CH78



$\pi/4$ -DQPSK

TX CH00



## TX CH39




## TX CH78




8DPSK mode

TX CH00

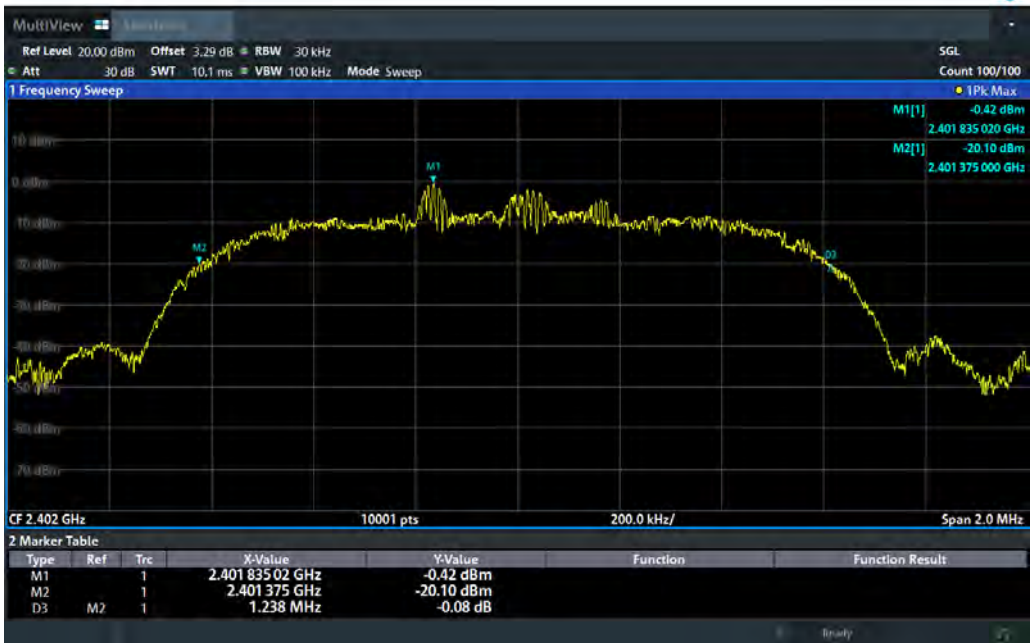

TX CH39

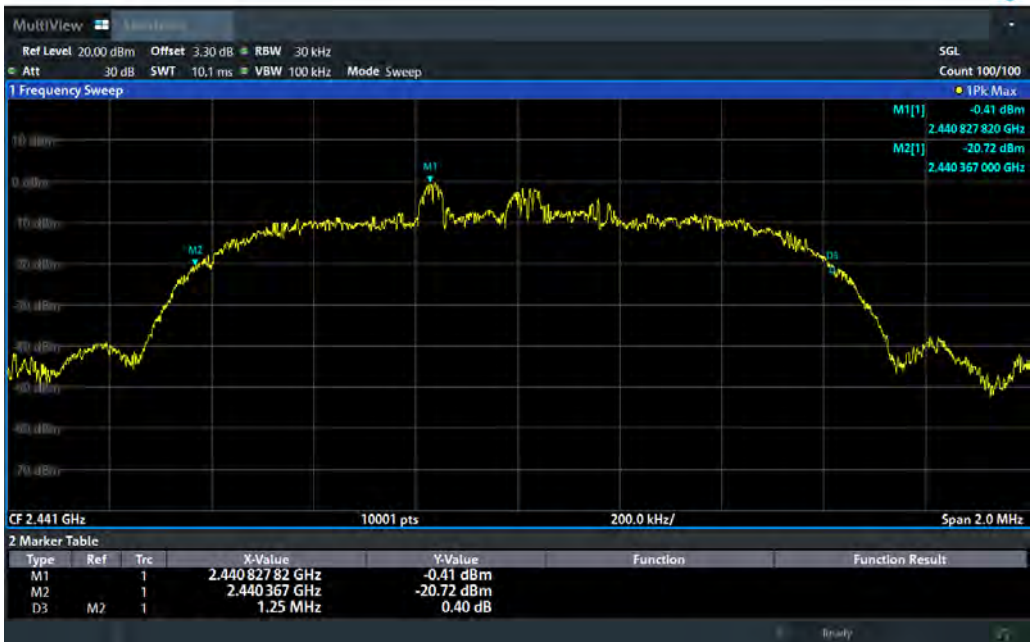

TX CH78



## 5.6 Carrier Frequency Separation


### 5.6.1 Limit

| FCC Part15 (15.247) , Subpart C |                    |                                                                 |                       |
|---------------------------------|--------------------|-----------------------------------------------------------------|-----------------------|
| Section                         | Test Item          | Limit                                                           | Frequency Range (MHz) |
| 15.247(a)(1)                    | Channel Separation | >25kHz or >two-thirds of the 20 dB bandwidth (Which is greater) | 2400-2483.5           |

### 5.6.2 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
RBW=30 kHz, VBW=100 kHz, detector= Peak, Sweep Time =auto.
- (3) The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Test.

### 5.6.3 Test Setup




### 5.6.4 Test Results

|            |                                               |               |                      |
|------------|-----------------------------------------------|---------------|----------------------|
| EUT:       | Wireless headset                              | Model Name:   | MD                   |
| Pressure:  | 1012 hPa                                      | Test Voltage: | DC 3.7V from battery |
| Test Mode: | GFSK, $\pi/4$ -DQPSK, 8DPSK /CH00, CH39, CH78 |               |                      |

| Mode           | Channel | Frequency<br>(MHz) | Test Result<br>(kHz) | Limit<br>(kHz) |                | Result |
|----------------|---------|--------------------|----------------------|----------------|----------------|--------|
| GFSK           | Low     | 2402               | 1.004                | 623            | 2/3 of 20dB BW | Pass   |
|                | Middle  | 2441               | 1.004                | 623            | 2/3 of 20dB BW | Pass   |
|                | High    | 2480               | 0.998                | 623            | 2/3 of 20dB BW | Pass   |
| $\pi/4$ -DQPSK | Low     | 2402               | 1.010                | 831            | 2/3 of 20dB BW | Pass   |
|                | Middle  | 2441               | 1.000                | 841            | 2/3 of 20dB BW | Pass   |
|                | High    | 2480               | 1.000                | 831            | 2/3 of 20dB BW | Pass   |
| 8DPSK          | Low     | 2402               | 1.002                | 833            | 2/3 of 20dB BW | Pass   |
|                | Middle  | 2441               | 0.998                | 832            | 2/3 of 20dB BW | Pass   |
|                | High    | 2480               | 1.002                | 827            | 2/3 of 20dB BW | Pass   |

### Test plots

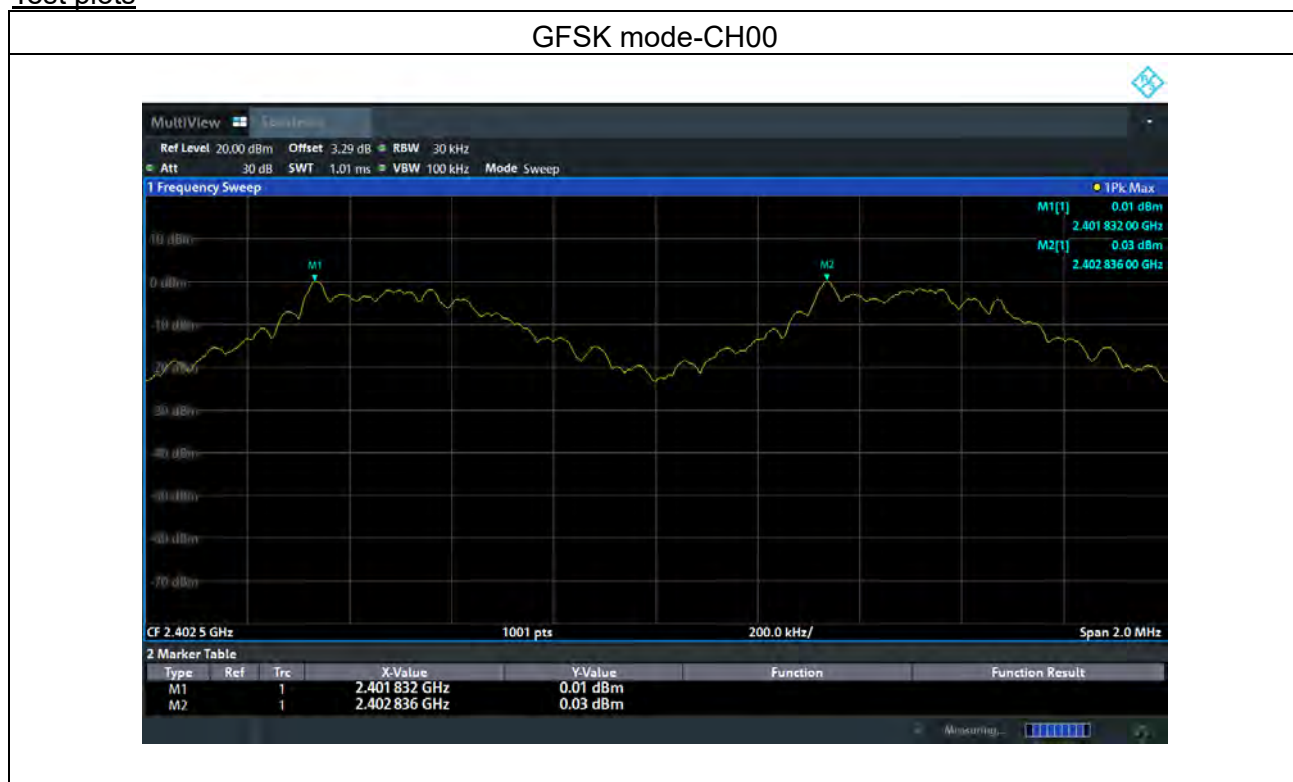



$\pi/4$ -DQPSK mode-CH00



$\pi/4$ -DQPSK mode-CH39







## 5.7 Hopping Channel Number

### 5.7.1 Limit

Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

### 5.7.2 Test Procedure

The testing follows IEEE / ANSI C63.10-2020 clause 7.8.3

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW : To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.


VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 5.7.3 Test Setup




### 5.7.4 Test Results

| Mode                        | Quantity of Hopping Channel | Limit | Results |
|-----------------------------|-----------------------------|-------|---------|
| GFSK, $\pi/4$ -DQPSK, 8DPSK | 79                          | >15   | Pass    |

### Test plots

#### GFSK mode

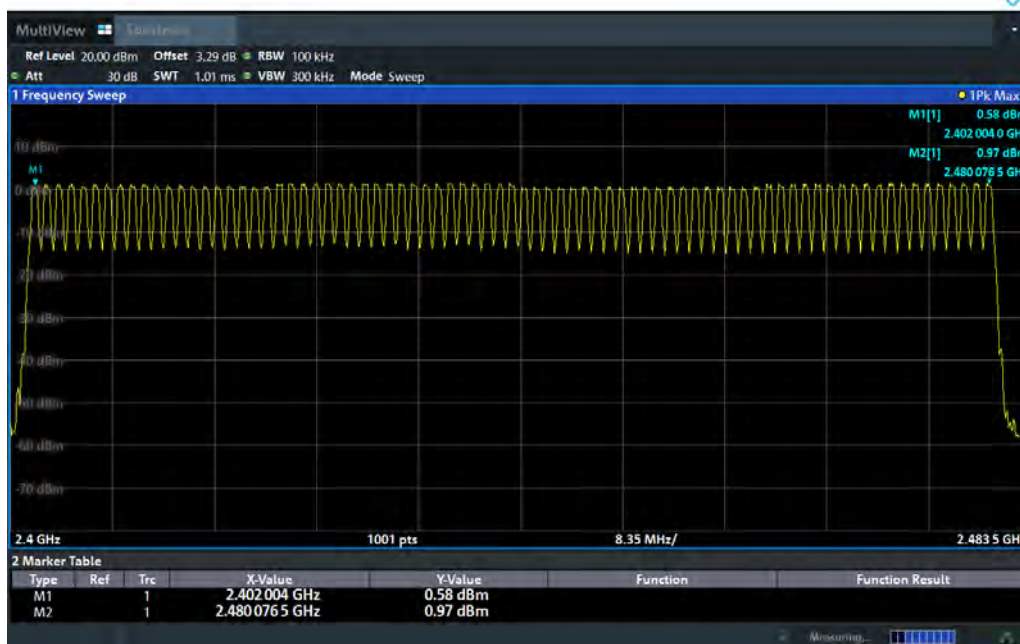

#### $\pi/4$ -DQPSK mode



8DPSK mode



## 5.8 Dwell Time


### 5.8.1 Limit

| FCC Part15 (15.247) , Subpart C |            |         |                       |
|---------------------------------|------------|---------|-----------------------|
| Section                         | Test Item  | Limit   | Frequency Range (MHz) |
| 15.247(a)(1)                    | Dwell time | 0.4 sec | 2400-2483.5           |

### 5.8.2 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.
- (9) The EUT was set to the Hopping Mode for Dwell Time Test.

### 5.8.3 Test Setup



### 5.8.4 Test Results

|            |                                   |               |                      |
|------------|-----------------------------------|---------------|----------------------|
| EUT:       | Wireless headset                  | Model Name:   | MD                   |
| Pressure:  | 1012 hPa                          | Test Voltage: | DC 3.7V from battery |
| Test Mode: | GFSK, $\pi/4$ -DQPSK, 8DPSK /CH39 |               |                      |

| Mode          | Data Packet | Frequency (MHz) | Pulse Duration (ms) | Dwell Time (ms) | Limit(s) | Conclusion |
|---------------|-------------|-----------------|---------------------|-----------------|----------|------------|
| GFSK          | DH1         | 2441            | 0.4                 | 128             | <0.4     | Pass       |
|               | DH3         | 2441            | 1.657               | 258.492         | <0.4     | Pass       |
|               | DH5         | 2441            | 2.905               | 310.835         | <0.4     | Pass       |
| $\pi/4$ DQPSK | 2DH1        | 2441            | 0.41                | 130.79          | <0.4     | Pass       |
|               | 2DH3        | 2441            | 1.663               | 274.395         | <0.4     | Pass       |
|               | 2DH5        | 2441            | 2.911               | 308.566         | <0.4     | Pass       |
| 8DPSK         | 3DH1        | 2441            | 0.412               | 131.428         | <0.4     | Pass       |
|               | 3DH3        | 2441            | 1.663               | 272.732         | <0.4     | Pass       |
|               | 3DH5        | 2441            | 2.914               | 288.486         | <0.4     | Pass       |

Note:

1. A period time =  $0.4 \text{ (s)} * 79 = 31.6 \text{ (s)}$




2. DH1 time slot = Pulse Duration \*  $(1600/(2*79))$  \* A period time




DH3 time slot = Pulse Duration \*  $(1600/(4*79))$  \* A period time




DH5 time slot = Pulse Duration \*  $(1600/(6*79))$  \* A period time

3. For GFSK,  $\pi/4$ -DQPSK and 8DPSK: The test period:  $T = 0.4 \text{ Second/Channel} * 79 \text{ Channel} = 31.6 \text{ s}$

Test plots
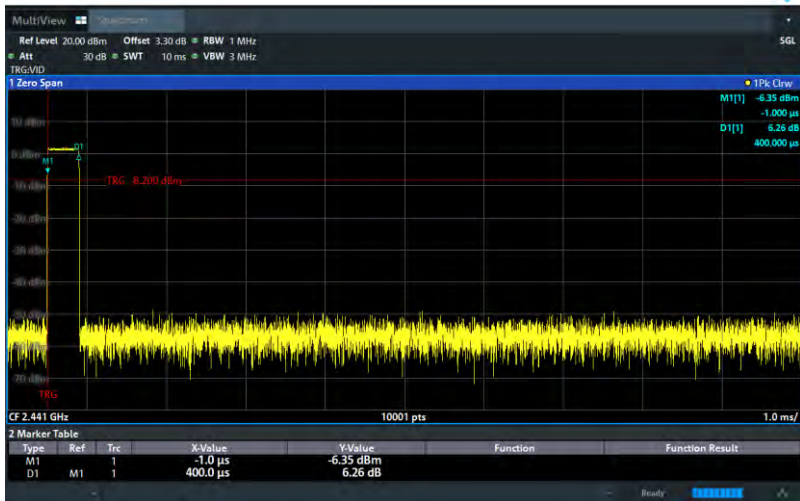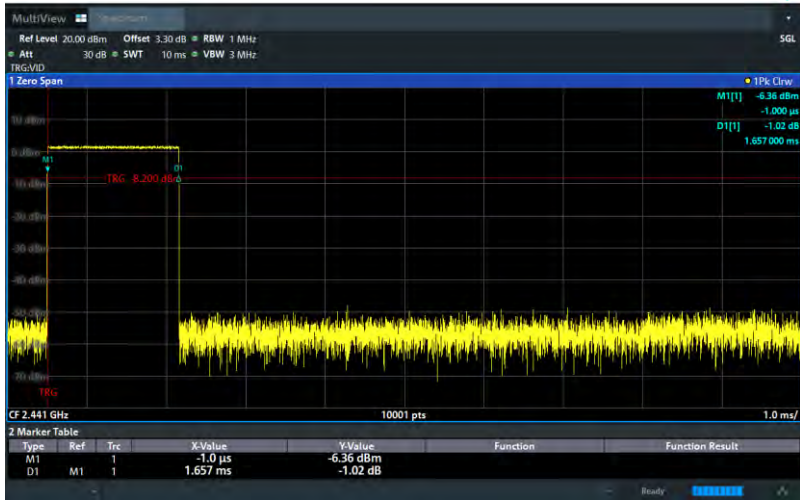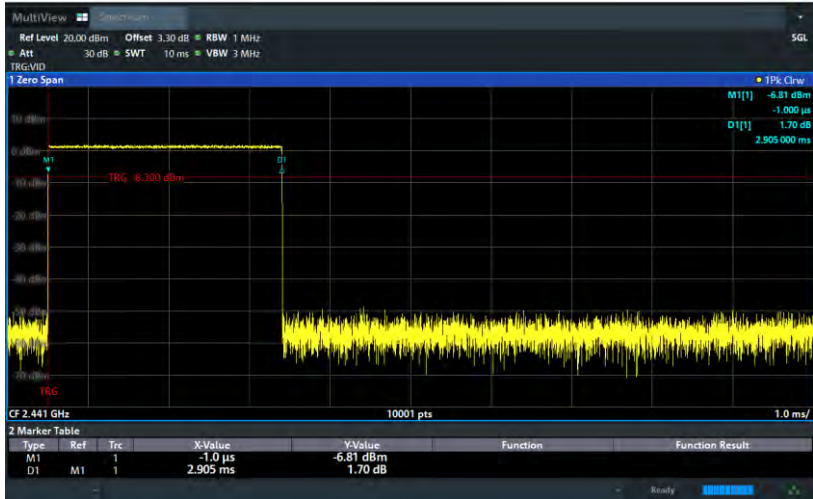
| Modulation mode |     | GFSK mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |               |           |          |                 |         |         |          |                 |    |  |   |              |           |  |  |    |    |   |               |          |  |  |
|-----------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|----------|-----------------|---------|---------|----------|-----------------|----|--|---|--------------|-----------|--|--|----|----|---|---------------|----------|--|--|
| DH1             |     |  <p>The plot shows a continuous signal at 2.441 GHz. The Y-axis represents power in dBm, ranging from -70 to 10. The X-axis represents time in ms, ranging from 0 to 1.0. A trigger level is set at -6.26 dB. The signal is centered around -6.35 dBm. The plot includes a 10001 pts scale and a 1.0 ms/div time base.</p> <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>-1.0 <math>\mu</math>s</td><td>-6.35 dBm</td><td></td><td></td></tr><tr><td>D1</td><td>M1</td><td>1</td><td>400.0 <math>\mu</math>s</td><td>-6.26 dB</td><td></td><td></td></tr></table> |               | Type      | Ref      | Trc             | X-Value | Y-Value | Function | Function Result | M1 |  | 1 | -1.0 $\mu$ s | -6.35 dBm |  |  | D1 | M1 | 1 | 400.0 $\mu$ s | -6.26 dB |  |  |
| Type            | Ref | Trc                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | X-Value       | Y-Value   | Function | Function Result |         |         |          |                 |    |  |   |              |           |  |  |    |    |   |               |          |  |  |
| M1              |     | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | -1.0 $\mu$ s  | -6.35 dBm |          |                 |         |         |          |                 |    |  |   |              |           |  |  |    |    |   |               |          |  |  |
| D1              | M1  | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 400.0 $\mu$ s | -6.26 dB  |          |                 |         |         |          |                 |    |  |   |              |           |  |  |    |    |   |               |          |  |  |
| DH3             |     |  <p>The plot shows a signal with a duration of 1.657 ms. The Y-axis represents power in dBm, ranging from -70 to 10. The X-axis represents time in ms, ranging from 0 to 1.0. A trigger level is set at -1.02 dB. The signal is centered around -6.36 dBm. The plot includes a 10001 pts scale and a 1.0 ms/div time base.</p> <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>-1.0 <math>\mu</math>s</td><td>-6.36 dBm</td><td></td><td></td></tr><tr><td>D1</td><td>M1</td><td>1</td><td>1.657 ms</td><td>-1.02 dB</td><td></td><td></td></tr></table>           |               | Type      | Ref      | Trc             | X-Value | Y-Value | Function | Function Result | M1 |  | 1 | -1.0 $\mu$ s | -6.36 dBm |  |  | D1 | M1 | 1 | 1.657 ms      | -1.02 dB |  |  |
| Type            | Ref | Trc                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | X-Value       | Y-Value   | Function | Function Result |         |         |          |                 |    |  |   |              |           |  |  |    |    |   |               |          |  |  |
| M1              |     | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | -1.0 $\mu$ s  | -6.36 dBm |          |                 |         |         |          |                 |    |  |   |              |           |  |  |    |    |   |               |          |  |  |
| D1              | M1  | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 1.657 ms      | -1.02 dB  |          |                 |         |         |          |                 |    |  |   |              |           |  |  |    |    |   |               |          |  |  |
| DH5             |     |  <p>The plot shows a signal with a duration of 2.905 ms. The Y-axis represents power in dBm, ranging from -70 to 10. The X-axis represents time in ms, ranging from 0 to 1.0. A trigger level is set at 1.70 dB. The signal is centered around -6.81 dBm. The plot includes a 10001 pts scale and a 1.0 ms/div time base.</p> <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>-1.0 <math>\mu</math>s</td><td>-6.81 dBm</td><td></td><td></td></tr><tr><td>D1</td><td>M1</td><td>1</td><td>2.905 ms</td><td>1.70 dB</td><td></td><td></td></tr></table>            |               | Type      | Ref      | Trc             | X-Value | Y-Value | Function | Function Result | M1 |  | 1 | -1.0 $\mu$ s | -6.81 dBm |  |  | D1 | M1 | 1 | 2.905 ms      | 1.70 dB  |  |  |
| Type            | Ref | Trc                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | X-Value       | Y-Value   | Function | Function Result |         |         |          |                 |    |  |   |              |           |  |  |    |    |   |               |          |  |  |
| M1              |     | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | -1.0 $\mu$ s  | -6.81 dBm |          |                 |         |         |          |                 |    |  |   |              |           |  |  |    |    |   |               |          |  |  |
| D1              | M1  | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 2.905 ms      | 1.70 dB   |          |                 |         |         |          |                 |    |  |   |              |           |  |  |    |    |   |               |          |  |  |
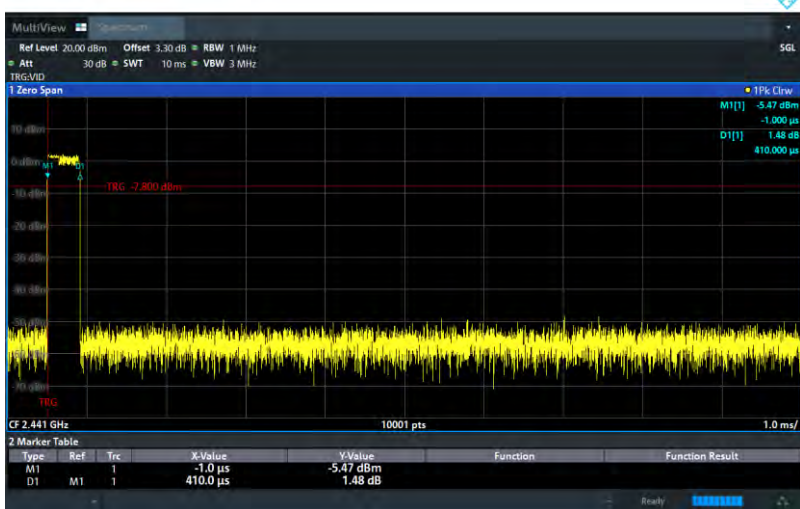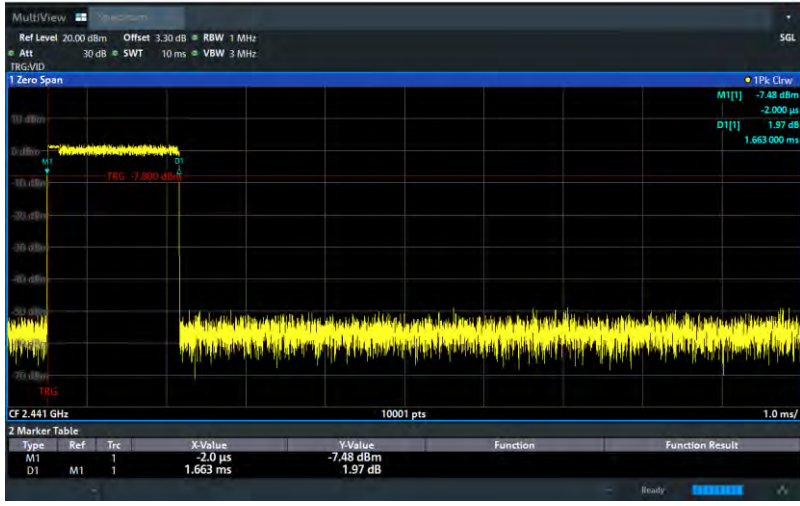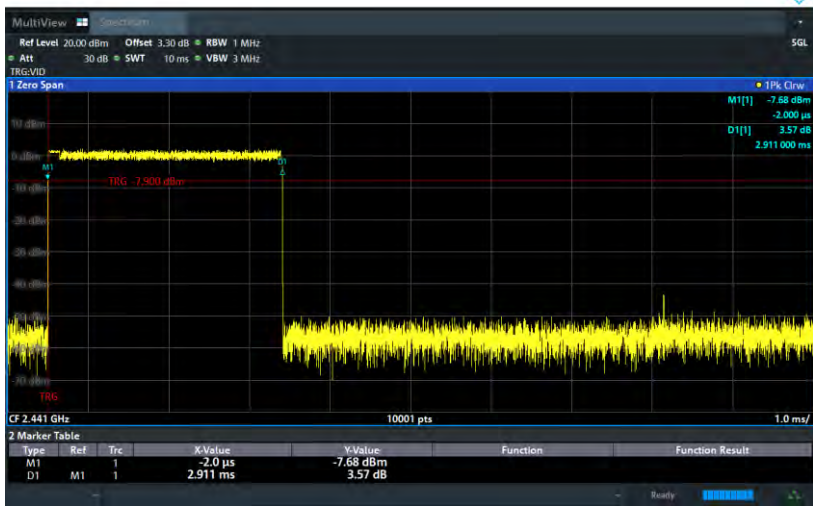
| Modulation mode |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | $\pi/4$ -DQPSK mode |          |           |          |                 |         |          |                 |    |   |   |         |           |  |  |    |    |   |          |         |  |  |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|-----------|----------|-----------------|---------|----------|-----------------|----|---|---|---------|-----------|--|--|----|----|---|----------|---------|--|--|
| 2-DH1           | <div><p>The spectrum plot for 2-DH1 shows a signal at 2.441 GHz. The peak level is -5.47 dBm, and the duration is 410.0 μs. The plot includes a 10001 pts scale and a 1.0 ms/div time base.</p><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td>1</td><td>-1.0 μs</td><td>-5.47 dBm</td><td></td><td></td></tr><tr><td>D1</td><td>M1</td><td>1</td><td>410.0 μs</td><td>1.48 dB</td><td></td><td></td></tr></table></div>   |                     | Type     | Ref       | Trc      | X-Value         | Y-Value | Function | Function Result | M1 | 1 | 1 | -1.0 μs | -5.47 dBm |  |  | D1 | M1 | 1 | 410.0 μs | 1.48 dB |  |  |
| Type            | Ref                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Trc                 | X-Value  | Y-Value   | Function | Function Result |         |          |                 |    |   |   |         |           |  |  |    |    |   |          |         |  |  |
| M1              | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1                   | -1.0 μs  | -5.47 dBm |          |                 |         |          |                 |    |   |   |         |           |  |  |    |    |   |          |         |  |  |
| D1              | M1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1                   | 410.0 μs | 1.48 dB   |          |                 |         |          |                 |    |   |   |         |           |  |  |    |    |   |          |         |  |  |
| 2-DH3           | <div><p>The spectrum plot for 2-DH3 shows a signal at 2.441 GHz. The peak level is -7.48 dBm, and the duration is 1.663 ms. The plot includes a 10001 pts scale and a 1.0 ms/div time base.</p><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td>1</td><td>-2.0 μs</td><td>-7.48 dBm</td><td></td><td></td></tr><tr><td>D1</td><td>M1</td><td>1</td><td>1.663 ms</td><td>1.97 dB</td><td></td><td></td></tr></table></div>  |                     | Type     | Ref       | Trc      | X-Value         | Y-Value | Function | Function Result | M1 | 1 | 1 | -2.0 μs | -7.48 dBm |  |  | D1 | M1 | 1 | 1.663 ms | 1.97 dB |  |  |
| Type            | Ref                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Trc                 | X-Value  | Y-Value   | Function | Function Result |         |          |                 |    |   |   |         |           |  |  |    |    |   |          |         |  |  |
| M1              | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1                   | -2.0 μs  | -7.48 dBm |          |                 |         |          |                 |    |   |   |         |           |  |  |    |    |   |          |         |  |  |
| D1              | M1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1                   | 1.663 ms | 1.97 dB   |          |                 |         |          |                 |    |   |   |         |           |  |  |    |    |   |          |         |  |  |
| 2-DH5           | <div><p>The spectrum plot for 2-DH5 shows a signal at 2.441 GHz. The peak level is -7.68 dBm, and the duration is 2.911 ms. The plot includes a 10001 pts scale and a 1.0 ms/div time base.</p><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td>1</td><td>-2.0 μs</td><td>-7.68 dBm</td><td></td><td></td></tr><tr><td>D1</td><td>M1</td><td>1</td><td>2.911 ms</td><td>3.57 dB</td><td></td><td></td></tr></table></div> |                     | Type     | Ref       | Trc      | X-Value         | Y-Value | Function | Function Result | M1 | 1 | 1 | -2.0 μs | -7.68 dBm |  |  | D1 | M1 | 1 | 2.911 ms | 3.57 dB |  |  |
| Type            | Ref                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Trc                 | X-Value  | Y-Value   | Function | Function Result |         |          |                 |    |   |   |         |           |  |  |    |    |   |          |         |  |  |
| M1              | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1                   | -2.0 μs  | -7.68 dBm |          |                 |         |          |                 |    |   |   |         |           |  |  |    |    |   |          |         |  |  |
| D1              | M1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1                   | 2.911 ms | 3.57 dB   |          |                 |         |          |                 |    |   |   |         |           |  |  |    |    |   |          |         |  |  |
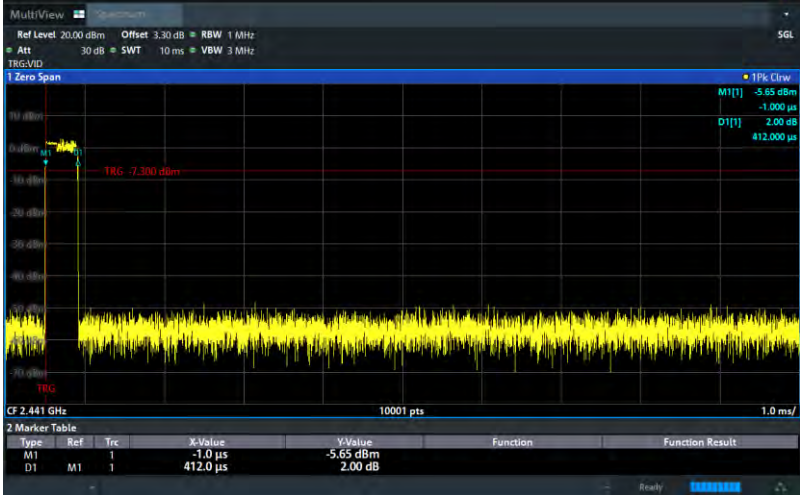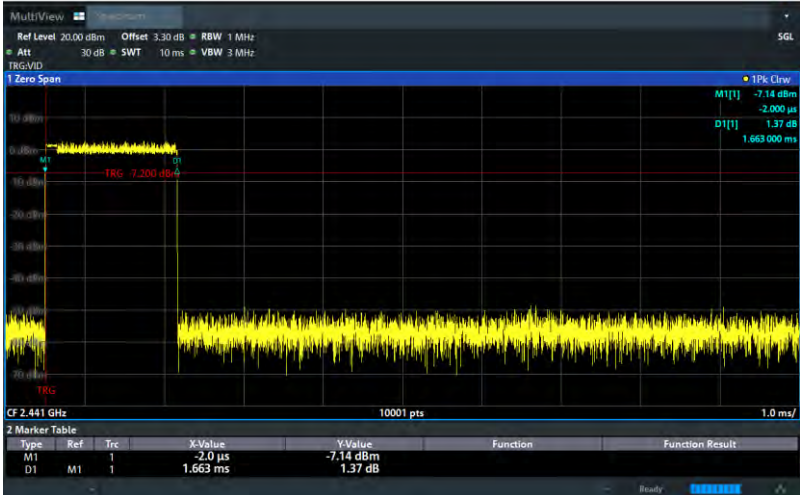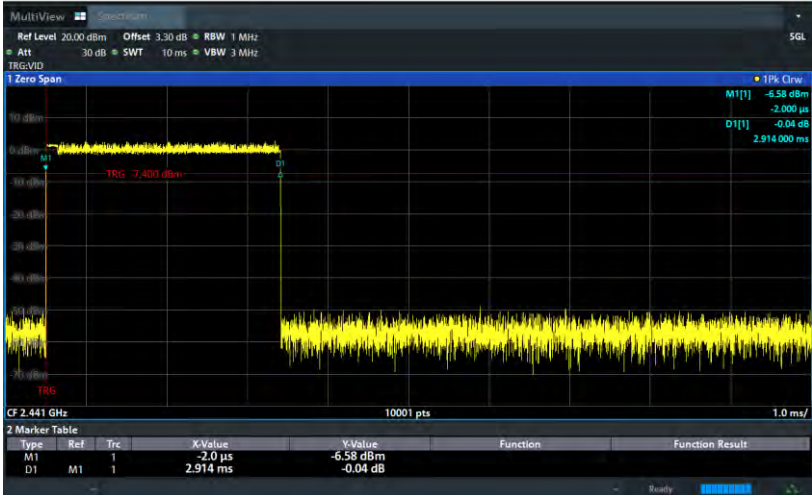
| Modulation mode | 8DPSK mode                                                                           |
|-----------------|--------------------------------------------------------------------------------------|
| 3-DH1           |    |
| 3-DH3           |   |
| 3-DH5           |  |

## 5.9 Conducted Band Edge

### 5.9.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 5.9.2 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- Repeat above procedures until all measured frequencies were complete.

### 5.9.3 Test Setup



### 5.9.4 Test Results


|           |                  |               |                      |
|-----------|------------------|---------------|----------------------|
| EUT:      | Wireless headset | Model Name:   | MD                   |
| Pressure: | 1012 hPa         | Test Voltage: | DC 3.7V from battery |

Test plots


GFSK: Band Edge, Left Side




GFSK: Band Edge, Right Side

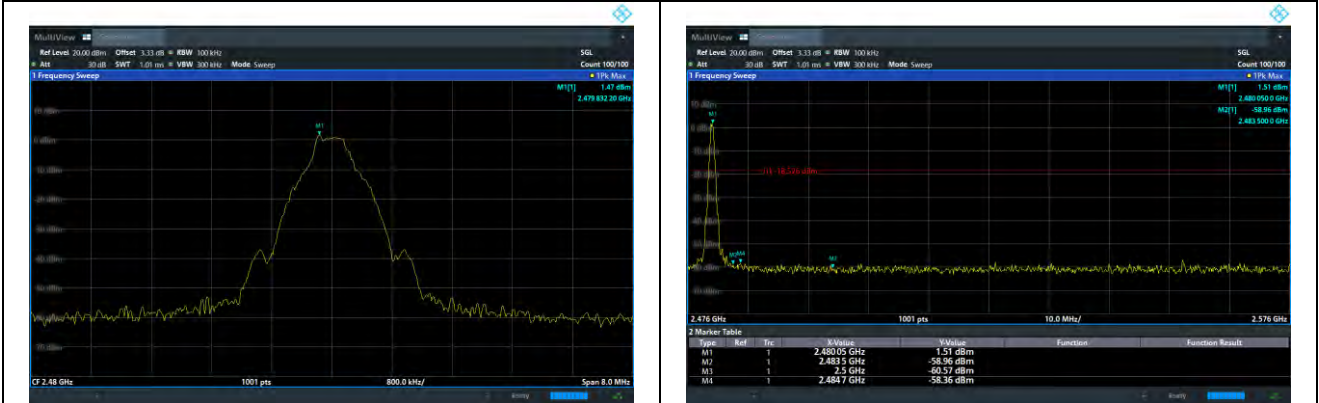


$\pi/4$ -DQPSK: Band Edge, Left Side

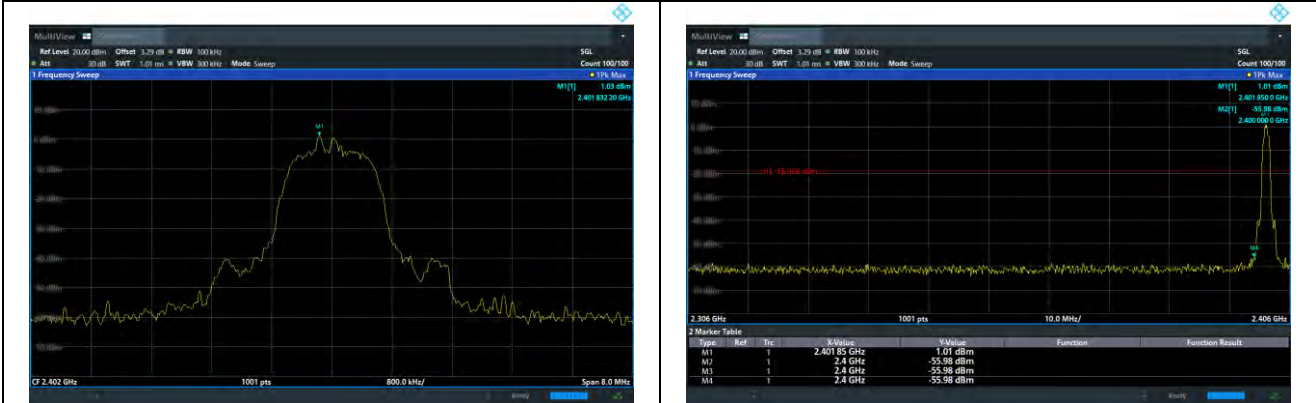


$\pi/4$ -DQPSK: Band Edge, Right Side

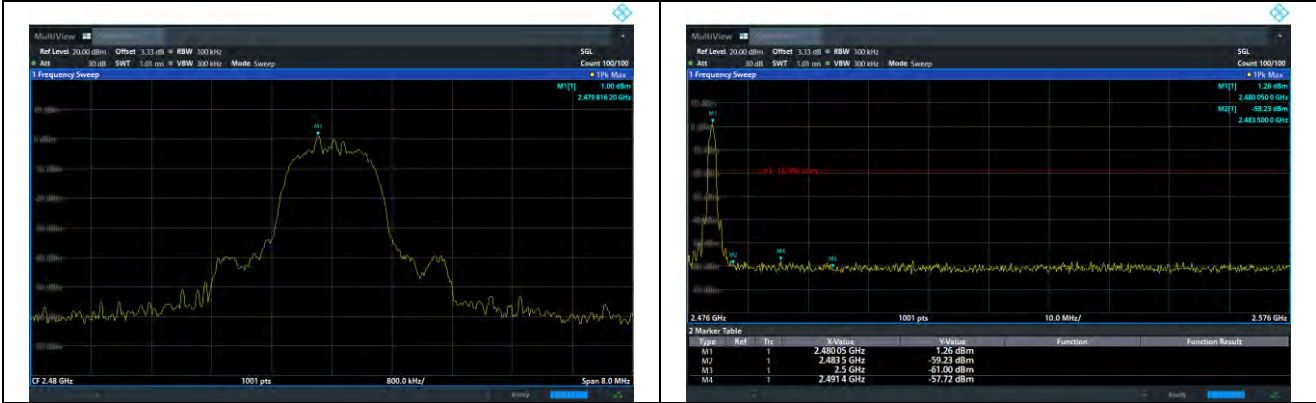

8DPSK: Band Edge, Left Side

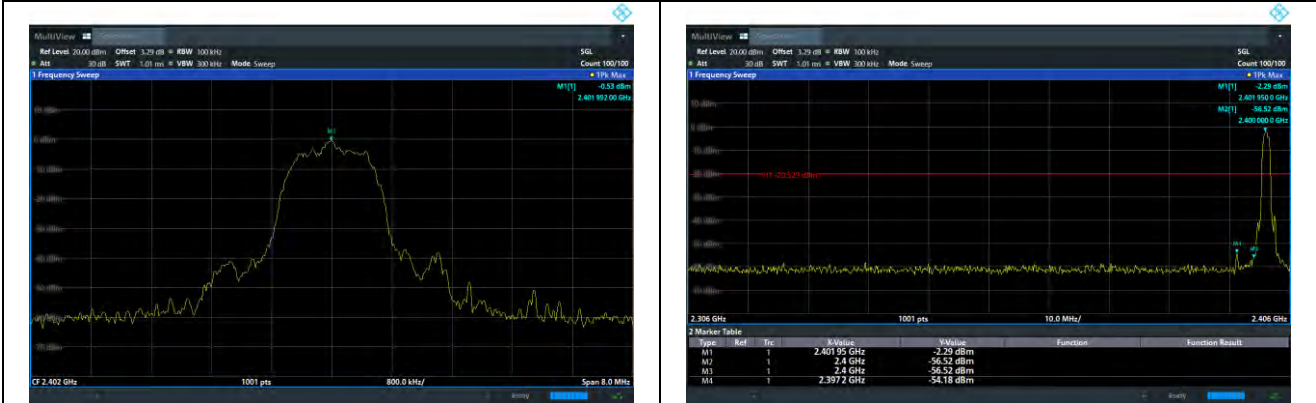


8DPSK: Band Edge, Right Side

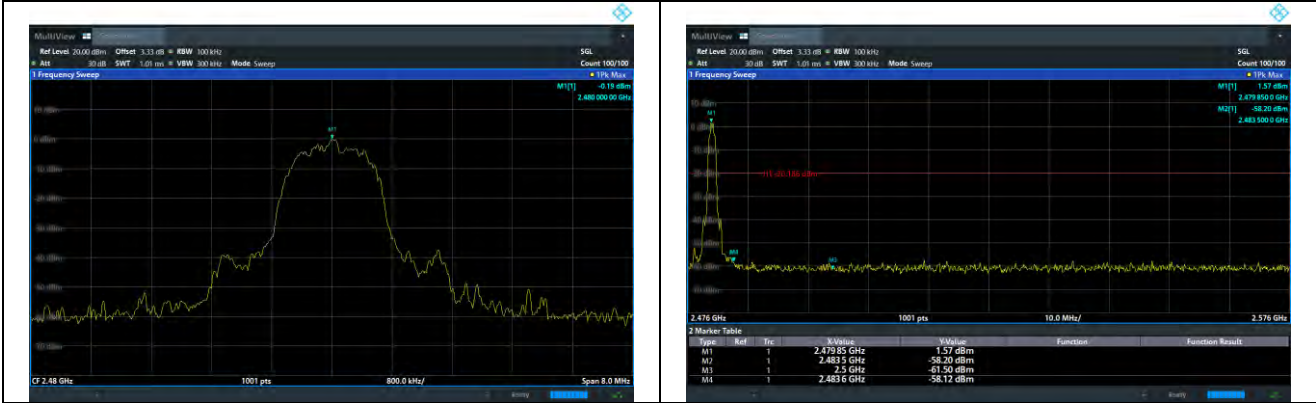

Hopping Mode

Test plots


GFSK: Band Edge, Left Side

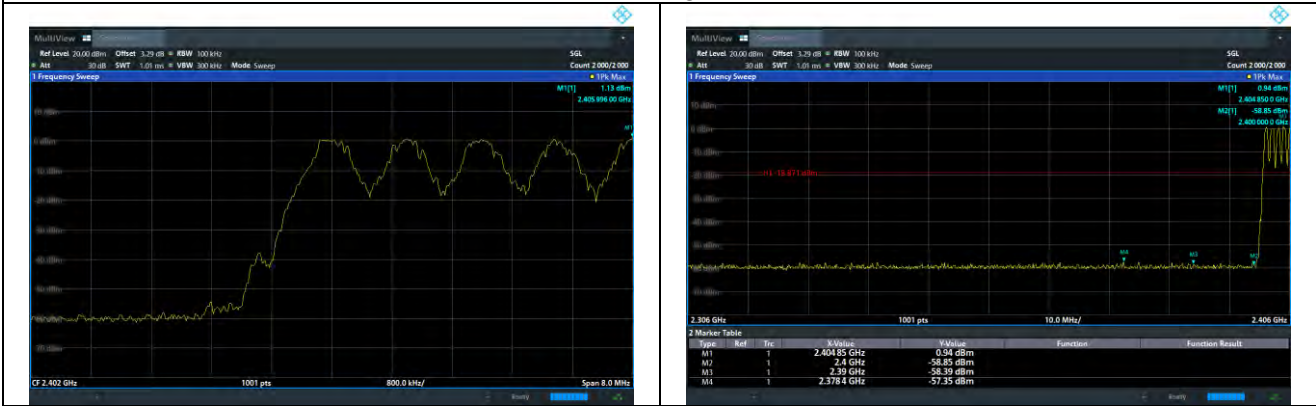

GFSK: Band Edge, Right Side




$\pi/4$ -DQPSK: Band Edge, Left Side

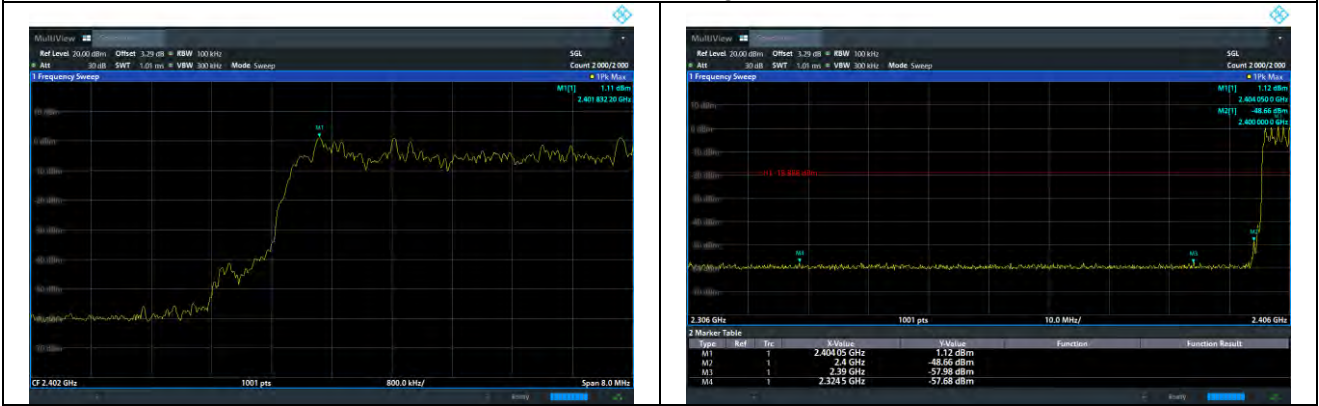

$\pi/4$ -DQPSK: Band Edge, Right Side



8DPSK: Band Edge, Left Side

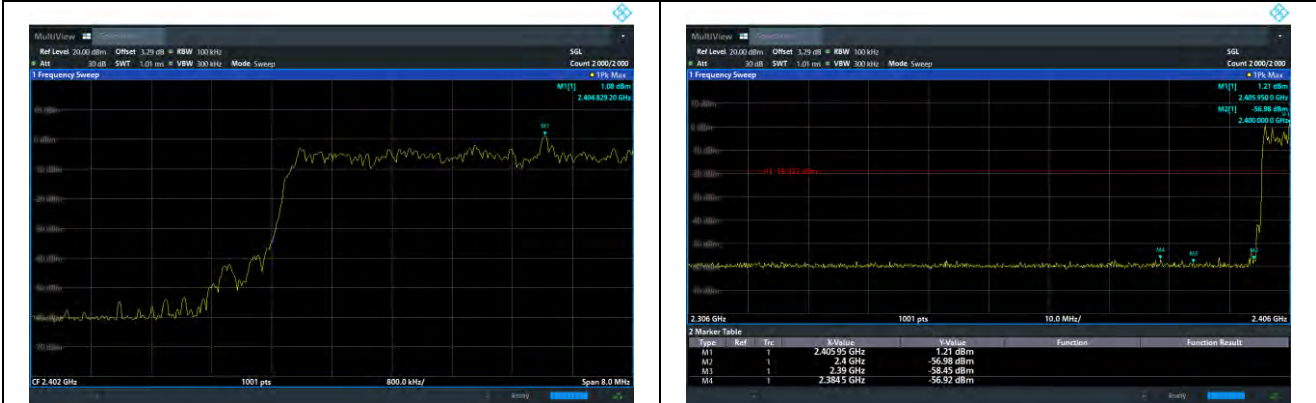

8DPSK: Band Edge, Right Side



## 5.10 Spurious RF Conducted Emissions


### 5.10.1 Limit

Below -20dB of the highest emission level in operating band.

### 5.10.2 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2020 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW=300kHz to measure the peak field strength, and measure frequency range from 9kHz to 26.5GHz.

### 5.10.3 Test Setup




### 5.10.4 Test Results


Note:

1: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.


GFSK on Channel 00

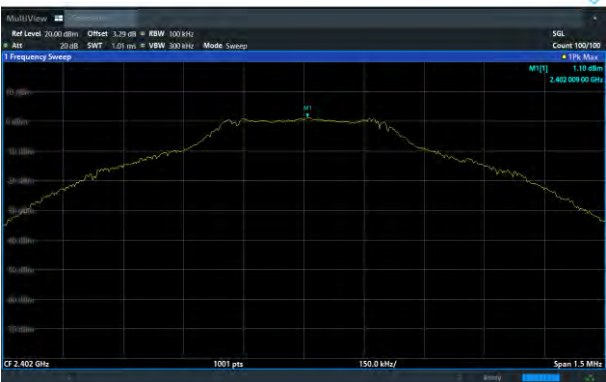


GFSK on Channel 00

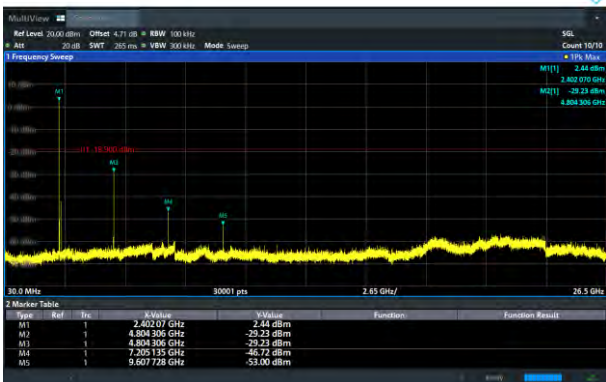


GFSK on Channel 39

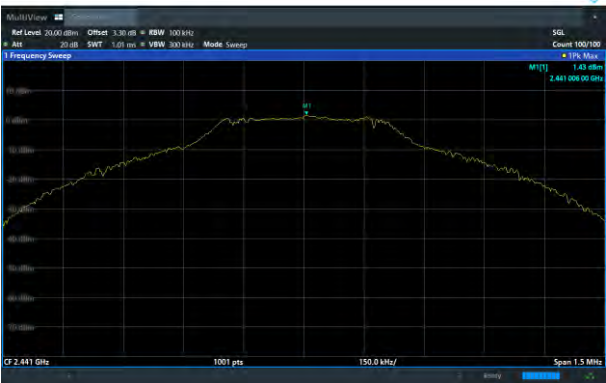


GFSK on Channel 39

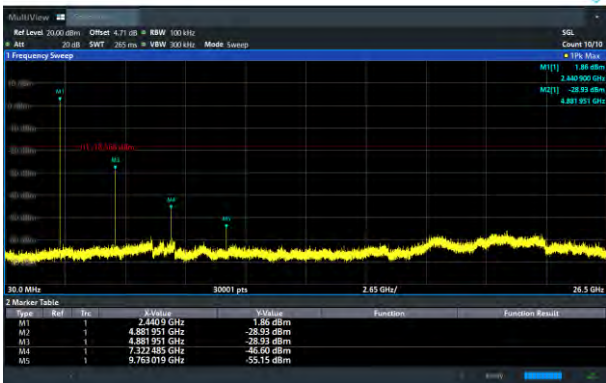


GFSK on Channel 78

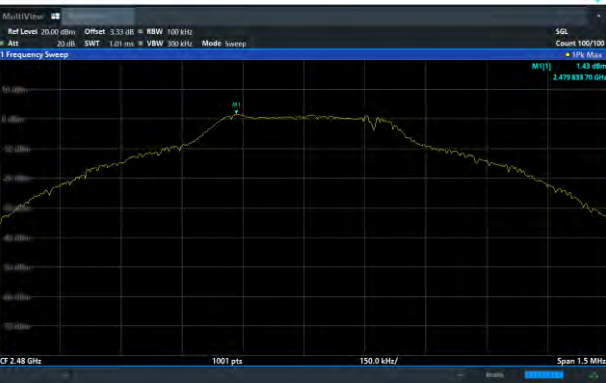


GFSK on Channel 78

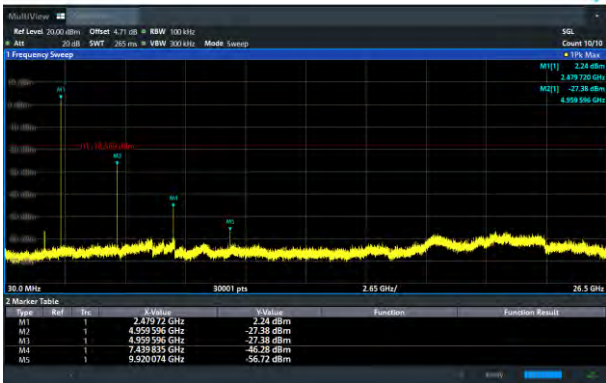


$\pi/4$ -DQPSK on Channel 00

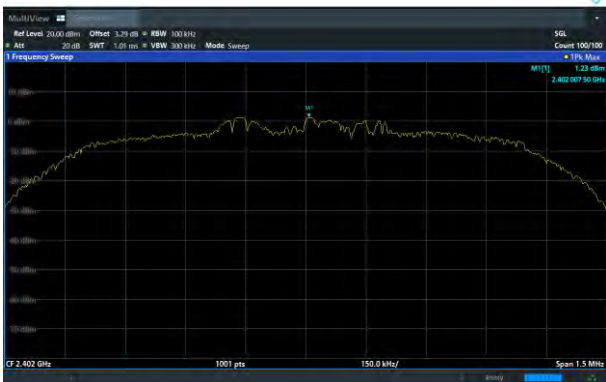


$\pi/4$ -DQPSK on Channel 00

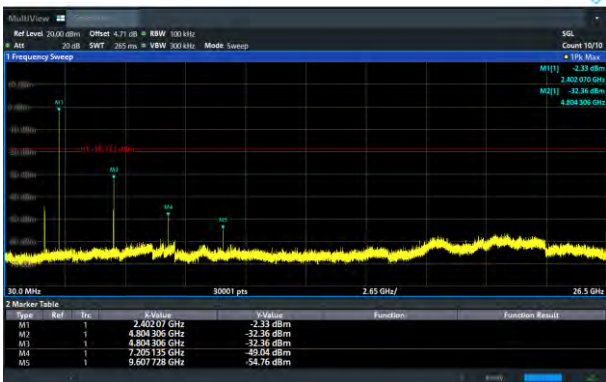

$\pi/4$ -DQPSK on Channel 39

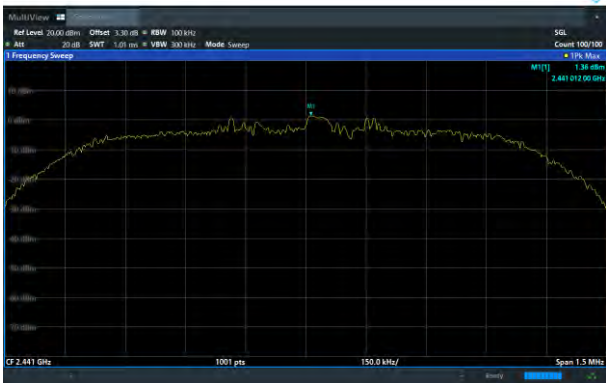


$\pi/4$ -DQPSK on Channel 39

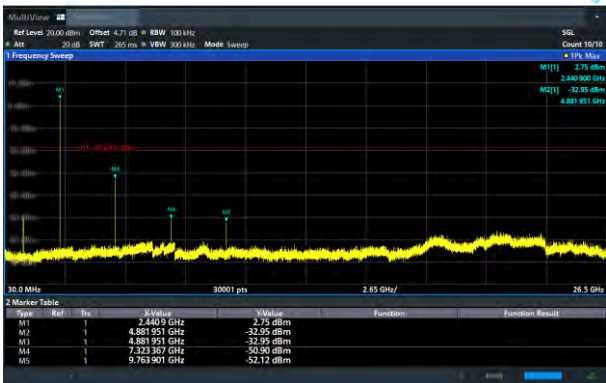

$\pi/4$ -DQPSK on Channel 78




$\pi/4$ -DQPSK on Channel 78

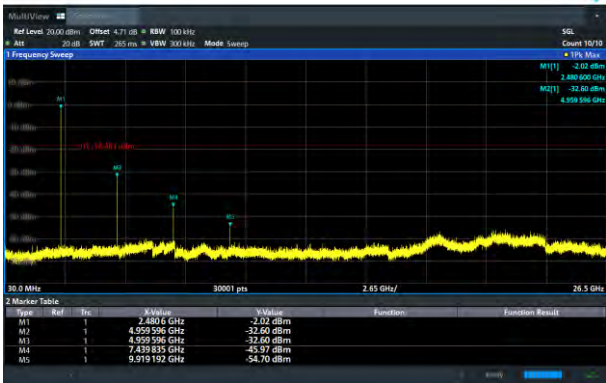

8DPSK on Channel 00




8DPSK on Channel 00

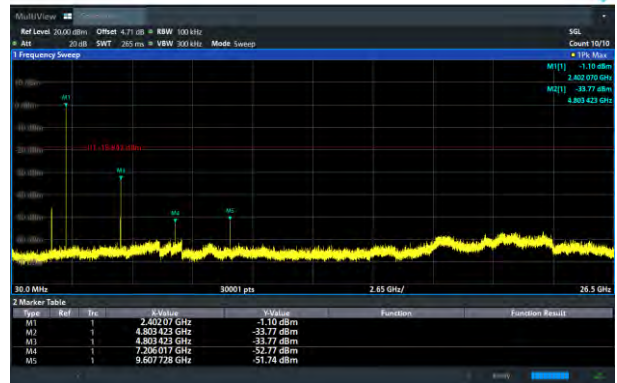

8DPSK on Channel 39




8DPSK on Channel 39

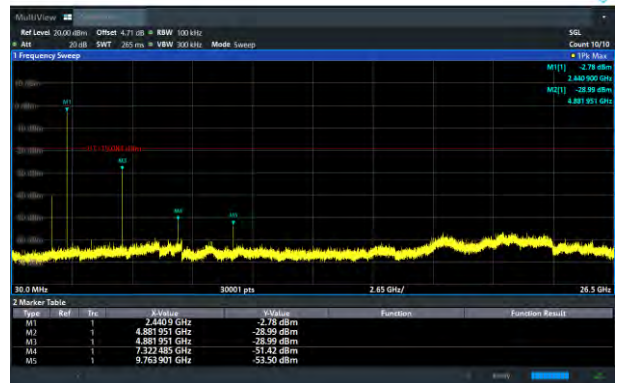

8DPSK on Channel 78




8DPSK on Channel 78

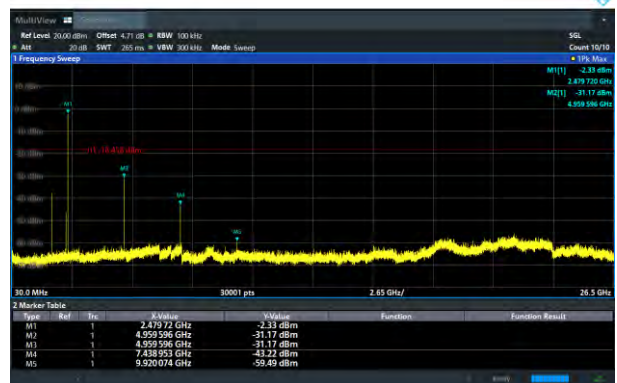

## 6 Photographs of the Test Setup


Radiated Emission Below 1GHz

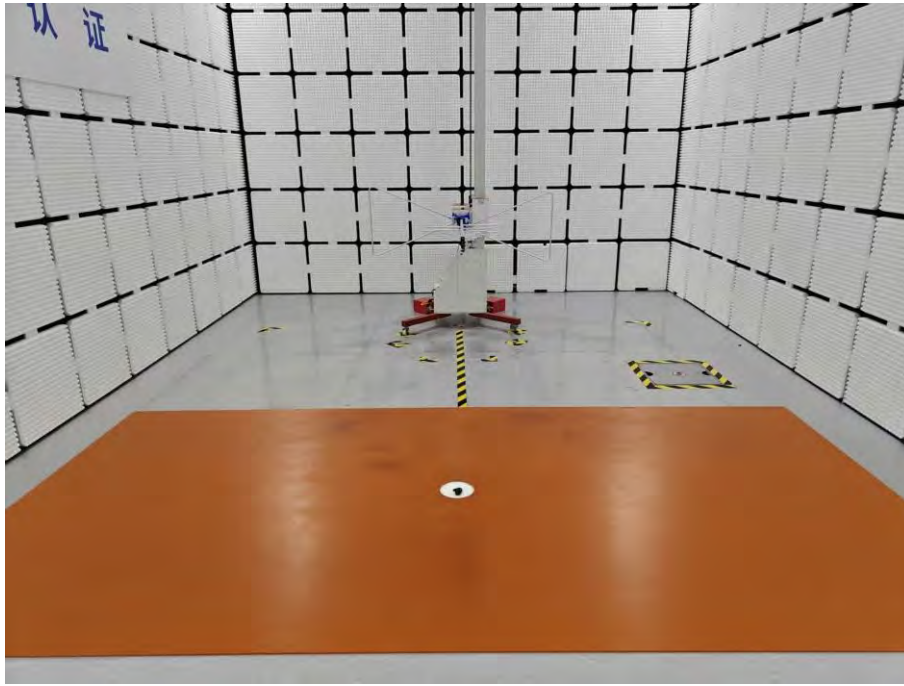

Radiated Emission Above 1GHz



Conducted Emission

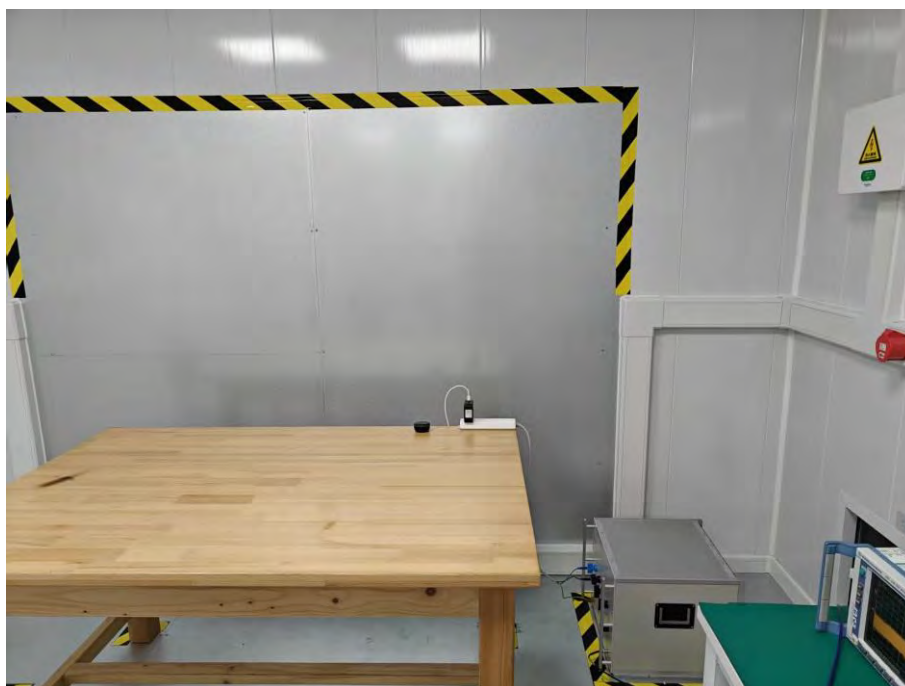

7 Photographs of the EUT

Photo 1



Photo 2



Photo 3



Photo 4

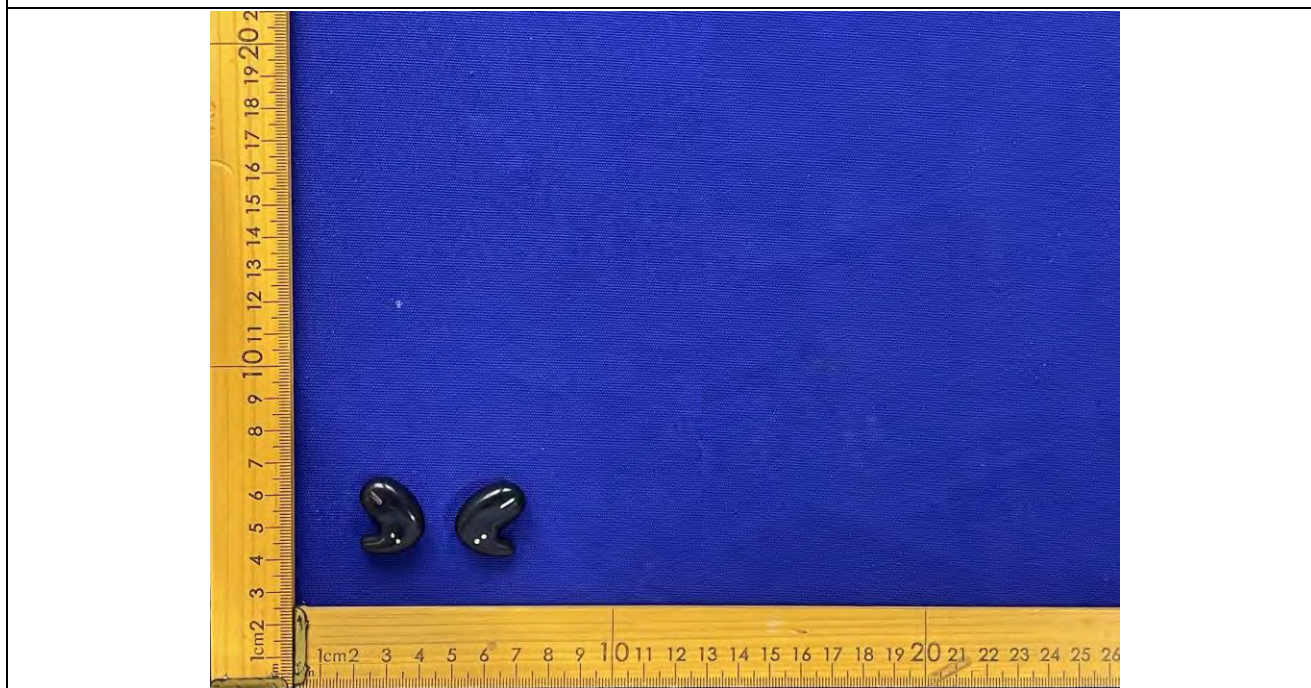


Photo 5

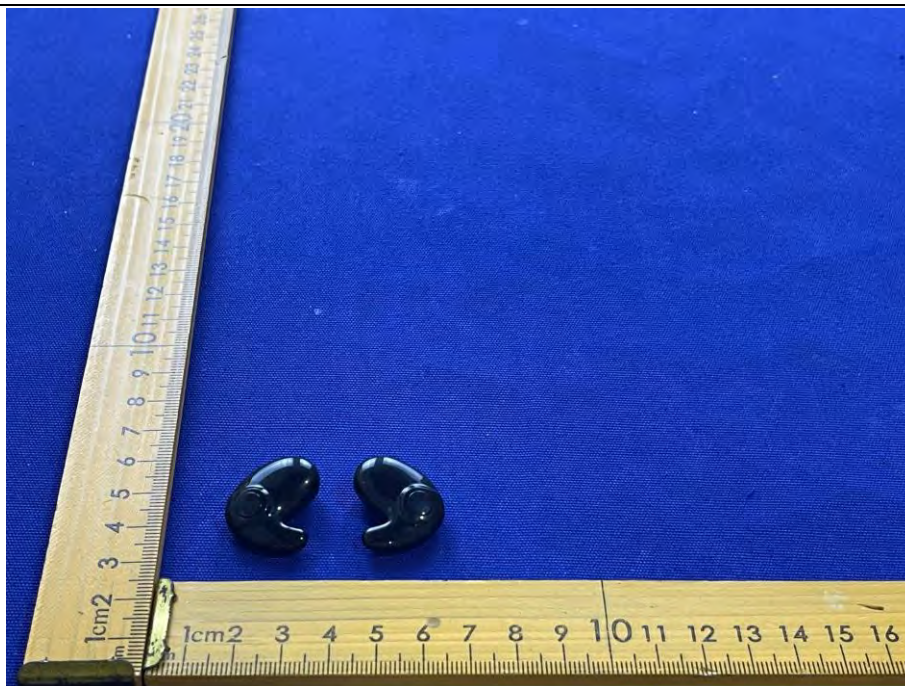


Photo 6



Photo 7

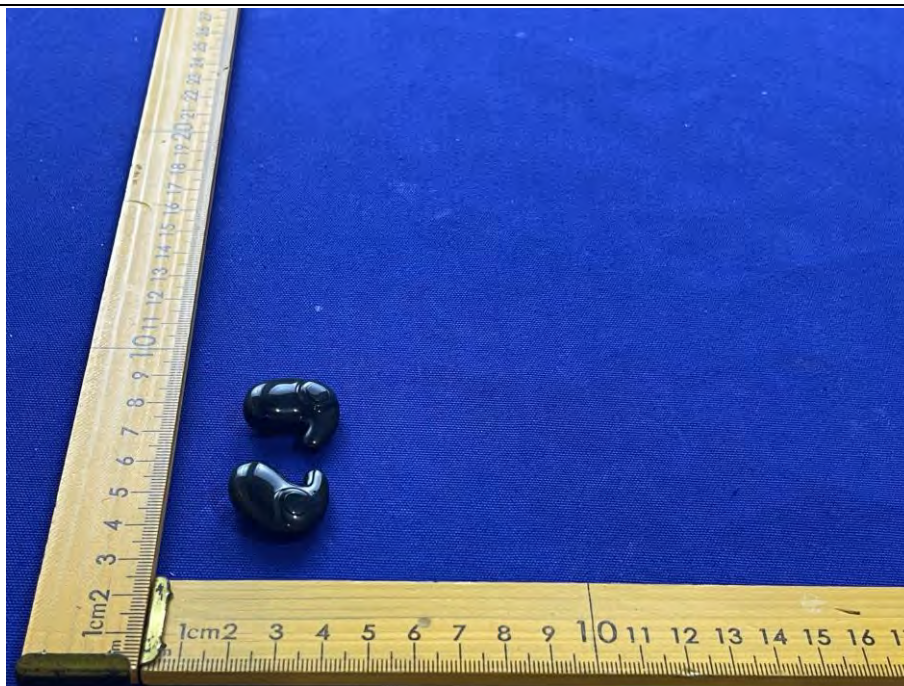


Photo 8

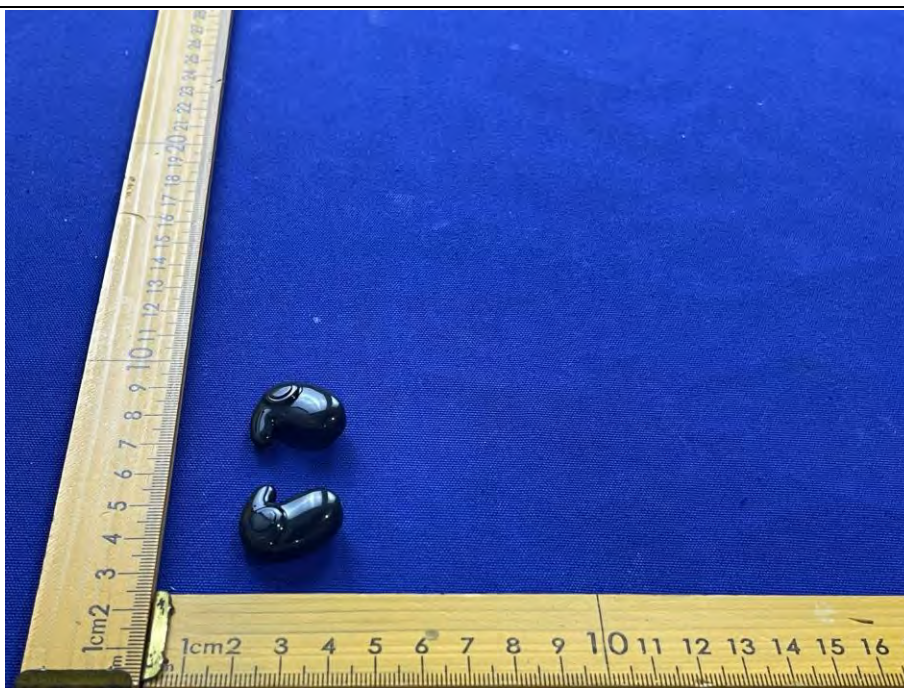


Photo 9



Photo 10



Photo 11

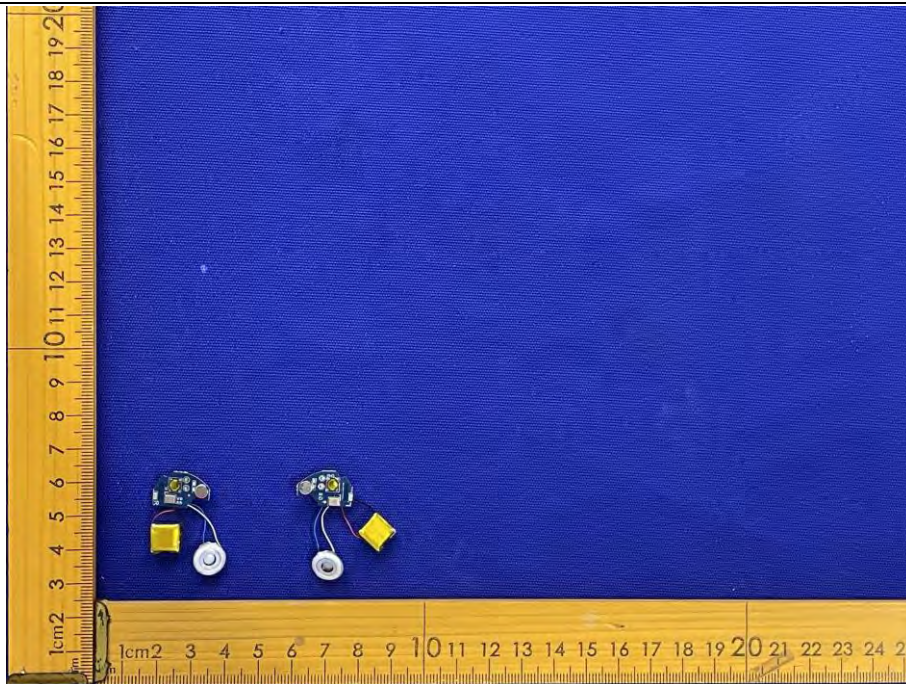


Photo 12

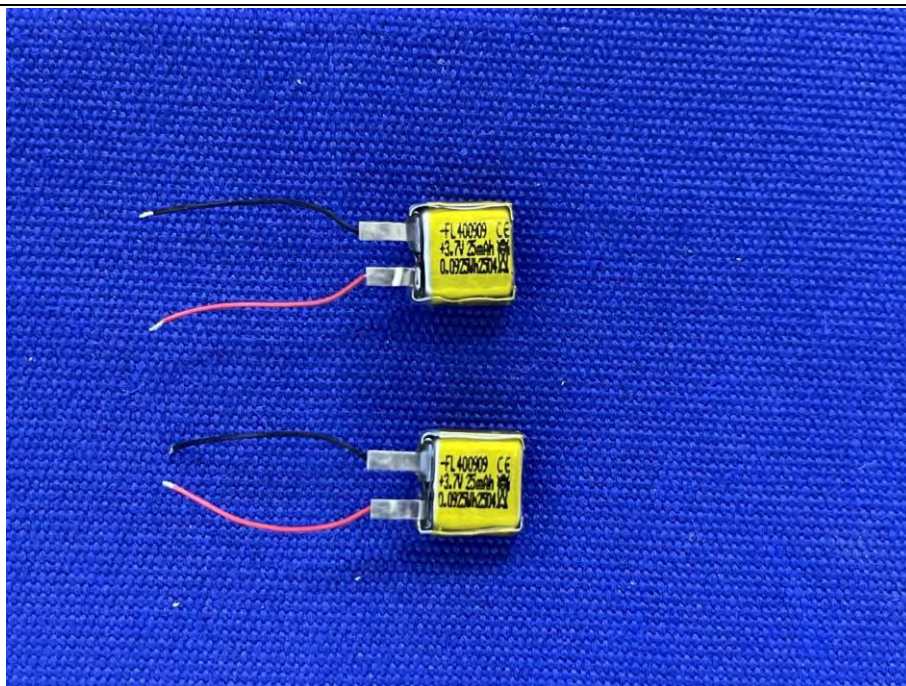


Photo 13

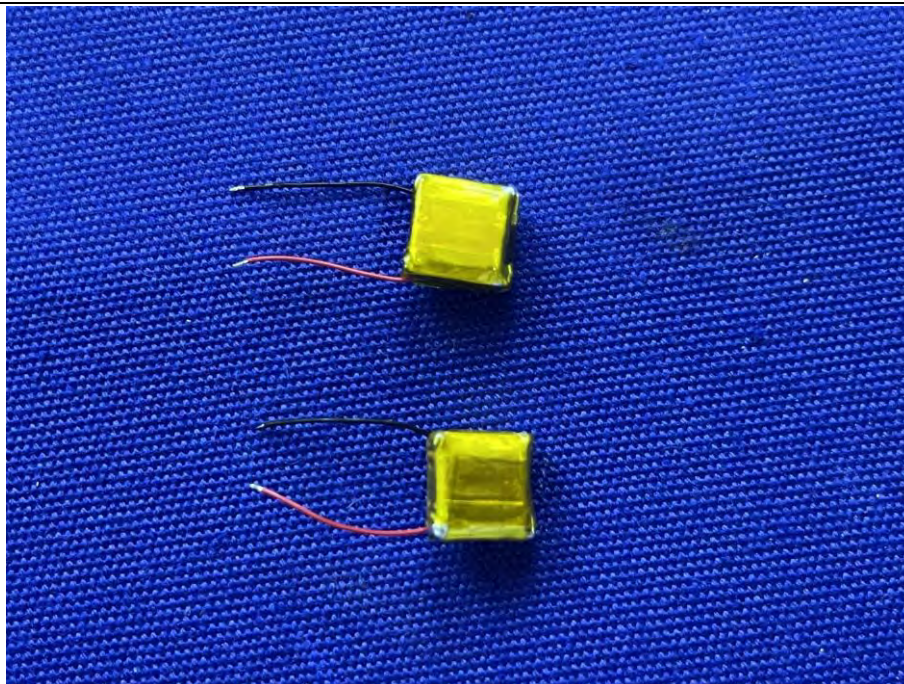


Photo 14


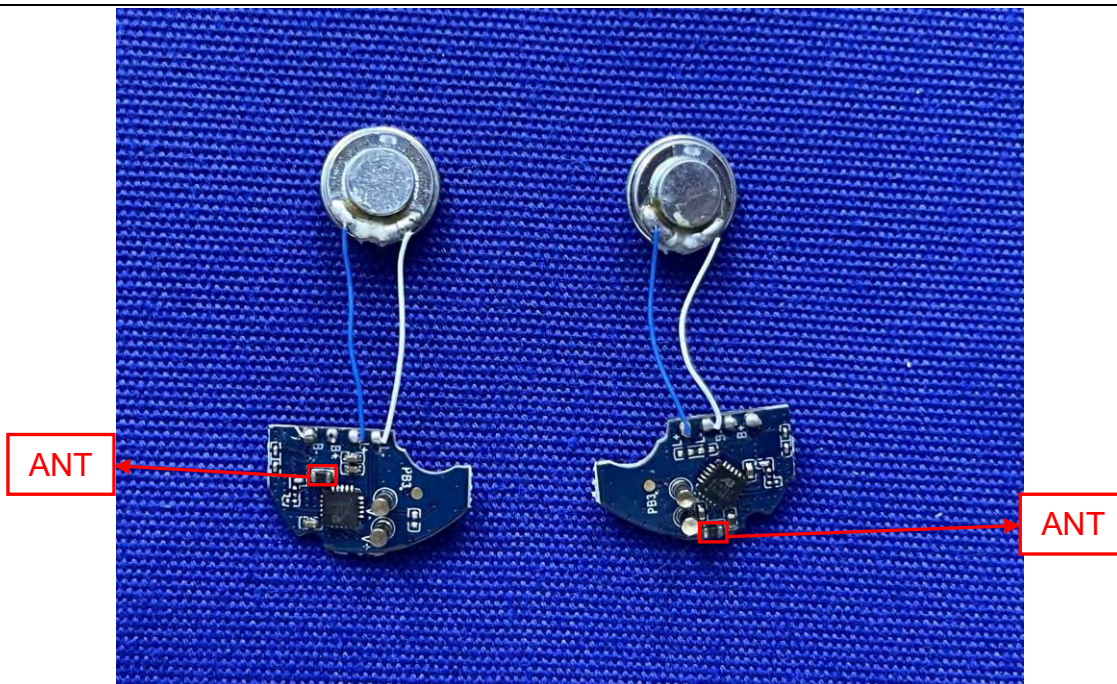


Photo 15

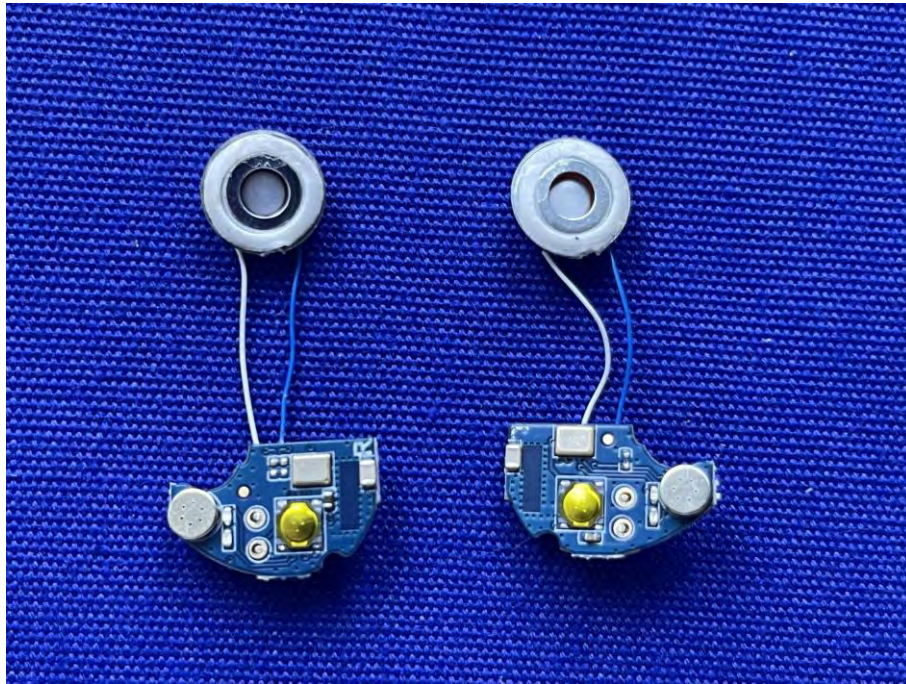

\*\*\*\*\* END OF REPORT \*\*\*\*\*