



**USER MANUAL**

Exclusive 3 channels camera



**Packing details drawing:**


- Packing envelope
- Product specifications
- Adjustable 3M rubber bracket
- Host-traffic recorder
- TYPE-C car charging cable (for power supply)
- Waterproof and pull headphone hole (for use after recording car)

**一、Product Specification**

|                |                                          |
|----------------|------------------------------------------|
| DOR            | Built-in 64M                             |
| FLASH          | 8M SPI nonflash                          |
| Display Screen | 2.0 inch IPS HD screen                   |
| LCD resolution | 800X480 pixels                           |
| External port  | TYPE-C 5V1A power adapter port           |
|                | 2.5mm digital 720P rear view lens port   |
| Speaker        | Monophonic 15*10mm speaker               |
| MIC            | 4015 Standard Omnidirectional Microphone |

| Features:                  |                                      |
|----------------------------|--------------------------------------|
| Front camera               | 6-glass/F2.0/aperture/170°wide angle |
| Inside camera              | VGA 120°                             |
| GPS tracker                | NO                                   |
| AV OUT                     | NO                                   |
| Rear camera                | 6M cable/2.5mm port                  |
| Photo                      | Support                              |
| Lens rotates               | Adjust manually                      |
| WDR                        | Support                              |
| HDR                        | Support                              |
| Reversing visual           | Support                              |
| Video format               | AVI                                  |
| Image format               | JPG                                  |
| Compression                | H.264                                |
| Battery                    | 150mAh polymer lithium battery       |
| Language                   | support multi-language               |
| G-sensor                   | Support                              |
| Motion Detection           | Support                              |
| Delay shutdown             | Support                              |
| Loop recording             | Support,Do not leak seconds          |
| Sound record               | Support                              |
| PIR light for night vision | Support(Open manually)               |
| Parking monitoring         | Support                              |
| In-car camera resolution   | Max 1920*1080P(30fps)                |
| Camera resolution          | HD640x480(25fps)                     |
| Working Environment        |                                      |
| Operating temperature      | -40°C~70°C                           |
| Operating humidity         | 15-65%RH                             |
| Storage temperature        | -40°C~70°C                           |

**二、Key Features (picture for reference only, mainly in kind)**

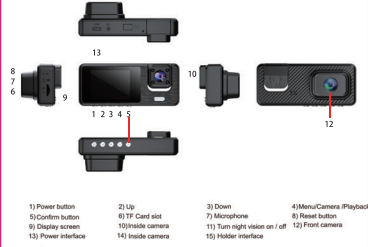

**[C1]** Power button, short press to turn on/off screen, long press to switch on/off the device.  
**[M]** Menu/Camera/playback button  
Press **[C1]** key to stop recording, press **[M]** to enter photo mode, press **[C1]** to take photo. In the camera mode, press **[M]** to enter playback mode, press **[C1]** key to playback. Lock function: In case of video recording, short press **[M]** for a key lock function to protect the current video file, and this file will not be covered by the cycle video in video mode. Long press **[M]** to enter video menu settings as follows:

| Recorder Menu               |                             |
|-----------------------------|-----------------------------|
| 1 Resolution                | 1080P FHD/720P VGA          |
| 2 Loop recording            | On/Off/1min/2min/5min/10min |
| 3 High definition range HDR | on/off                      |
| 4 Exposure compensation     | -3.2 -1.6 1.2 3             |
| 5 Motion detection          | on/off                      |
| 6 Sound prompt              | on/off                      |
| 7 Time                      | on/off                      |
| 8 Car                       | on/off                      |

| 9  | G-sensor               | High/Medium/Low Sensitivity                        | When car rear collision/accident it will lock current video and can't be covered |
|----|------------------------|----------------------------------------------------|----------------------------------------------------------------------------------|
| 10 | Playback               | on/off                                             | unattended surveillance                                                          |
| 11 | Destination            | Adjustment Years months days hours minutes seconds |                                                                                  |
| 12 | Automatic and alarm    | On/Off/continuous/1min/5min/10min                  |                                                                                  |
| 13 | keypad tone            | on/off                                             |                                                                                  |
| 14 | LOD language           | Support multi lingual                              | Choose a language                                                                |
| 15 | Light source frequency | 50HZ/60HZ                                          | Choose the Light source frequency                                                |
| 16 | format                 | Conf/normal                                        | format TF card                                                                   |
| 17 | Screen saver           | On/Off/continuous/1min/5min/10min                  |                                                                                  |
| 18 | Default setting        | Conf/normal                                        |                                                                                  |
| 19 | version                | Machine software version number                    |                                                                                  |

In photo mode, long press **[M]** to enter photo menu settings as follows:

|                         |                                                                  |
|-------------------------|------------------------------------------------------------------|
| 1 Shooting method       | Single shooting/2 seconds timer/5 seconds timer/10 seconds timer |
| 2 Resolution            | 1M/2M/3M                                                         |
| 3 Continuous shooting   | on/off                                                           |
| 4 Picture quality       | High quality/standard/economy                                    |
| 5 Aperture              | Strong/standard/soft                                             |
| 6 White balance         | Automatic/light/indoor/hungry lamp/fluorescent lamp              |
| 7 ISO                   | Automatic/100/200/400                                            |
| 8 Exposure compensation | -3 -2 -1 0 1 2 3                                                 |
| 9 Time stamp            | On/Off                                                           |

**[1-3]** Down key, short press **[1-3]** to select function at the Menu interface, short press button to turn on/off sound record at the shooting interface.  
**[4-6]** Up key, 1, short press **[4]** to select function at the Menu interface; 2. In case of video recording, short press **[4]** button to pause, then short press **[4]** button to switch front-side view image (require inside view lens); 3. long press **[4]** button to switch front-view image; 4. In case of front-view image, short press **[4]** button to pause, then short press **[4]** button to switch front-view image (require rear view lens).  
**[C1]** Confirm button, short press to confirm in the menu interface, short press to video record on/off in the video mode.

**Rear view lens (optional)**  
In case of video recording, a pin plug of rear view lens must AV-in hole of device, then a rear view image in top-right of the screen, then menu connected successfully, short press **[C1]** button to pause, long press **[4]** button to switch front-view image. When hang up "H" gear, it will show full image of rear view.  
Note: This device can only support dual camera to video record at the same time. Instead of 3 channels camera, that is front-side camera or front-rear camera, if installed a rear-view.

camera and choose front-inside view mode, it will automatically indicate full image of car reversing visual when you hang up "H" gear, but won't effect front-inside view record, also will automatically switch back front-inside view after cancel "H" gear.  
As for system update to support 3 channels camera to video record at the same time, please prevail in kind and write sorry for further notice.  
Reset key **[RESET]**  
If the recorder crashes and accidental operation is not a normal fault, press **[RESET]** to shutdown the device, then press **[C1]** to reboot the device.

**Installation Notes**

- Please test the rear view camera firstly, if it works well then install (package without rear view lens can be ignored).
- Turn off the car engine.
- The TF card must be the higher speed.
- Press the use the recorder slot.
- The recorder via a bracket lead to the front windshield of the car.
- Insert the car charger into the car cigarette lighter.
- When using extend the charging line along the edge of the car door frame and carpet under the car laying.
- Install the rear camera at the rear of the vehicle, and pay attention to the up and down direction. Wiring can be buried along the edge of the car roof lining. Note: There are two ways to install the rear camera:  
A. Attached on the glass above and behind the car, hands-on self-installation.  
(Reversing visual function can not be achieved, only real-time recording rear view).  
B. To find a professional installation staff installed in the license plate above the camera at the same time need to connect the power reversing lights. (Reversing visual function can be achieved).
- Adjust the lens position to ensure the best viewing angle.
- Start the engine and check that the machine is operating properly.

**Features**

- Use the automatic recording function.
- In standby mode, the recorder automatically starts to open the recording function. Close the car engine. The recorder automatically saves the contents of the log and shuts down, recorded video segments are all on the TF card. When the TF card is full, the recorder will overwrite the oldest recorded image preferentially. Note: The time segment of record can be set 10/20 minutes to the menu.
- The video individually saved in the folder named "LOG" and "DCIM" in TF card (package include rear view lens).
3. Use motion detection.  
In standby mode, enter the menu screen open the motion detection mode. When the lens is sensitive to the peripheral area of a moving object, the state machine into the camera recording 30 seconds after the system stops recording. To exit the motion detection mode, in standby mode to enter the menu screen close motion detection mode.

**G-sensor**  
The built-in gravity sensor (G-sensor), if serious vehicle collision, the recorder will lock the last 5 seconds and 10 seconds after the image data when the accident occurred within the bottom left of the display screen displays a lock icon (locked image will be marked as a record file, the file).

will be overwritten cycle.  
(note) Gravity sensor (G-Sensor)/sensitivity adjustment support may actually need to change setting in the setup menu according to their image.

5. The device has a key lock feature that will need to retain an image without being locked loop operation. In the video mode, short press **[C1]** key trigger will then lock the entire video image.

6. In shooting mode, Press the **[M]** key to enter the menu setting, find the destination menu, short press the **[C1]** button to confirm and return to the setup menu settings, press the **[END]** key to exit the menu setting. **[End]** In order to effectively record the date and time traffic safety accident process, before using the menu setting.

7. The playback  
In the playback mode, press the **[C1]** key to play back. To exit playback mode, press MODE button again.

8. Reversing visual function  
First, you must connect the car with car charger/rear-view camera connected the reversing lights. Insert the car charger, machine will automatically start recording status, screen switch to position in the reversing mode automatically switches to the rear-view camera, display reverse image. After reversing visual machine automatically return to video mode.  
Reminder: Please test the rearview camera is normal before installation.

9. Parking monitor (To achieve unattended surveillance video)  
To achieve the function must be connected to the machine in the case of electricity, in the main menu to open the motion detection and parking monitoring function, in the standby state of the vehicle under vibration or moving objects in front, the recorder according to G-sensor to sense automatically start the machine and automatically lock the video for 30 seconds, and automatically save the video file, the video 30 seconds after 5 seconds without the operation will automatically shut down.  
[Note] This function is only used when sleeping. Please turn off the motion detection and stop monitoring function during normal driving.

**FAQ**

|                                                                   |                                                                                                                                                                           |
|-------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Machine appears "No error" message                                | Settings menu => Restore factory settings and format the memory card,the general problem is TF card                                                                       |
| The screen appears horizontal stripes interference                | Please select the correct power supply frequency 50HZ/60HZ                                                                                                                |
| How to prevent fan and the 360° rear parking monitoring function  | When a normal driving process to car speed is slowly start to automatic shutdown or crash after parking is required to open cylinder the lock line or mobile power source |
| Night shooting screen is unclear image                            | Recorder shooting depends on the outside strong light source (such as headlights or car GPS)                                                                              |
| The machine always reverts to the default date and time           | Shutdown in the first case full of electricity you can use car charger or mobile power supply to add power                                                                |
| what is the reason for video file leak seconds                    | [Turn off motion detection] Turn on the loop recording function [With a certain choice of their own genuine car CD high-speed card]                                       |
| Why during recording the machine automatically shut down suddenly | Please turn off the parking monitoring function [Note: Ambient temperature exceeds 70°C will cause automatic shutdown]                                                    |
| [Note] Practice proof                                             | Most of the problems sources from the memory card, a small part comes of power cord                                                                                       |

This feature is only available on devices with wifi functionality. If there are devices without wifi functionality, please ignore the following content

**三、Wi-Fi Connection And APP Control**


**1.Download Vidure APP**

- Method 1: Scan the QR code below to download Vidure APP
- Method 2: You can search for "Vidure" in the Android App Store or the IOS App Store and download it.



**2. Connect to the dash cam**

- Step 1: Enter the video recording mode of the dash cam, then press the **[A]** UP button, the dash cam will automatically enter the following wifi connection mode. The dash cam screen will display as follows:



- Step 3: Enter the WIFI connection page of the mobile phone, find the **WIFI SSID** corresponding to the driving recorder, and enter the **WIFI password: 12345678** to complete the WIFI connection.



- Step 4: Return to the Vidure APP, where you can view recorded videos and set up the dashcam.



**3.View recorded videos**

- Operation step: Click "Camera File" below to view the recorded video.
- Note: The video played on the mobile phone is compressed. If you want to watch the original high-definition video, please download it to the mobile phone to play.




**4. Download videos**

- Operation step: Select the video you need and select the "Download" icon at the bottom of the screen to download the video
- Note: After the video is downloaded to your phone, if you need you can share it with your friends or social media, or collect evidence to protect your safety and rights.



**5. Set up the dashcam through the APP**

- Click "Camera Settings" on the bottom right of the page to set up
- Specific setting parameters are as follows:



**6. Return to key operation**

If the dashboard screen shows the following situation (WIFI connection prompt), and you want to restore to the recorder recording screen, you close the Vidure APP and press the **[A]** up button of the dashboard at the same time, and wait for 3 seconds to restore.



**7. Technical Support**

If you encounter any problems in connecting the APP and the dashcam, you can contact our technical team through the email below. Our technicians will help you solve the problem as soon as possible.

**FCC Caution:**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.  
Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates noise and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
-Reorient or relocate the receiving antenna.  
-Increase the separation between the equipment and receiver.  
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
-Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body. Use only the supplied antenna.

成品: 100x140mm