




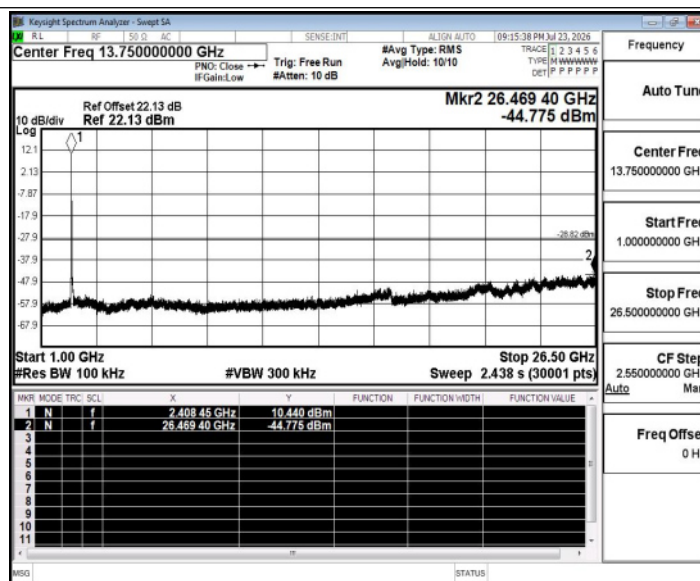


11N20SISO_Ant1_2437_0~Reference

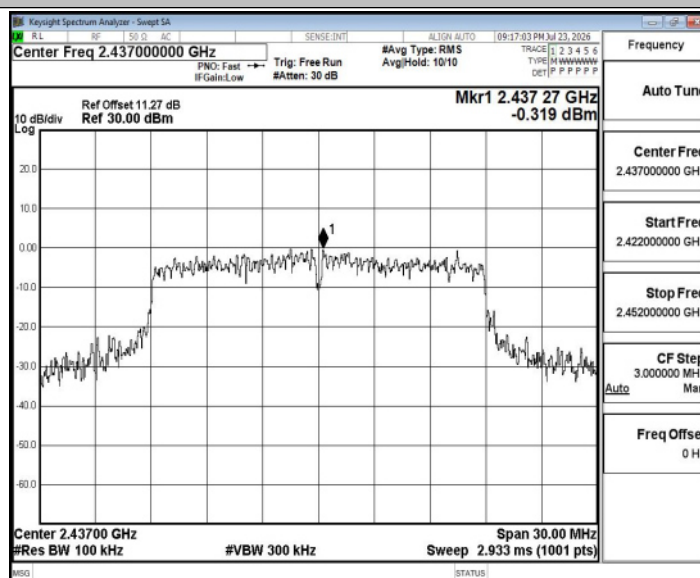


11N20SISO_Ant1_2437_30~1000

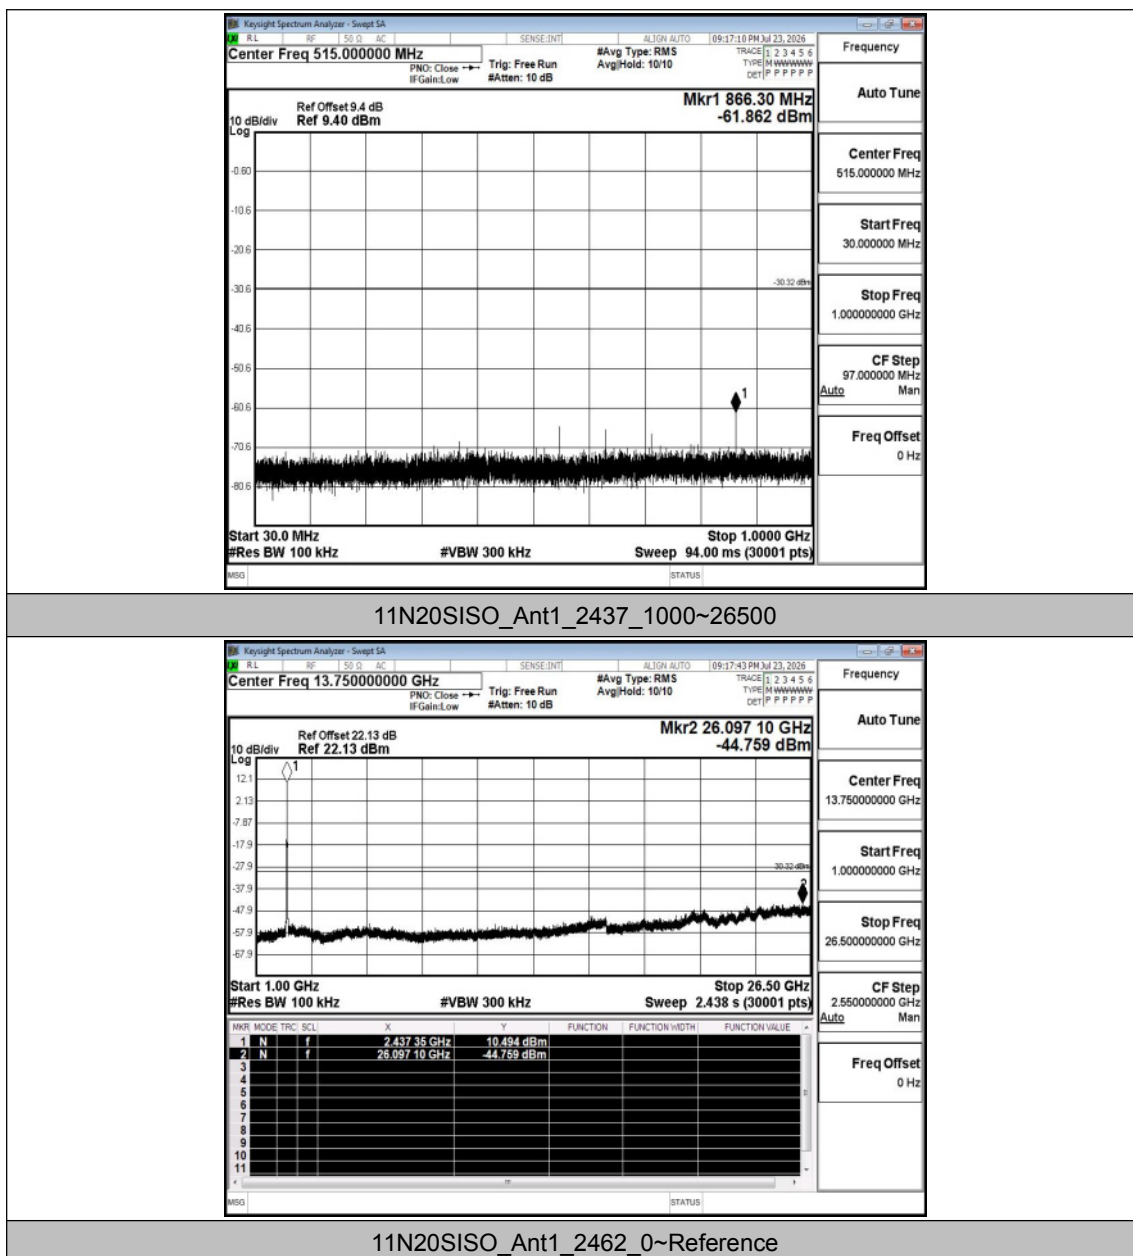


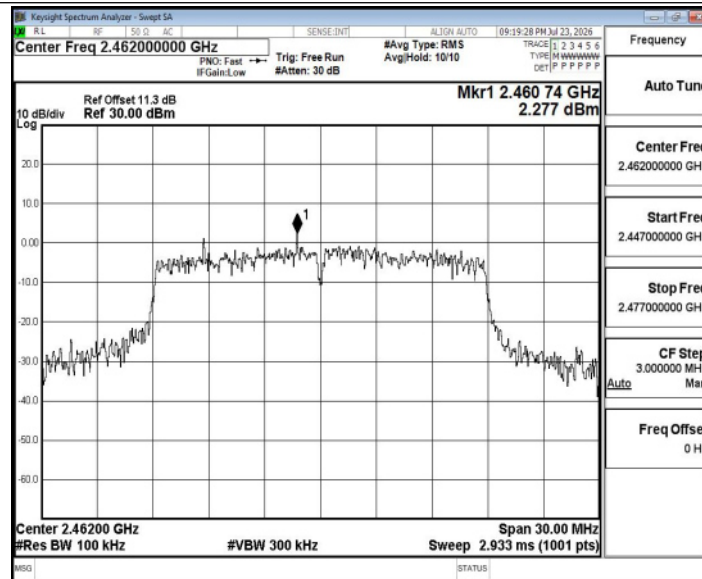

11N20SISO_Ant1_2462_30~1000

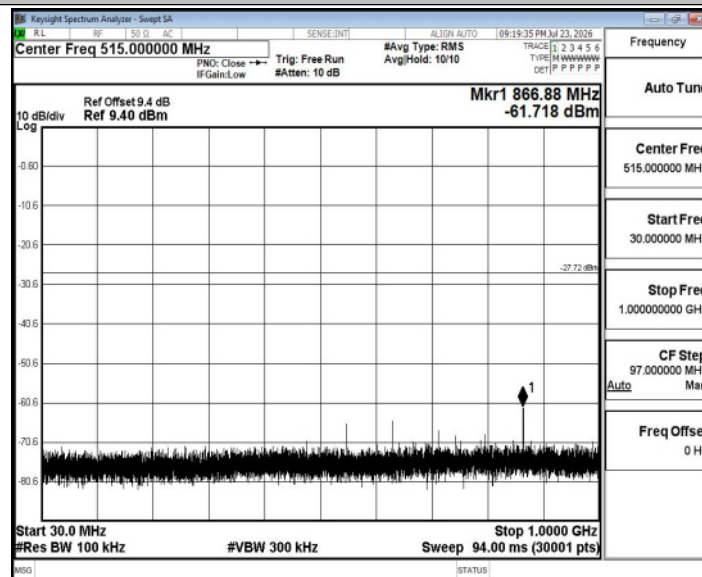

11N20SISO_Ant1_2462_1000~26500

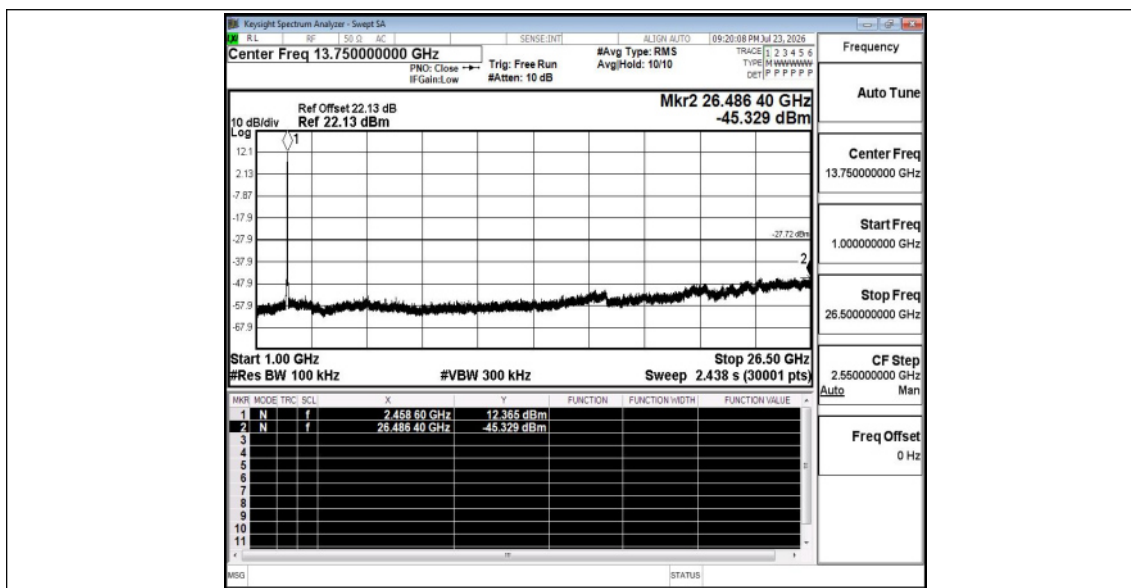


B.6 Duty Cycle

Test Result


TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	xFactor
11B	Ant1	2412	8.41	8.46	99.41	0.03
		2437	8.42	8.48	99.29	0.03
		2462	8.42	8.46	99.53	0.02
11G	Ant1	2412	1.39	1.45	95.86	0.18
		2437	1.39	1.45	95.86	0.18
		2462	1.40	1.46	95.89	0.18
11N20SISO	Ant1	2412	1.31	1.37	95.62	0.19
		2437	1.31	1.37	95.62	0.19
		2462	1.31	1.36	96.32	0.16

Test Graphs


11B_Ant1_2412

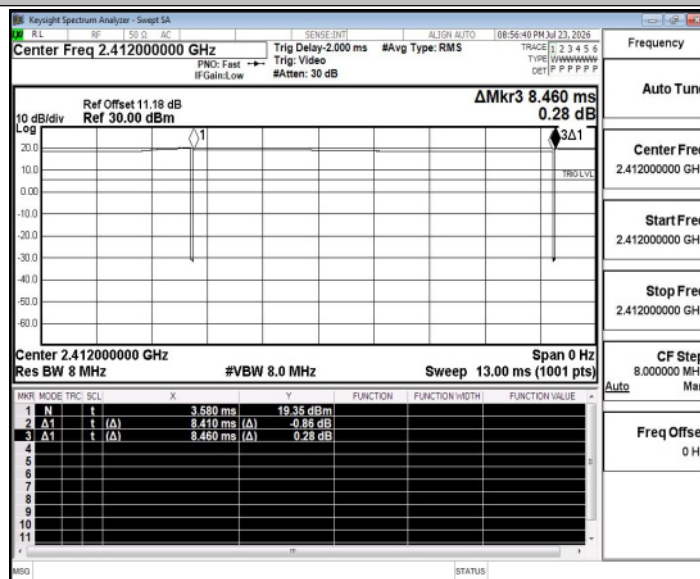



11B_Ant1_2437

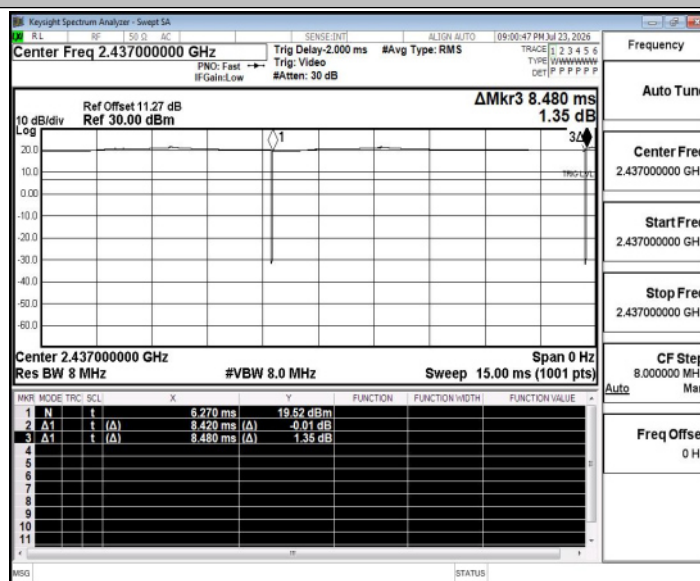


11B_Ant1_2462

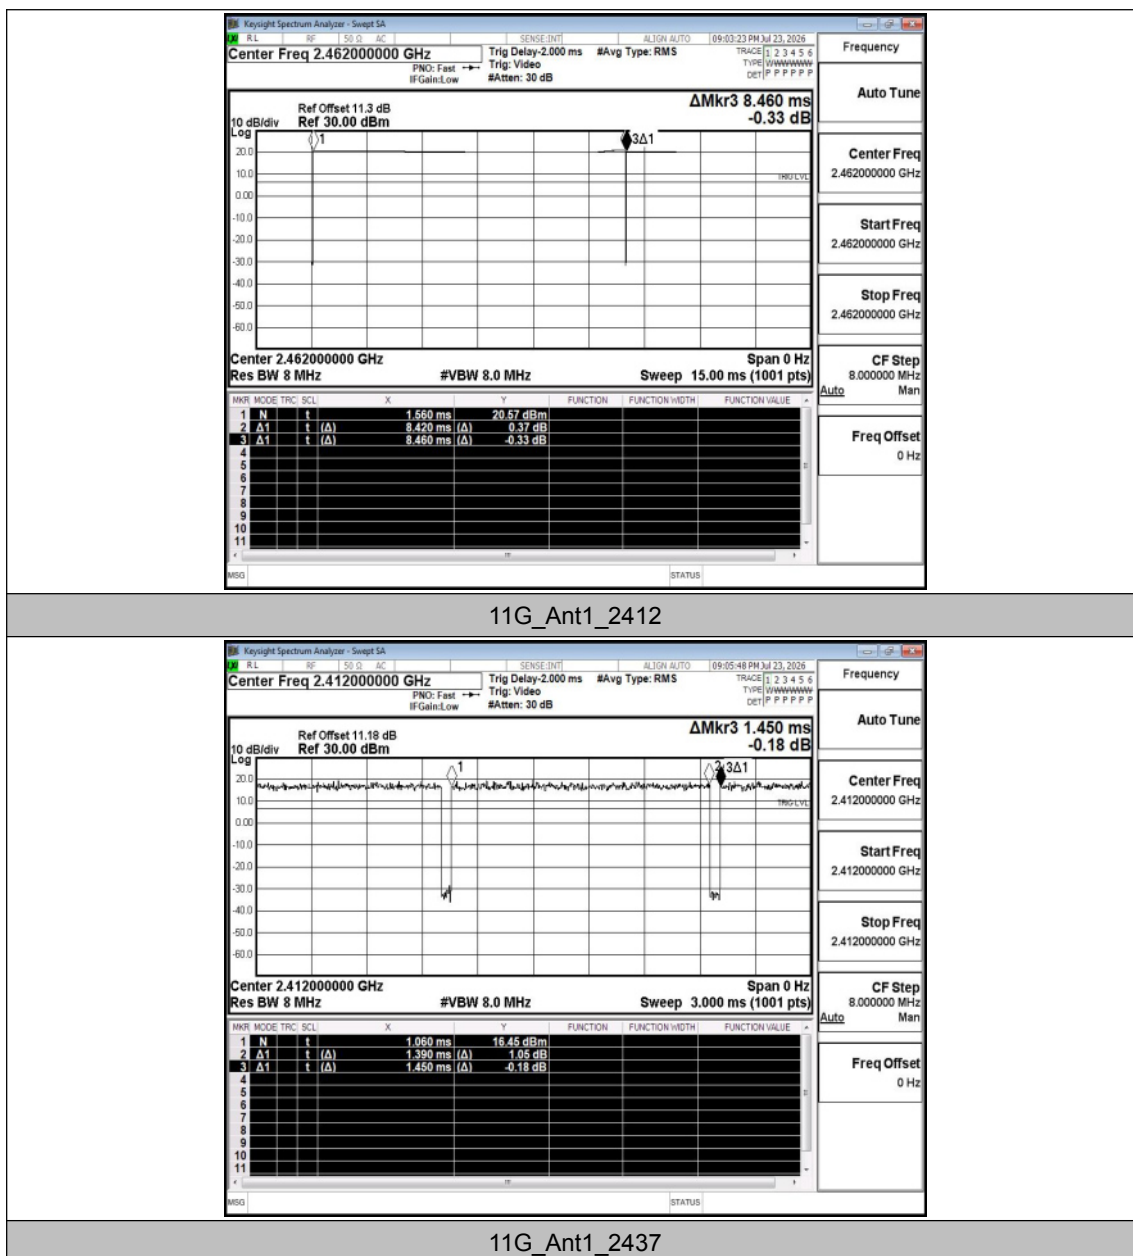

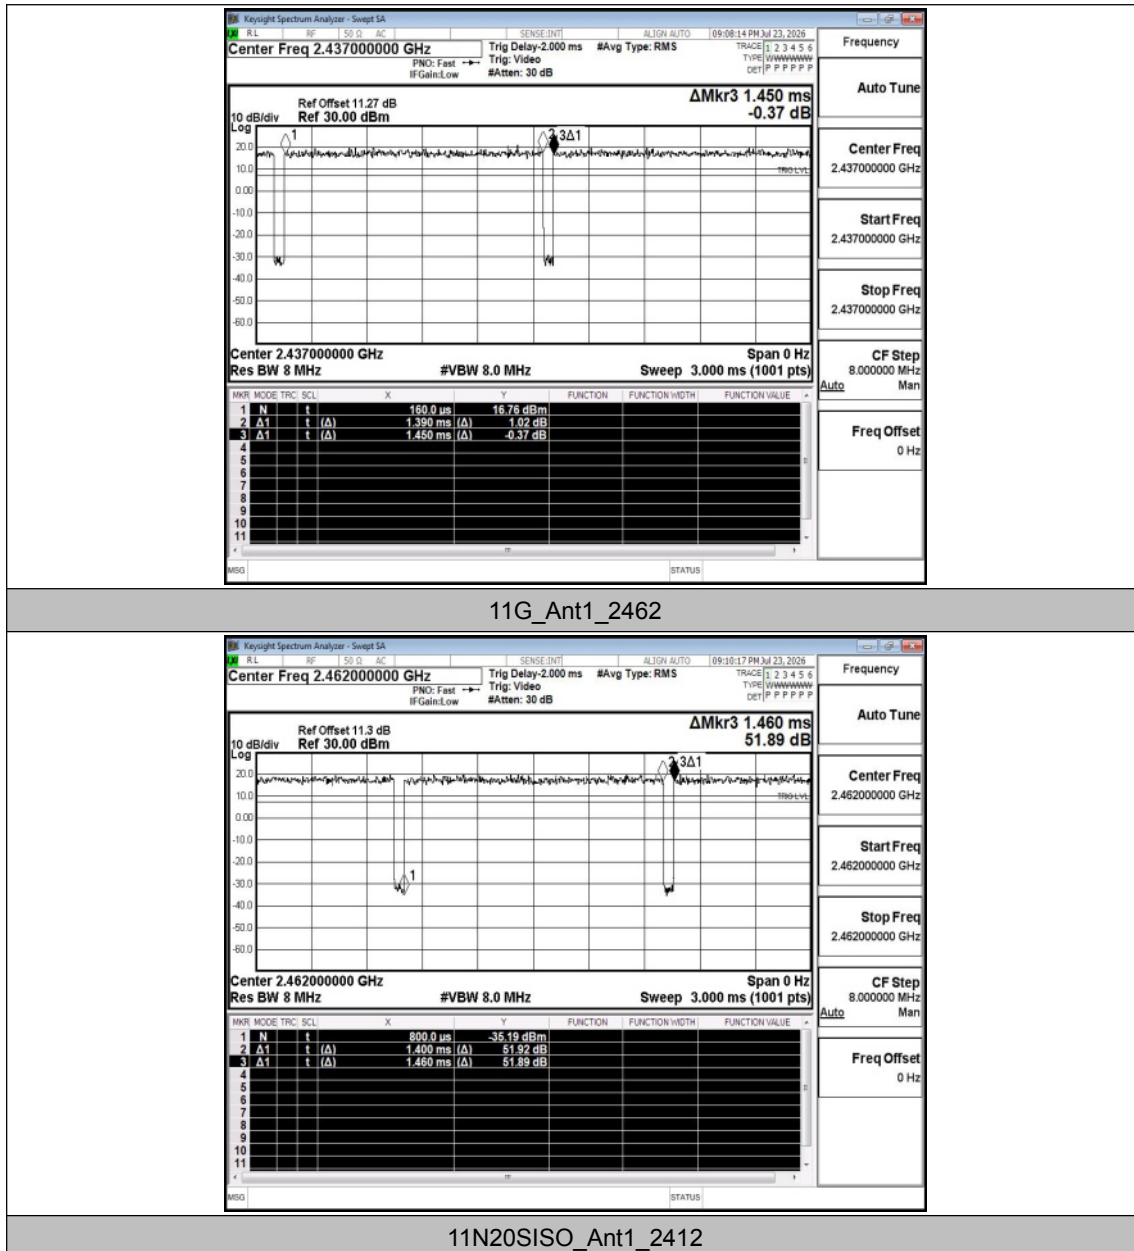

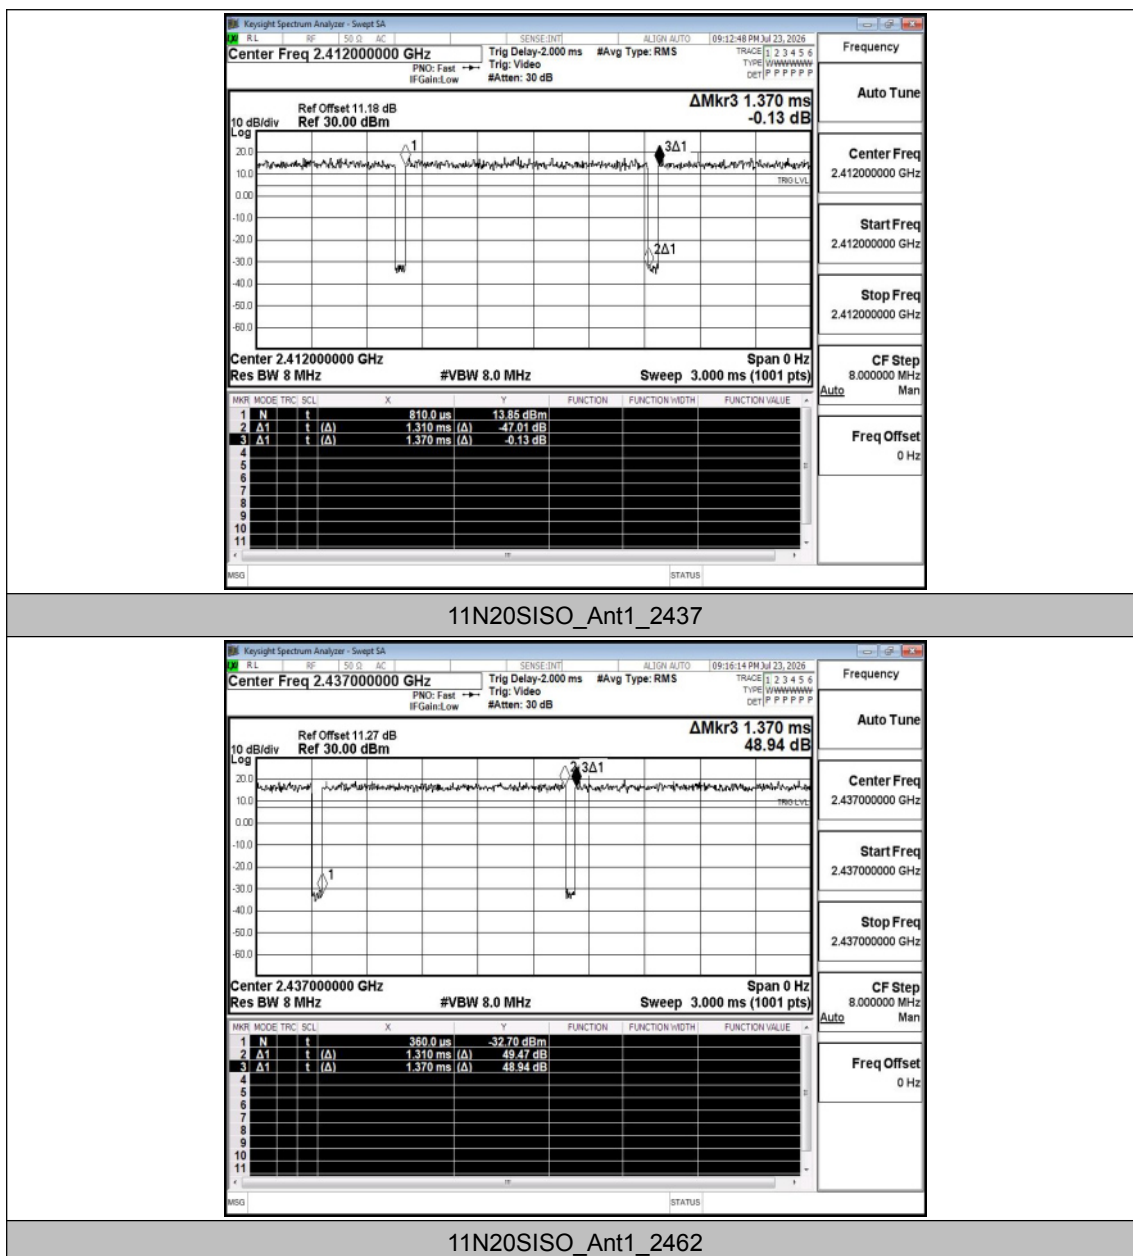

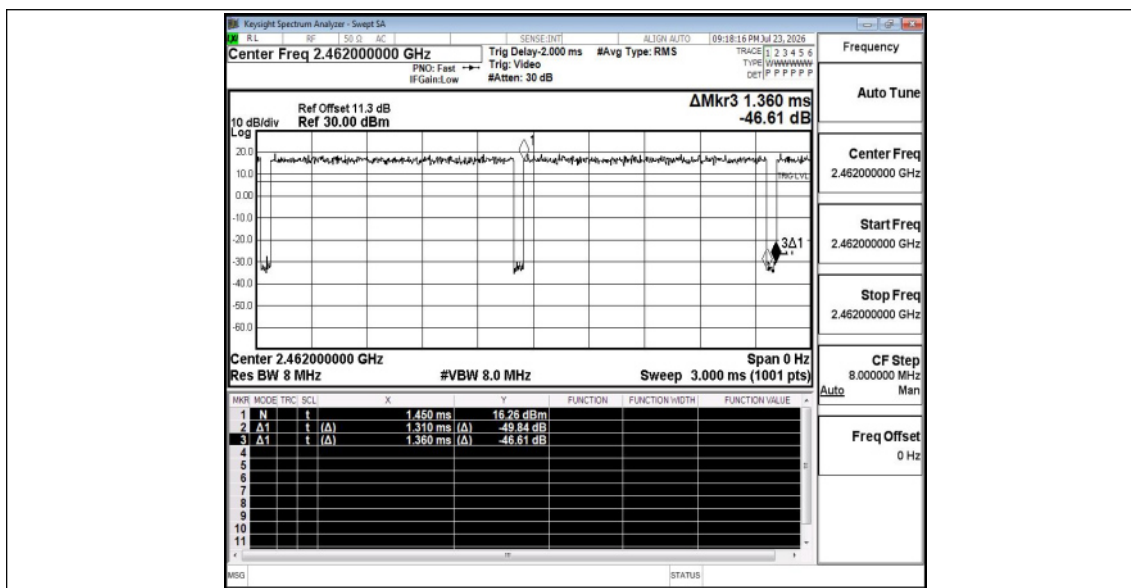

B.7 Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Gain [dBi]	DC Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
11B	Ant1	Low	2412	AV	2310.000	-48.43	≤-43.23	2.00	0.03	48.80	≤54	PASS
				AV	2318.460	-45.16	≤-43.23	2.00	0.03	52.07	≤54	PASS
				AV	2390.000	-50.06	≤-43.23	2.00	0.03	47.17	≤54	PASS
				Peak	2310.000	-39.75	≤-23.20	2.00	0.00	57.45	≤74	PASS
				Peak	2332.370	-37.98	≤-23.20	2.00	0.00	59.22	≤74	PASS
				Peak	2390.000	-42.89	≤-23.20	2.00	0.00	54.31	≤74	PASS
		High	2462	AV	2483.500	-47.1	≤-43.22	2.00	0.02	50.12	≤54	PASS
				AV	2495.440	-45.35	≤-43.22	2.00	0.02	51.87	≤54	PASS
				AV	2500.000	-47.59	≤-43.22	2.00	0.02	49.63	≤54	PASS
				Peak	2483.500	-43.73	≤-23.20	2.00	0.00	53.47	≤74	PASS
				Peak	2489.610	-39.05	≤-23.20	2.00	0.00	58.15	≤74	PASS
				Peak	2500.000	-43.08	≤-23.20	2.00	0.00	54.12	≤74	PASS
11G	Ant1	Low	2412	AV	2310.000	-47.69	≤-43.38	2.00	0.18	49.69	≤54	PASS
				AV	2371.500	-47.09	≤-43.38	2.00	0.18	50.29	≤54	PASS
				AV	2390.000	-47.41	≤-43.38	2.00	0.18	49.97	≤54	PASS
				Peak	2310.000	-40.71	≤-23.20	2.00	0.00	56.49	≤74	PASS
				Peak	2326.130	-37.29	≤-23.20	2.00	0.00	59.91	≤74	PASS
				Peak	2390.000	-39.67	≤-23.20	2.00	0.00	57.53	≤74	PASS
		High	2462	AV	2483.500	-46.57	≤-43.38	2.00	0.18	50.81	≤54	PASS
				AV	2483.560	-46.25	≤-43.38	2.00	0.18	51.13	≤54	PASS
				AV	2500.000	-47.44	≤-43.38	2.00	0.18	49.94	≤54	PASS
				Peak	2483.500	-37.59	≤-23.20	2.00	0.00	59.61	≤74	PASS
				Peak	2493.680	-36.34	≤-23.20	2.00	0.00	60.86	≤74	PASS
				Peak	2500.000	-40.2	≤-23.20	2.00	0.00	57.00	≤74	PASS
11N20SISO	Ant1	Low	2412	AV	2310.000	-47.91	≤-43.39	2.00	0.19	49.48	≤54	PASS
				AV	2389.830	-47.14	≤-43.39	2.00	0.19	50.25	≤54	PASS
				AV	2390.000	-47.24	≤-43.39	2.00	0.19	50.15	≤54	PASS
				Peak	2310.000	-40.7	≤-23.20	2.00	0.00	56.50	≤74	PASS
				Peak	2327.560	-37.43	≤-23.20	2.00	0.00	59.77	≤74	PASS
				Peak	2390.000	-40.31	≤-23.20	2.00	0.00	56.89	≤74	PASS
		High	2462	AV	2483.500	-45.92	≤-43.36	2.00	0.16	51.44	≤54	PASS
				AV	2483.560	-46.09	≤-43.36	2.00	0.16	51.27	≤54	PASS
				AV	2500.000	-47.25	≤-43.36	2.00	0.16	50.11	≤54	PASS
				Peak	2483.500	-36.91	≤-23.20	2.00	0.00	60.29	≤74	PASS


				Peak	2486.640	-35.9	≤-23.20	2.00	0.00	61.30	≤74	PASS
				Peak	2500.000	-39.52	≤-23.20	2.00	0.00	57.68	≤74	PASS

Note:


1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs


11B_Ant1_Low_2412_AV

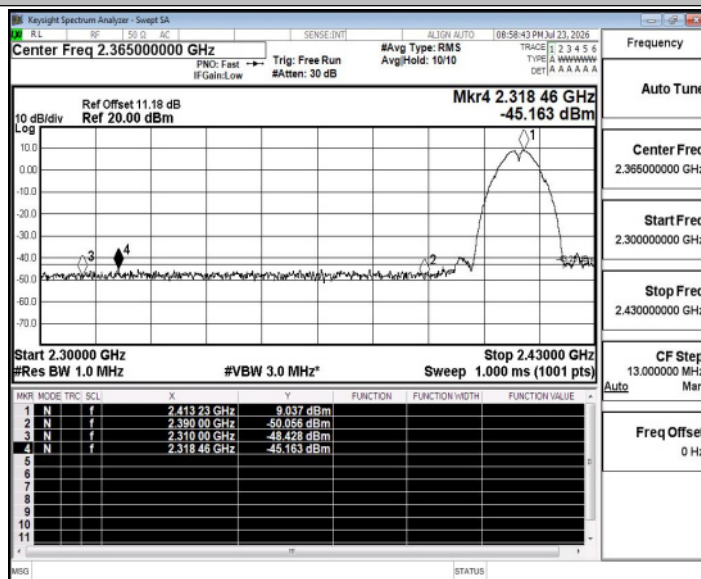



11B_Ant1_Low_2412_Peak

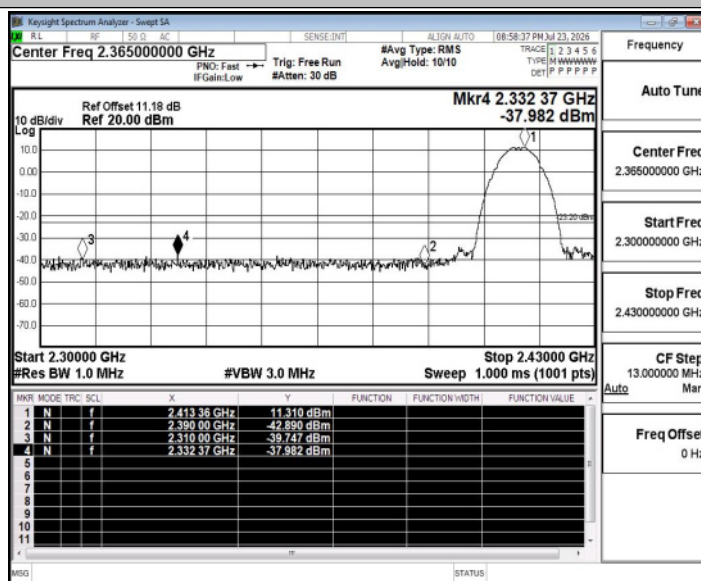


11B_Ant1_High_2462_AV

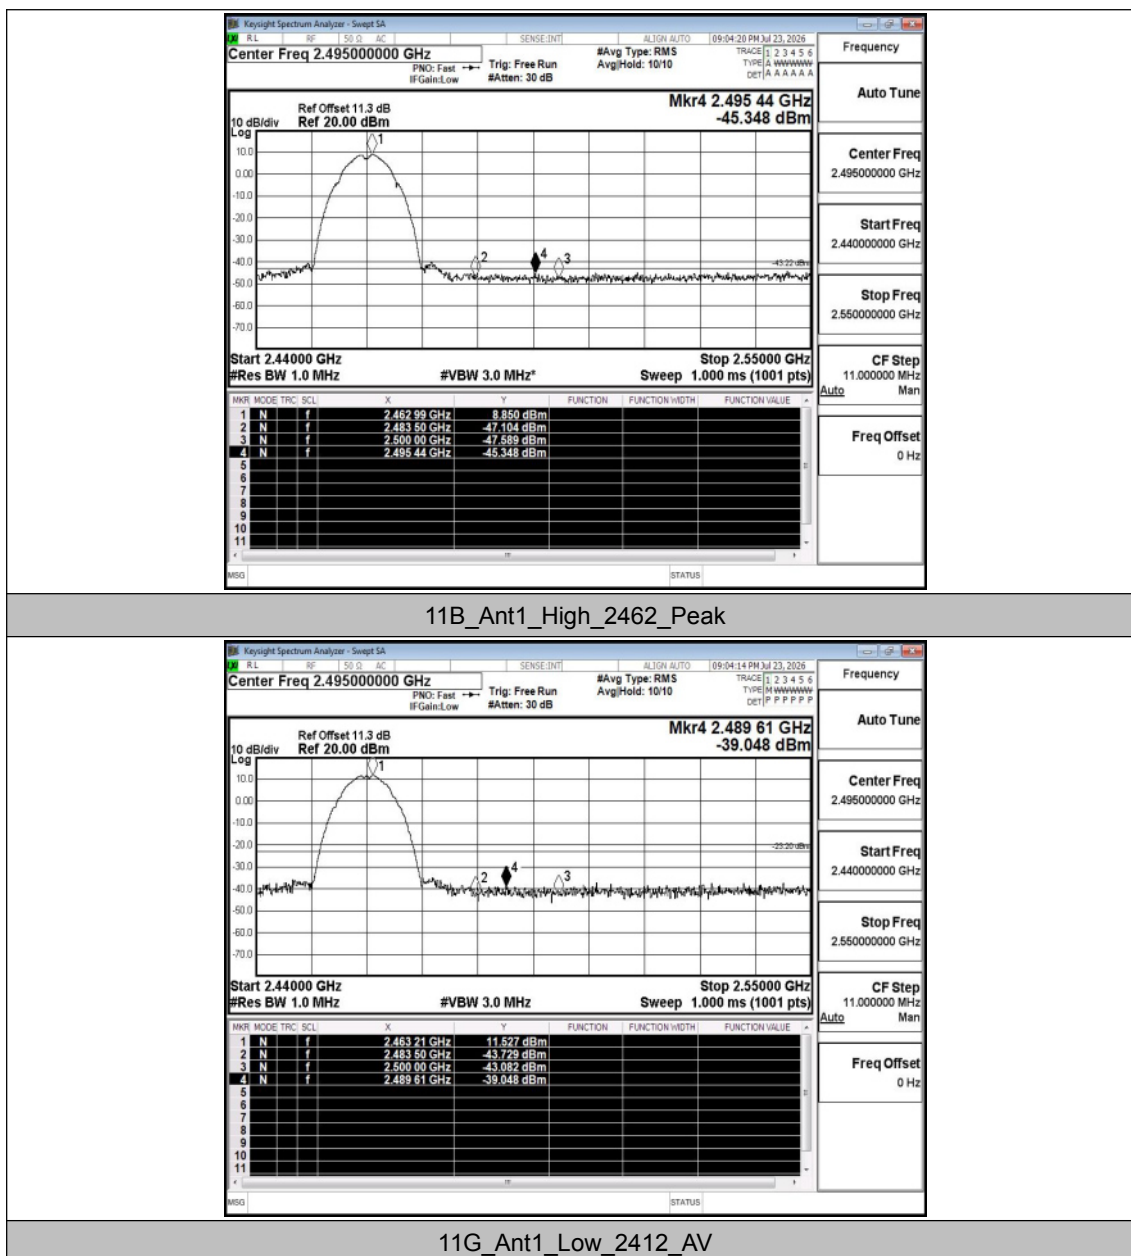

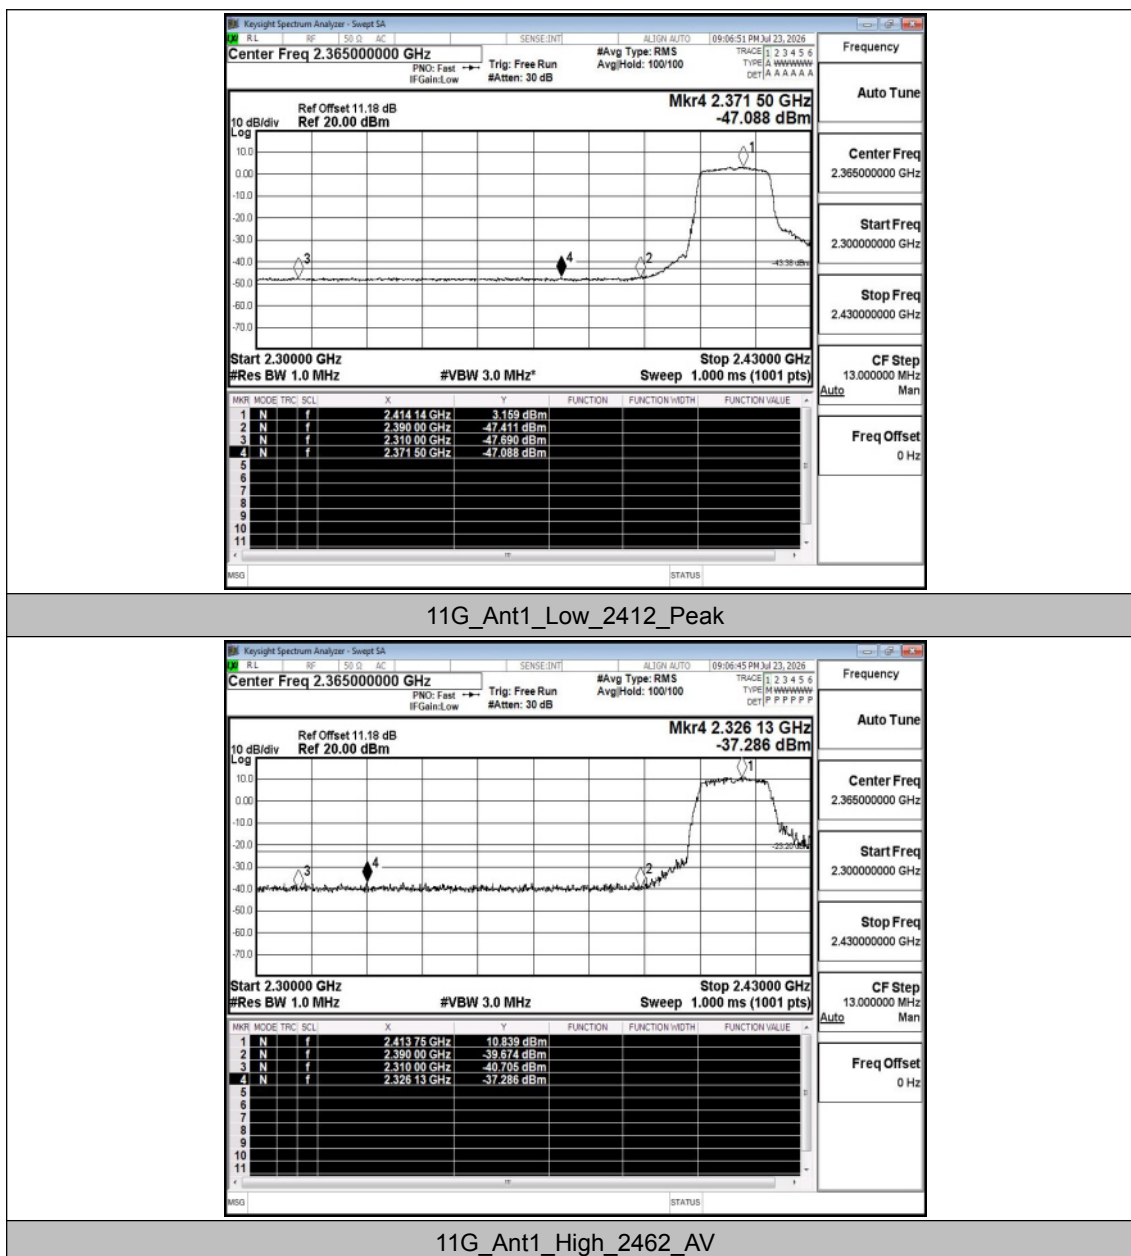

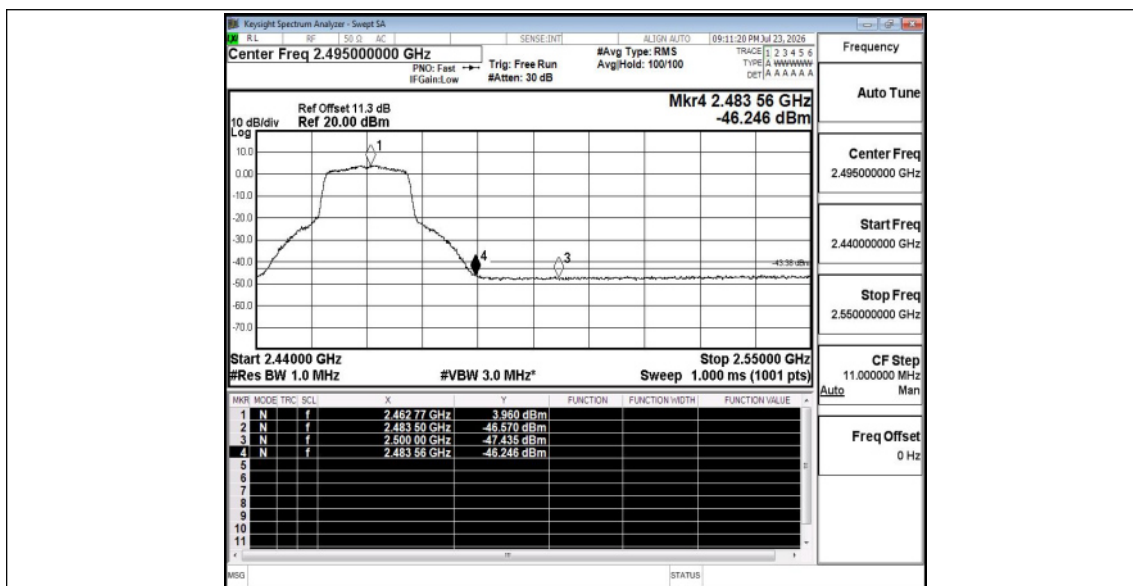

11G_Ant1_High_2462_Peak

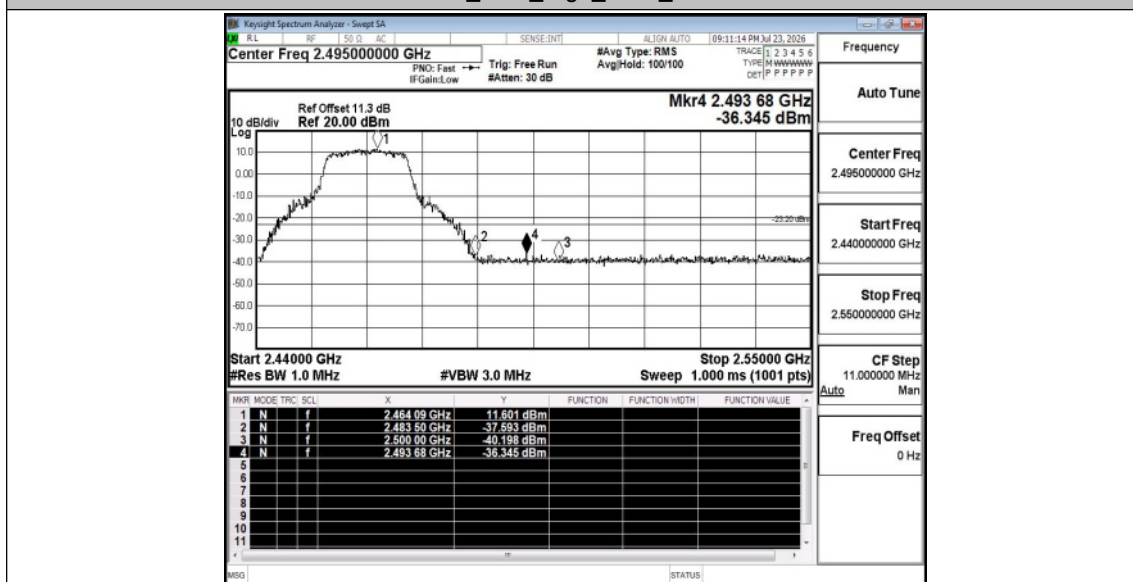

11N20SISO_Ant1_Low_2412_AV

