


# JH1200 Router INSTRUMENTS ON USE

· English

Kirpalgaldus


1.0 Insert the power adapter and plug cable as shown in the picture below.




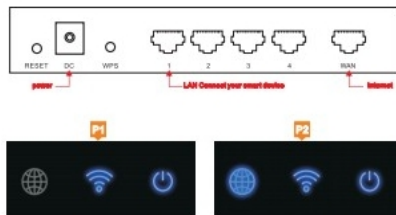


2. Connect the power adapter and wait for about 30 seconds until the indicator light shows the status shown in P1.
3. Insert the plug cable into the WAN port and wait for about 20 seconds until the indicator light shows the status shown in the picture P2-that is, the plug is connected.
4. Open your phone's Wi-Fi account, find A JH1200-XXX, enter password 12345678 and click To join .

## Change Wi-Fi password

Samml: ohendügej300-xocx nl-mellse w--gasseütage chendus.





#### FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.

Lalumbritueva v õrgu kontoga Intametu slenamlee steps;

summl:DhendugeH300-  
XXW-A-gajasiUtage @hendus.

Step 2: Ava brauser, slaesta  
192.168. 11.1 Enter.

Step 3: Enter the password admin  
and type slseeloginlook in the white  
collar

dialing), error bilnboavbru account ja  
parolnlg hpa sahtartanlak.

540d30nacde

