

Microgrid Advanced Controller

CSA C22.2 No.107.1;
FCC Part 15 Class B

UL 1741; UL 1741 PCS;
UL 3141; IEEE 1547;
IEEE 1547.1;
CSA C22.2 No.107.1;
FCC Part 15 Class B



The maximum operating current of this system may be controlled electronically. Refer to manufacture's instructions for more information.

Rated DC Input Voltage	12 VDC; 24 VDC
------------------------	----------------

Rated DC Input Voltage	12 VDC; 24 VDC
------------------------	----------------

Operating DC voltage range	10~16VDC 20~28VDC
----------------------------	----------------------

Rated power consumption	7W
-------------------------	----

FCC ID: 2BCMR-MAC20

IC: 31293-MAC20

Contains FCC ID: XMR201909EC25AFX
Contains IC: 10224A-2019EC25AFX

Operation	-20 °C to 50 °C
-----------	-----------------

Operation Temperature Range	-20 °C to 50 °C (-4 °F to 122 °F)
-----------------------------	--------------------------------------

Temperature Range	(-4 °F to 140 °F)
Enclosure Type	Type 3R

Protective Class	Class III
------------------	-----------


Environment	Indoor/Outdoor
-------------	----------------

Max.Elevation	3000 m (9843 ft)
Weight	1kg

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including Interference that may cause undesired operation.

FranklinWH Energy Storage Inc.
Website: www.franklinwh.com
Email: service@franklinwh.com

Made in China

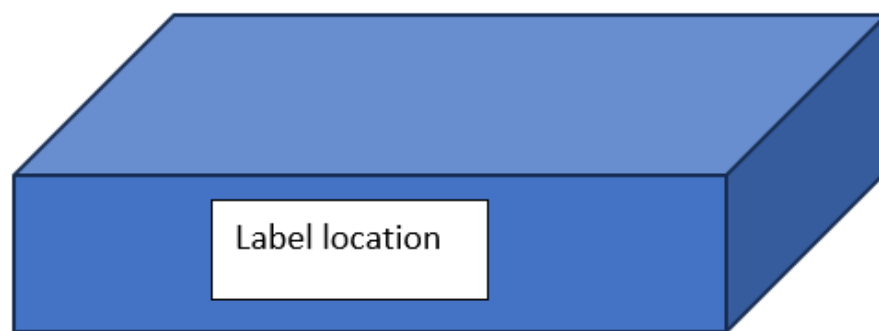

Permanent adhesive type is used to fix the label ,the label drawing isn't removed easily.