





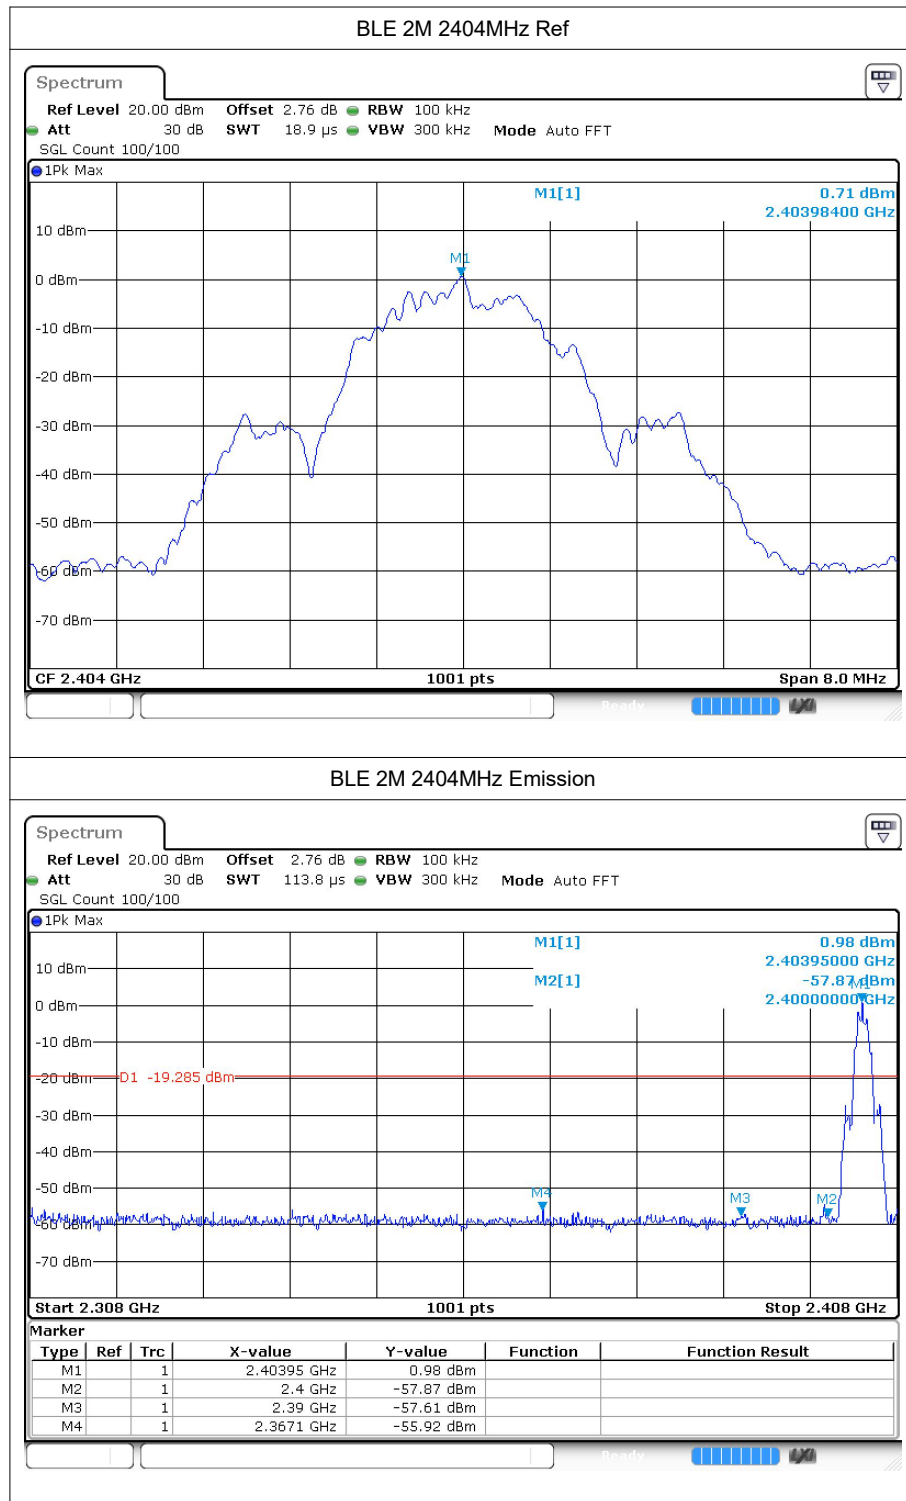

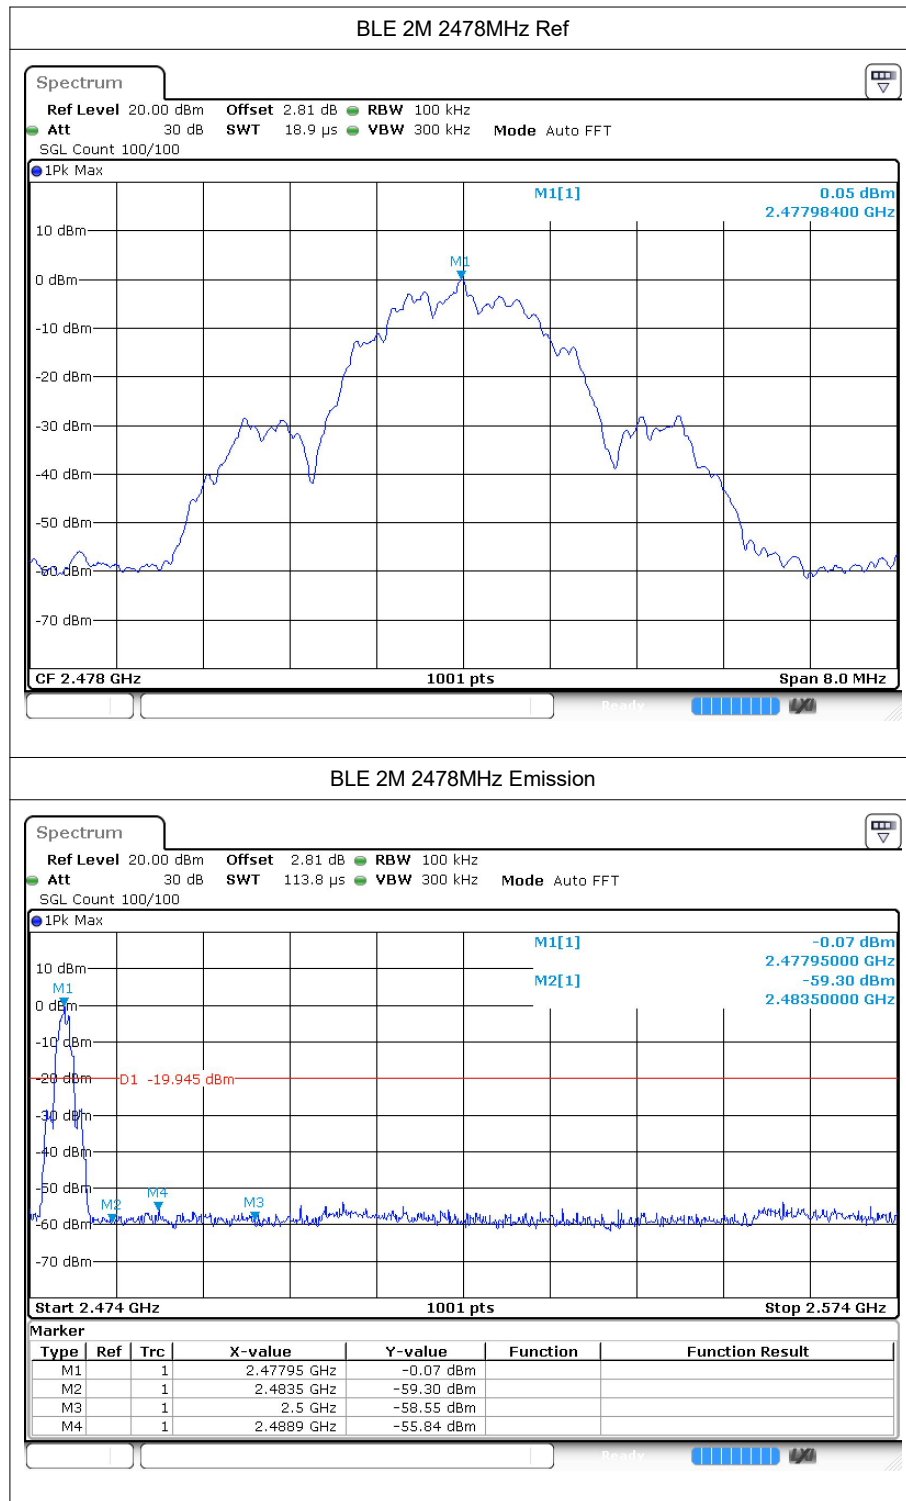



6 Conducted RF Spurious Emission


6.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-44	-20	Pass
BLE 1M	2440	-43.72	-20	Pass
BLE 1M	2480	-42.11	-20	Pass
BLE 2M	2404	-43.38	-20	Pass
BLE 2M	2442	-45.55	-20	Pass
BLE 2M	2478	-43.32	-20	Pass


6.2 Test Graphs

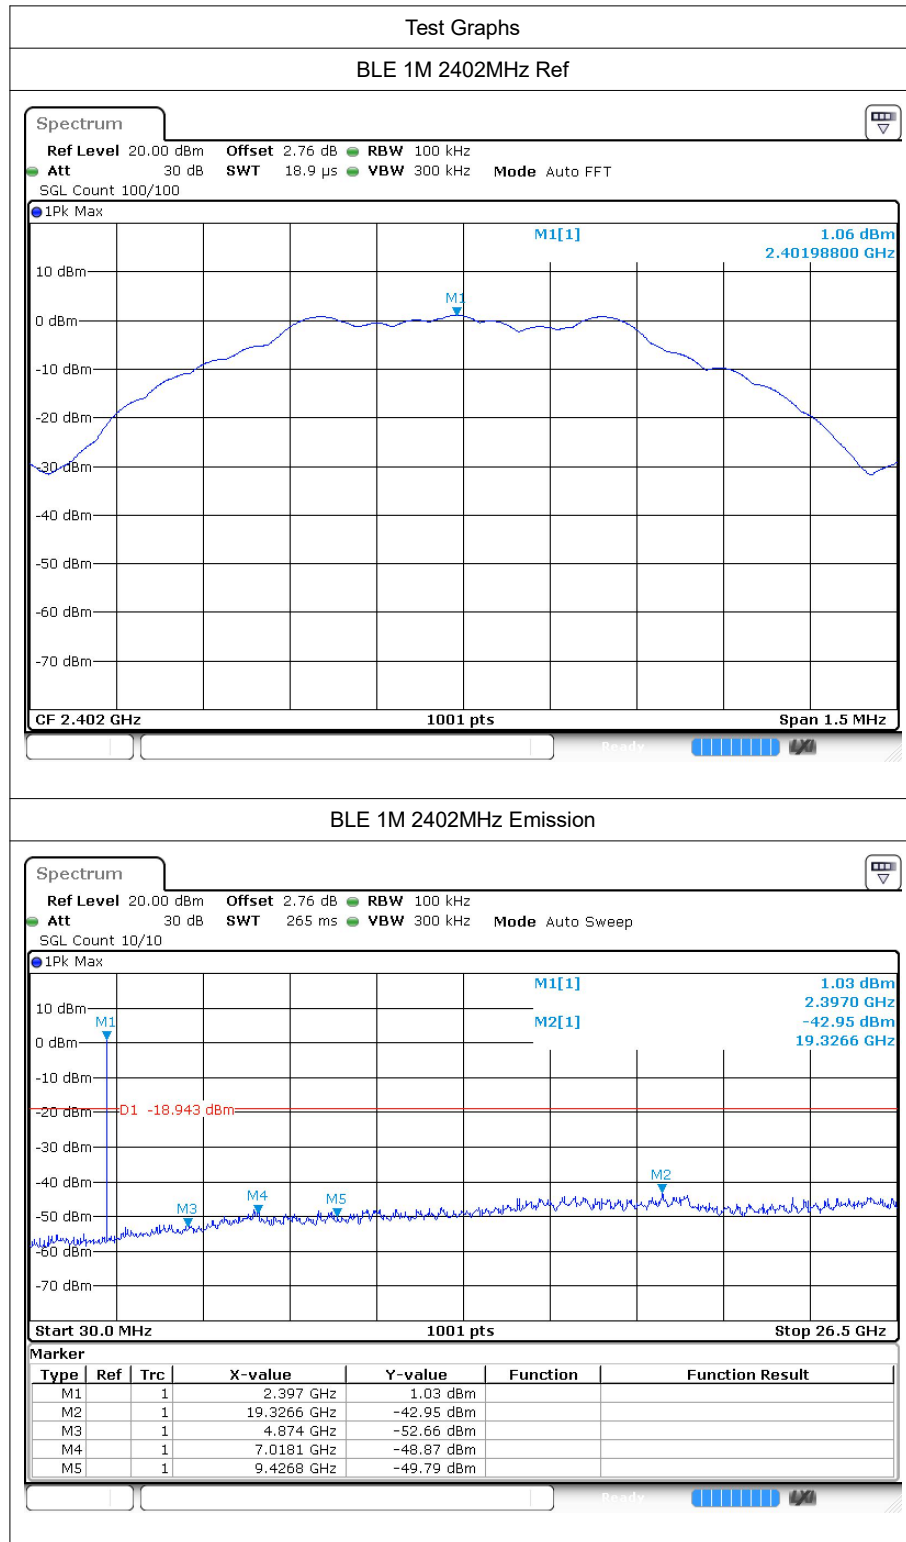


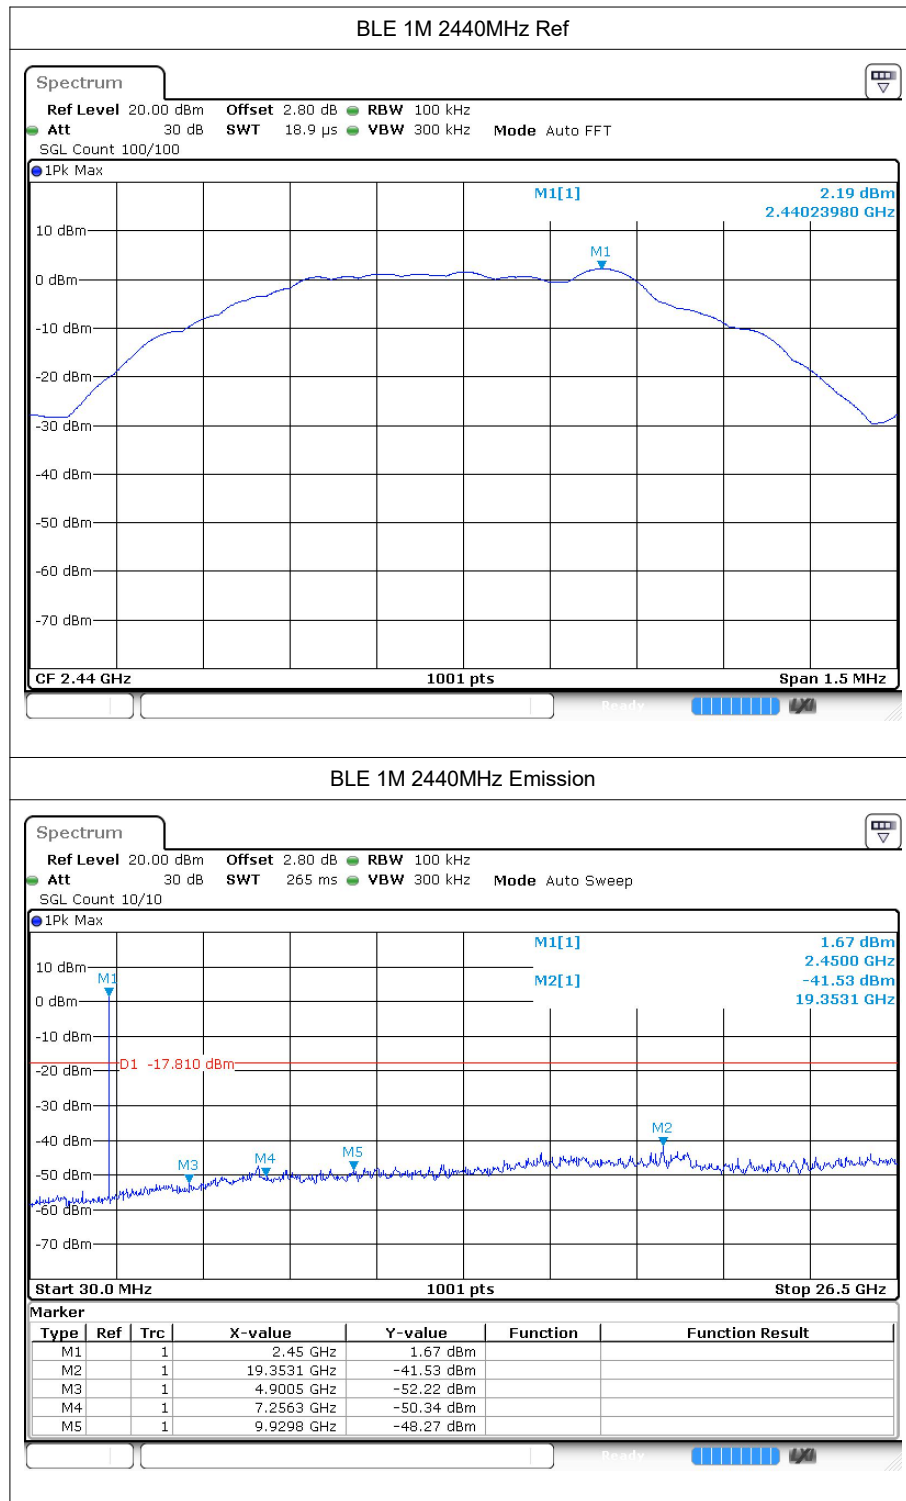

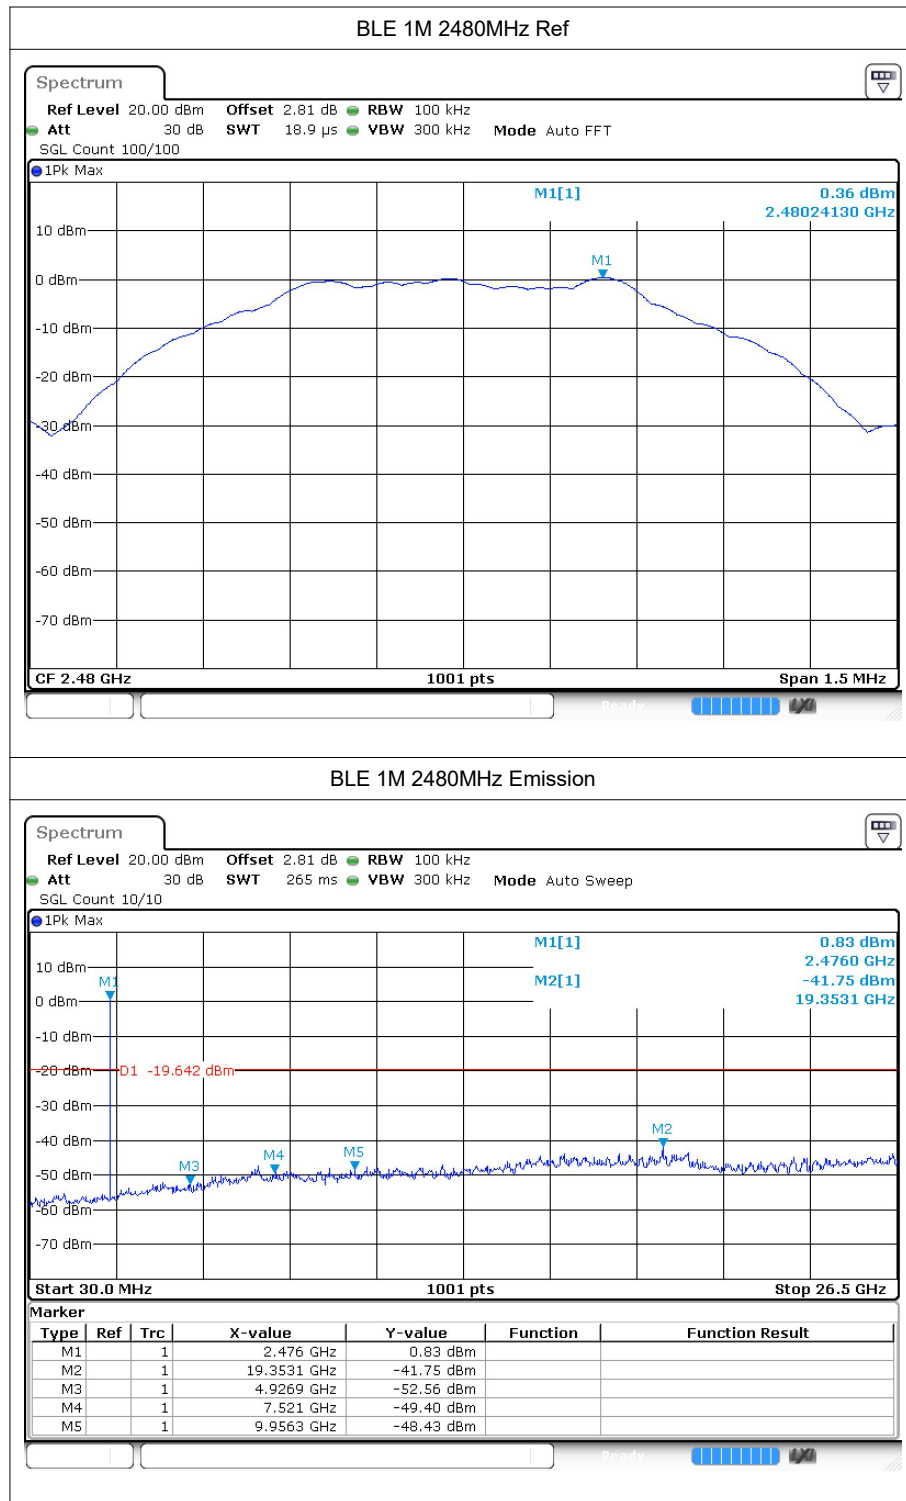

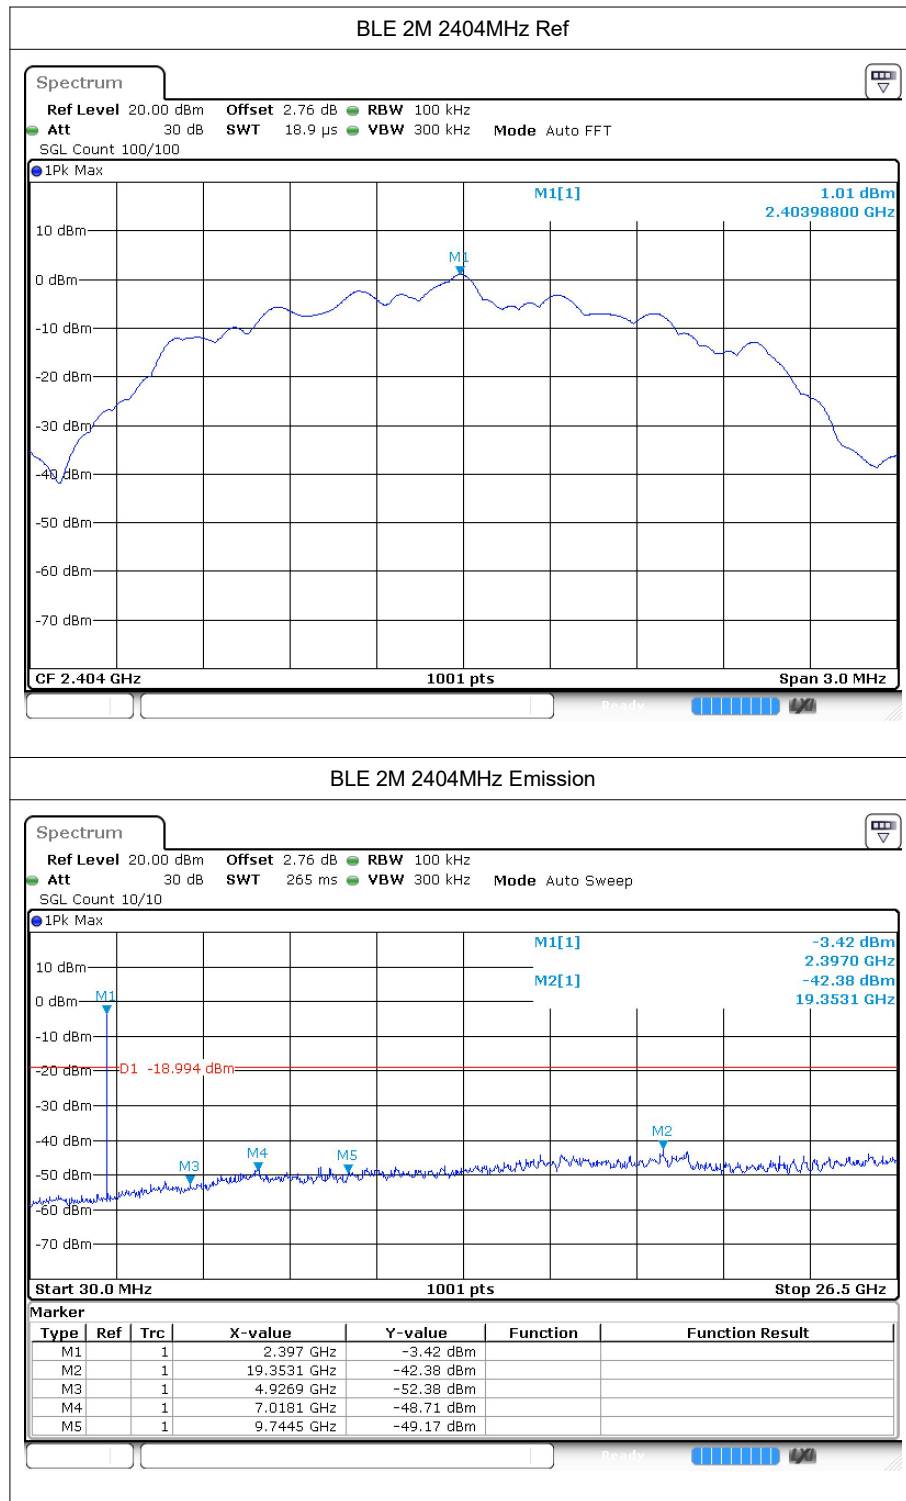

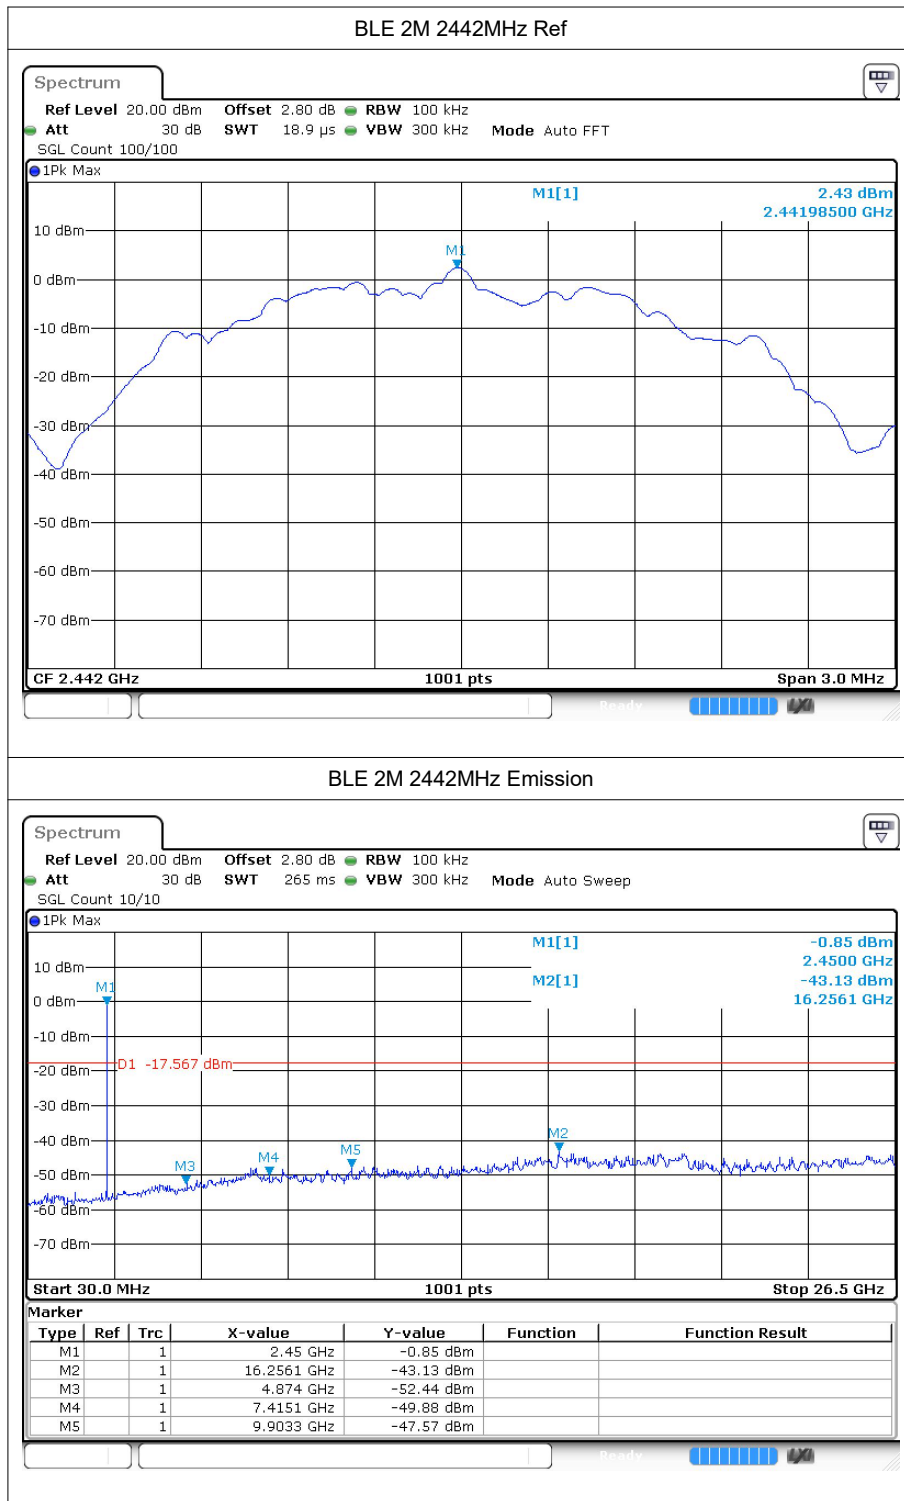

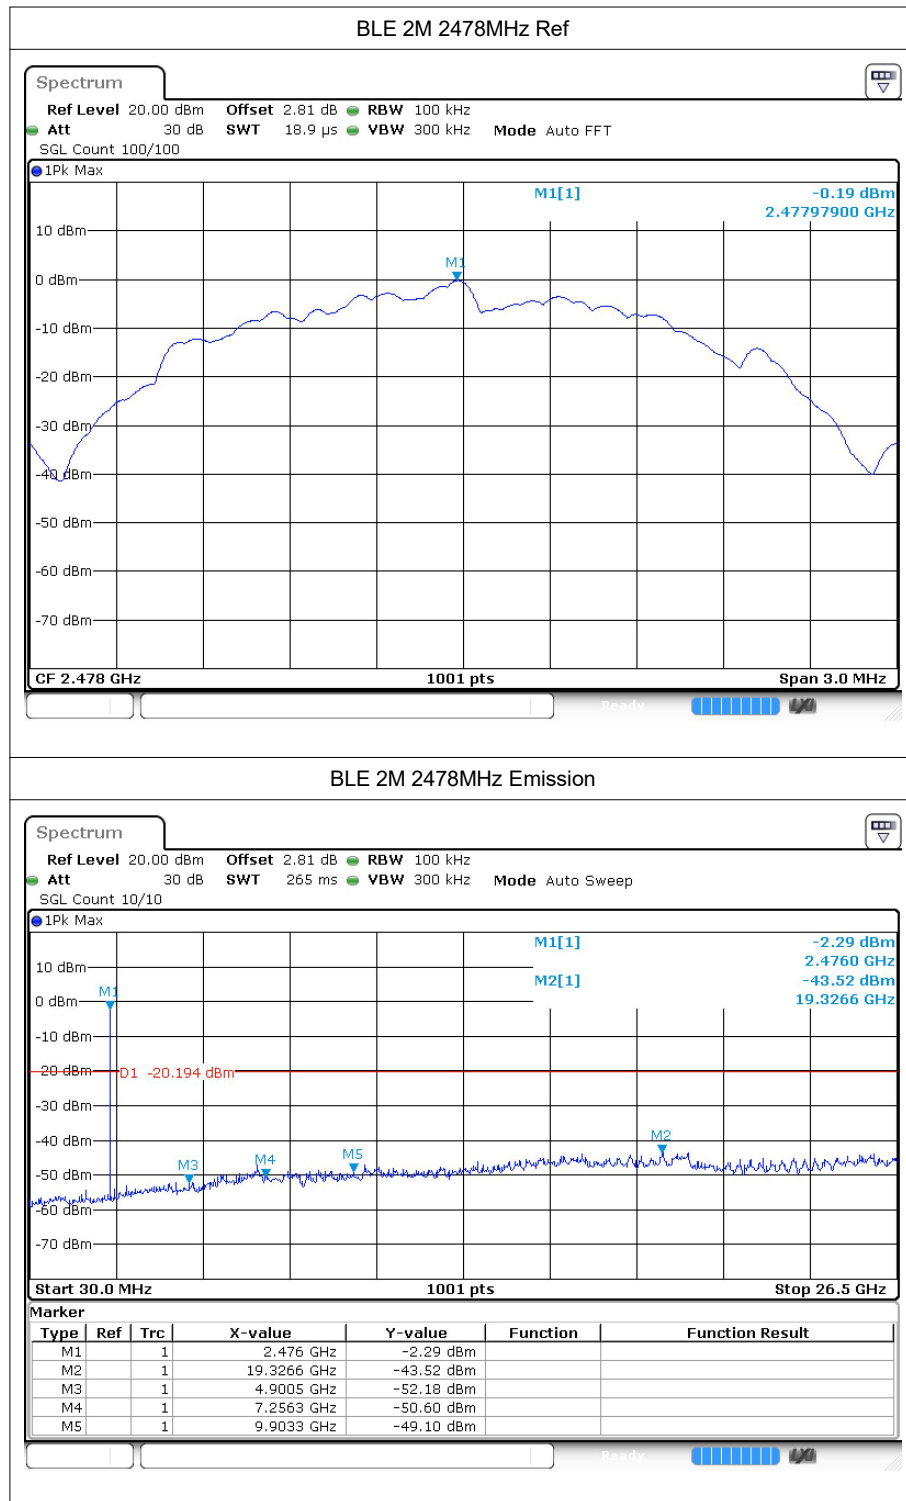





7 Restrict Band


7.1 Test Result


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-48.29	2	-	48.97	Peak	74	Pass
BLE 1M	2402	2310	-57.21	2	1.99	42.04	Average	54	Pass
BLE 1M	2402	2334.576	-46.68	2	-	50.58	Peak	74	Pass
BLE 1M	2402	2343.12	-54.3	2	1.99	44.95	Average	54	Pass
BLE 1M	2402	2390	-50.43	2	-	46.83	Peak	74	Pass
BLE 1M	2402	2390	-57.26	2	1.99	41.99	Average	54	Pass
BLE 1M	2480	2483.5	-49.78	2	-	47.48	Peak	74	Pass
BLE 1M	2480	2483.5	-56.27	2	1.99	42.98	Average	54	Pass
BLE 1M	2480	2491.624	-48.13	2	-	49.13	Peak	74	Pass
BLE 1M	2480	2498.176	-55.17	2	1.99	44.08	Average	54	Pass
BLE 1M	2480	2500	-49	2	-	48.26	Peak	74	Pass
BLE 1M	2480	2500	-56.39	2	1.99	42.86	Average	54	Pass
BLE 2M	2404	2310	-46.9	2	-	50.36	Peak	74	Pass
BLE 2M	2404	2310	-56.75	2	4.74	45.25	Average	54	Pass
BLE 2M	2404	2339.988	-44.83	2	-	52.43	Peak	74	Pass
BLE 2M	2404	2342.634	-54.21	2	4.74	47.79	Average	54	Pass
BLE 2M	2404	2390	-49.92	2	-	47.34	Peak	74	Pass
BLE 2M	2404	2390	-56.97	2	4.74	45.03	Average	54	Pass
BLE 2M	2478	2483.5	-48.47	2	-	48.79	Peak	74	Pass
BLE 2M	2478	2483.5	-55.87	2	4.74	46.13	Average	54	Pass
BLE 2M	2478	2494.618	-47.67	2	-	49.59	Peak	74	Pass
BLE 2M	2478	2498.674	-55.72	2	4.74	46.28	Average	54	Pass
BLE 2M	2478	2500	-50.41	2	-	46.85	Peak	74	Pass
BLE 2M	2478	2500	-56.6	2	4.74	45.4	Average	54	Pass

7.2 Test Graphs

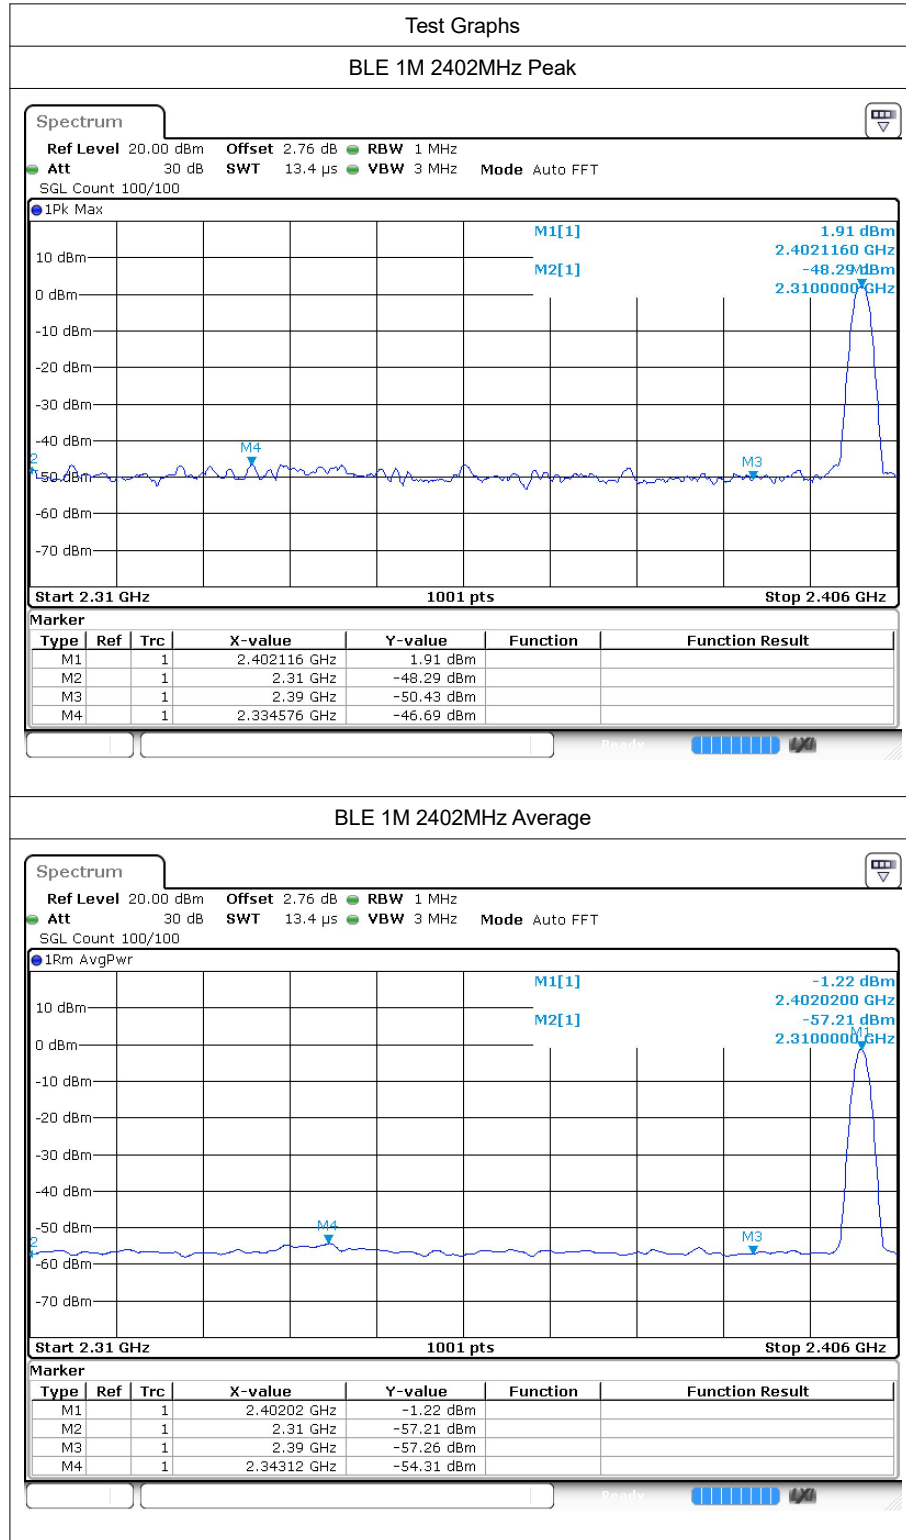

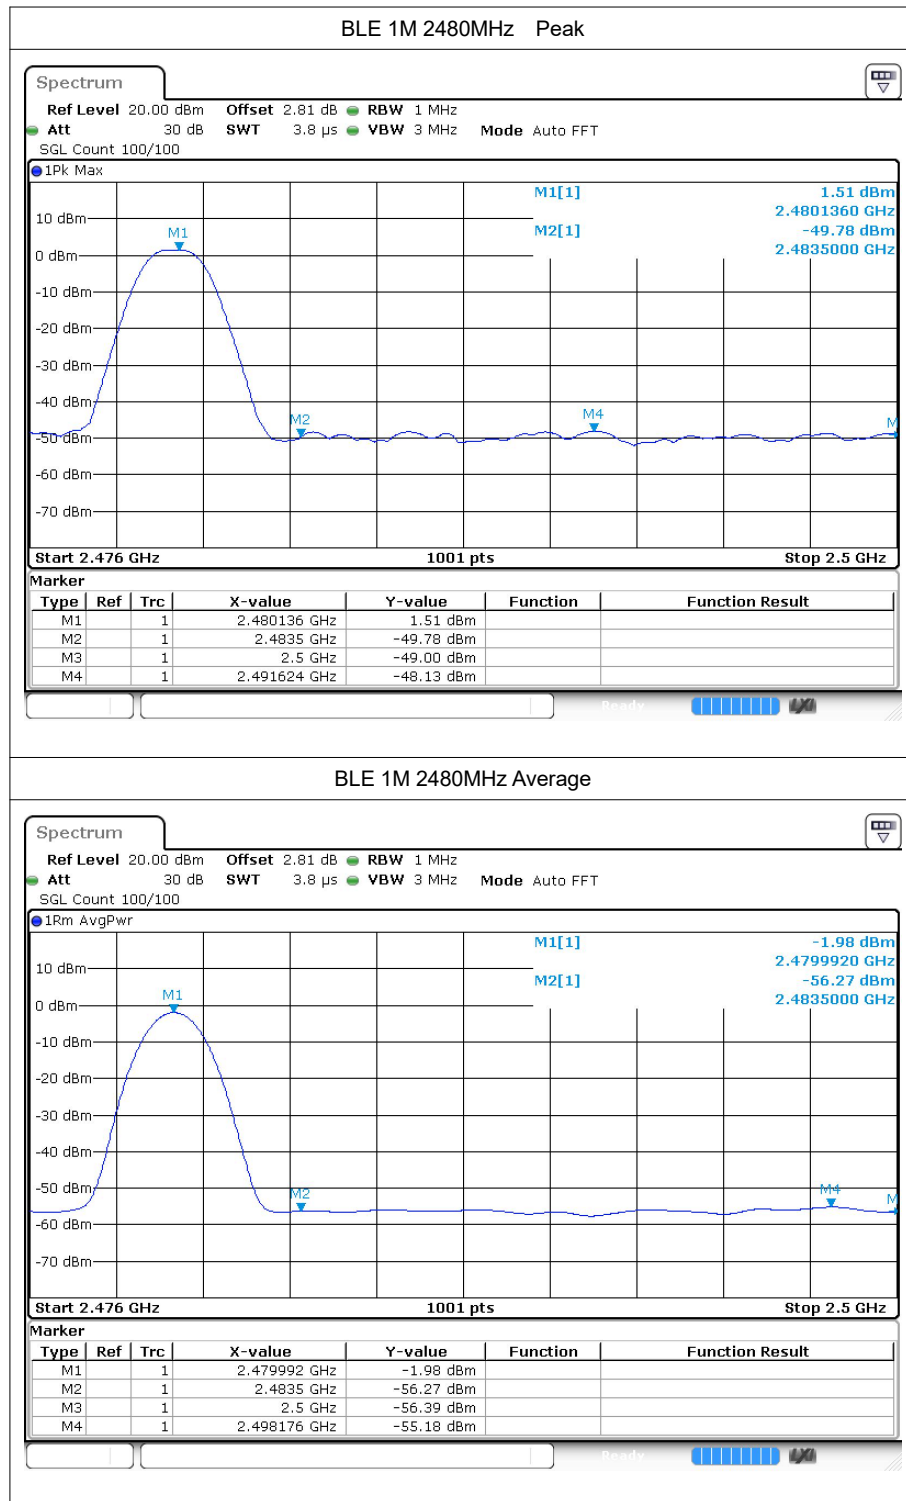

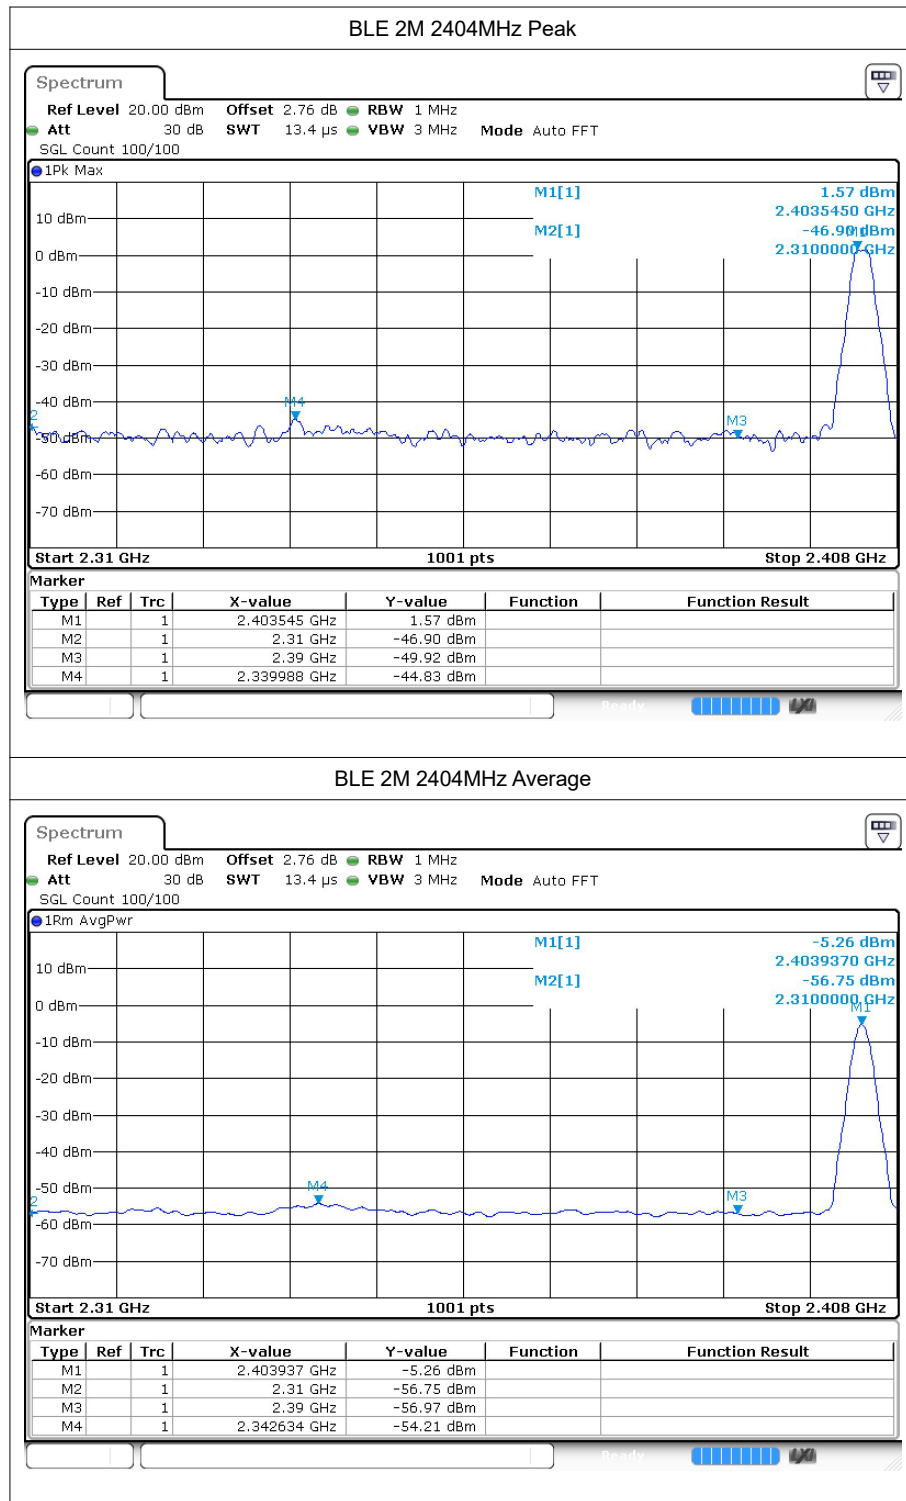

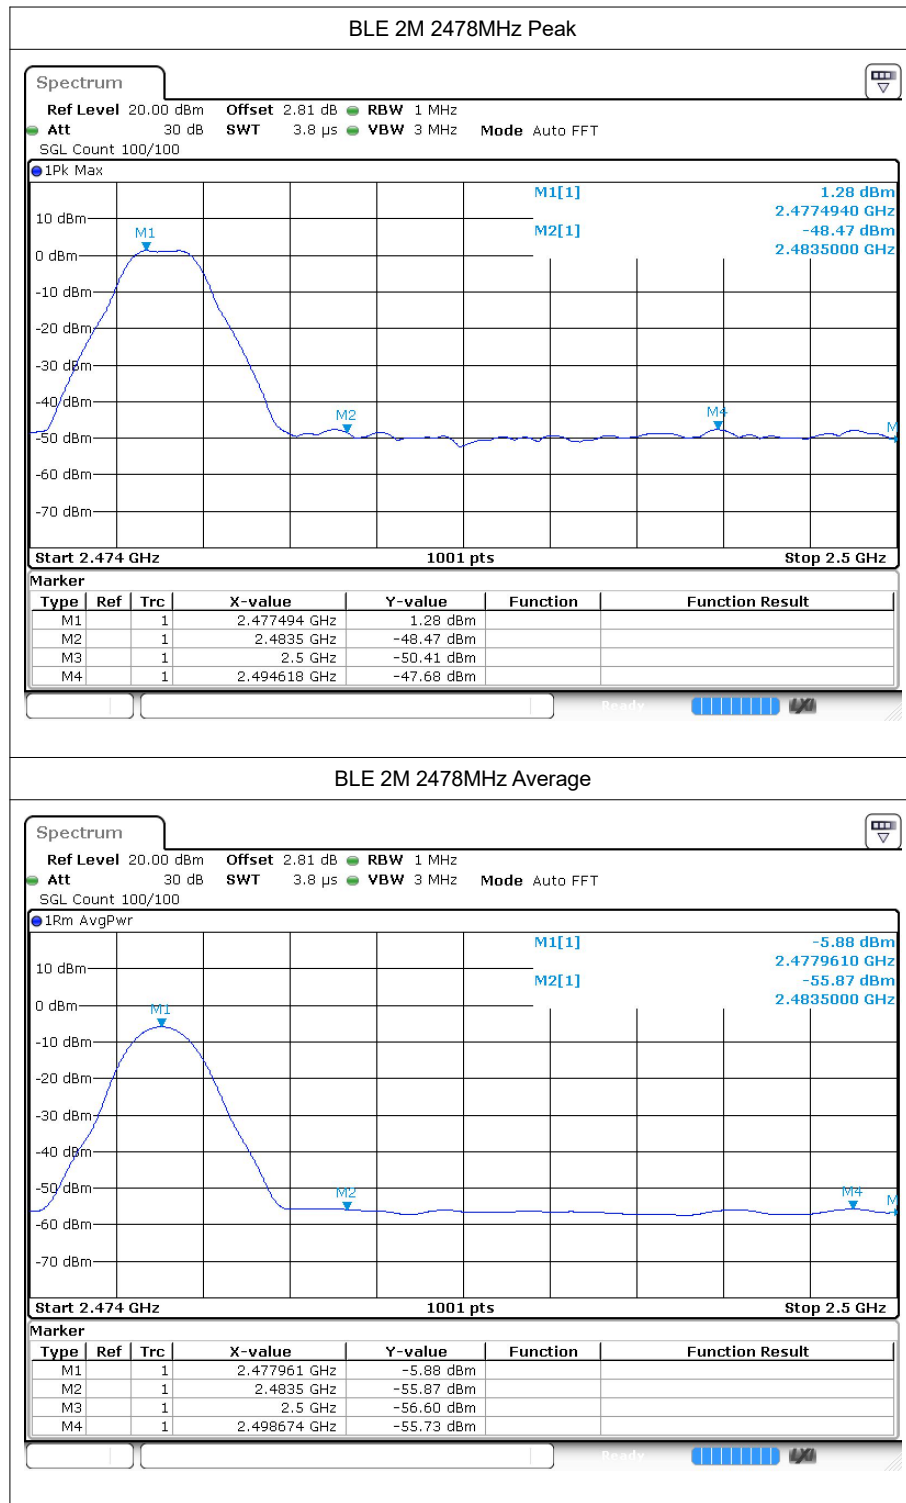

---The End---