TEST REPORT

Reference No.	:	WTZ23F08182728E
FCC ID	:	2BCN7-SG385DXLG
Applicant	:	SHINEGIANT NEW ENERGY TECHNOLOGY INC.
Address	:	SUITE 665,17800 CASTLETON ST.,CITY OF INDUSTRY,CA 91748
Manufacturer	:	The same as above
Address	:	The same as above
Product Name	:	Refrigerator
Model No.	:	SG383DXLG, SG384DXLG, SG385DXLG, SG584DXLG, SG585DXLG, SG586DXLG, SG684DXLG, SG685DXLG, SG686DXLG
Test specification	:	FCC CFR47 Part 15 Subpart C (Section 15.247):2021
Date of Receipt sample	:	2023-08-31
Date of Test	:	2023-09-01 to 2023-09-10
Date of Issue	:	2023-10-10
Test Report Form No.	:	WEW-15247A-01A
Test Result	:	**Pass**

Remarks:
The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:
Waltek Testing Group (Foshan) Co., Ltd.
Address: No.13-19, 2/F., 2nd Building, Sunlink International Machinery City, Chencun, Shunde District, Foshan, Guangdong, China
Tel:+86-757-23811398 Fax:+86-757-23811381 E-mail:info@waltek.com.cn

Tested by:

Roy Hong

Approved by:

Tammy Zhou

1 Revision History

Test Report No.	Date of Issue	Description	Status
WTZ23F08182728E	2023-10-10	Original	Valid

2 Contents

Page

1 REVISION HISTORY 2
2 CONTENTS 3
3 GENERAL INFORMATION 4
3.1 GENERAL DESCRIPTION OF E.U.T 4
3.2 TECHNICAL CHARACTERISTICS OF EUT 4
3.3 STANDARDS APPLICABLE FOR TESTING 4
3.4 TEST FACILITY 5
3.5 SUBCONTRACTED 5
3.6 ABNORMALITIES FROM STANDARD CONDITIONS 5
3.7 DISCLAIMER 5
4 EUT SETUP AND TEST MODE 6
5 EQUIPMENT USED DURING TEST 7
5.1 EQUIPMENT LIST 7
5.2 TEST SOFTWARE 8
5.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT 8
5.4 MEASUREMENT UNCERTAINTY 8
6 SUMMARY OF TEST RESULT 9
6.1 ANTENNA REQUIREMENT 10
6.2 RADIATED SPURIOUS EMISSIONS 11
6.3 POWER SPECTRAL DENSITY 21
6.4 DTS BANDWIDTH 23
6.5 RF OUTPUT POWER 25
6.6 OUT OF BAND EMISSIONS 27
6.7 CONDUCTED EMISSIONS 32
7 PHOTOGRAPHS TEST SETUP 36
7.1 PHOTOGRAPHS - RADIATED EMISSION TEST SETUP 36
7.2 PHOTOGRAPHS – CONDUCTED EMISSION TEST SETUP 37
8 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS 38
8.1 EUT - EXTERNAL PHOTOS 38
8.2 EUT - INTERNAL PHOTOS 43

3 General Information

3.1 General Description of E.U.T

Product Name ..... : Refrigerator

Model No. ..... : SG383DXLG, SG384DXLG, SG385DXLG, SG584DXLG, SG585DXLG, SG586DXLG, SG684DXLG, SG685DXLG, SG686DXLG

Model Description ..... : All models have same circuit diagram except for their appearance. Therefore the full tests were performed on model SG385DXLG.

Rated Voltage..... : DC 12V/24V

Battery Capacity ..... : ---

Power Adapter ..... : GRT60-145410
Input: 100-240V~, 50/60Hz, 1.5A Max. Output: DC 14.5V, 4.1A

3.2 Technical Characteristics of EUT

Bluetooth Version ..... : V5.1 (BLE mode)

Frequency Range ..... : 2402-2480MHz

RF Output Power ..... : -5.84dBm (Conducted)

Modulation ..... : GFSK

Data Rate ..... : 1Mbps

Quantity of Channels ..... : 40

Channel Separation..... : 2MHz

Type of Antenna ..... : PCB Printed Antenna

Antenna Gain ..... : -0.29dBi

3.3 Standards Applicable for Testing

The tests were performed according to following standards:

FCC Rules Part 15.247	Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
558074 D01 15.247 Meas Guidance v05r02	Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The FCC Rules
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.4 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science an Economic Development Canada(ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number:21895, March 12, 2019

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **FCC – Designation No.: CN5034**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation No. CN5034.

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.
This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

3.6 Abnormalities from Standard Conditions

None.

3.7 Disclaimer

The antenna gain information is provided by the customer. The laboratory is not responsible for the accuracy of the antenna gain information.

4 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List

Test Mode	Description	Remark
TM1	Low Channel	2402MHz
TM2	Middle Channel	2440MHz
TM3	High Channel	2480MHz

Test Conditions

Temperature:	22~25℃
Relative Humidity:	50~55%
Atmospheric pressure:	101.9kPa

5 Equipment Used during Test

5.1 Equipment List

☐Conducted Emissions 1#						
Item	**Equipment**	**Manufacturer**	**Model No.**	**Serial No.**	**Last Cal Date**	**Cal Due Date**
1.	EMI Test Receiver	R&S	ESR3	102423	2023-01-05	2024-01-04
2.	LISN	R&S	ENV216	101343	2023-01-05	2024-01-04
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	223NN624	2023-01-05	2024-01-04
4.	Switch	CD	RSU-A4 18G	RSUA4008	2023-01-05	2024-01-04

☐Conducted Emissions 2#						
Item	**Equipment**	**Manufacturer**	**Model No.**	**Serial No.**	**Last Cal Date**	**Cal Due Date**
1.	EMI Test Receiver	R&S	ESCI	101178	2023-01-05	2024-01-04
2.	LISN	R&S	ENV216	101215	2023-01-05	2024-01-04
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	6102701	2023-01-05	2024-01-04
4.	Switch	ESE	RSU/M2	---	2023-01-05	2024-01-04

☐Conducted Emissions 3#						
Item	**Equipment**	**Manufacturer**	**Model No.**	**Serial No.**	**Last Cal Date**	**Cal Due Date**
1.	EMI Test Receiver	R&S	ESR3	102842	2023-01-05	2024-01-04
2.	LISN	R&S	ENV216	101542	2023-01-05	2024-01-04
3.	Cable	YIHENG	LMR195UF-NMNM-2.5	---	2023-01-05	2024-01-04
4.	Manual RF Switch	YIHENG	SW-2	RSU0402	2023-01-05	2024-01-04

☒Radiation Emissions						
Item	**Equipment**	**Manufacturer**	**Model No.**	**Serial No.**	**Last Calibration Date**	**Calibration Due Date**
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	2021-01-11	2024-01-10
2.	EMI Test Receiver	RS	ESR7	101566	2023-01-05	2024-01-04
3.	EMC Analyzer	Agilent	N9020A	MY48011796	2023-05-15	2024-05-14
4.	Active Loop Antenna	SCHWARZBECK	FMZB1519B	00004	2023-01-05	2024-01-04
5.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	2023-03-10	2024-03-09
6.	Coaxial Cable (below 1GHz)	H+S	CBL3-NN-12+3 m	214NN320	2023-01-06	2024-01-05
7.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	01561	2023-01-06	2024-01-05
8.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	01119	2023-01-06	2024-01-05
9.	Coaxial Cable (above 1GHz)	Times-Micorwave	CBL5-NN	-	2023-01-05	2024-01-04
10.	Amplifier	Lunar E M	LNA1G18-40	20160501002	2023-01-05	2024-01-04

☒RF Conducted Testing						
Item	**Equipment**	**Manufacturer**	**Model No.**	**Serial No.**	**Last Calibration Date**	**Calibration Due Date**
1.	Spectrum Analyzer	Agilent	N9020A	MY48011796	2023-05-15	2024-05-14
2.	Analog Signal Generator	Agilent	N5181A	MY48180720	2023-01-05	2024-01-04
3.	RF Control Unit	CHANGCHUANG	JS0806-2	-	2023-01-06	2024-01-05

☐: ***Not Used***

☒: ***Used***

5.2 Test Software

Description	Manufacturer	Model	Version
EMI Test Software (Conducted Emission 1#)	FARATRONIC	EZ-EMC	EMEC-3A1
EMI Test Software (Conducted Emission 2#)	FARATRONIC	EZ-EMC	CON-03A1
EMI Test Software (Conducted Emission 3#)	FARATRONIC	EZ-EMC	COM 3A1.1
EMI Test Software (Radiated Emission)	FARATRONIC	EZ-EMC	RA-03A1-1
RF Conducted Test Software	TONSCEND	JS1120-2	V2.6

5.3 Special Accessories and Auxiliary Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.
1.	/	/	/	/

5.4 Measurement Uncertainty

Parameter	Uncertainty
RF Output Power	±2.2dB
Occupied Bandwidth	±1.5%
Conducted Emission	±2.6dB
Transmitter Spurious Emission	±3.8dB (for 25MHz-1GHz)
	±5.0dB (for 1GHz-18GHz)

6 Summary of Test Result

Test Items	FCC Rules	Result
Antenna Requirement	§15.203; §15.247(b)(4)(i)	Compliant
Restricted Band of Operation	§15.205	Compliant
Conducted Emissions	§15.207(a)	Compliant
Radiated Spurious Emissions	§15.209(a)	Compliant
Power Spectral Density	§15.247(e)	Compliant
DTS Bandwidth	§15.247(a)(2)	Compliant
RF Output Power	§15.247(b)(1)	Compliant
Band edge (Out of Band Emissions)	§15.247(d)	Compliant

Remark:

Pass Test item meets the requirement

Fail Test item does not meet the requirement

N/A Test case does not apply to the test object

6.1 Antenna Requirement

6.1.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

6.1.2 Evaluation Information

The EUT has a PCB Printed Antenna, the gain is -0.29 dBi, fulfil the requirement of this section.

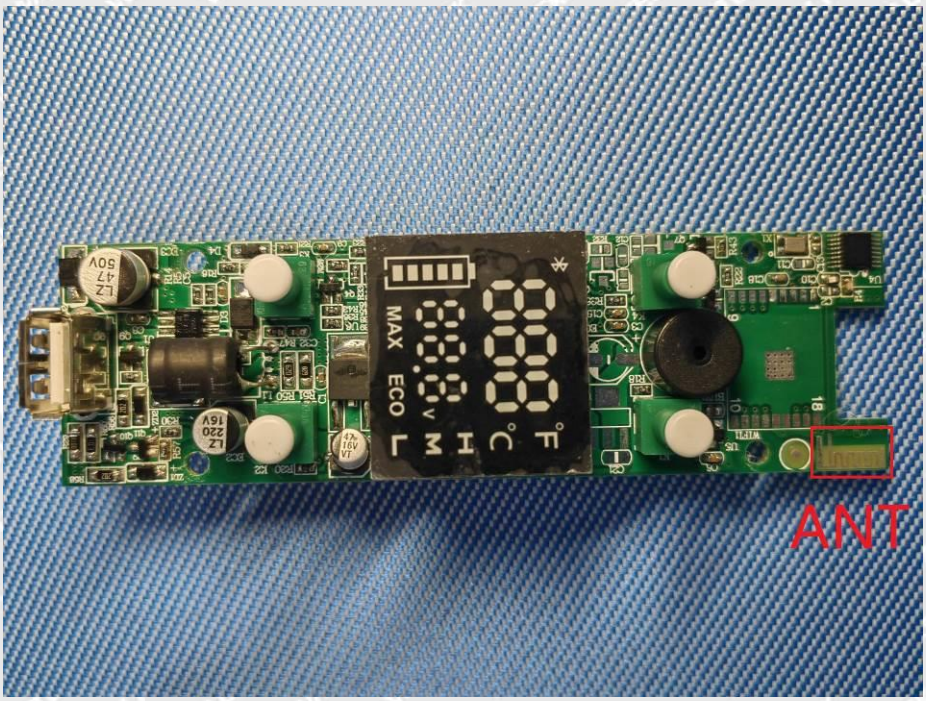

6.2 Radiated Spurious Emissions

6.2.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

6.2.2 Test Procedure

1) The EUT is placed on a turntable, which is 0.8m(Below 1G) 1.5m(above 1G)above ground plane.

2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

3) EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4) Maximum procedure was performed on the six highest emissions to ensure EUT compliance.

5) And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

6) Repeat above procedures until the measurements for all frequencies are complete.

7) The radiation measurements are tested under 3-axes(X, Y, Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.

6.2.3 Test Setup

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz.

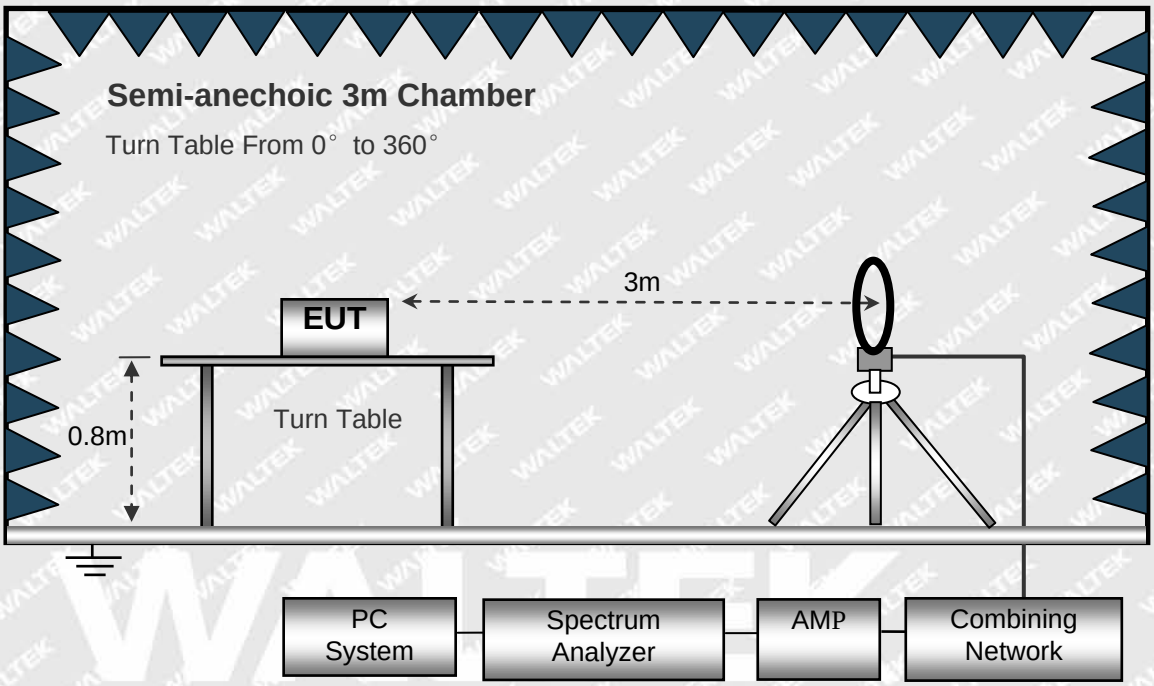

The test setup for emission measurement from 30 MHz to 1 GHz.

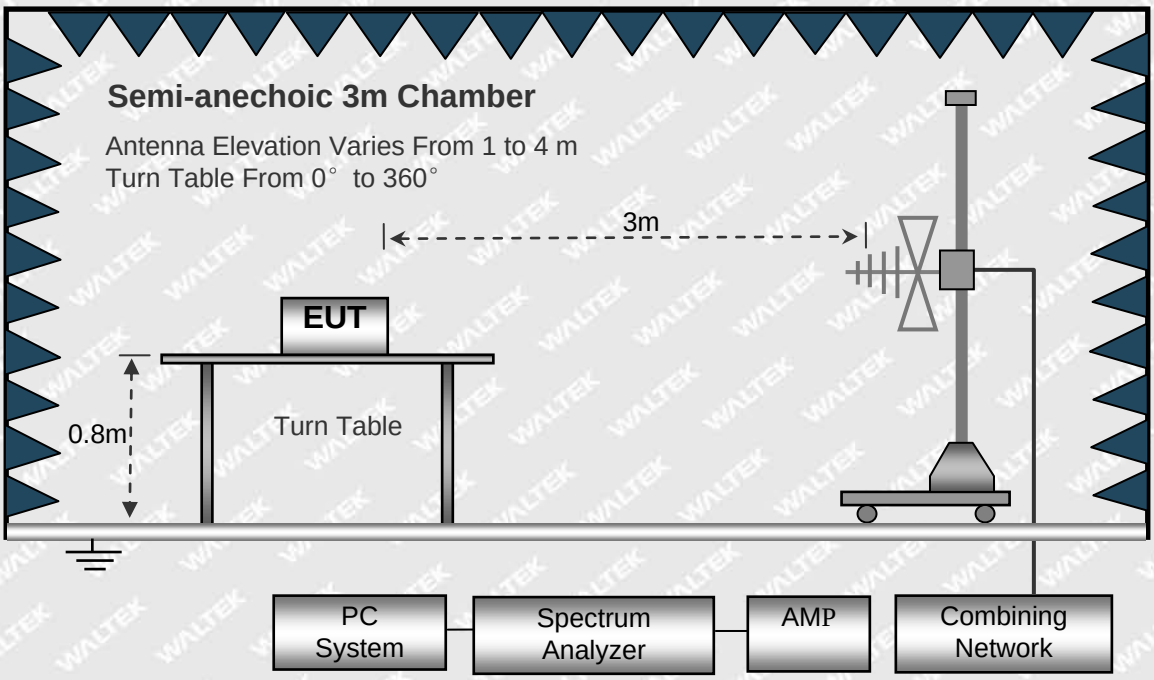

The test setup for emission measurement above 1 GHz.

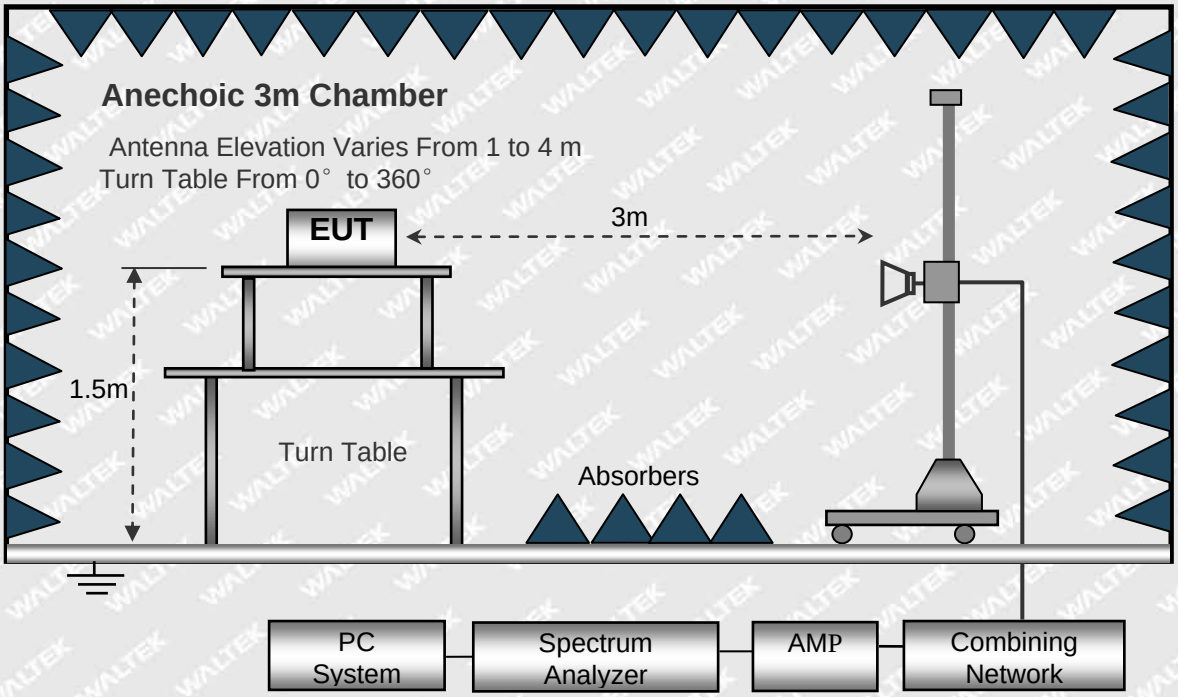

6.2.4 Spectrum Analyzer Setup

9KHz-30MHz	30MHz-1GHz	Above 1GHz
RBW=10kHz	RBW=120kHz	RBW=1MHz
VBW=30kHz	VBW=300kHz	VBW=3MHz(Peak), 10MHz(AV)
Sweep time=Auto	Sweep time=Auto	Sweep time=Auto
Trace=Max hold	Trace=Max hold	Trace=Max hold
Detector function=peak	Detector function=peak, QP	Detector function=peak, AV

6.2.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

Corr. Ampl. = Indicated Reading + Corr. Factor

Corr.Factor=Antenna Factor + Cable Factor - Amplifier Gain

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

Margin = Corr. Ampl. – Limit

6.2.6 Test Results

Test Frequency: Below 1GHz

Test Channel Low **Polarization** Vertical

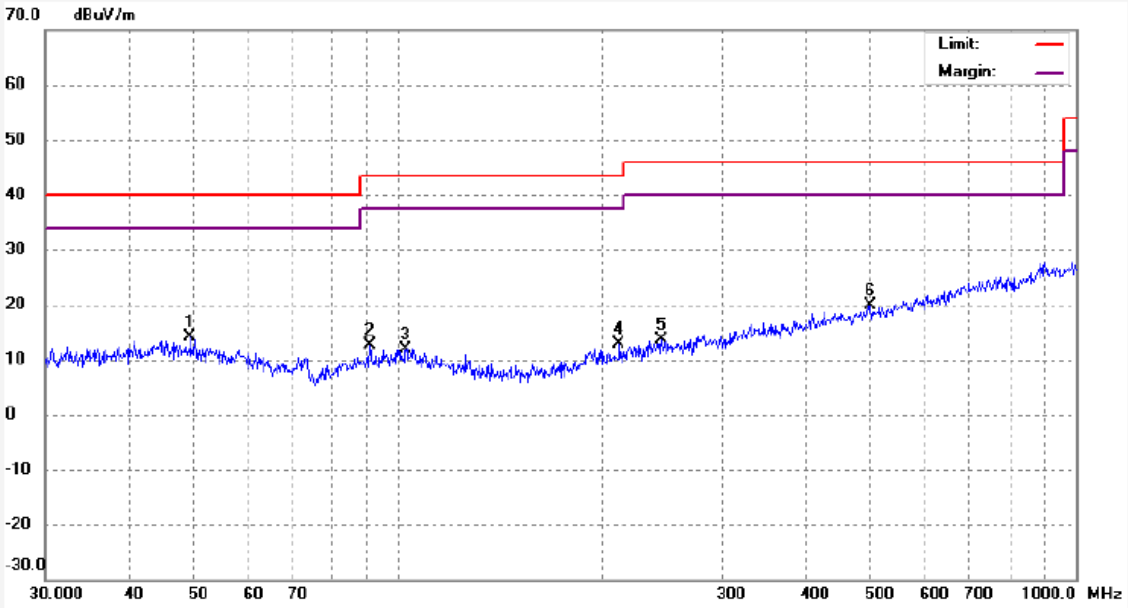

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	49.2729	-0.88	15.04	14.16	40.00	-25.84	QP	
2	90.6327	-0.26	12.84	12.58	43.50	-30.92	QP	
3	102.4673	-2.04	14.01	11.97	43.50	-31.53	QP	
4	212.1950	-0.36	13.19	12.83	43.50	-30.67	QP	
5	245.0900	-0.85	14.39	13.54	46.00	-32.46	QP	
6	499.0745	-0.32	20.24	19.92	46.00	-26.08	QP	

Test Channel Low **Polarization** Horizontal

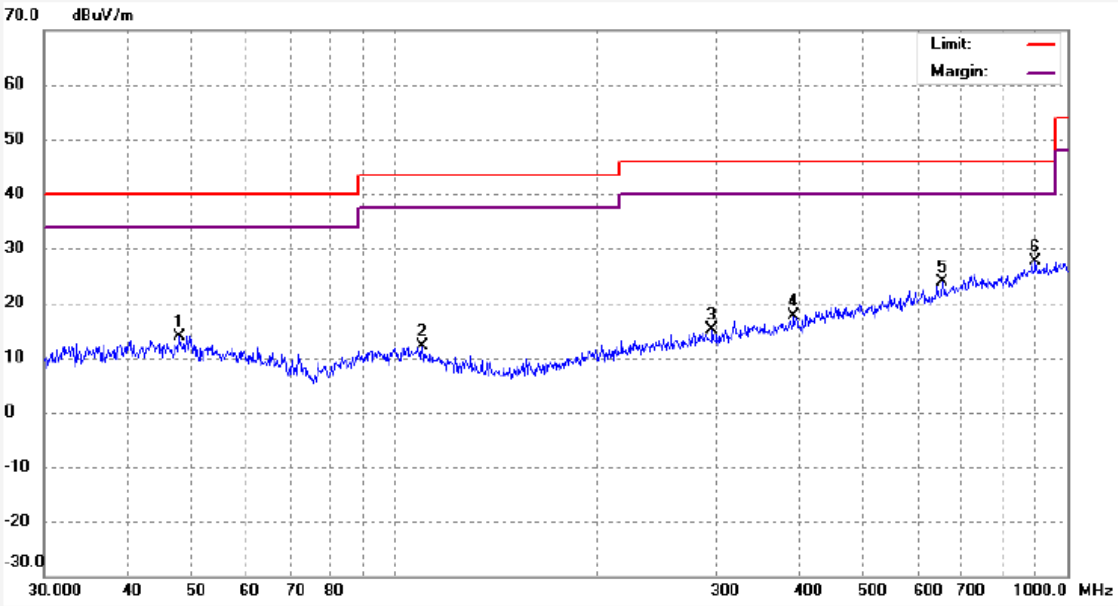

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	47.6920	-1.28	15.21	13.93	40.00	-26.07	QP	
2	110.1430	-1.20	13.39	12.19	43.50	-31.31	QP	
3	296.4953	-0.30	15.54	15.24	46.00	-30.76	QP	
4	392.6454	-0.46	18.16	17.70	46.00	-28.30	QP	
5	652.6279	1.22	22.57	23.79	46.00	-22.21	QP	
6	898.8857	1.15	26.39	27.54	46.00	-18.46	QP	

Test Channel Middle Channel **Polarization** Vertical

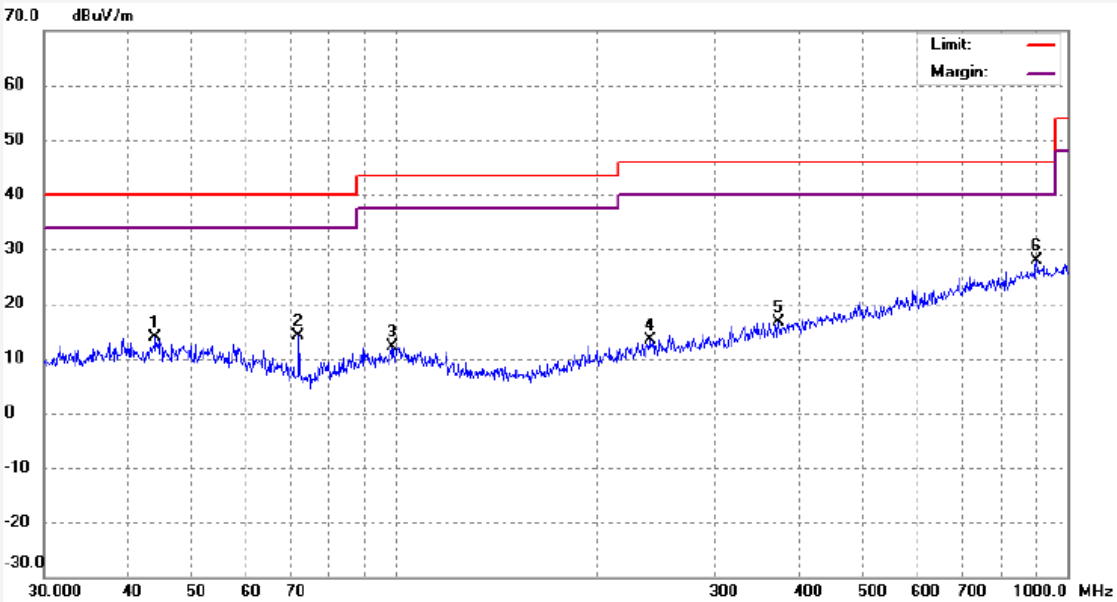

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	44.0738	-1.61	15.42	13.81	40.00	-26.19	QP	
2	71.9580	3.80	10.28	14.08	40.00	-25.92	QP	
3	99.3886	-1.62	13.79	12.17	43.50	-31.33	QP	
4	239.6509	-0.76	14.26	13.50	46.00	-32.50	QP	
5	372.0045	-0.91	17.64	16.73	46.00	-29.27	QP	
6	902.0432	1.46	26.43	27.89	46.00	-18.11	QP	

Test Channel Middle Channel **Polarization** Horizontal

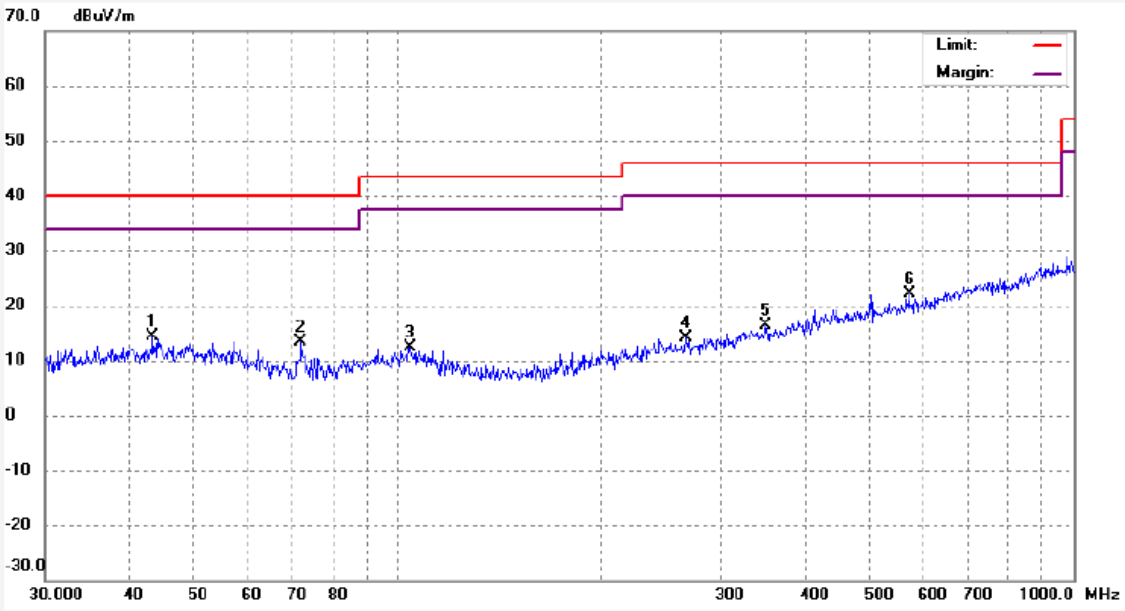

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	43.4752	-1.02	15.34	14.32	40.00	-25.68	QP	
2	71.9833	3.07	10.27	13.34	40.00	-26.66	QP	
3	104.4261	-1.76	14.14	12.38	43.50	-31.12	QP	
4	267.2641	-0.74	14.84	14.10	46.00	-31.90	QP	
5	349.9854	-0.90	17.22	16.32	46.00	-29.68	QP	
6	572.4136	1.20	21.03	22.23	46.00	-23.77	QP	

Test Channel High Channel **Polarization** Vertical

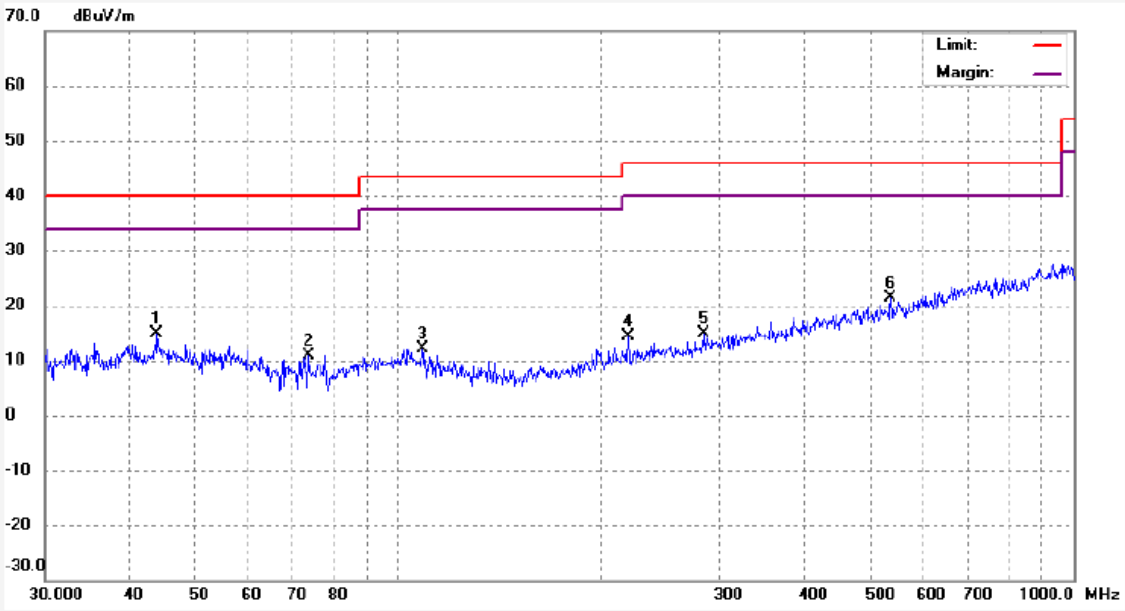

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	43.9966	-0.46	15.42	14.96	40.00	-25.04	QP	
2	73.7462	1.08	9.86	10.94	40.00	-29.06	QP	
3	108.6851	-1.44	13.61	12.17	43.50	-31.33	QP	
4	219.4597	1.03	13.46	14.49	46.00	-31.51	QP	
5	284.7769	-0.54	15.36	14.82	46.00	-31.18	QP	
6	535.8952	0.78	20.58	21.36	46.00	-24.64	QP	

Test Channel High Channel **Polarization** Horizontal

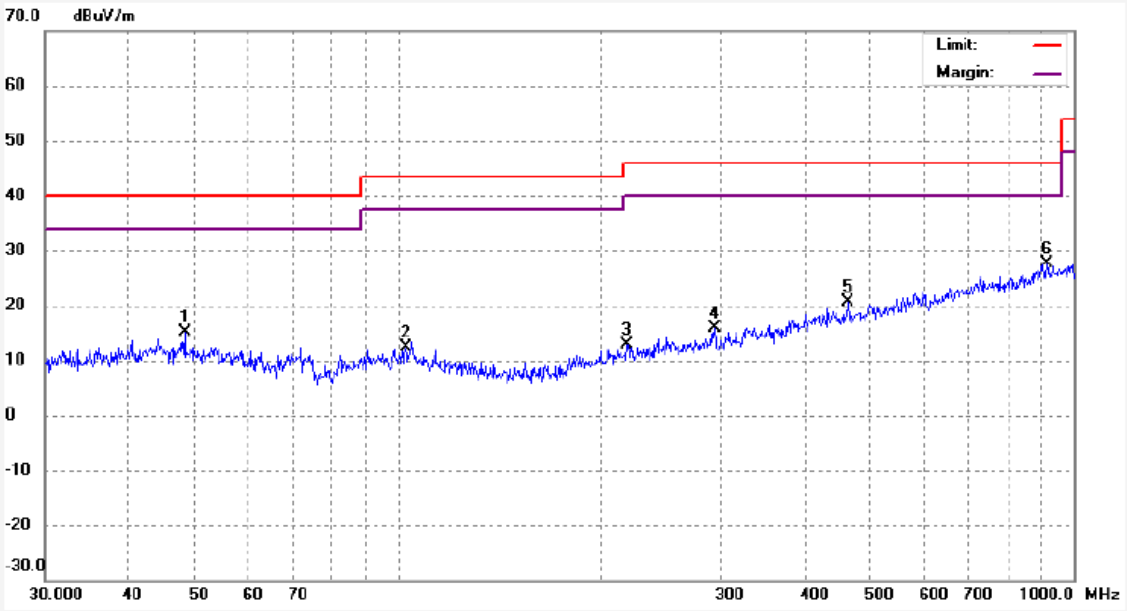

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	48.4845	0.02	15.12	15.14	40.00	-24.86	QP	
2	103.0077	-1.65	14.05	12.40	43.50	-31.10	QP	
3	218.3084	-0.47	13.41	12.94	46.00	-33.06	QP	
4	294.4233	0.26	15.51	15.77	46.00	-30.23	QP	
5	465.4361	1.08	19.44	20.52	46.00	-25.48	QP	
6	915.1055	1.08	26.59	27.67	46.00	-18.33	QP	

Test Frequency: Above 1GHz

Frequency (MHz)	Reading (dBμV/m)	Detector	Polar (H/V)	Corrected Factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel							
4804	50.42	Peak	H	-6.71	43.71	74	-30.29
4804	41.99	AVG	H	-6.71	35.28	54	-18.72
7206	46.81	Peak	H	-1.46	45.35	74	-28.65
7206	37.47	AVG	H	-1.46	36.01	54	-17.99
4804	51.39	Peak	V	-6.71	44.68	74	-29.32
4804	42.49	AVG	V	-6.71	35.78	54	-18.22
7206	45.61	Peak	V	-1.46	44.15	74	-29.85
7206	36.81	AVG	V	-1.46	35.35	54	-18.65
Middle Channel							
4880	50.97	Peak	H	-6.5	44.47	74	-29.53
4880	41.51	AVG	H	-6.5	35.01	54	-18.99
7320	46.22	Peak	H	-1.12	45.1	74	-28.9
7320	37.13	AVG	H	-1.12	36.01	54	-17.99
4880	51.71	Peak	V	-6.5	45.21	74	-28.79
4880	42.58	AVG	V	-6.5	36.08	54	-17.92
7320	46.11	Peak	V	-1.12	44.99	74	-29.01
7320	37.71	AVG	V	-1.12	36.59	54	-17.41
High Channel							
4960	50.74	Peak	H	-6.29	44.45	74	-29.55
4960	41.77	AVG	H	-6.29	35.48	54	-18.52
7440	46.51	Peak	H	-0.8	45.71	74	-28.29
7440	37.41	AVG	H	-0.8	36.61	54	-17.39
4960	50.24	Peak	V	-6.29	43.95	74	-30.05
4960	41.03	AVG	V	-6.29	34.74	54	-19.26
7440	46.82	Peak	V	-0.8	46.02	74	-27.98
7440	37.21	AVG	V	-0.8	36.41	54	-17.59

Note:

1.Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

2. Average measurement was not performed if peak level is lower than average limit 54 dBuV/m) for above 1GHz.

6.3 Power Spectral Density

6.3.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

a) Set analyzer center frequency to DTS channel center frequency.
b) Set the span to 1.5 times the DTS bandwidth.
c) Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
d) Set the VBW ≥ 3 × RBW.
e) Detector = peak.
f) Sweep time = auto couple.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the maximum amplitude level within the RBW.
j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3.3 Test Result

Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
BLE	Low	-21.33	8
	Middle	-22.14	8
	High	-22.65	8

BLE_Low Channel

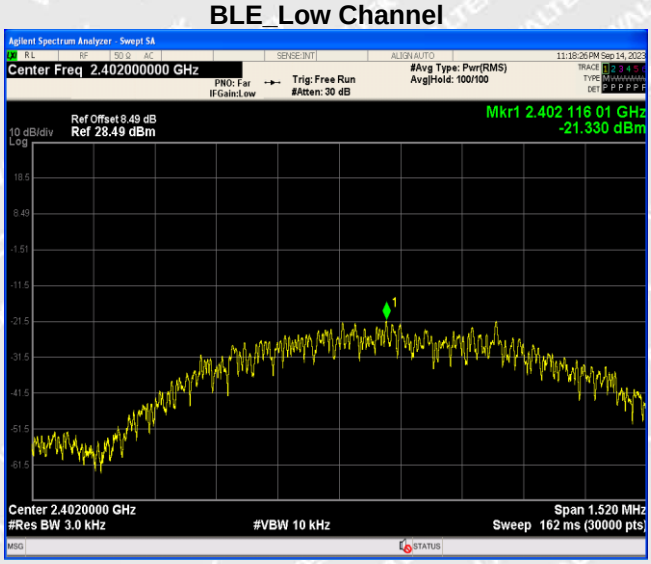

BLE_Middle Channel

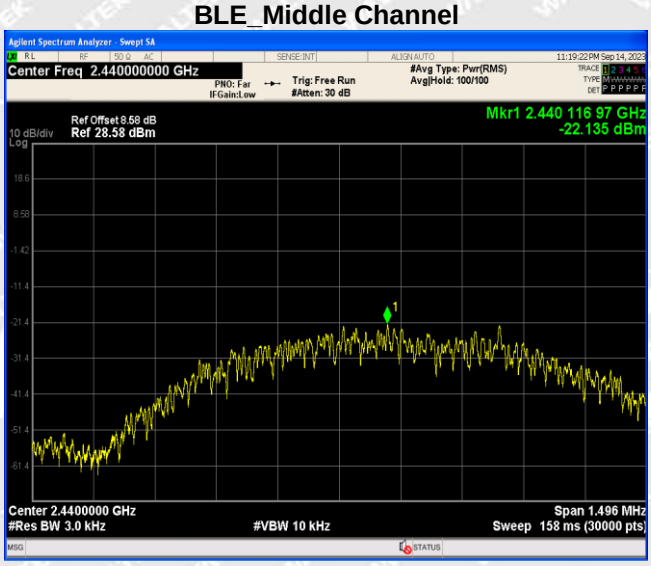

BLE_High Channel

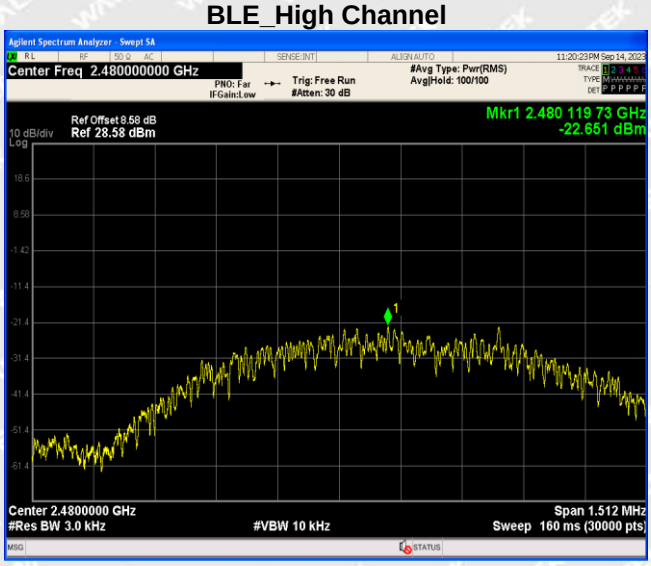

6.4 DTS Bandwidth

6.4.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.4.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

a) Set RBW = 100 kHz.

b) Set the video bandwidth (VBW) ≥ 3 × RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Sweep = auto couple.

f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4.3 Test Result

Test Mode	Test Channel	6dB Bandwidth MHz	Limit kHz
BLE	Low	0.760	≥500
	Middle	0.748	≥500
	High	0.756	≥500

BLE_Low Channel

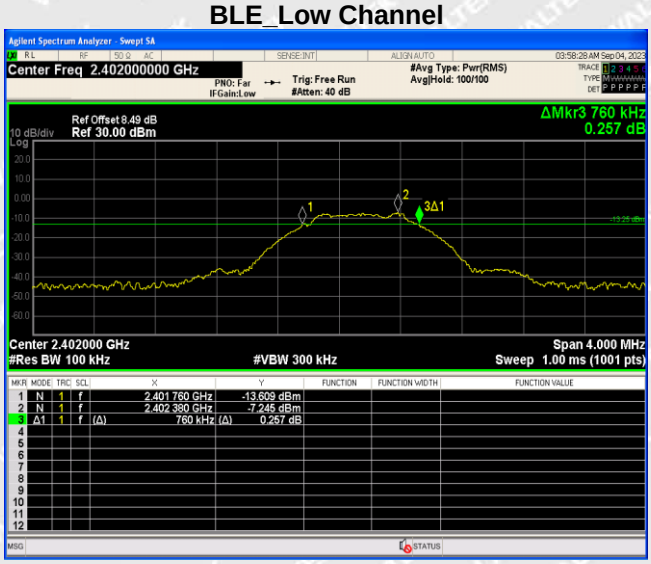

BLE_Middle Channel

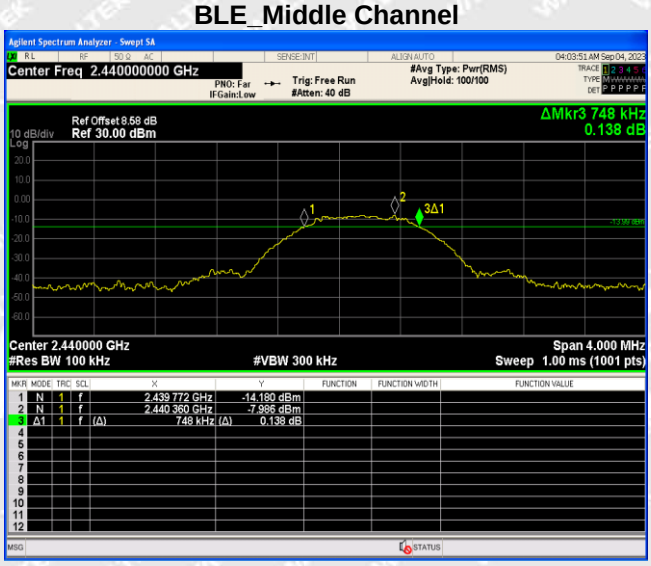

BLE_High Channel

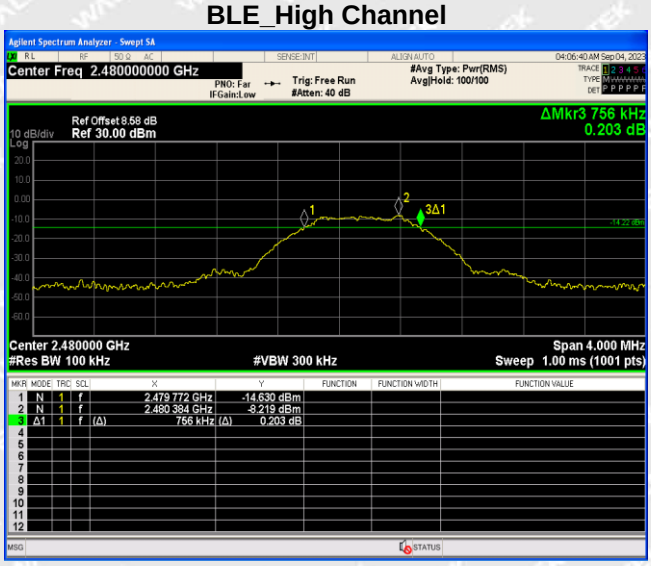

6.5 RF Output Power

6.5.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

6.5.2 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

a) Set the RBW ≥ DTS bandwidth.
b) Set VBW ≥ 3 × RBW.
c) Set span ≥ 3 x RBW
d) Sweep time = auto couple.
e) Detector = peak.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use peak marker function to determine the peak amplitude level.

6.5.3 Test Result

Modulation	Test Channel	Reading (dBm)	Output Power (mW)	Limit (mW)
BLE	Low	-5.84	0.261	1000
	Middle	-6.27	0.236	1000
	High	-6.76	0.211	1000

BLE_Low Channel

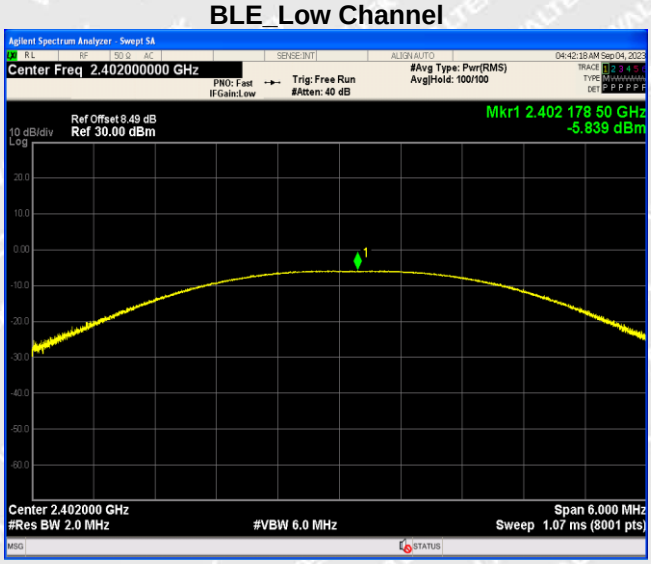

BLE_Middle Channel

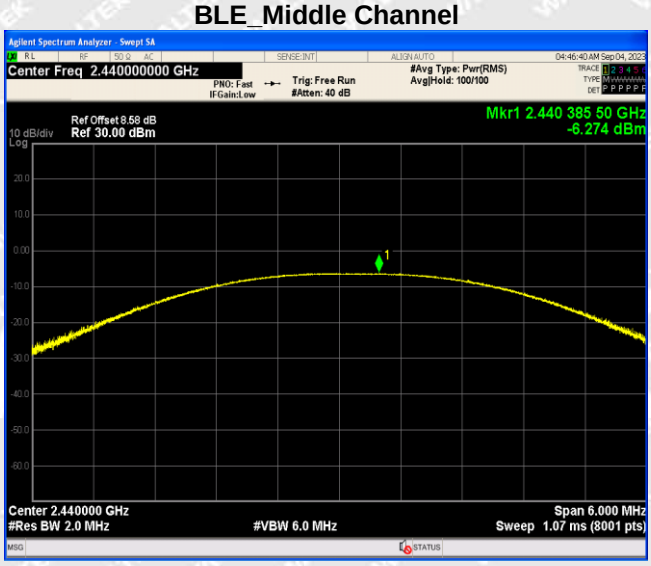

BLE_High Channel

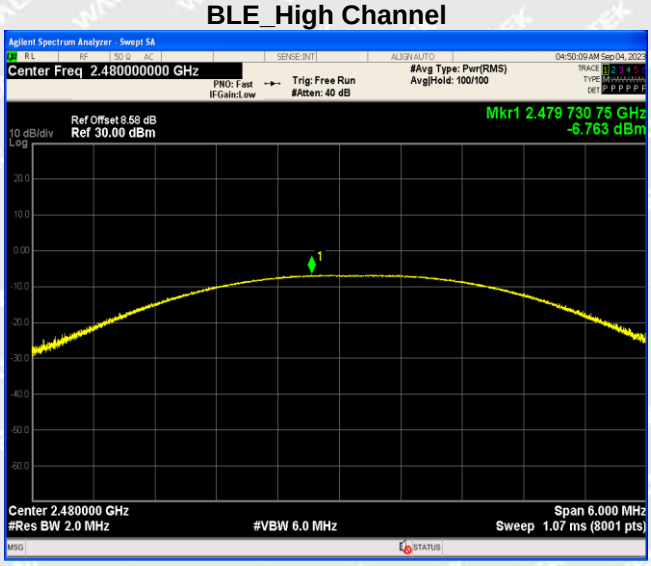

6.6 Out of Band Emissions

6.6.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

6.6.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

a) Set the center frequency and span to encompass frequency range to be measured.
b) Set the RBW = 100 kHz.
c) Set the VBW ≥ [3 × RBW].
d) Detector = peak.
e) Sweep time = auto couple.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:
Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge,
as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz
for low bandedge, 2460MHz to 2500MHz for the high bandedge)
RBW = 1MHz, VBW = 1MHz for peak value measured
RBW = 1MHz, VBW = 10Hz for average value measured
Sweep = auto; Detector function = peak/average; Trace = max hold
All the trace to stabilize, set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emissions must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205.

Note that the method of measurement KDB publication number: 913591 may be used for the radiated band edge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

a) RBW = as specified in Table 9/

b) VBW ≥ [3 × RBW].

c) Detector = peak.

d) Sweep time = auto.

e) Trace mode = max hold.

f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1.

6.6.3 Test Result

Radiated Test

Test Channel Low Channel **Polarization** Horizontal (worst case)

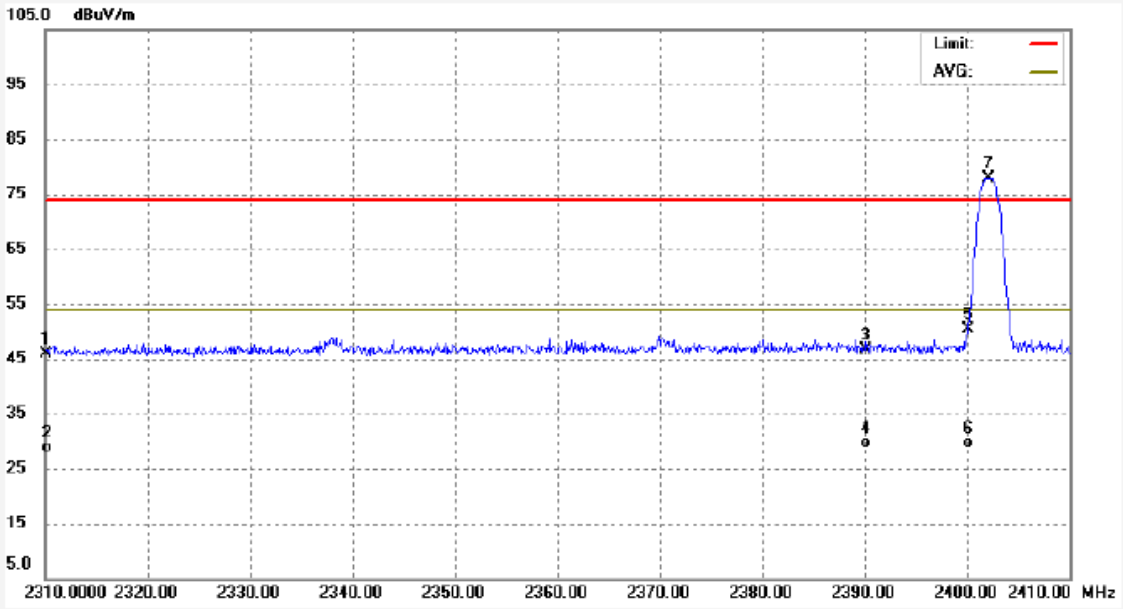

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2310.000	14.04	31.85	45.89	74.00	-28.11	peak	
2	2310.000	-2.85	31.85	29.00	54.00	-25.00	AVG	
3	2390.000	14.50	32.25	46.75	74.00	-27.25	peak	
4	2390.000	-2.66	32.25	29.59	54.00	-24.41	AVG	
5	2400.000	18.02	32.30	50.32	74.00	-23.68	peak	
6	2400.000	-2.56	32.30	29.74	54.00	-24.26	AVG	
7	2402.000	45.49	32.31	77.80	74.00	3.80	peak	

Test Channel High Channel **Polarization** Horizontal (worst case)

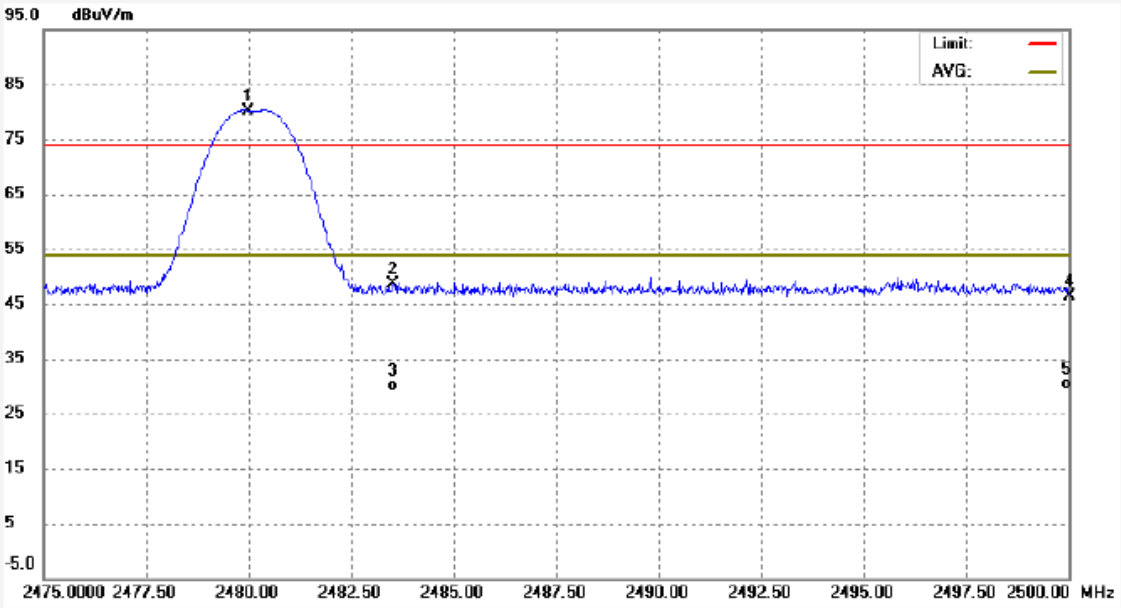

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.000	47.52	32.70	80.22	74.00	6.22	peak	
2	2483.500	15.88	32.72	48.60	74.00	-25.40	peak	
3	2483.500	-2.52	32.72	30.20	54.00	-23.80	AVG	
4	2500.000	13.67	32.80	46.47	74.00	-27.53	peak	
5	2500.000	-2.43	32.80	30.37	54.00	-23.63	AVG	

Conducted Test

BLE_Low Channel

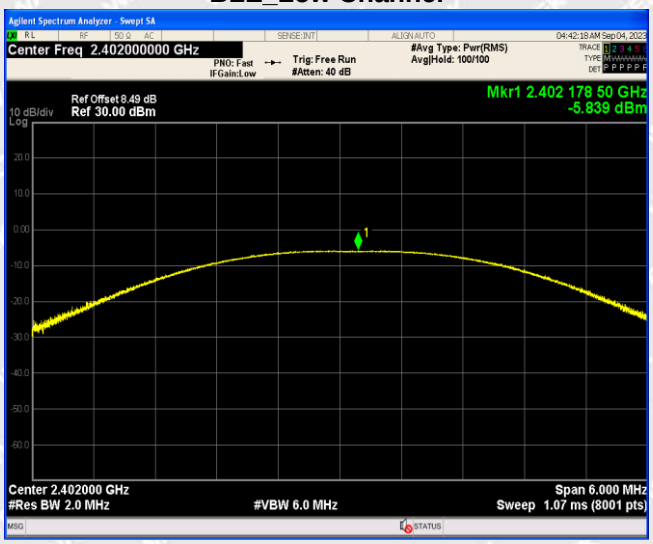

BLE_High Channel

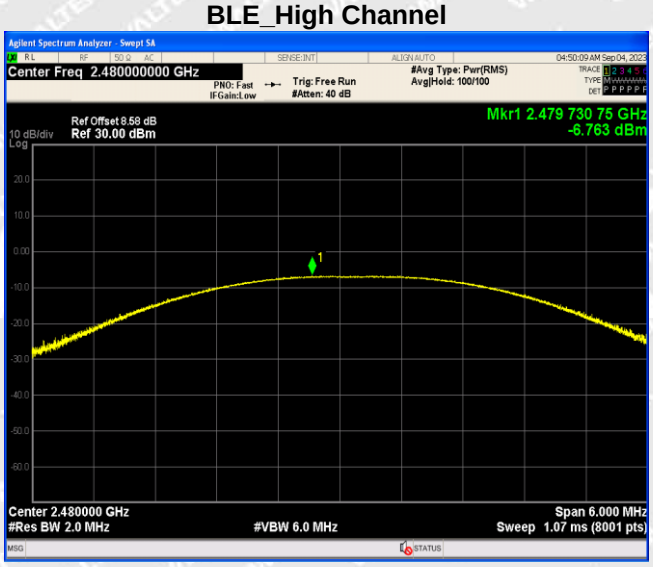

6.7 Conducted Emissions

6.7.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013measurement procedure. The specification used was with the FCC Part 15.207Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in themiddle. The spacing between the peripherals was 10 cm.

6.7.2 Basic Test Setup Block Diagram

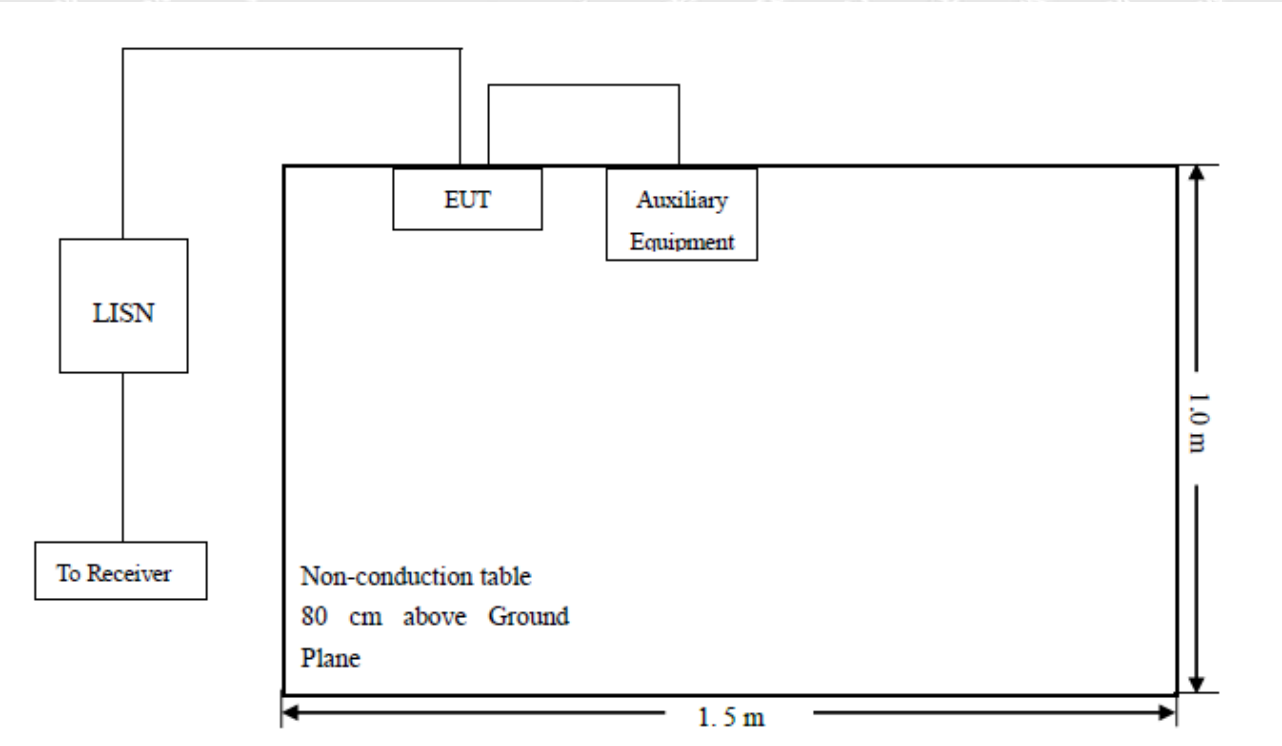

6.7.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....150 kHz

Stop Frequency.....30 MHz

Sweep Speed.....Auto

IF Bandwidth.....10 kHz

Quasi-Peak Adapter Bandwidth.....9 kHz

Quasi-Peak Adapter Mode.....Normal

6.7.4 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.7.5 Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF(Voltage Division Facotr), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Measurement=Reading Level+Correct Factor

Correct Facotor=LISN VDF+Cable Loss

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin= Measurement-Limit

6.7.6 Test Result

Test Mode Communication mode (AC 120V/60Hz) **Polarity** Line

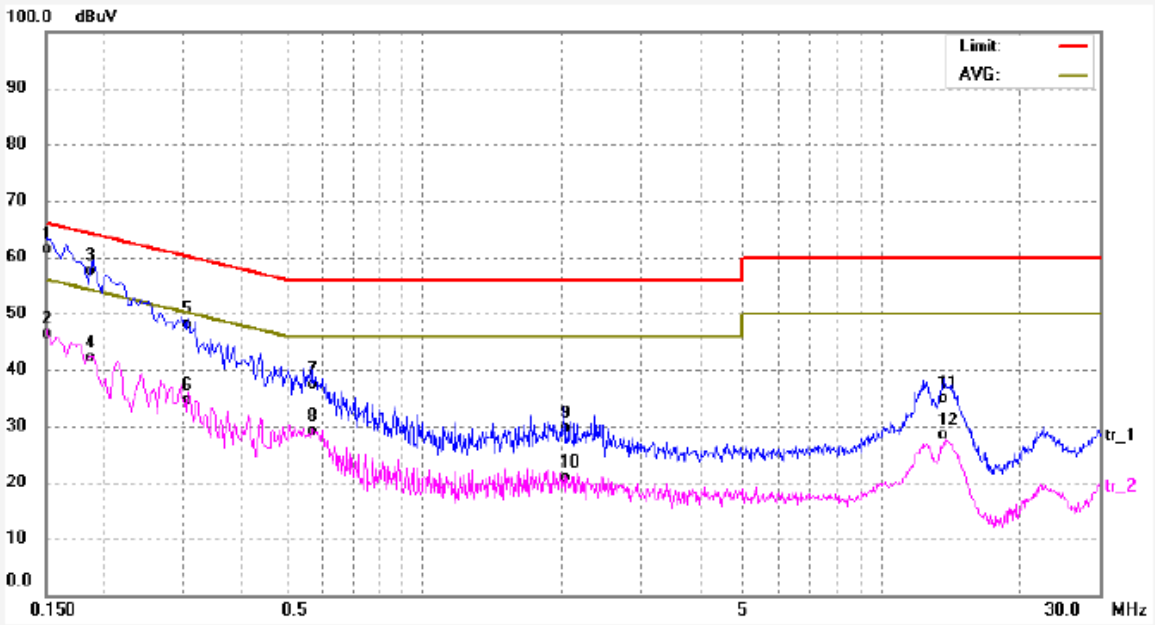

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	50.72	9.73	60.45	65.99	-5.54	QP	
2	0.1500	35.63	9.73	45.36	55.99	-10.63	AVG	
3	0.1900	46.83	9.76	56.59	64.03	-7.44	QP	
4	0.1900	31.29	9.76	41.05	54.03	-12.98	AVG	
5	0.3060	37.39	9.63	47.02	60.08	-13.06	QP	
6	0.3060	24.07	9.63	33.70	50.08	-16.38	AVG	
7	0.5700	26.73	9.63	36.36	56.00	-19.64	QP	
8	0.5700	18.52	9.63	28.15	46.00	-17.85	AVG	
9	2.0300	18.95	9.80	28.75	56.00	-27.25	QP	
10	2.0300	10.20	9.80	20.00	46.00	-26.00	AVG	
11	13.6660	23.26	10.55	33.81	60.00	-26.19	QP	
12	13.6660	16.74	10.55	27.29	50.00	-22.71	AVG	

Test Mode Communication mode (AC 120V/60Hz) **Polarity** Neutral

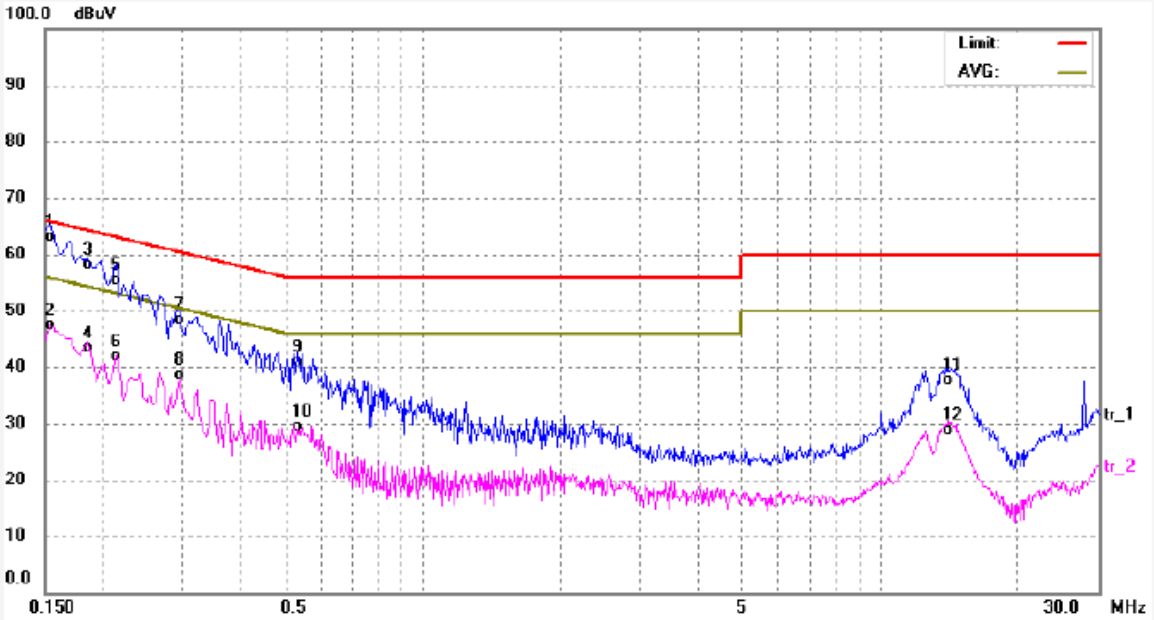

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	52.63	9.57	62.20	65.78	-3.58	QP	
2	0.1539	36.74	9.57	46.31	55.78	-9.47	AVG	
3	0.1844	47.44	9.58	57.02	64.28	-7.26	QP	
4	0.1844	32.77	9.58	42.35	54.28	-11.93	AVG	
5	0.2140	44.67	9.59	54.26	63.04	-8.78	QP	
6	0.2140	31.40	9.59	40.99	53.04	-12.05	AVG	
7	0.2940	37.76	9.60	47.36	60.41	-13.05	QP	
8	0.2940	27.95	9.60	37.55	50.41	-12.86	AVG	
9	0.5340	30.38	9.62	40.00	56.00	-16.00	QP	
10	0.5340	18.71	9.62	28.33	46.00	-17.67	AVG	
11	14.2420	26.42	10.14	36.56	60.00	-23.44	QP	
12	14.2420	17.86	10.14	28.00	50.00	-22.00	AVG	

7 Photographs Test Setup

7.1 Photographs - Radiated Emission Test Setup

30MHz-1GHz

Above 1GHz

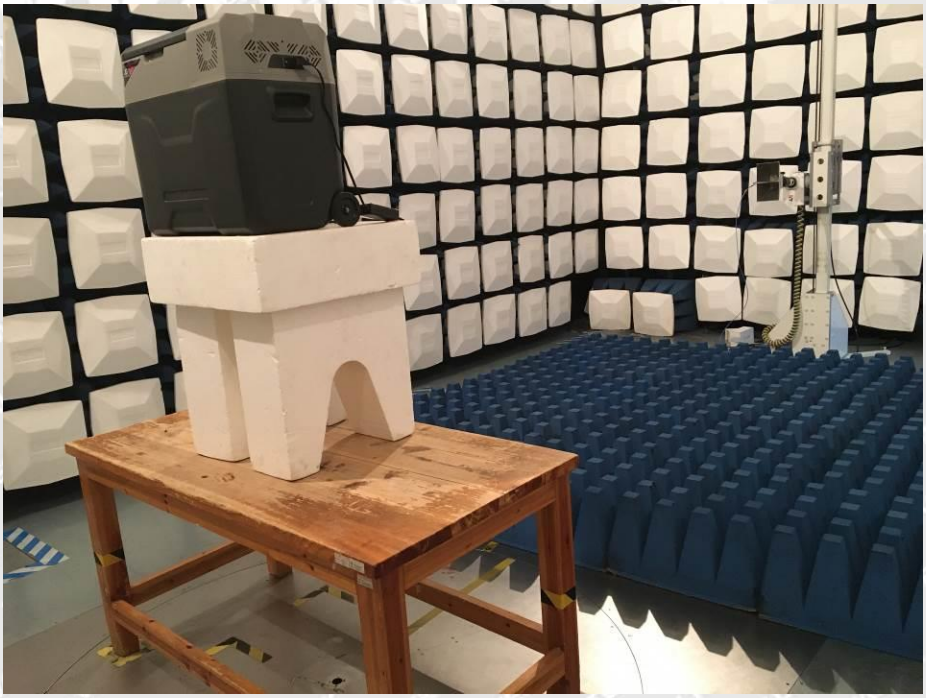

7.2 Photographs – Conducted Emission Test Setup

8 Photographs - Constructional Details

8.1 EUT - External Photos

C-PENTAVE

DC 12V/24V
FUSE

AC/DC ADAPTER
(电源适配器)
MODEL (型号) :GRT60-145410
INPUT (输入): 100~240V~/ 1.5A
Max 50/60Hz
OUTPUT (输出):14.5V 4.1A 59.45W
Intertek
5003778
SU10768-23001
R-R-FGP-GRT60-130500
ta=40℃ IP20 PF≥0.5
MADE IN CHINA (中国制造)
FoShan Great Power Co.,Ltd.
SN:2308032613

8.2 EUT - Internal Photos

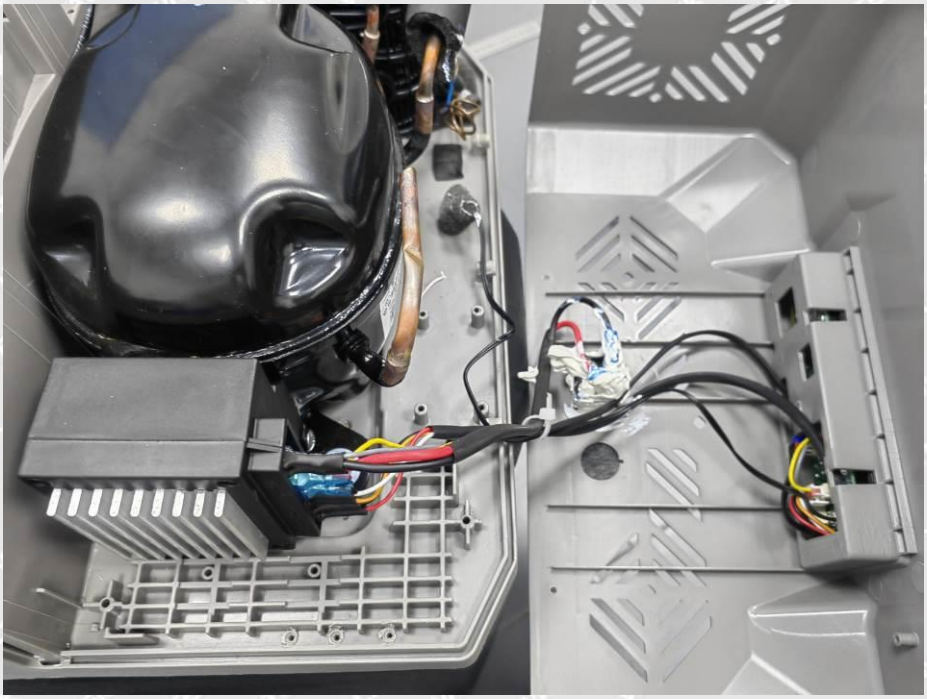

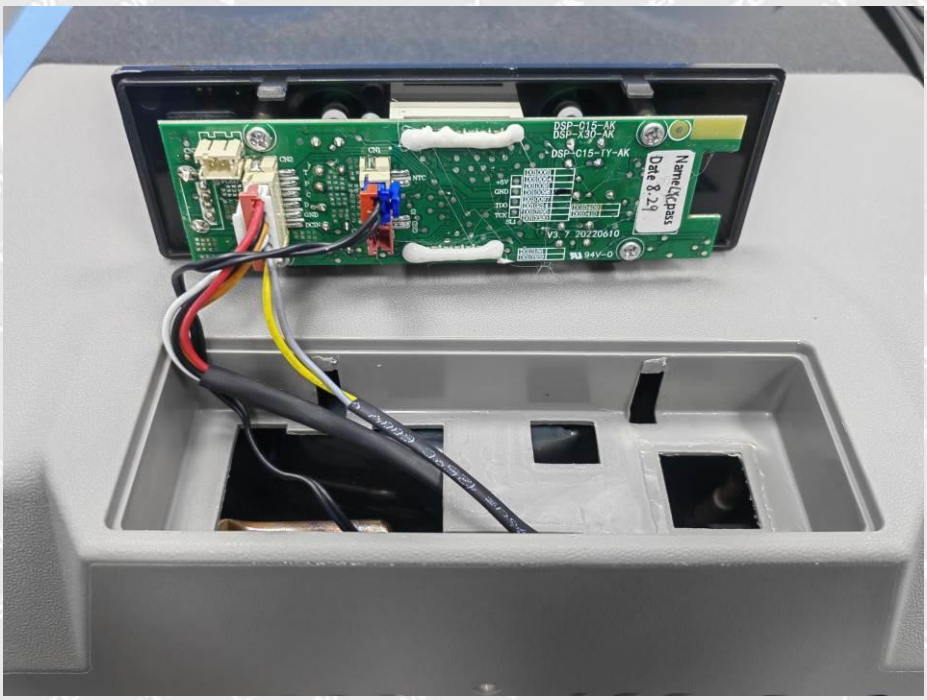

SYSTEM
SYS24230728
C25B(BSA025LCVV)
HV1.0 SV1.0
01040312(H020043)
12/24V MAX 6.0A
Made in China
T80

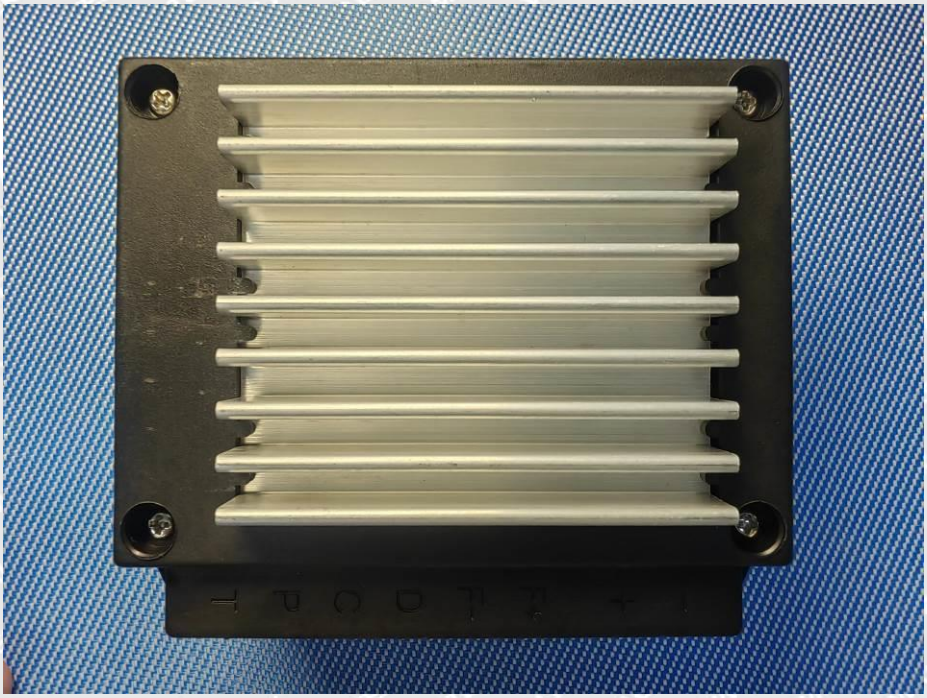

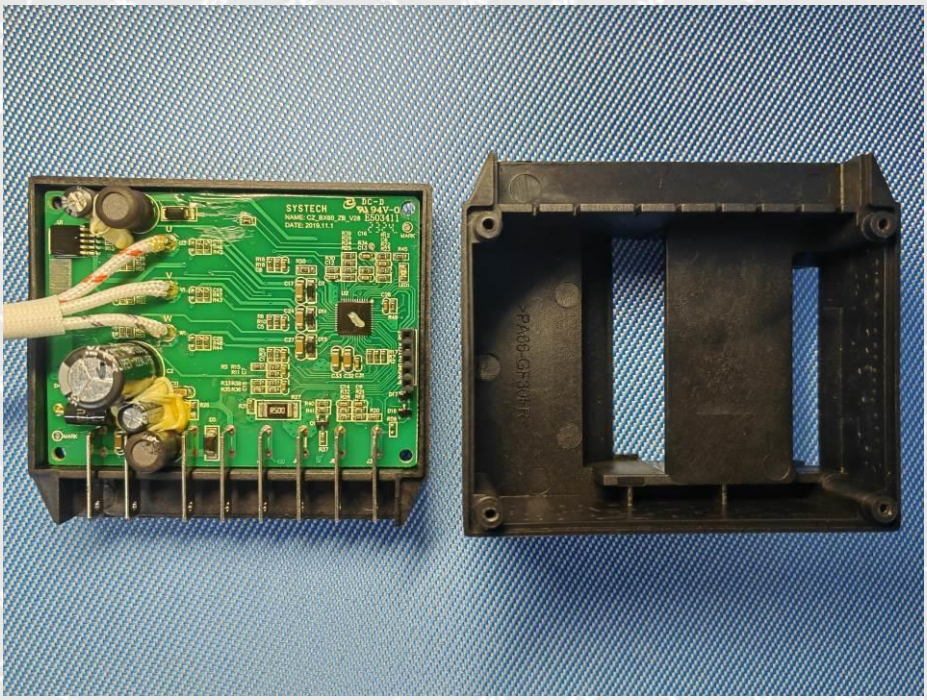
SYSTECH
DC-B
94V-0

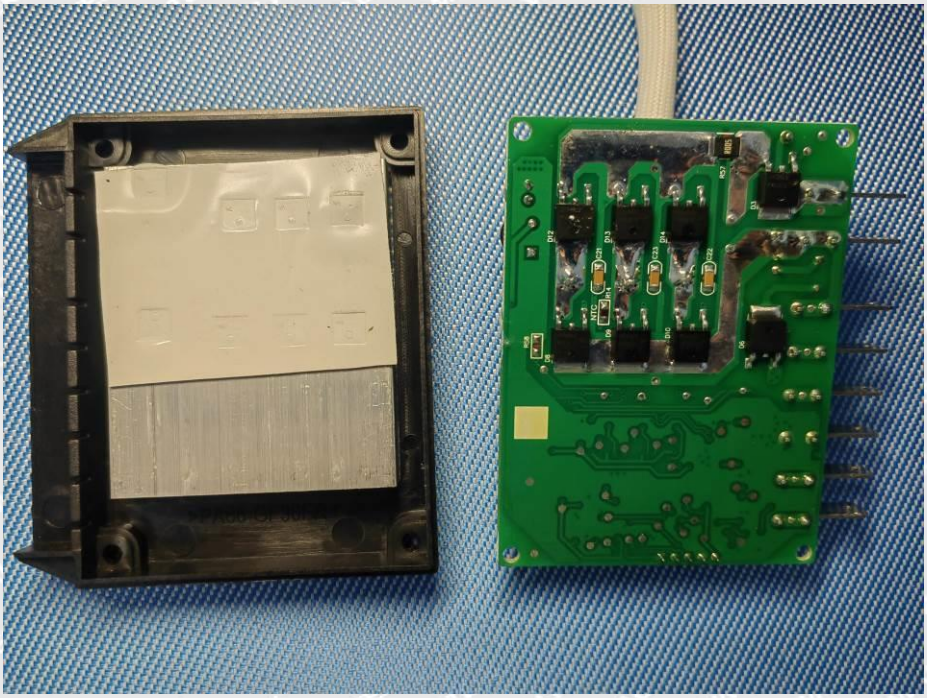

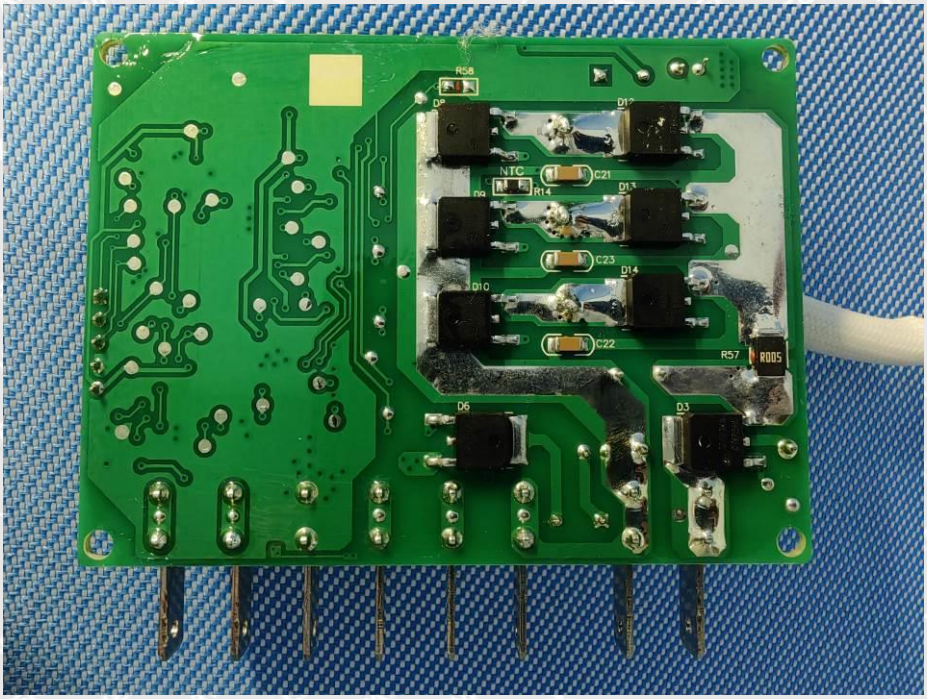
NTC
R005

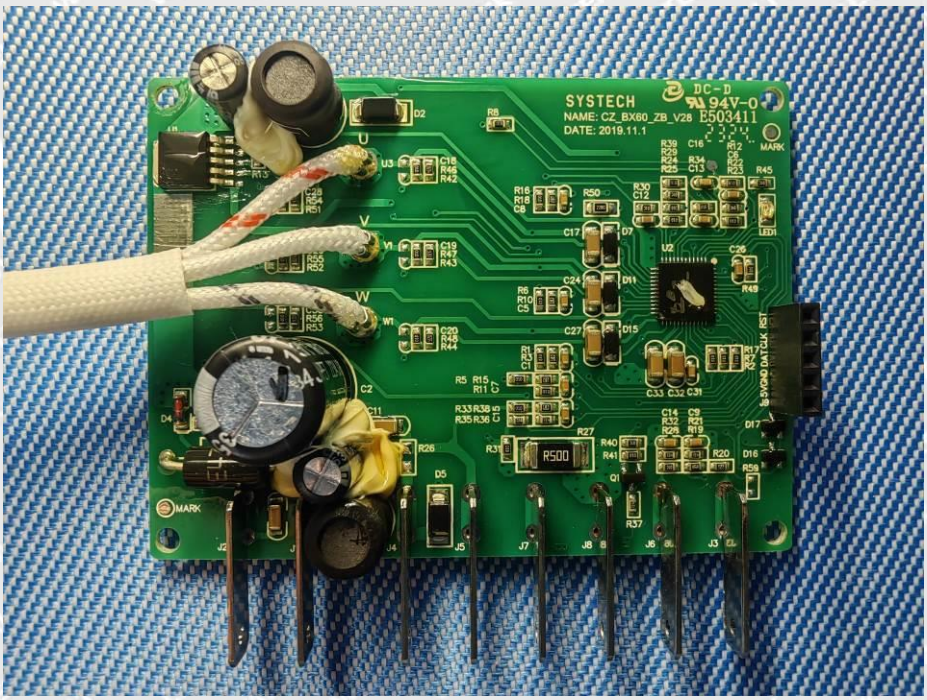
SYSTECH
NAME: CZ_BX60_ZB_V28
DATE: 2019.11.1
DC-D
94V-0
E503411
MARK
R500

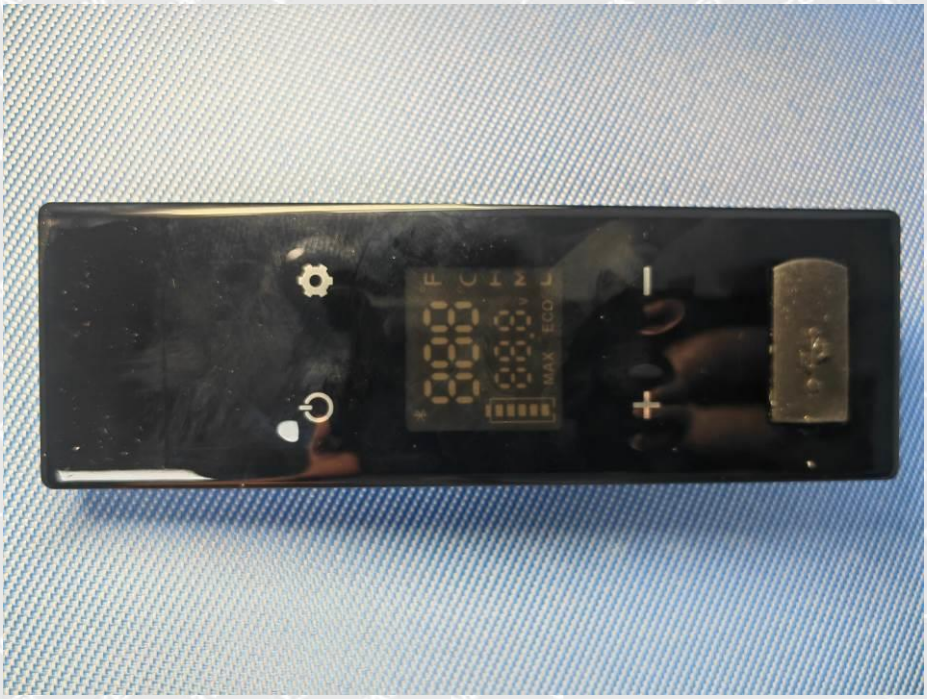
F
C
T
N
MAX
ECO
L

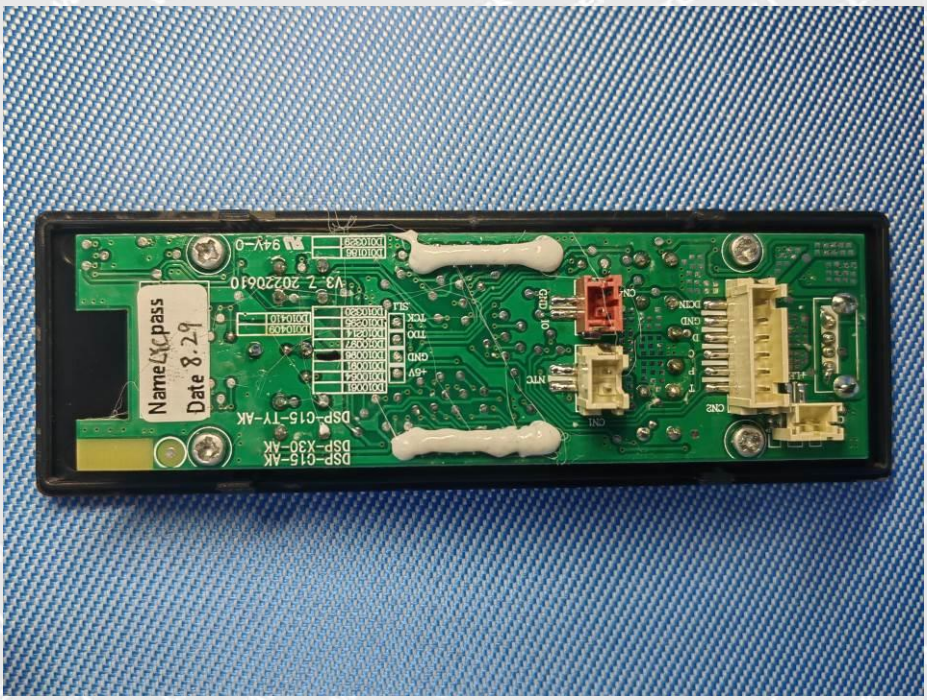
Name
pass
Date 8.29
DSP-015-TY-AK
DSP-015-AK
DSP-X30-AK
V3 Z 20220610
94V-0
+5V
GND
TXD
TCK
SCL
NTC
CN1
CN2
CN3
CN4
CN5
CN6
CN7
CN8
CN9
CN10
CN11
CN12
CN13
CN14
CN15
CN16
CN17
CN18
CN19
CN20
CN21
CN22
CN23
CN24
CN25
CN26
CN27
CN28
CN29
CN30
CN31
CN32
CN33
CN34
CN35
CN36
CN37
CN38
CN39
CN40
CN41
CN42
CN43
CN44
CN45
CN46
CN47
CN48
CN49
CN50
CN51
CN52
CN53
CN54
CN55
CN56
CN57
CN58
CN59
CN60
CN61
CN62
CN63
CN64
CN65
CN66
CN67
CN68
CN69
CN70
CN71
CN72
CN73
CN74
CN75
CN76
CN77
CN78
CN79
CN80
CN81
CN82
CN83
CN84
CN85
CN86
CN87
CN88
CN89
CN90
CN91
CN92
CN93
CN94
CN95
CN96
CN97
CN98
CN99
CN100
CN101
CN102
CN103
CN104
CN105
CN106
CN107
CN108
CN109
CN110
CN111
CN112
CN113
CN114
CN115
CN116
CN117
CN118
CN119
CN120
CN121
CN122
CN123
CN124
CN125
CN126
CN127
CN128
CN129
CN130
CN131
CN132
CN133
CN134
CN135
CN136
CN137
CN138
CN139
CN140
CN141
CN142
CN143
CN144
CN145
CN146
CN147
CN148
CN149
CN150
CN151
CN152
CN153
CN154
CN155
CN156
CN157
CN158
CN159
CN160
CN161
CN162
CN163
CN164
CN165
CN166
CN167
CN168
CN169
CN170
CN171
CN172
CN173
CN174
CN175
CN176
CN177
CN178
CN179
CN180
CN181
CN182
CN183
CN184
CN185
CN186
CN187
CN188
CN189
CN190
CN191
CN192
CN193
CN194
CN195
CN196
CN197
CN198
CN199
CN200
CN201
CN202
CN203
CN204
CN205
CN206
CN207
CN208
CN209
CN210
CN211
CN212
CN213
CN214
CN215
CN216
CN217
CN218
CN219
CN220
CN221
CN222
CN223
CN224
CN225
CN226
CN227
CN228
CN229
CN230
CN231
CN232
CN233
CN234
CN235
CN236
CN237
CN238
CN239
CN240
CN241
CN242
CN243
CN244
CN245
CN246
CN247
CN248
CN249
CN250
CN251
CN252
CN253
CN254
CN255
CN256
CN257
CN258
CN259
CN260
CN261
CN262
CN263
CN264
CN265
CN266
CN267
CN268
CN269
CN270
CN271
CN272
CN273
CN274
CN275
CN276
CN277
CN278
CN279
CN280
CN281
CN282
CN283
CN284
CN285
CN286
CN287
CN288
CN289
CN290
CN291
CN292
CN293
CN294
CN295
CN296
CN297
CN298
CN299
CN300
CN301
CN302
CN303
CN304
CN305
CN306
CN307
CN308
CN309
CN310
CN311
CN312
CN313
CN314
CN315
CN316
CN317
CN318
CN319
CN320
CN321
CN322
CN323
CN324
CN325
CN326
CN327
CN328
CN329
CN330
CN331
CN332
CN333
CN334
CN335
CN336
CN337
CN338
CN339
CN340
CN341
CN342
CN343
CN344
CN345
CN346
CN347
CN348
CN349
CN350
CN351
CN352
CN353
CN354
CN355
CN356
CN357
CN358
CN359
CN360
CN361
CN362
CN363
CN364
CN365
CN366
CN367
CN368
CN369
CN370
CN371
CN372
CN373
CN374
CN375
CN376
CN377
CN378
CN379
CN380
CN381
CN382
CN383
CN384
CN385
CN386
CN387
CN388
CN389
CN390
CN391
CN392
CN393
CN394
CN395
CN396
CN397
CN398
CN399
CN400
CN401
CN402
CN403
CN404
CN405
CN406
CN407
CN408
CN409
CN410
CN411
CN412
CN413
CN414
CN415
CN416
CN417
CN418
CN419
CN420
CN421
CN422
CN423
CN424
CN425
CN426
CN427
CN428
CN429
CN430
CN431
CN432
CN433
CN434
CN435
CN436
CN437
CN438
CN439
CN440
CN441
CN442
CN443
CN444
CN445
CN446
CN447
CN448
CN449
CN450
CN451
CN452
CN453
CN454
CN455
CN456
CN457
CN458
CN459
CN460
CN461
CN462
CN463
CN464
CN465
CN466
CN467
CN468
CN469
CN470
CN471
CN472
CN473
CN474
CN475
CN476
CN477
CN478
CN479
CN480
CN481
CN482
CN483
CN484
CN485
CN486
CN487
CN488
CN489
CN490
CN491
CN492
CN493
CN494
CN495
CN496
CN497
CN498
CN499
CN500
CN501
CN502
CN503
CN504
CN505
CN506
CN507
CN508
CN509
CN510
CN511
CN512
CN513
CN514
CN515
CN516
CN517
CN518
CN519
CN520
CN521
CN522
CN523
CN524
CN525
CN526
CN527
CN528
CN529
CN530
CN531
CN532
CN533
CN534
CN535
CN536
CN537
CN538
CN539
CN540
CN541
CN542
CN543
CN544
CN545
CN546
CN547
CN548
CN549
CN550
CN551
CN552
CN553
CN554
CN555
CN556
CN557
CN558
CN559
CN560
CN561
CN562
CN563
CN564
CN565
CN566
CN567
CN568
CN569
CN570
CN571
CN572
CN573
CN574
CN575
CN576
CN577
CN578
CN579
CN580
CN581
CN582
CN583
CN584
CN585
CN586
CN587
CN588
CN589
CN590
CN591
CN592
CN593
CN594
CN595
CN596
CN597
CN598
CN599
CN600
CN601
CN602
CN603
CN604
CN605
CN606
CN607
CN608
CN609
CN610
CN611
CN612
CN613
CN614
CN615
CN616
CN617
CN618
CN619
CN620
CN621
CN622
CN623
CN624
CN625
CN626
CN627
CN628
CN629
CN630
CN631
CN632
CN633
CN634
CN635
CN636
CN637
CN638
CN639
CN640
CN641
CN642
CN643
CN644
CN645
CN646
CN647
CN648
CN649
CN650
CN651
CN652
CN653
CN654
CN655
CN656
CN657
CN658
CN659
CN660
CN661
CN662
CN663
CN664
CN665
CN666
CN667
CN668
CN669
CN670
CN671
CN672
CN673
CN674
CN675
CN676
CN677
CN678
CN679
CN680
CN681
CN682
CN683
CN684
CN685
CN686
CN687
CN688
CN689
CN690
CN691
CN692
CN693
CN694
CN695
CN696
CN697
CN698
CN699
CN700
CN701
CN702
CN703
CN704
CN705
CN706
CN707
CN708
CN709
CN710
CN711
CN712
CN713
CN714
CN715
CN716
CN717
CN718
CN719
CN720
CN721
CN722
CN723
CN724
CN725
CN726
CN727
CN728
CN729
CN730
CN731
CN732
CN733
CN734
CN735
CN736
CN737
CN738
CN739
CN740
CN741
CN742
CN743
CN744
CN745
CN746
CN747
CN748
CN749
CN750
CN751
CN752
CN753
CN754
CN755
CN756
CN757
CN758
CN759
CN760
CN761
CN762
CN763
CN764
CN765
CN766
CN767
CN768
CN769
CN770
CN771
CN772
CN773
CN774
CN775
CN776
CN777
CN778
CN779
CN780
CN781
CN782
CN783
CN784
CN785
CN786
CN787
CN788
CN789
CN790
CN791
CN792
CN793
CN794
CN795
CN796
CN797
CN798
CN799
CN800
CN801
CN802
CN803
CN804
CN805
CN806
CN807
CN808
CN809
CN810
CN811
CN812
CN813
CN814
CN815
CN816
CN817
CN818
CN819
CN820
CN821
CN822
CN823
CN824
CN825
CN826
CN827
CN828
CN829
CN830
CN831
CN832
CN833
CN834
CN835
CN836
CN837
CN838
CN839
CN840
CN841
CN842
CN843
CN844
CN845
CN846
CN847
CN848
CN849
CN850
CN851
CN852
CN853
CN854
CN855
CN856
CN857
CN858
CN859
CN860
CN861
CN862
CN863
CN864
CN865
CN866
CN867
CN868
CN869
CN870
CN871
CN872
CN873
CN874
CN875
CN876
CN877
CN878
CN879
CN880
CN881
CN882
CN883
CN884
CN885
CN886
CN887
CN888
CN889
CN890
CN891
CN892
CN893
CN894
CN895
CN896
CN897
CN898
CN899
CN900
CN901
CN902
CN903
CN904
CN905
CN906
CN907
CN908
CN909
CN910
CN911
CN912
CN913
CN914
CN915
CN916
CN917
CN918
CN919
CN920
CN921
CN922
CN923
CN924
CN925
CN926
CN927
CN928
CN929
CN930
CN931
CN932
CN933
CN934
CN935
CN936
CN937
CN938
CN939
CN940
CN941
CN942
CN943
CN944
CN945
CN946
CN947
CN948
CN949
CN950
CN951
CN952
CN953
CN954
CN955
CN956
CN957
CN958
CN959
CN960
CN961
CN962
CN963
CN964
CN965
CN966
CN967
CN968
CN969
CN970
CN971
CN972
CN973
CN974
CN975
CN976
CN977
CN978
CN979
CN980
CN981
CN982
CN983
CN984
CN985
CN986
CN987
CN988
CN989
CN990
CN991
CN992
CN993
CN994
CN995
CN996
CN997
CN998
CN999
CN1000

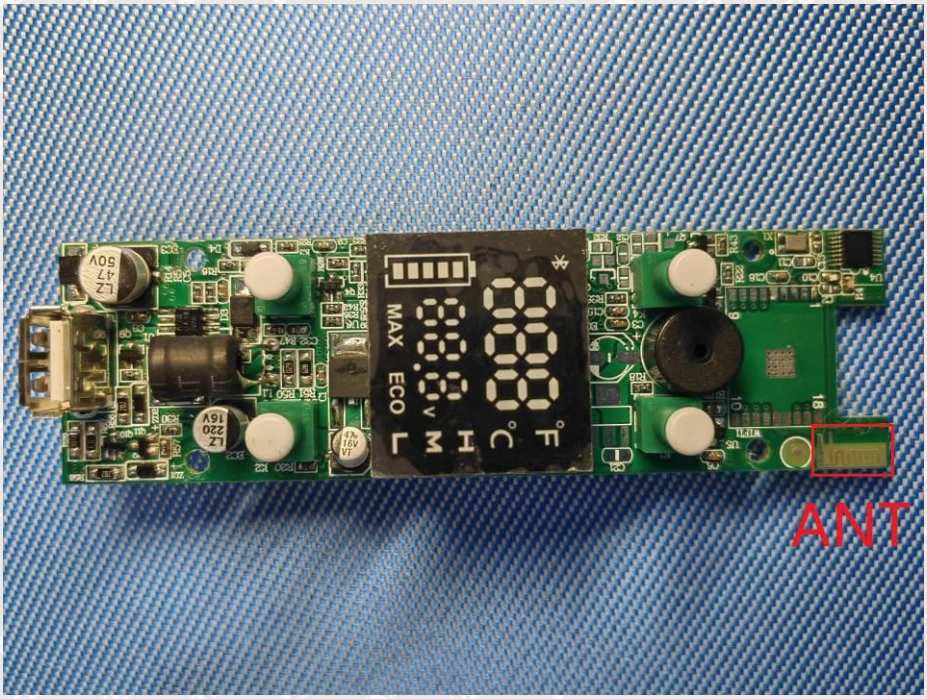
MAX
ECO
ANT

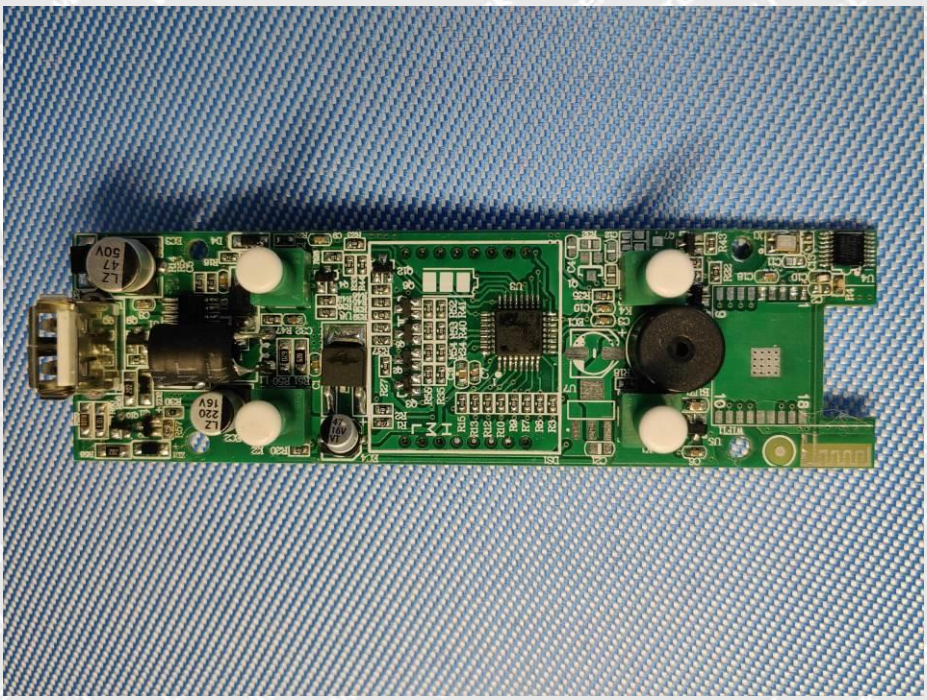

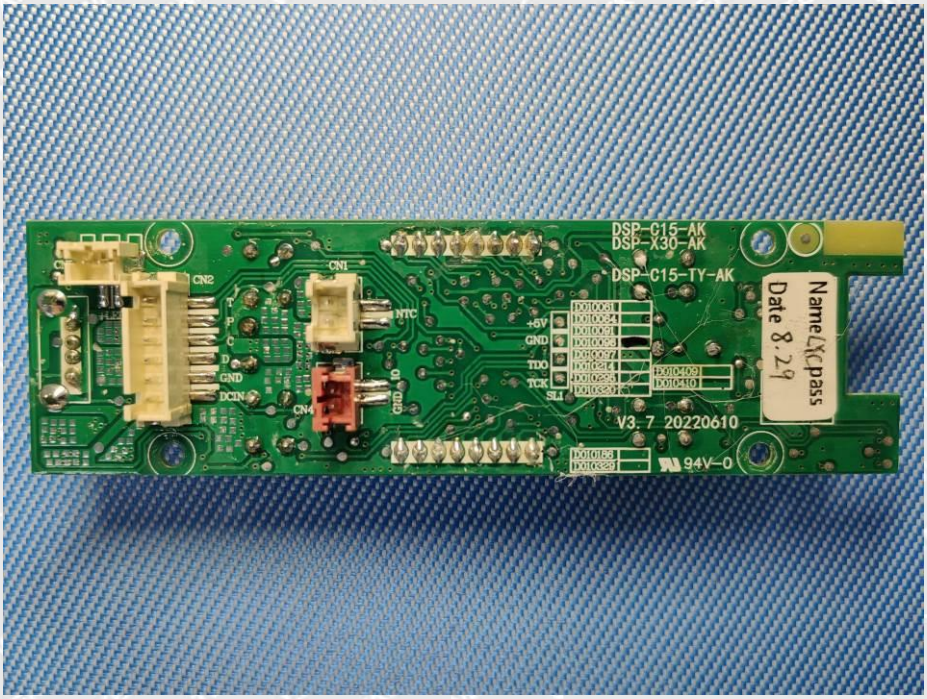
DSP-C15-AK
DSP-X30-AK
DSP-C15-TY-AK
Name LXCpass
Date 8.29
V3.7 20220610
94V-0

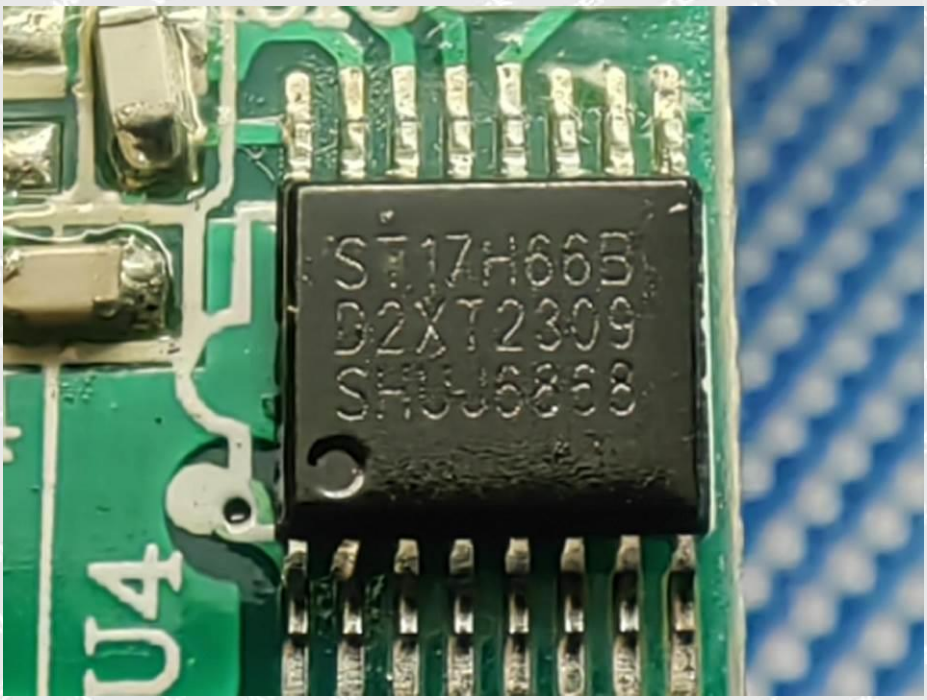
ST17H66B
D2XT2309
SHUJ6868
U4

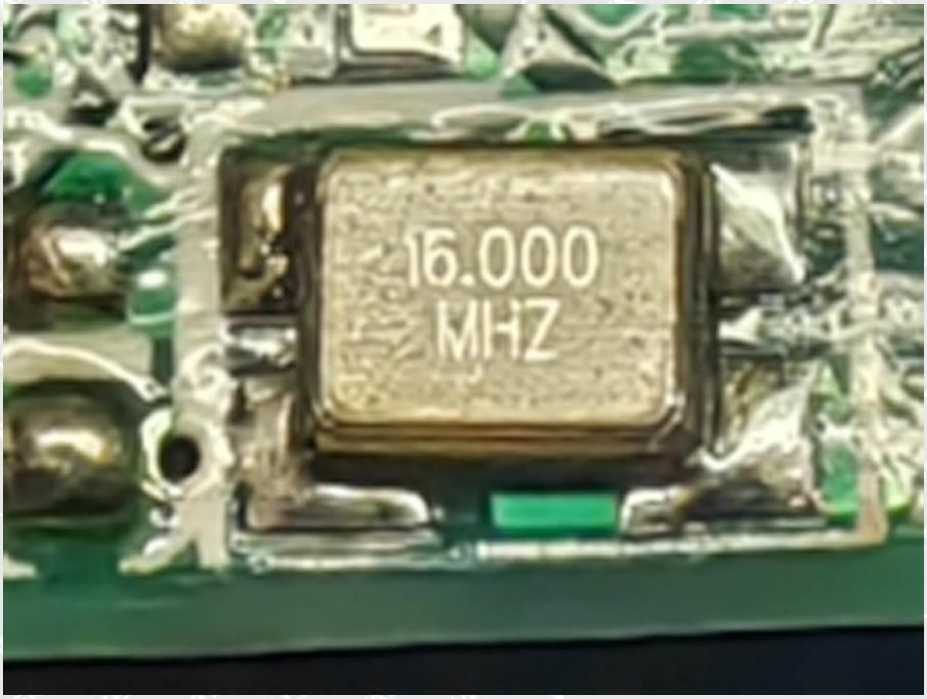
16.000
MHZ

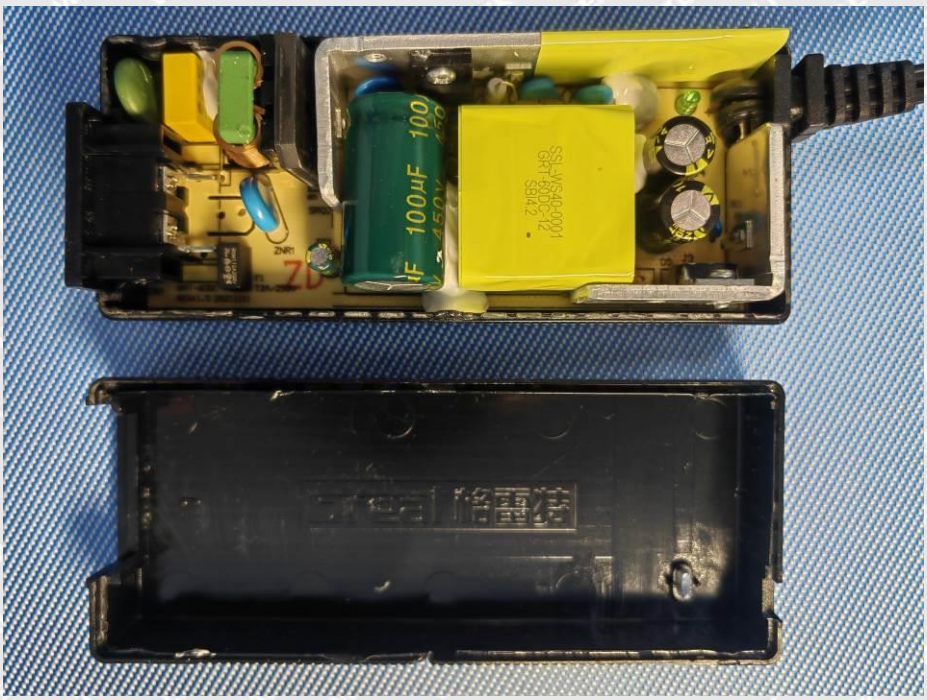
100μF
SSL-WS40-0001
GRT-60DC-12
SBI4.2

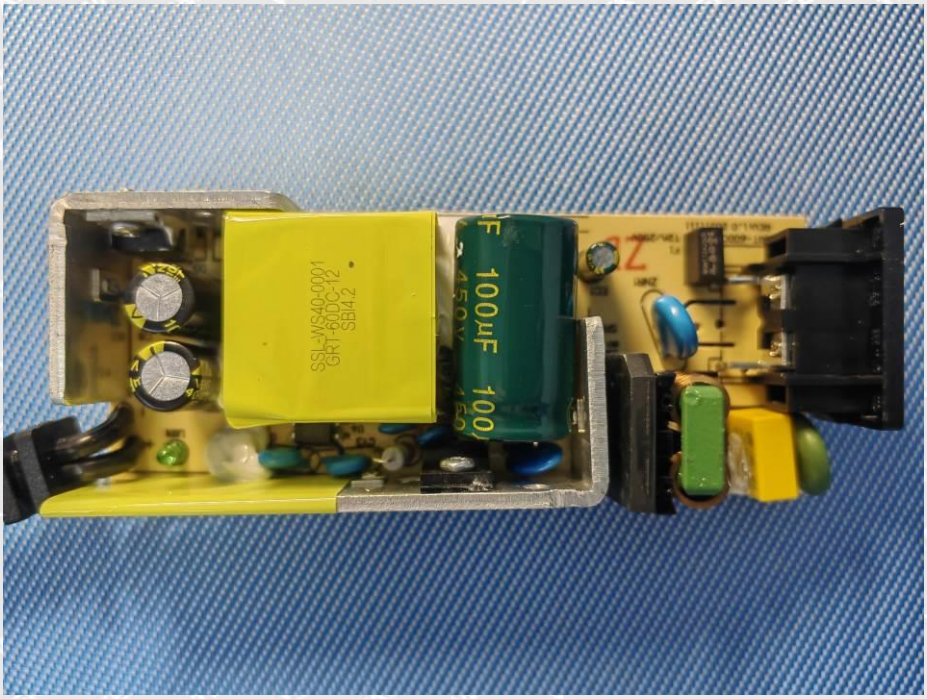

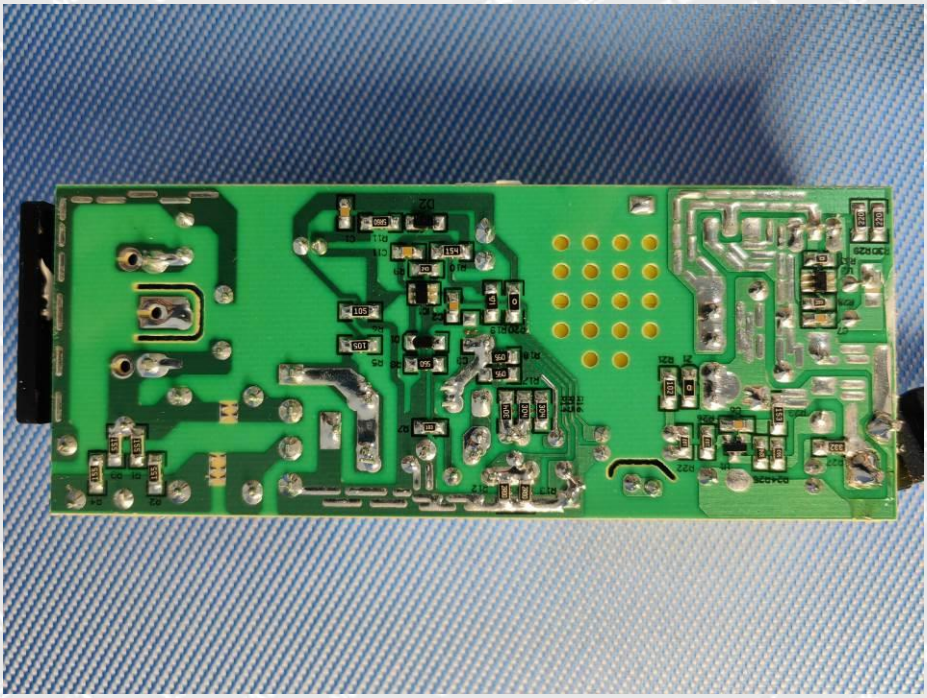

======End of Report======