

TEST REPORT

Applicant Name: Blackshark Technologies (Nanchang) Co., Ltd
Address: Room 1001, Floor 10, Floor 3-23, Room 201, Building 8 and 9, No.528, Shuanggang West Street, Nanchang City, Jiangxi Province, China
Report Number: 2501X77241E-RF-00D
FCC ID: 2BCNP-BG-PAD

Test Standard (s)
FCC PART 15.407

Sample Description

Product Type: Black Shark Tablet
Model No.: BSG1
Multiple Model(s) No.: BSG2,BSG3,BSG4,BSG5,BSG6,BSG7,BSG8,BSG9,BSG10
Trade Mark: BLACK SHARK
Date Received: 2025-09-09
Issue Date: 2025-11-14

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Ekko Wu

Ekko Wu
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked* is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
SUMMARY OF TEST RESULTS	13
TEST EQUIPMENT LIST	14
REQUIREMENTS AND TEST PROCEDURES	15
CONDUCTED EMISSIONS	15
UNDESIRABLE EMISSION	17
EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	21
CONDUCTED TRANSMITTER OUTPUT POWER	23
POWER SPECTRAL DENSITY	24
DUTY CYCLE	25
ANTENNA REQUIREMENT	26
TEST DATA AND RESULTS	27
CONDUCTED EMISSIONS	27
UNDESIRABLE EMISSION	30
EMISSION BANDWIDTH	499
99% OCCUPIED BANDWIDTH	530
MAXIMUM CONDUCTED OUTPUT POWER	561
POWER SPECTRAL DENSITY	571
DUTY CYCLE	606
RF EXPOSURE EVALUATION	610
EUT PHOTOGRAPHS	611
TEST SETUP PHOTOGRAPHS	612

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2501X77241E-RF-00D	Original Report	2025/11/14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Black Shark Tablet
Tested Model	BSG1
Multiple Model(s)	BSG2,BSG3,BSG4,BSG5,BSG6,BSG7,BSG8,BSG9,BSG10
Frequency Range	5150-5250MHz; 5250-5350MHz; 5470-5725MHz; 5725-5850MHz
Mode	802.11a/n20/n40/ac20/ac40/ac80/ac160/ax20/ax40/ax80/ax160
Maximum Conducted Average Output Power	5150-5250MHz: 9.27dBm; 5250-5350MHz: 8.03dBm 5470-5725MHz: 6.36dBm; 5725-5850MHz: 9.90Bm
Modulation Technique	OFDM, OFDMA
Antenna Specification[#]	5150-5250MHz: ANT0(Chain 0): 0.83dBi, ANT1(Chain 1): 0.79dBi 5250-5350MHz: ANT0(Chain 0): 0.89dBi, ANT1(Chain 1): 0.97dBi 5470-5725MHz: ANT0(Chain 0): 1.07dBi, ANT1(Chain 1): 1.17dBi; 5725-5850MHz: ANT0(Chain 0): 0.63dBi, ANT1(Chain 1): 0.79dBi (provided by the applicant)
Voltage Range	DC 5V/9V from adapter or DC 3.8V from battery
Sample serial number	39RQ-3 for Conducted and Radiated Emissions Test 39RQ-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: ES166A-US-1200167 Input: AC 100-240V~50/60Hz, 0.6A Output: DC 5.0V, 3.0A, 15.0W/9.0V, 2.22A, 20.0W/12.0V, 1.67A, 20.0W (PPS): DC 5.0-11.0V, 1.8A (20.0W MAX)
Note: The Multiple models are electrically identical with the test model except for model number and sales channel. Please refer to the declaration letter [#] for more detail, which was provided by manufacturer.	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF Frequency		56.6Hz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.60dB(k=2, 95% level of confidence)
Power Spectral Density		0.90dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.63dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

For 5150-5350MHz Band, 15 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260
38	5190	54	5270
40	5200	56	5280
42	5210	58	5290
44	5220	60	5300
46	5230	62	5310
48	5240	64	5320
50	5250	/	/

For 802.11a/ac20/ax20 mode:

channel 36, 40, 48 were tested for 5150-5250MHz band,

channel 52, 56, 64 were tested for 5250-5350MHz band

For 802.11ac40/ax40 mode:

channel 38, 46 were tested for 5150-5250MHz band,

channel 54, 62 were tested for 5250-5350MHz band

For 802.11ac80/ax80 mode:

channel 42 was tested for 5150-5250MHz band,

channel 58 was tested for 5250-5350MHz band

For 802.11ac160/ax160 mode: channel 50 was tested

For 5470-5725MHz Band, 22channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	122	5610
102	5510	124	5620
104	5520	126	5630
106	5530	128	5640
108	5540	132	5660
110	5550	134	5670
112	5560	136	5680
114	5570	138	5690
116	5580	140	5700
118	5590	142	5710
120	5600	144	5720

For 802.11a/ac20/ax20 mode: channel 100, 116, 140, 144 were tested

For 802.11ac40/ax40 mode: channel 102, 110, 134, 142 were tested

For 802.11ac80/ax80 mode, channel 106, 122, 138 was tested

For 802.11ac160/ax160 mode, channel 114 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a/ac20/ax20 mode: channel 149, 157, 165 were tested

For 802.11ac40/ax40 mode: channel 151, 159 were tested

For 802.11ac80/ax80 mode, channel 155 was tested

EUT Exercise Software

Exercise Software#	QRCT				
5150-5250 MHz Band					
Mode	Test Channels	Test Frequency (MHz)	Data rate	Power Level#	
				ANT0	ANT1
802.11a	Low	5180	6Mbps	6.5	11
	Middle	5200	6Mbps	6.5	11
	High	5240	6Mbps	6.5	11
802.11ac-VHT20	Low	5180	MCS0	6.5	
	Middle	5200	MCS0	6.5	
	High	5240	MCS0	6.5	
802.11ac-VHT40	Low	5190	MCS0	6.5	
	High	5230	MCS0	6.5	
802.11ac-VHT80	Middle	5210	MCS0	6.5	
802.11ax-HE20	Low	5180	MCS0	6.5	
	Middle	5200	MCS0	6.5	
	High	5240	MCS0	6.5	
802.11ax-HE40	Low	5190	MCS0	6.5	
	High	5230	MCS0	6.5	
802.11ax-HE80	Middle	5210	MCS0	6.5	

5250-5350 MHz Band					
Mode	Test Channels	Test Frequency (MHz)	Data rate	Power Level[#]	
				ANT0	ANT1
802.11a	Low	5260	6Mbps	6.5	10
	Middle	5280	6Mbps	6.5	10
	High	5320	6Mbps	6.5	10
802.11ac-VHT20	Low	5260	MCS0	6.5	
	Middle	5280	MCS0	6.5	
	High	5320	MCS0	6.5	
802.11ac-VHT40	Low	5270	MCS0	6.5	
	High	5310	MCS0	6.5	
802.11ac-VHT80	Middle	5290	MCS0	6.5	
802.11ac-VHT160	Middle	5250	MCS0	6.5	
802.11ax-HE20	Low	5260	MCS0	6.5	
	Middle	5280	MCS0	6.5	
	High	5320	MCS0	6.5	
802.11ax-HE40	Low	5270	MCS0	6.5	
	High	5310	MCS0	6.5	
802.11ax-HE80	Middle	5290	MCS0	6.5	
802.11ax-HE160	Middle	5250	MCS0	6.5	

5470-5725 MHz Band					
Mode	Test Channels	Test Frequency (MHz)	Data rate	Power Level [#]	
				ANT0	ANT1
802.11a	Low	5500	6Mbps	7	6.5
	Middle	5580	6Mbps	7	6.5
	High	5700	6Mbps	7	6.5
	Cross	5720	6Mbps	7	6.5
802.11ac-VHT20	Low	5500	MCS0	5	
	Middle	5580	MCS0	5	
	High	5700	MCS0	5	
	Cross	5720	MCS0	5	
802.11ac-VHT40	Low	5510	MCS0	4.5	
	Middle	5550	MCS0	4.5	
	High	5670	MCS0	4.5	
	Cross	5710	MCS0	4.5	
802.11ac-VHT80	Low	5530	MCS0	2.5	
	High	5610	MCS0	2.5	
	Cross	5690	MCS0	2.5	
802.11ac-VHT160	Middle	5570	MCS0	2.5	
802.11ax-HE20	Low	5500	MCS0	3.5	
	Middle	5580	MCS0	3.5	
	High	5700	MCS0	3.5	
	Cross	5720	MCS0	3.5	
802.11ax-HE40	Low	5510	MCS0	3.5	
	Middle	5550	MCS0	3.5	
	High	5670	MCS0	3.5	
	Cross	5710	MCS0	3.5	
802.11ax-HE80	Low	5530	MCS0	2.5	
	High	5610	MCS0	2.5	
	Cross	5690	MCS0	2.5	
802.11ax-HE160	Middle	5570	MCS0	2.5	

5725-5850 MHz Band					
Mode	Test Channels	Test Frequency (MHz)	Data rate	Power Level [#]	
				ANT0	ANT1
802.11a	Low	5745	6Mbps	8	11.5
	Middle	5785	6Mbps	8	11.5
	High	5825	6Mbps	8	11.5
802.11ac-VHT20	Low	5745	MCS0	7.5	
	Middle	5785	MCS0	7.5	
	High	5825	MCS0	7.5	
802.11ac-VHT40	Low	5755	MCS0	7.5	
	High	5795	MCS0	7.5	
802.11ac-VHT80	Middle	5775	MCS0	7.5	
802.11ax-HE20	Low	5745	MCS0	7.5	
	Middle	5785	MCS0	7.5	
	High	5825	MCS0	7.5	
802.11ax-HE40	Low	5755	MCS0	8	
	High	5795	MCS0	8	
802.11ax-HE80	Middle	5775	MCS0	7.5	

Note:

1. The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the power and PSD across all data rates bandwidths, and modulations.
2. The device supports SISO in all modes, and MIMO 2T2R in 802.11n/ac/ax modes, per pretest, 2T2R mode was the worst mode and reported for 802.11n/ac/ax modes.
3. The n20/n40 mode was reduced test as identical parameter with ac20/ac40 mode.
4. For 802.11 ax modes, the device not support partial RU mode.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Un-detachable AC cable	1.2	Receptacle	LISN/AC Mains
Unshielded Detachable USB cable	0.8	Adapter	EUT

Block Diagram of Test Setup


For Conducted Emissions:

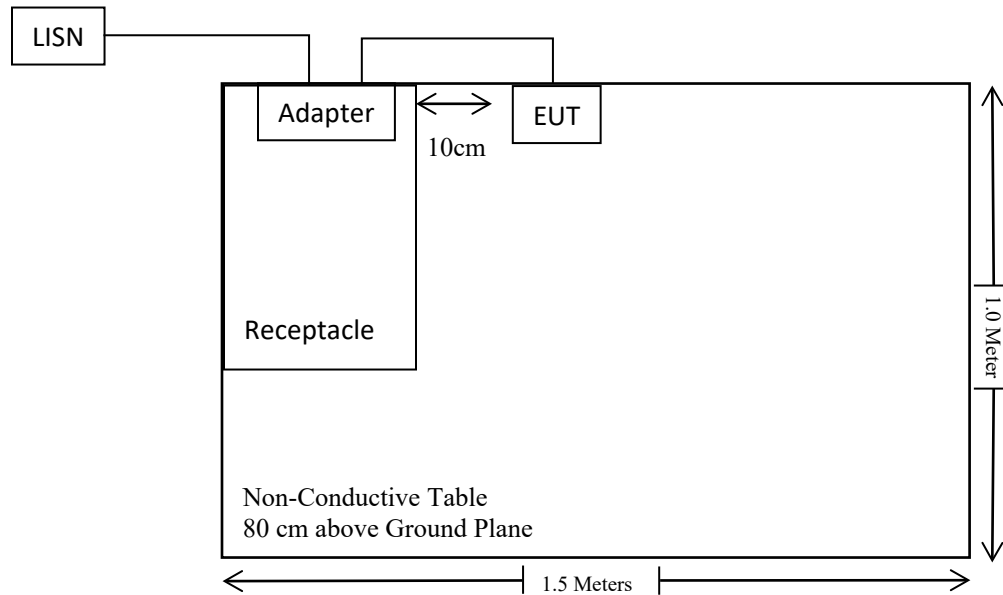

For Radiated Emissions below 1GHz:

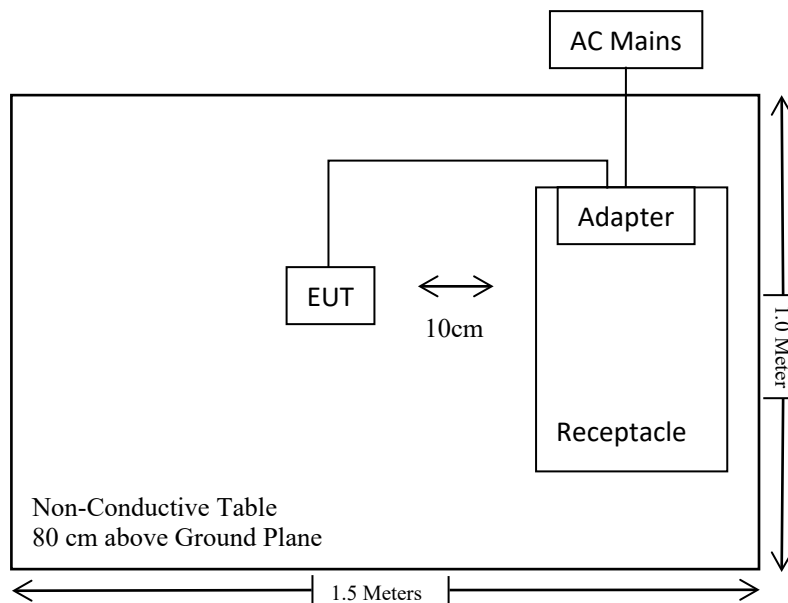

For Radiated Emissions above 1GHz:

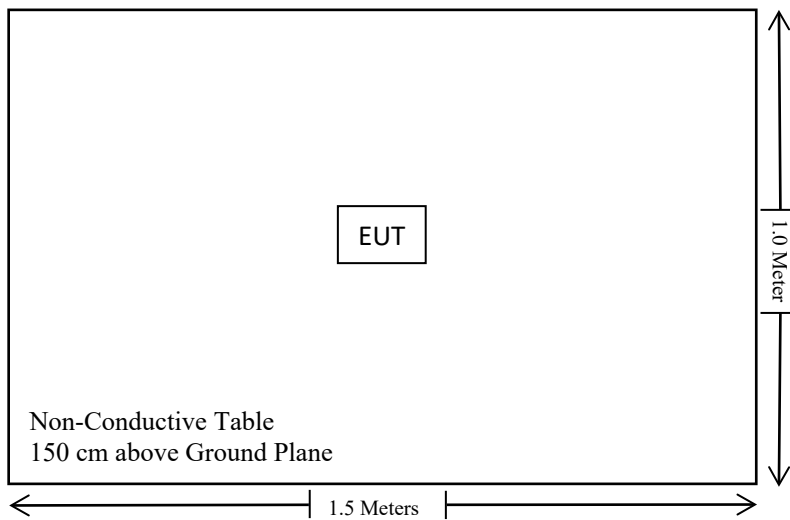

SUMMARY OF TEST RESULTS

Test Rules	Description of Test	Result
FCC §1.1307 (b) & §2.1093	RF Exposure	Compliant
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207(a)	Conducted Emissions	Compliant
FCC §15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
FCC §15.407(a) (e)	Emission Bandwidth & 99% Occupied Bandwidth	Compliant
FCC §15.407(a)	Conducted Transmitter Output Power	Compliant
FCC §15.407 (a)	Power Spectral Density	Compliant
FCC §15.407 (h)	Transmit Power Control (TPC)	Not Applicable
FCC §15.407 (h)	Dynamic Frequency Selection (DFS)	Compliant*
C63.10 §11.6	Duty Cycle	/

Compliant*: Please refer to the DFS report 2501X77241E-RF-00E.

Not Applicable: For 5250-5350MHz/5470-5725MHz, the maximum EIRP is 11.43dBm<27dBm (500mW).

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2025/09/01	2026/08/31
Rohde & Schwarz	LISN	ENV216	101613	2025/09/18	2026/09/17
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/09/18	2026/09/17
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/09/18	2026/09/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2025/09/01	2026/08/31
Sonoma instrument	Pre-amplifier	310N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Chamber A Cable	Cable A3	Cable A3	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A4	Cable A4	2025/09/08	2026/09/07
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Chamber A Cable	Cable A2	Cable A2	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A1	Cable A1	2025/09/08	2026/09/07
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2025/09/01	2026/08/31
A.H.System	Preamplifier	PAM-0118P	489	2025/09/08	2026/09/07
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	Chamber B Cable	Cable B1	Cable B1	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B2	Cable B2	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B3	Cable B3	2025/09/08	2026/09/07
JD	Filter Switch Unit	DT7220FSU	DS79906	2025/08/12	2026/08/11
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2025/08/12	2026/08/11
A.H.System	Pre-amplifier	PAM-1840VH	190	2025/09/08	2026/09/07
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	Chamber B Cable	Cable B4	Cable B4	2025/09/17	2026/09/16
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV40-N	102259	2025/09/01	2026/08/31
ANRITSU	Microwave peak	MA24418A	12622	2025/09/01	2026/08/31
Unknown	10dB Attenuator	Unknown	F-03-EM065	2025/06/26	2026/06/25

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


REQUIREMENTS AND TEST PROCEDURES

Conducted Emissions

Applicable Standard

FCC §15.207

EUT Setup

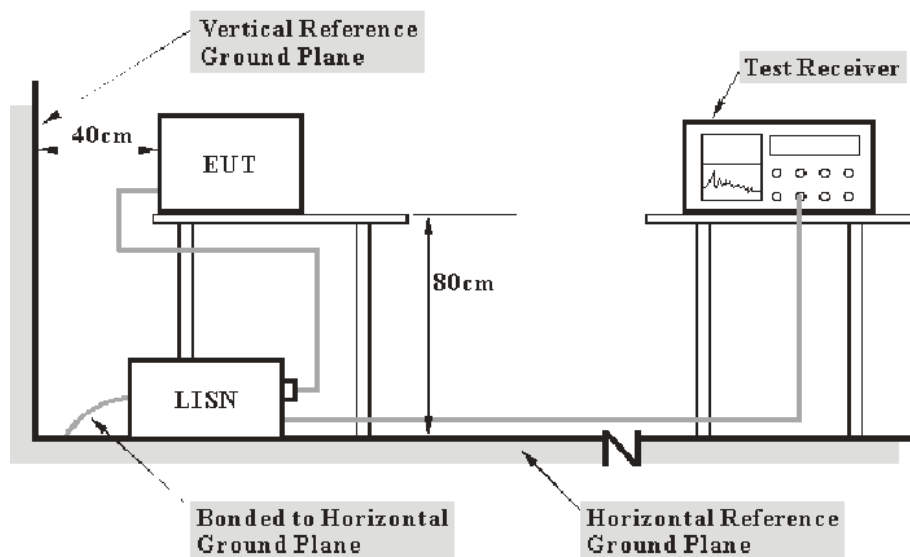

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Undesirable Emission

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:



- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

9 kHz-30MHz:

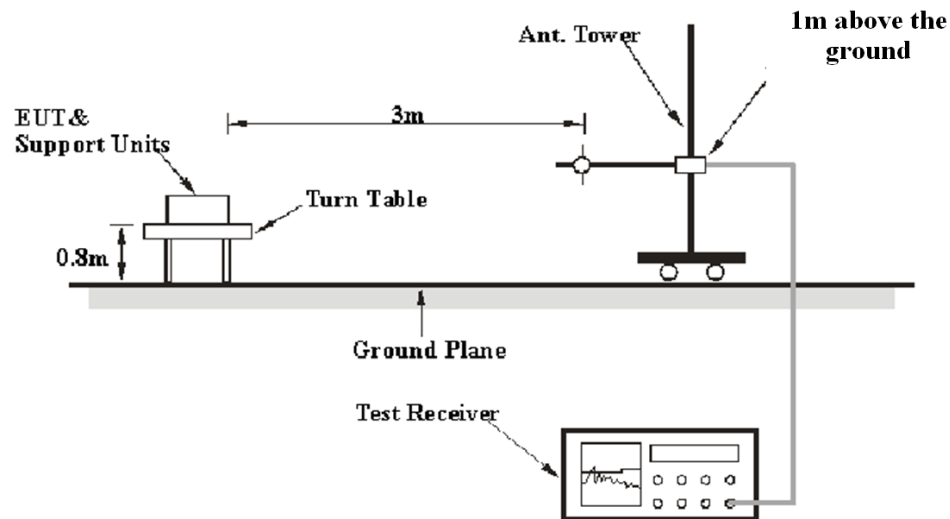

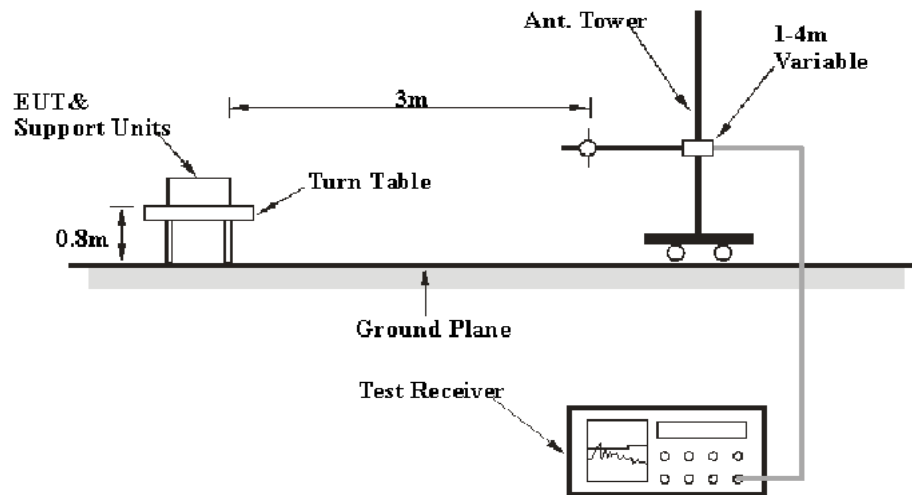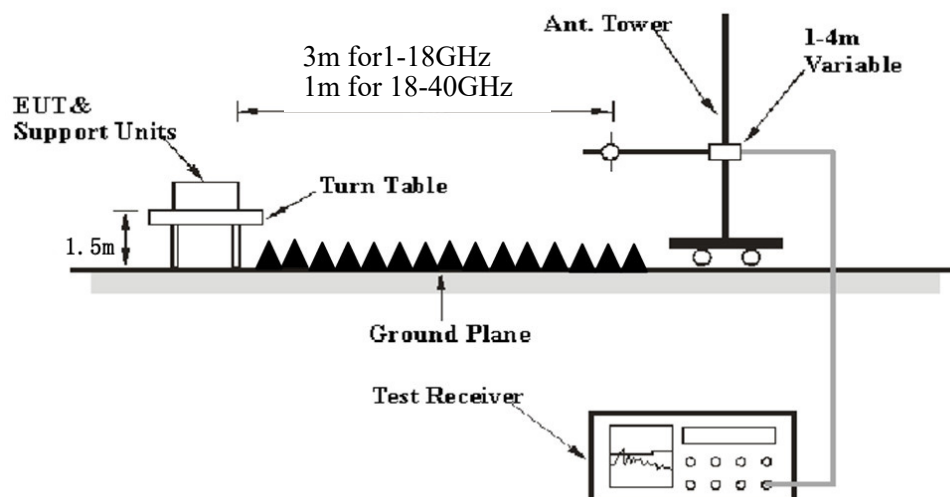30MHz-1GHz:**Above 1 GHz:**

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak

1-40GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	≥1 kHz	Peak
	<98%	1MHz	≥1/Ton	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	≥1/Ton	Peak

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Radiated Spurious Emission

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

According to ANSI C63.10-2020,9.2.1: For field strength measurements made at other than the distance specified by the limit, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance)

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dBμV/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dBμV/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1/3) = -9.5\text{dB}$, for 18-40GHz range, the limit of 1m distance was added by 9.5dB from limit of 3m to compared with the result measurement at 1m distance.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit}; \text{Margin} = \text{Limit} - \text{Corrected Amplitude} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Emission Bandwidth & 99% Occupied Bandwidth

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2020 Section 12.5.1 & 12.5.2 & 12.5.3

12.5.1 Emission bandwidth for the band 5.725 GHz to 5.85 GHz

The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

12.5.2 Emission bandwidth for all other bands

The procedure for this method is as follows:


- a) Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- b) Set the VBW $>$ RBW.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

12.5.3 Occupied bandwidth

See 6.9.3 for the measurement procedure for OBW.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

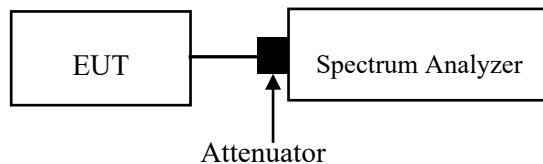

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Conducted Transmitter Output Power

Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2 Method PM-G

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.

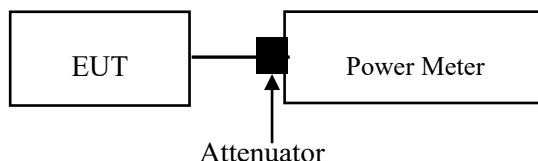

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Power Spectral Density


For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to ANSI C63.10-2020 Clause 12.6 Method SA-2 should be applied

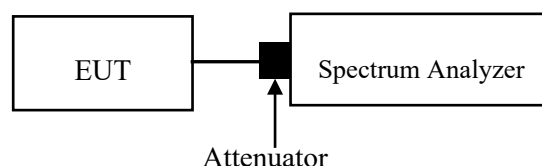

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)


Duty Cycle

Test Procedure

According to ANSI C63.10-2020 Section 12.2

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

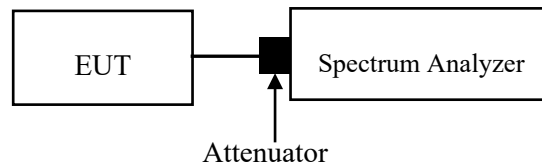

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT have two internal antennas arrangement for 5G Wi-Fi which were permanently attached. Please refer to the EUT photos.

Antenna	Type	Antenna Gain [#]	Impedance	Frequency Range
0	FPC	0.83dBi	50Ω	5150-5250MHz
		0.89dBi	50Ω	5250-5350MHz
		1.07dBi	50Ω	5470-5725MHz
		0.63dBi	50Ω	5725-5850MHz
1	FPC	0.79dBi	50Ω	5150-5250MHz
		0.97dBi	50Ω	5250-5350MHz
		1.17dBi	50Ω	5470-5725MHz
		0.79dBi	50Ω	5725-5850MHz


Result: Compliant

TEST DATA AND RESULTS

Conducted Emissions

Temperature (°C)	25.6	Relative Humidity (%)	67
ATM Pressure (kPa)	99.9	Test engineer	Macy.shi
Test date	2025.9.25		
EUT operation mode	Transmitting(Maximum output power mode, ANT1 802.11a 5825MHz)		

AC 120V 60 Hz, Line

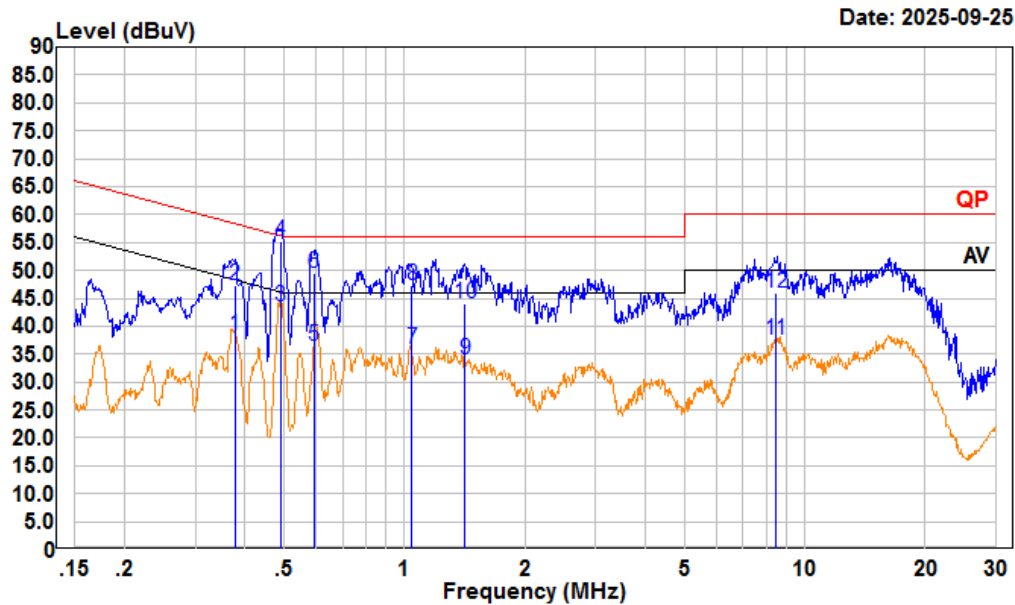

Condition: Line


Project : 2501X77241E-RF

tester : Macy.shi Note:5G WIFI Transmitting

Setting : RBW:9kHz

	Read	LISN	Cable	Limit	Over	
Freq	Level	Level	Factor	Loss	Line	Limit
MHz	dBuV	dBuV	dB	dB	dBuV	dB
1	0.377	17.70	38.46	10.56	10.20	48.34
2	0.377	26.60	47.36	10.56	10.20	58.34
3	0.491	22.92	43.60	10.50	10.18	46.16
4	0.491	34.66	55.34	10.50	10.18	56.16
5	0.594	15.49	36.42	10.70	10.23	46.00
6	0.594	28.55	49.48	10.70	10.23	56.00
7	1.044	15.01	35.87	10.63	10.23	46.00
8	1.044	26.58	47.44	10.63	10.23	56.00
9	1.413	12.99	34.04	10.85	10.20	46.00
10	1.413	23.09	44.14	10.85	10.20	56.00
11	8.427	16.97	37.65	10.44	10.24	50.00
12	8.427	25.32	46.00	10.44	10.24	60.00

AC 120V 60 Hz, Neutral

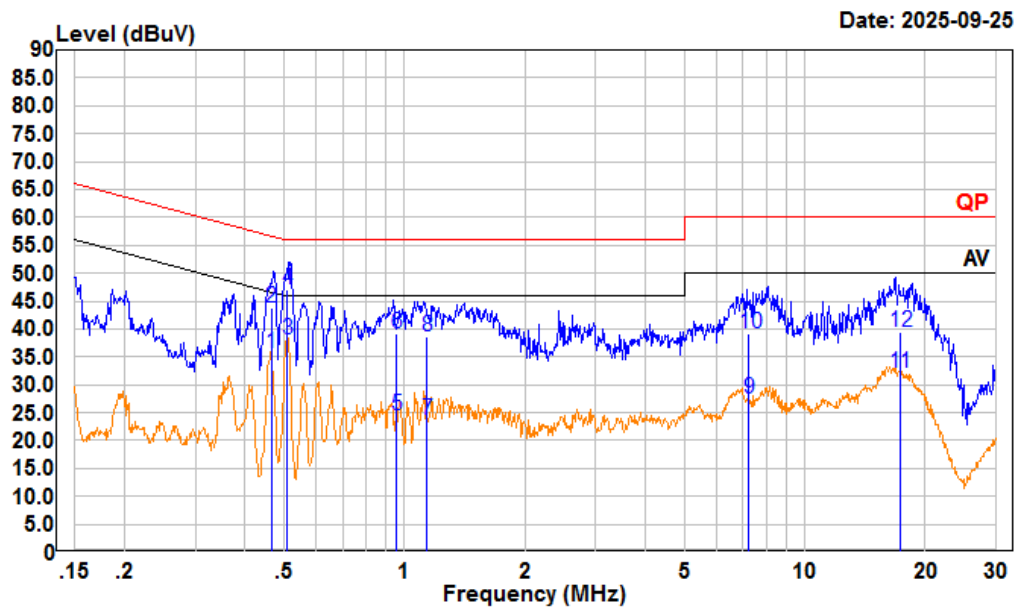

Condition: neutral

Project : 2501X77241E-RF

tester : Macy.shi Note:5G WIFI Transmitting

Setting : RBW:9kHz


	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.466	14.96	35.67	10.52	10.19	46.59	-10.92	Average
2	0.466	23.19	43.90	10.52	10.19	56.59	-12.69	QP
3	0.510	17.50	38.19	10.51	10.18	46.00	-7.81	Average
4	0.510	26.42	47.11	10.51	10.18	56.00	-8.89	QP
5	0.954	3.54	24.55	10.77	10.24	46.00	-21.45	Average
6	0.954	18.14	39.15	10.77	10.24	56.00	-16.85	QP
7	1.138	2.75	23.72	10.78	10.19	46.00	-22.28	Average
8	1.138	17.75	38.72	10.78	10.19	56.00	-17.28	QP
9	7.262	6.52	27.34	10.59	10.23	50.00	-22.66	Average
10	7.262	18.34	39.16	10.59	10.23	60.00	-20.84	QP
11	17.252	11.16	32.11	10.69	10.26	50.00	-17.89	Average
12	17.252	18.36	39.31	10.69	10.26	60.00	-20.69	QP

Undesirable Emission

Temperature (°C)	24.3&24.6	Relative Humidity (%)	48&52
ATM Pressure (kPa):	100.6&100.8	Test engineer:	Anson Su& Wing K Ji
Test date:	Below 1GHz: 2025.09.24 Above 1GHz: 2025.10.25~2025.10.26		
EUT operation mode:	Below 1GHz: Transmitting(Maximum output power mode, ANT1 802.11a 5825MHz) Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. For the radiated spurious emission below 1GHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded. 3. After pre-scan in the X, Y and Z axes of orientation, the worst case z-axis of orientation were recorded.		

Below 1GHz:


9kHz-150kHz

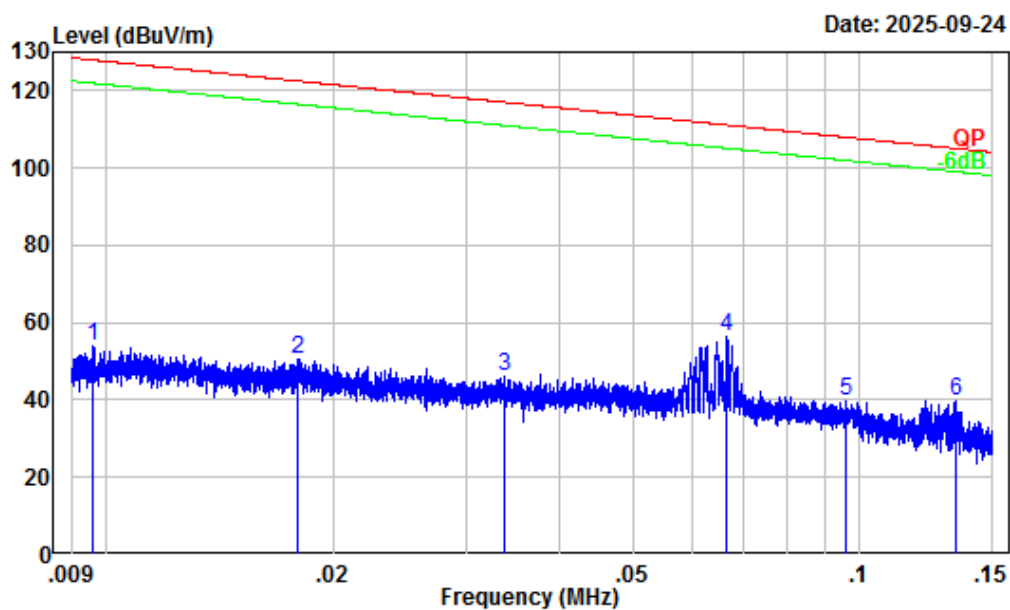

Site : Chamber A
Condition : 3m
Project Number : 2501X77241E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.010	32.37	21.67	54.04	127.93	-73.89	Peak
2	0.018	30.79	19.91	50.70	122.52	-71.82	Peak
3	0.034	28.10	17.96	46.06	117.02	-70.96	Peak
4	0.067	24.74	31.69	56.43	111.13	-54.70	Peak
5	0.096	22.28	17.22	39.50	107.96	-68.46	Peak
6	0.134	19.97	19.67	39.64	105.04	-65.40	Peak


150kHz-30MHz

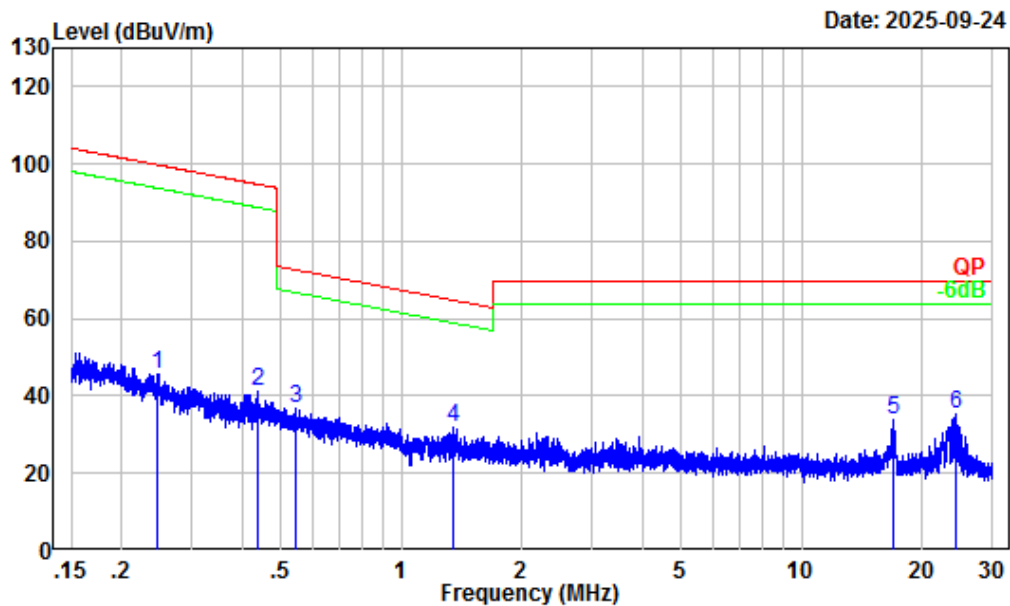

Site : Chamber A
Condition : 3m
Project Number : 2501X77241E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.247	13.32	32.41	45.73	99.74	-54.01	Peak
2	0.438	7.58	33.40	40.98	94.77	-53.79	Peak
3	0.545	5.85	30.70	36.55	72.86	-36.31	Peak
4	1.351	0.22	31.82	32.04	64.80	-32.76	Peak
5	17.007	-2.60	36.41	33.81	69.54	-35.73	Peak
6	24.206	-3.12	38.46	35.34	69.54	-34.20	Peak


30MHz-1GHz_Horizontal

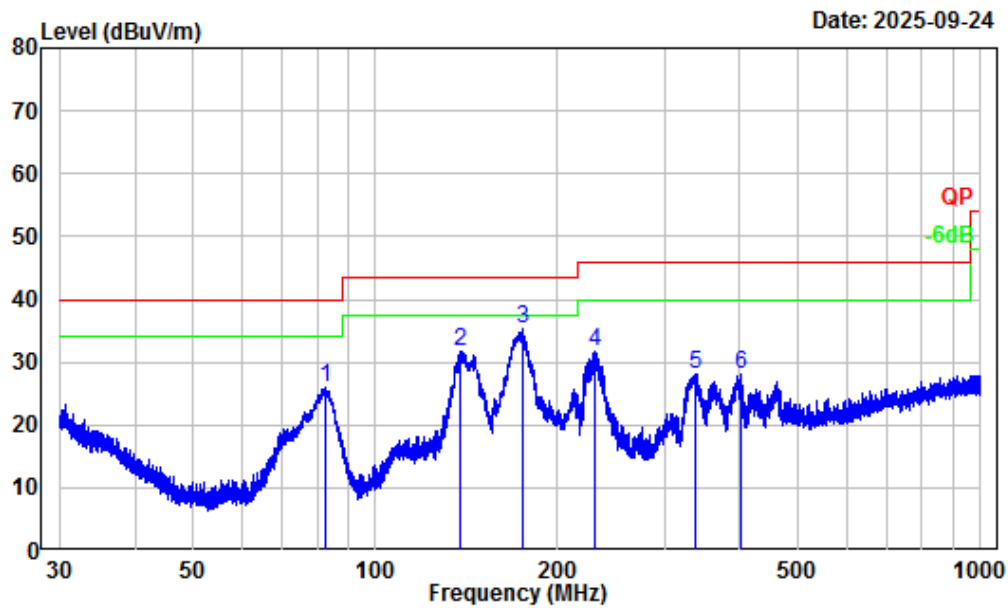

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501X77241E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq Factor		Read Level		Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	82.65	-18.05	44.13	26.08	40.00	-13.92	Peak
2	138.02	-11.70	43.32	31.62	43.50	-11.88	Peak
3	175.19	-13.39	48.73	35.34	43.50	-8.16	Peak
4	231.01	-13.79	45.56	31.77	46.00	-14.23	Peak
5	337.96	-10.46	38.55	28.09	46.00	-17.91	Peak
6	400.96	-8.38	36.36	27.98	46.00	-18.02	Peak

30MHz-1GHz_Vertical

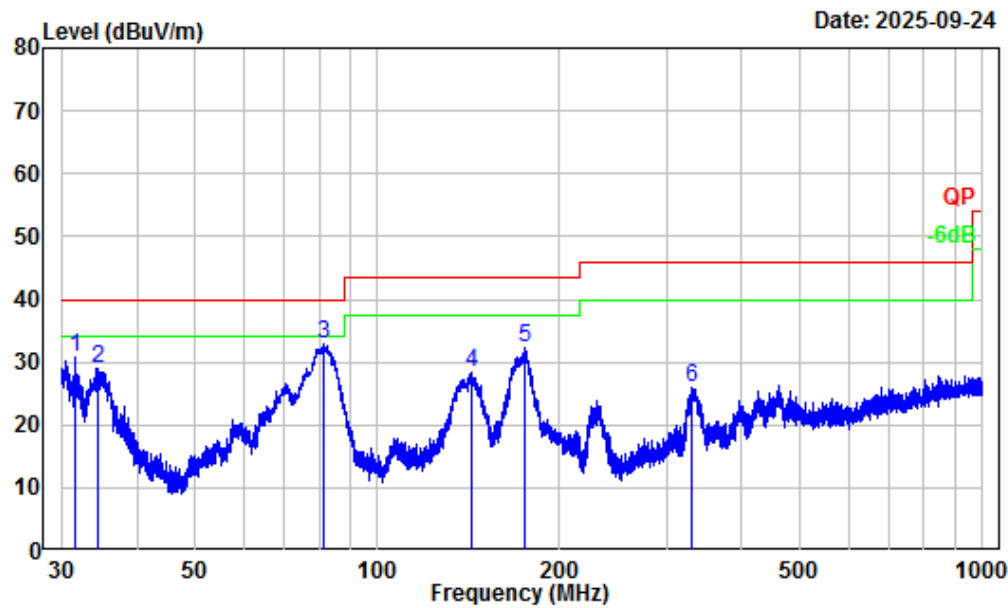

Site : Chamber A
Condition : 3m Vertical
Project Number : 2501X77241E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	31.54	-6.80	37.51	30.71	40.00	-9.29 Peak
2	34.38	-8.51	37.56	29.05	40.00	-10.95 Peak
3	81.43	-17.99	50.90	32.91	40.00	-7.09 Peak
4	142.89	-12.07	40.32	28.25	43.50	-15.25 Peak
5	175.57	-13.43	45.67	32.24	43.50	-11.26 Peak
6	331.06	-10.63	36.59	25.96	46.00	-20.04 Peak

Above 1GHz:**5150-5250 MHz**

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a, ANT0							
Low Channel							
10360.00	49.92	PK	H	2.48	52.4	68.2	-15.8
10360.00	49.78	PK	V	2.48	52.26	68.2	-15.94
Middle Channel							
10400.00	51.10	PK	H	2.47	53.57	68.2	-14.63
10400.00	50.96	PK	V	2.47	53.43	68.2	-14.77
High Channel							
10480.00	49.69	PK	H	2.19	51.88	68.2	-16.32
10480.00	49.55	PK	V	2.19	51.74	68.2	-16.46
802.11a, ANT1							
Low Channel							
10360.00	49.38	PK	H	2.48	51.86	68.2	-16.34
10360.00	49.24	PK	V	2.48	51.72	68.2	-16.48
Middle Channel							
10400.00	50.56	PK	H	2.47	53.03	68.2	-15.17
10400.00	50.42	PK	V	2.47	52.89	68.2	-15.31
High Channel							
10480.00	49.15	PK	H	2.19	51.34	68.2	-16.86
10480.00	49.01	PK	V	2.19	51.2	68.2	-17
802.11ac20							
Low Channel							
10360.00	49.40	PK	H	2.48	51.88	68.2	-16.32
10360.00	49.17	PK	V	2.48	51.65	68.2	-16.55
Middle Channel							
10400.00	50.58	PK	H	2.47	53.05	68.2	-15.15
10400.00	50.35	PK	V	2.47	52.82	68.2	-15.38
High Channel							
10480.00	49.17	PK	H	2.19	51.36	68.2	-16.84
10480.00	48.94	PK	V	2.19	51.13	68.2	-17.07
802.11ac40							
Low Channel							
10380.00	48.97	PK	H	2.48	51.45	68.2	-16.75
10380.00	48.46	PK	V	2.48	50.94	68.2	-17.26
High Channel							
10460.00	50.03	PK	H	2.26	52.29	68.2	-15.91
10460.00	49.52	PK	V	2.26	51.78	68.2	-16.42

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ac80							
Middle Channel							
10420.00	49.89	PK	H	2.40	52.29	68.2	-15.91
10420.00	49.38	PK	V	2.40	51.78	68.2	-16.42
802.11ax20							
Low Channel							
10360.00	50.13	PK	H	2.48	52.61	68.2	-15.59
10360.00	50.00	PK	V	2.48	52.48	68.2	-15.72
Middle Channel							
10400.00	51.31	PK	H	2.47	53.78	68.2	-14.42
10400.00	51.18	PK	V	2.47	53.65	68.2	-14.55
High Channel							
10480.00	49.90	PK	H	2.19	52.09	68.2	-16.11
10480.00	49.77	PK	V	2.19	51.96	68.2	-16.24
802.11ax40							
Low Channel							
10380.00	49.37	PK	H	2.48	51.85	68.2	-16.35
10380.00	49.24	PK	V	2.48	51.72	68.2	-16.48
High Channel							
10460.00	50.43	PK	H	2.26	52.69	68.2	-15.51
10460.00	50.30	PK	V	2.26	52.56	68.2	-15.64
802.11ax80							
Middle Channel							
10420.00	50.29	PK	H	2.40	52.69	68.2	-15.51
10420.00	50.16	PK	V	2.40	52.56	68.2	-15.64

5250-5350MHz							
Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a, ANT0							
Low Channel							
10520.00	50.15	PK	H	2.13	52.28	68.2	-15.92
10520.00	49.61	PK	V	2.13	51.74	68.2	-16.46
Middle Channel							
10560.00	49.39	PK	H	2.17	51.56	68.2	-16.64
10560.00	48.85	PK	V	2.17	51.02	68.2	-17.18
High Channel							
10640.00	49.35	PK	H	2.57	51.92	74	-22.08
10640.00	48.81	PK	V	2.57	51.38	74	-22.62
802.11a, ANT1							
Low Channel							
10520.00	49.72	PK	H	2.13	51.85	68.2	-16.35
10520.00	50.20	PK	V	2.13	52.33	68.2	-15.87
Middle Channel							
10560.00	48.96	PK	H	2.17	51.13	68.2	-17.07
10560.00	49.44	PK	V	2.17	51.61	68.2	-16.59
High Channel							
10640.00	48.92	PK	H	2.57	51.49	74	-22.51
10640.00	49.40	PK	V	2.57	51.97	74	-22.03
802.11ac20							
Low Channel							
10520.00	49.65	PK	H	2.13	51.78	68.2	-16.42
10520.00	50.01	PK	V	2.13	52.14	68.2	-16.06
Middle Channel							
10560.00	48.89	PK	H	2.17	51.06	68.2	-17.14
10560.00	49.25	PK	V	2.17	51.42	68.2	-16.78
High Channel							
10640.00	48.85	PK	H	2.57	51.42	74	-22.58
10640.00	49.21	PK	V	2.57	51.78	74	-22.22
802.11ac40							
Low Channel							
10540.00	50.98	PK	H	2.15	53.13	68.2	-15.07
10540.00	50.10	PK	V	2.15	52.25	68.2	-15.95
High Channel							
10620.00	49.68	PK	H	2.39	52.07	74	-21.93
10620.00	48.80	PK	V	2.39	51.19	74	-22.81

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ac80							
Middle Channel							
10580.00	50.02	PK	H	2.18	52.20	68.2	-16.00
10580.00	49.14	PK	V	2.18	51.32	68.2	-16.88
802.11ac160							
Middle Channel							
10500.00	49.23	PK	H	2.12	51.35	68.2	-16.85
10500.00	49.38	PK	V	2.12	51.50	68.2	-16.70
802.11ax20							
Low Channel							
10520.00	49.42	PK	H	2.13	51.55	68.2	-16.65
10520.00	49.75	PK	V	2.13	51.88	68.2	-16.32
Middle Channel							
10560.00	48.66	PK	H	2.17	50.83	68.2	-17.37
10560.00	48.99	PK	V	2.17	51.16	68.2	-17.04
High Channel							
10640.00	48.62	PK	H	2.57	51.19	74	-22.81
10640.00	48.95	PK	V	2.57	51.52	74	-22.48
802.11ax40							
Low Channel							
10540.00	50.13	PK	H	2.15	52.28	68.2	-15.92
10540.00	50.46	PK	V	2.15	52.61	68.2	-15.59
High Channel							
10620.00	48.83	PK	H	2.39	51.22	74	-22.78
10620.00	49.16	PK	V	2.39	51.55	74	-22.45
802.11ax80							
Middle Channel							
10580.00	49.17	PK	H	2.18	51.35	68.2	-16.85
10580.00	49.50	PK	V	2.18	51.68	68.2	-16.52
802.11ax160							
Middle Channel							
10500.00	50.11	PK	H	2.12	52.23	68.2	-15.97
10500.00	49.98	PK	V	2.12	52.10	68.2	-16.10

5470-5725MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a, ANT0							
Low Channel							
11000.00	48.83	PK	H	4.26	53.09	74	-20.91
11000.00	48.92	PK	V	4.26	53.18	74	-20.82
Middle Channel							
11160.00	49.67	PK	H	3.51	53.18	74	-20.82
11160.00	49.76	PK	V	3.51	53.27	74	-20.73
High Channel							
11400.00	50.44	PK	H	3.31	53.75	74	-20.25
11400.00	50.53	PK	V	3.31	53.84	74	-20.16
Cross Channel							
11440.00	49.82	PK	H	3.46	53.28	74	-20.72
11440.00	50.26	PK	V	3.46	53.72	74	-20.28
802.11a, ANT1							
Low Channel							
11000.00	49.24	PK	H	4.26	53.5	74	-20.5
11000.00	48.80	PK	V	4.26	53.06	74	-20.94
Middle Channel							
11160.00	50.08	PK	H	3.51	53.59	74	-20.41
11160.00	49.64	PK	V	3.51	53.15	74	-20.85
High Channel							
11400.00	50.57	PK	H	3.31	53.88	74	-20.12
11400.00	50.41	PK	V	3.31	53.72	74	-20.28
Cross Channel							
11440.00	50.05	PK	H	3.46	53.51	74	-20.49
11440.00	49.94	PK	V	3.46	53.4	74	-20.6

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac20							
Low Channel							
11000.00	48.72	PK	H	4.26	52.98	74	-21.02
11000.00	48.63	PK	V	4.26	52.89	74	-21.11
Middle Channel							
11160.00	49.56	PK	H	3.51	53.07	74	-20.93
11160.00	49.47	PK	V	3.51	52.98	74	-21.02
High Channel							
11400.00	50.33	PK	H	3.31	53.64	74	-20.36
11400.00	50.24	PK	V	3.31	53.55	74	-20.45
Cross Channel							
11440.00	49.99	PK	H	3.46	53.45	74	-20.55
11440.00	49.84	PK	V	3.46	53.3	74	-20.7
802.11ac40							
Low Channel							
11020.00	48.96	PK	H	4.08	53.04	74	-20.96
11020.00	48.87	PK	V	4.08	52.95	74	-21.05
Middle Channel							
11100.00	49.44	PK	H	3.36	52.8	74	-21.2
11100.00	49.35	PK	V	3.36	52.71	74	-21.29
High Channel							
11340.00	48.72	PK	H	3.47	52.19	74	-21.81
11340.00	48.63	PK	V	3.47	52.1	74	-21.9
Cross Channel							
11420.00	49.73	PK	H	3.39	53.12	74	-20.88
11420.00	49.93	PK	V	3.39	53.32	74	-20.68
802.11ac80							
Low Channel							
11060.00	49.91	PK	H	3.72	53.63	74	-20.37
11060.00	48.90	PK	V	3.72	52.62	74	-21.38
High Channel							
11220.00	50.18	PK	H	3.6	53.78	74	-20.22
11220.00	49.44	PK	V	3.6	53.04	74	-20.96
Cross Channel							
11380.00	49.99	PK	H	3.36	53.35	74	-20.65
11380.00	49.91	PK	V	3.36	53.27	74	-20.73

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11ac160							
Middle Channel							
11140.00	49.36	PK	H	3.45	52.81	74	-21.19
11140.00	49.95	PK	V	3.45	53.40	74	-20.60
802.11ax20							
Low Channel							
11000.00	48.78	PK	H	4.26	53.04	74	-20.96
11000.00	48.36	PK	V	4.26	52.62	74	-21.38
Middle Channel							
11160.00	49.62	PK	H	3.51	53.13	74	-20.87
11160.00	49.20	PK	V	3.51	52.71	74	-21.29
High Channel							
11400.00	50.39	PK	H	3.31	53.70	74	-20.30
11400.00	49.97	PK	V	3.31	53.28	74	-20.72
Cross Channel							
11440.00	50.10	PK	H	3.46	53.56	74	-20.44
11440.00	50.21	PK	V	3.46	53.67	74	-20.33

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ax40							
Low Channel							
11020.00	49.02	PK	H	4.08	53.1	74	-20.9
11020.00	48.60	PK	V	4.08	52.68	74	-21.32
Middle Channel							
11100.00	49.52	PK	H	3.36	52.88	74	-21.12
11100.00	49.10	PK	V	3.36	52.46	74	-21.54
High Channel							
11340.00	48.79	PK	H	3.47	52.26	74	-21.74
11340.00	48.37	PK	V	3.47	51.84	74	-22.16
Cross Channel							
11420.00	49.94	PK	H	3.39	53.33	74	-20.67
11420.00	50.03	PK	V	3.39	53.42	74	-20.58
802.11ax80							
Low Channel							
11060.00	49.41	PK	H	3.72	53.13	74	-20.87
11060.00	48.99	PK	V	3.72	52.71	74	-21.29
High Channel							
11220.00	49.95	PK	H	3.6	53.55	74	-20.45
11220.00	49.53	PK	V	3.6	53.13	74	-20.87
Cross Channel							
11380.00	50.22	PK	H	3.36	53.58	74	-20.42
11380.00	50.09	PK	V	3.36	53.45	74	-20.55
802.11ax160							
Middle Channel							
11140.00	49.41	PK	H	3.45	52.86	74	-21.14
11140.00	48.99	PK	V	3.45	52.44	74	-21.56

5725-5850MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a, ANT0							
Low Channel							
11490.00	47.48	PK	H	3.64	51.12	74	-22.88
11490.00	48.37	PK	V	3.64	52.01	74	-21.99
Middle Channel							
11570.00	48.55	PK	H	3.34	51.89	74	-22.11
11570.00	49.44	PK	V	3.34	52.78	74	-21.22
High Channel							
11650.00	50.42	PK	H	3.46	53.88	74	-20.12
11650.00	50.31	PK	V	3.46	53.77	74	-20.23
802.11a, ANT1							
Low Channel							
11490.00	47.75	PK	H	3.64	51.39	74	-22.61
11490.00	47.31	PK	V	3.64	50.95	74	-23.05
Middle Channel							
11570.00	48.82	PK	H	3.34	52.16	74	-21.84
11570.00	48.38	PK	V	3.34	51.72	74	-22.28
High Channel							
11650.00	49.69	PK	H	3.46	53.15	74	-20.85
11650.00	50.25	PK	V	3.46	53.71	74	-20.29
802.11ac20							
Low Channel							
11490.00	47.92	PK	H	3.64	51.56	74	-22.44
11490.00	48.00	PK	V	3.64	51.64	74	-22.36
Middle Channel							
11570.00	48.99	PK	H	3.34	52.33	74	-21.67
11570.00	49.07	PK	V	3.34	52.41	74	-21.59
High Channel							
11650.00	49.86	PK	H	3.46	53.32	74	-20.68
11650.00	49.94	PK	V	3.46	53.40	74	-20.60

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac40							
Low Channel							
11510.00	48.69	PK	H	3.63	52.32	74	-21.68
11510.00	48.77	PK	V	3.63	52.4	74	-21.6
High Channel							
11590.00	49.40	PK	H	3.24	52.64	74	-21.36
11590.00	49.48	PK	V	3.24	52.72	74	-21.28
802.11ac80							
Middle Channel							
11550.00	48.19	PK	H	3.44	51.63	74	-22.37
11550.00	48.27	PK	V	3.44	51.71	74	-22.29
802.11ax20							
Low Channel							
11490.00	48.00	PK	H	3.64	51.64	74	-22.36
11490.00	47.83	PK	V	3.64	51.47	74	-22.53
Middle Channel							
11570.00	49.07	PK	H	3.34	52.41	74	-21.59
11570.00	48.90	PK	V	3.34	52.24	74	-21.76
High Channel							
11650.00	49.94	PK	H	3.46	53.40	74	-20.60
11650.00	49.77	PK	V	3.46	53.23	74	-20.77
802.11ax40							
Low Channel							
11510.00	48.77	PK	H	3.63	52.4	74	-21.6
11510.00	48.60	PK	V	3.63	52.23	74	-21.77
High Channel							
11590.00	49.48	PK	H	3.24	52.72	74	-21.28
11590.00	49.31	PK	V	3.24	52.55	74	-21.45
802.11ax80							
Middle Channel							
11550.00	48.27	PK	H	3.44	51.71	74	-22.29
11550.00	48.10	PK	V	3.44	51.54	74	-22.46

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.

Test plots:**Band Edge**


Left Band edge_Horizontal_Peak_5GWiFi_B1_A_ANT0_5180MHz

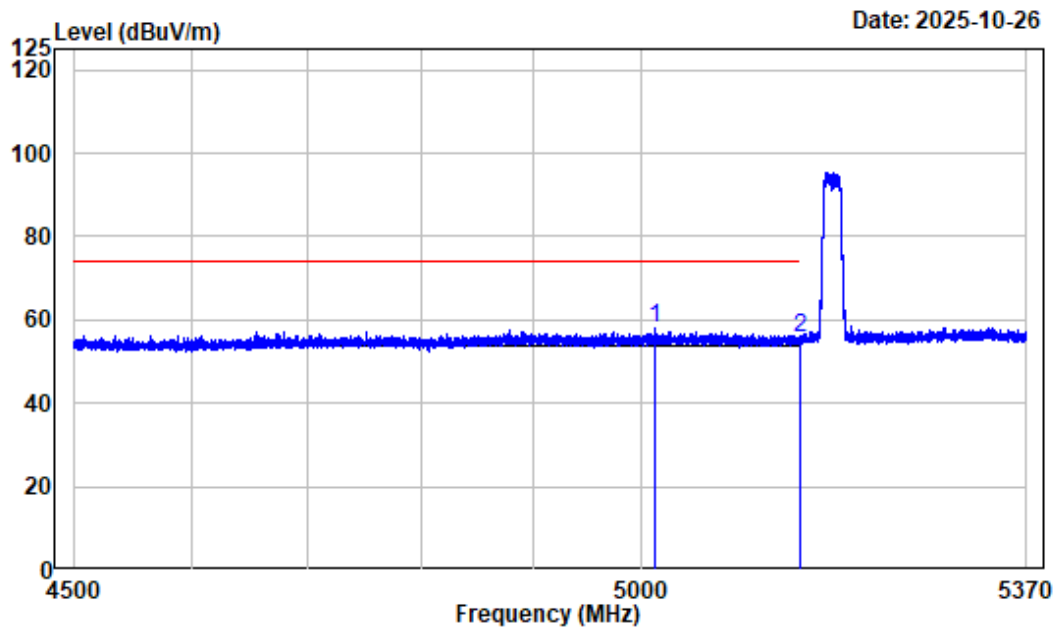

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_A_ANT0_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5011.777	7.56	50.37	57.93	74.00	-16.07	Peak
2	5150.000	7.47	48.06	55.53	74.00	-18.47	Peak


Left Band edge_Horizontal_Average_5GWiFi_B1_A_ANT0_5180MHz

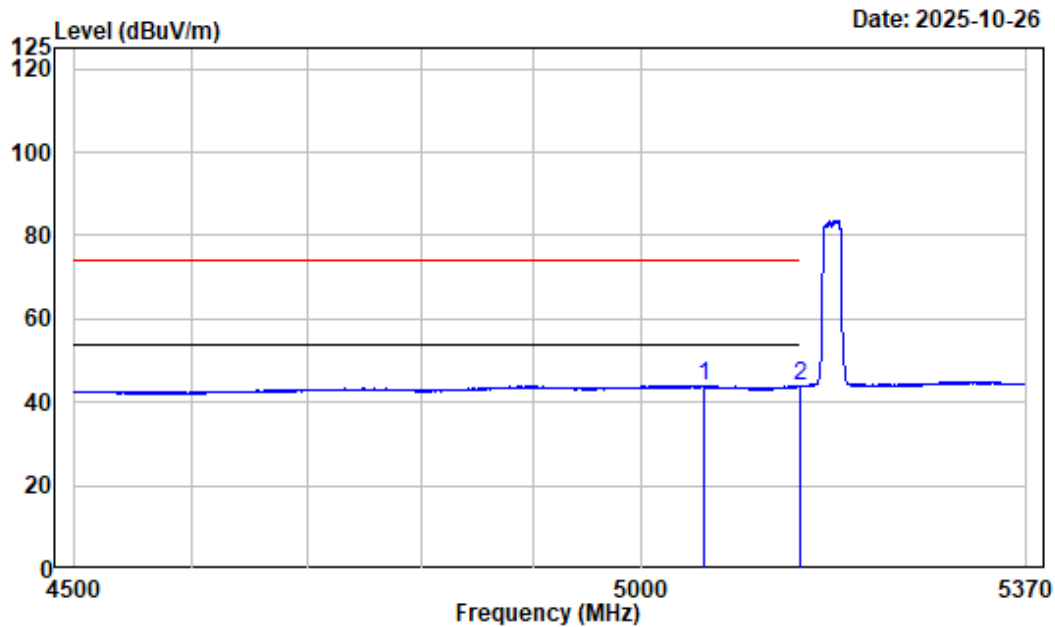

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_A_ANT0_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5057.453	7.72	36.15	43.87	54.00	-10.13	Average
2	5150.000	7.47	36.24	43.71	54.00	-10.29	Average


Left Band edge_Vertical_Peak_5GWiFi_B1_A_ANT0_5180MHz

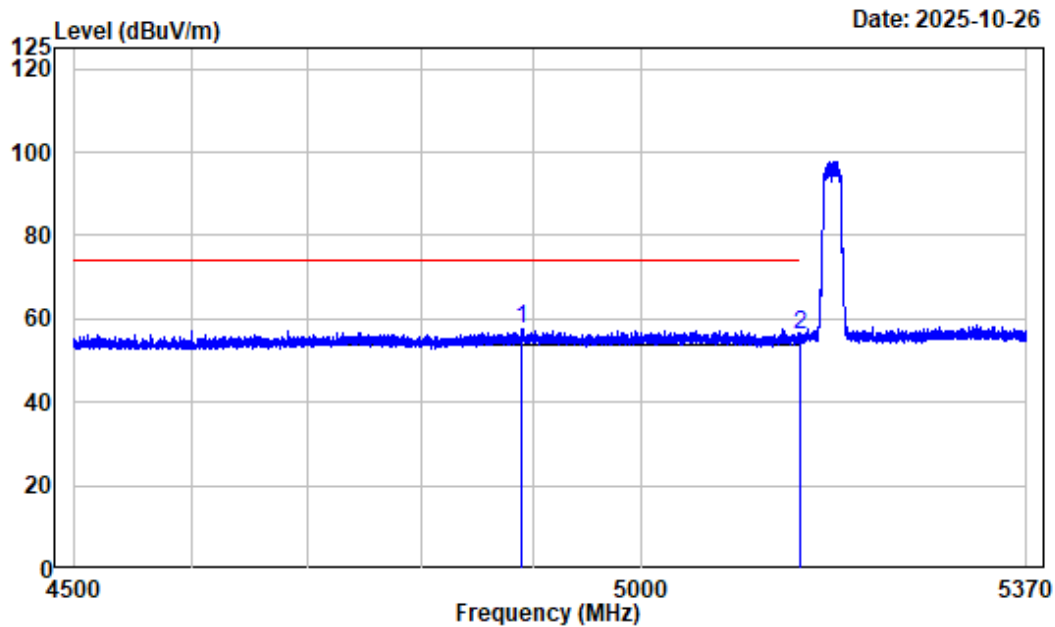

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_A_ANT0_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4890.739	7.34	50.37	57.71	74.00	-16.29	Peak
2	5150.000	7.47	48.62	56.09	74.00	-17.91	Peak


Left Band edge_Vertical_Average_5GWiFi_B1_A_ANT0_5180MHz

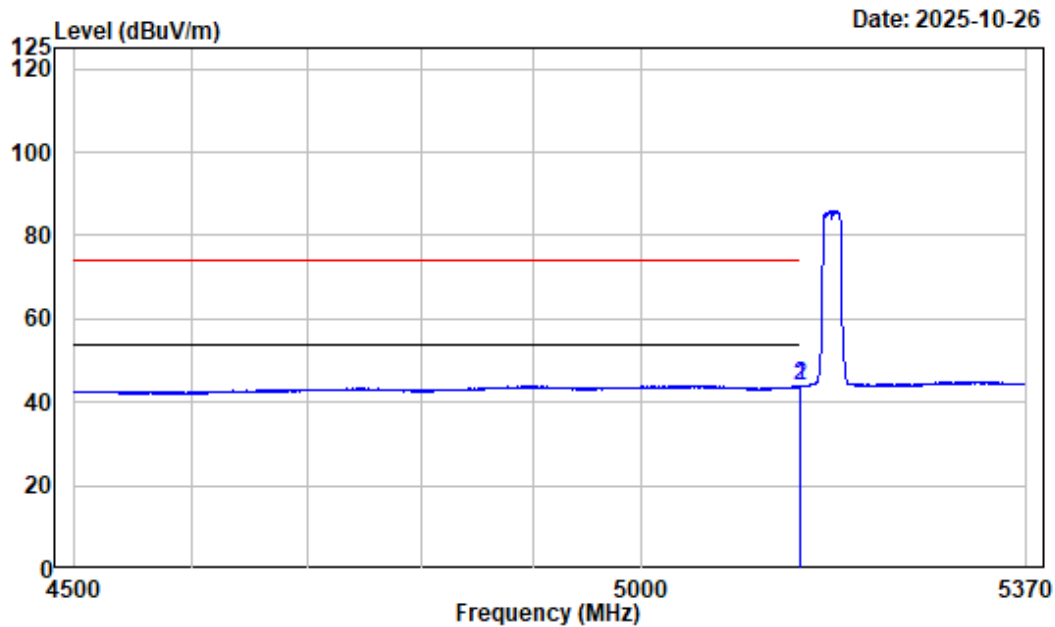

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_A_ANT0_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.781	7.47	36.39	43.86	54.00	-10.14	Average
2	5150.000	7.47	36.24	43.71	54.00	-10.29	Average


Right Band edge_Horizontal_Peak_5GWiFi_B1_A_ANT0_5240MHz

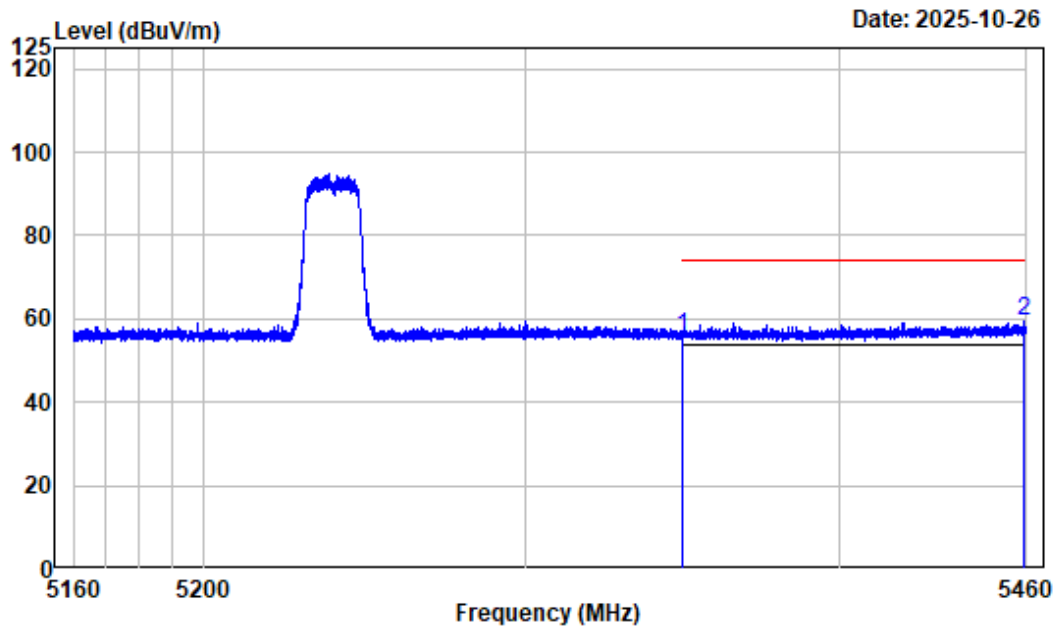

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_A_ANT0_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	47.40	55.77	74.00	-18.23	Peak
2	5459.400	8.90	50.30	59.20	74.00	-14.80	Peak


Right Band edge_Horizontal_Average_5GWiFi_B1_A_ANT0_5240MHz

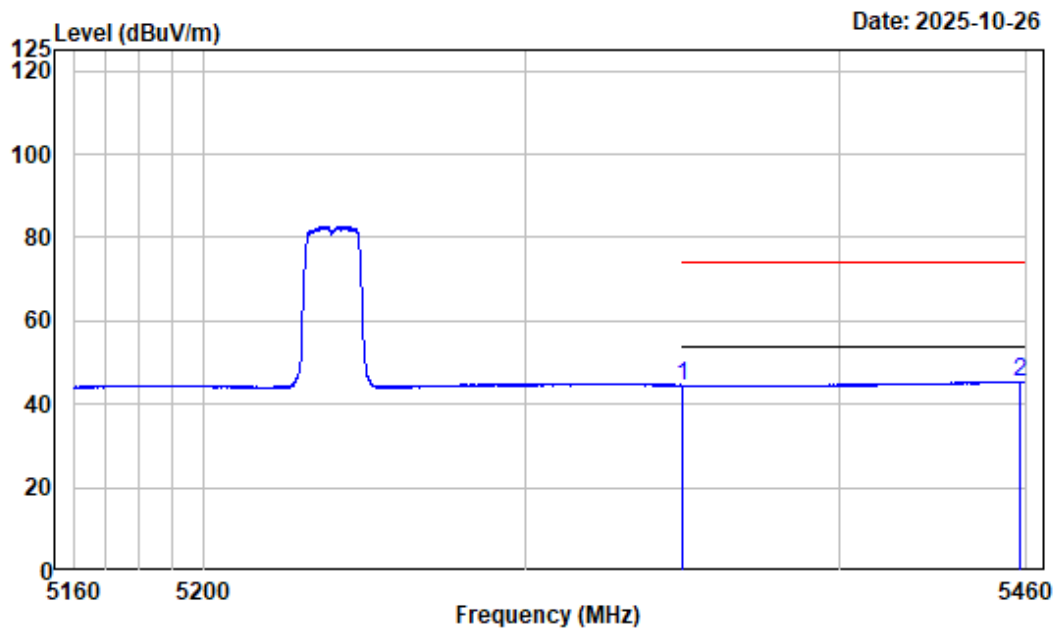

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_A_ANT0_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.09	44.46	54.00	-9.54	Average
2	5457.975	8.87	36.55	45.42	54.00	-8.58	Average


Right Band edge_Vertical_Peak_5GWiFi_B1_A_ANT0_5240MHz

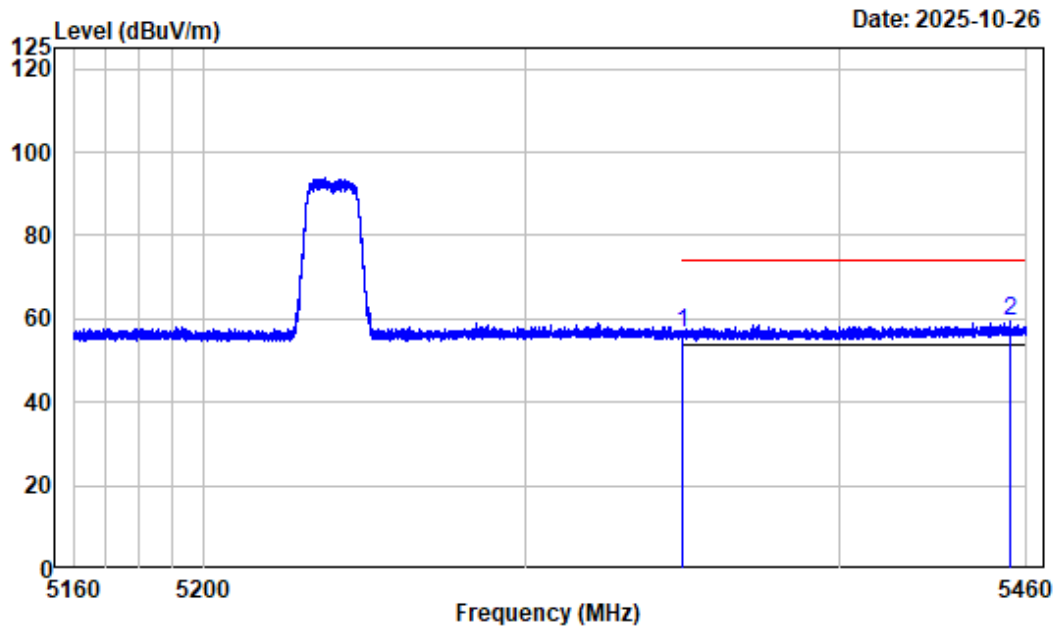

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_A_ANT0_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	48.17	56.54	74.00	-17.46	Peak
2	5454.600	8.84	50.52	59.36	74.00	-14.64	Peak


Right Band edge_Vertical_Average_5GWiFi_B1_A_ANT0_5240MHz

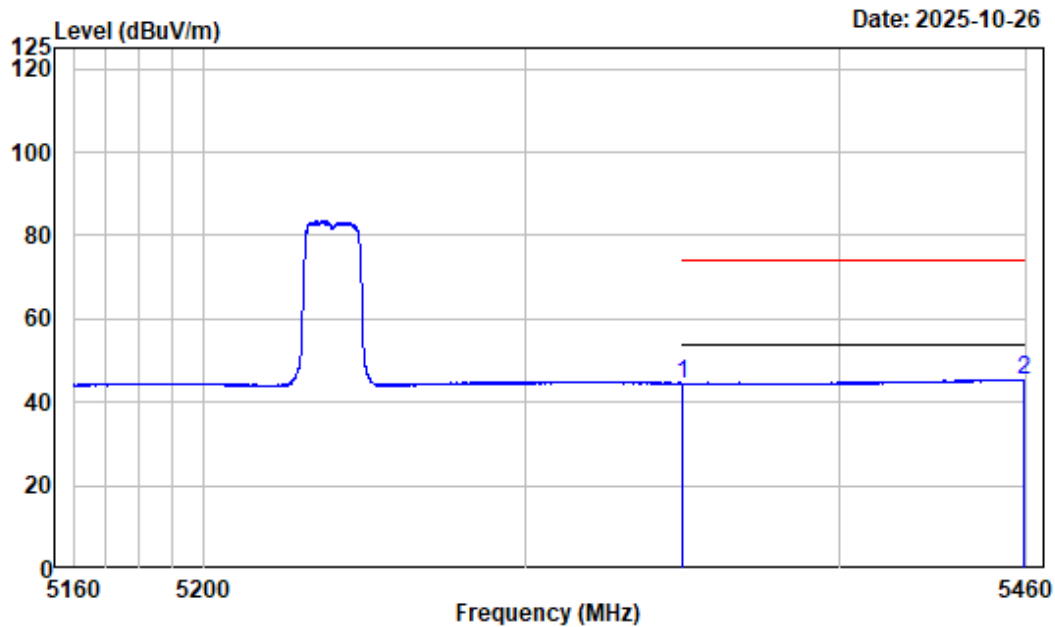

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_A_ANT0_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.14	44.51	54.00	-9.49	Average
2	5459.212	8.90	36.60	45.50	54.00	-8.50	Average


Left Band edge_Horizontal_Peak_5GWiFi_B1_A_ANT1_5180MHz

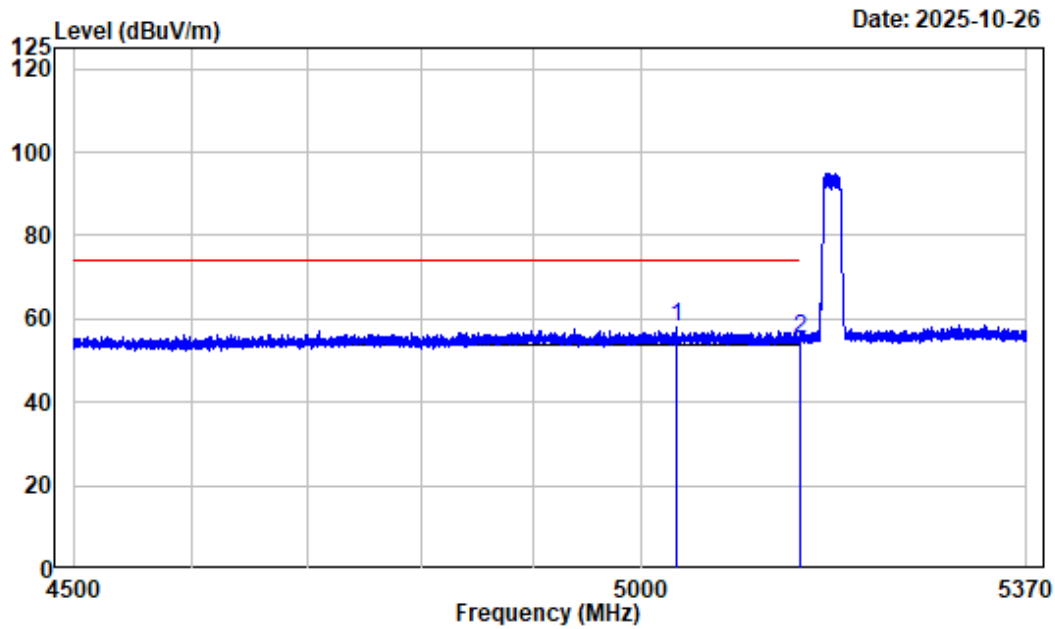

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_A_ANT1_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5031.896	7.48	50.55	58.03	74.00	-15.97	Peak
2	5150.000	7.47	47.69	55.16	74.00	-18.84	Peak


Left Band edge_Horizontal_Average_5GWiFi_B1_A_ANT1_5180MHz

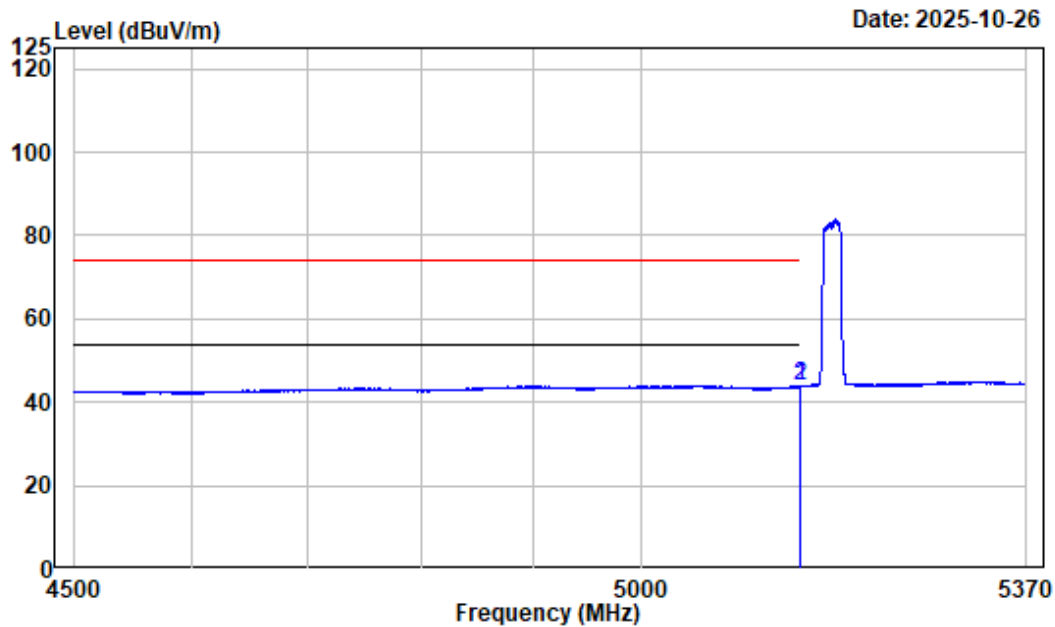

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_A_ANT1_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.129	7.47	36.40	43.87	54.00	-10.13	Average
2	5150.000	7.47	36.34	43.81	54.00	-10.19	Average


Left Band edge_Vertical_Peak_5GWiFi_B1_A_ANT1_5180MHz

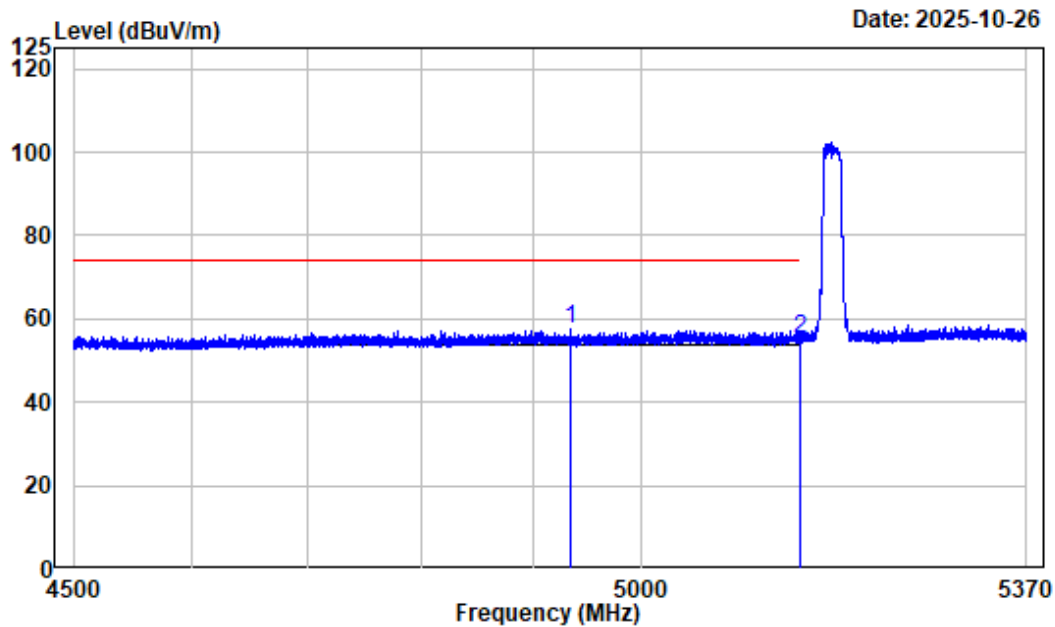

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_A_ANT1_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4934.021	7.38	50.07	57.45	74.00	-16.55	Peak
2	5150.000	7.47	47.74	55.21	74.00	-18.79	Peak


Left Band edge_Vertical_Average_5GWiFi_B1_A_ANT1_5180MHz

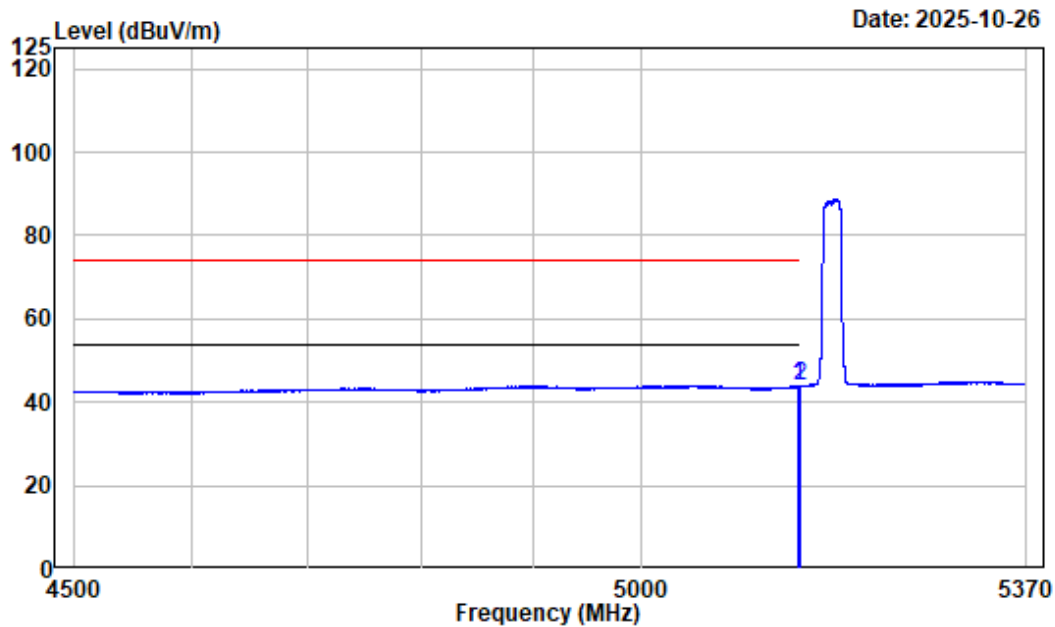

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_A_ANT1_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.150	7.46	36.44	43.90	54.00	-10.10	Average
2	5150.000	7.47	36.31	43.78	54.00	-10.22	Average


Right Band edge_Horizontal_Peak_5GWiFi_B1_A_ANT1_5240MHz

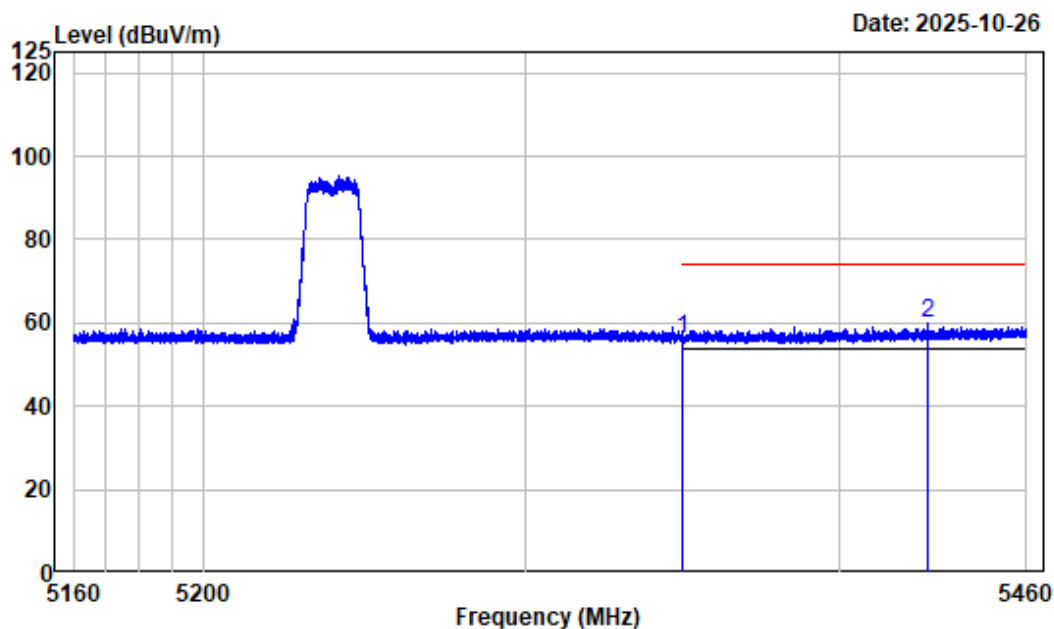

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_A_ANT1_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	47.60	55.97	74.00	-18.03	Peak
2	5428.163	8.65	51.26	59.91	74.00	-14.09	Peak


Right Band edge_Horizontal_Average_Peak_5GWiFi_B1_A_ANT1_5240MHz

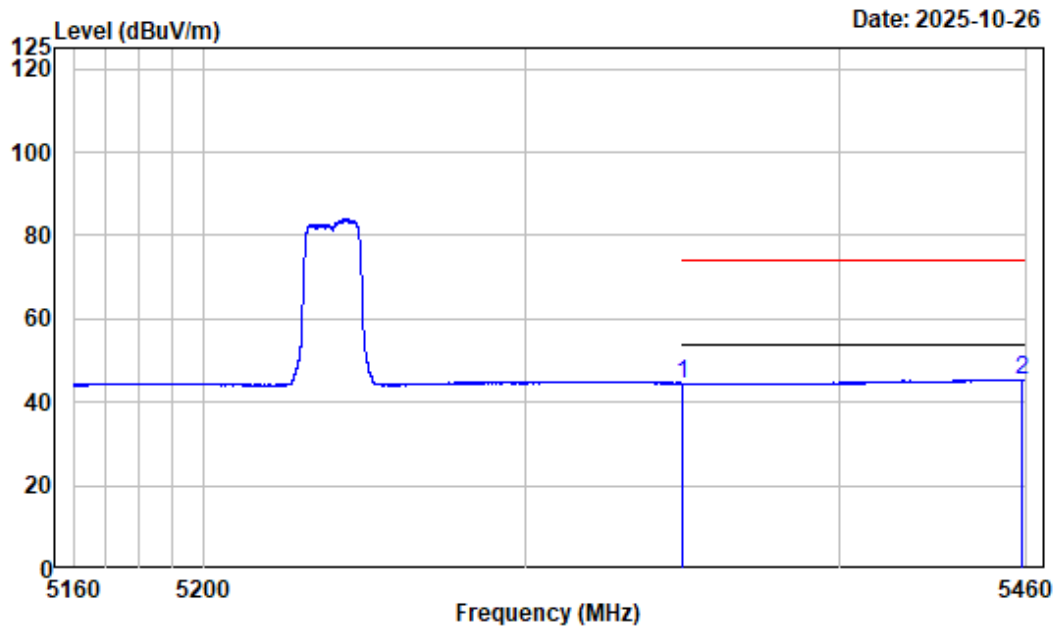

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_A_ANT1_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.10	44.47	54.00	-9.53	Average
2	5458.313	8.87	36.63	45.50	54.00	-8.50	Average


Right Band edge_Vertical_Peak_Peak_5GWiFi_B1_A_ANT1_5240MHz

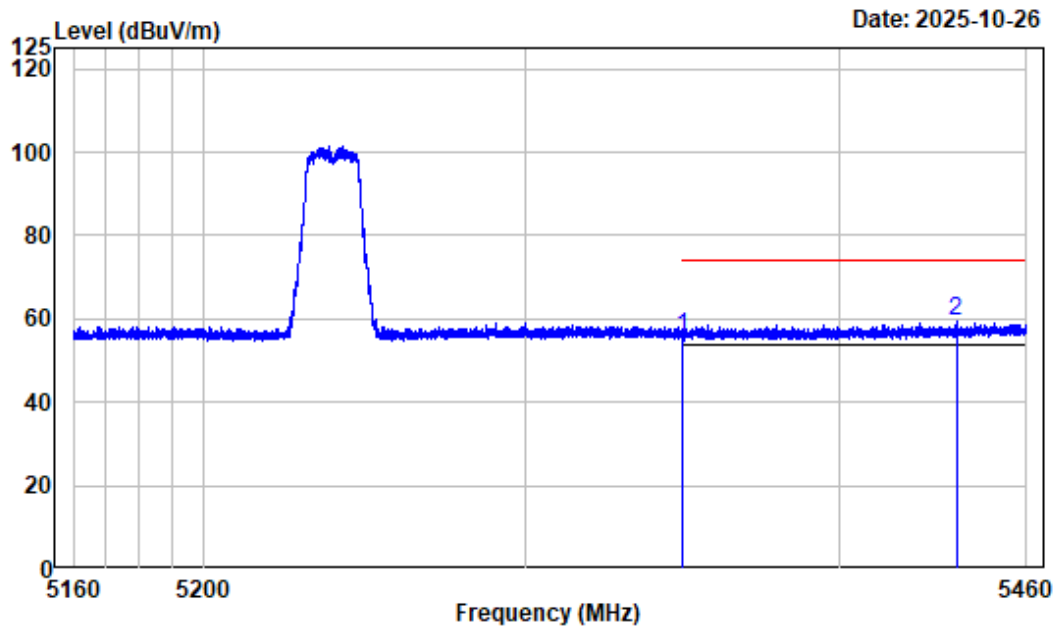

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_A_ANT1_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	47.30	55.67	74.00	-18.33	Peak
2	5437.313	8.73	50.63	59.36	74.00	-14.64	Peak


Right Band edge_Vertical_Average_Peak_5GWiFi_B1_A_ANT1_5240MHz

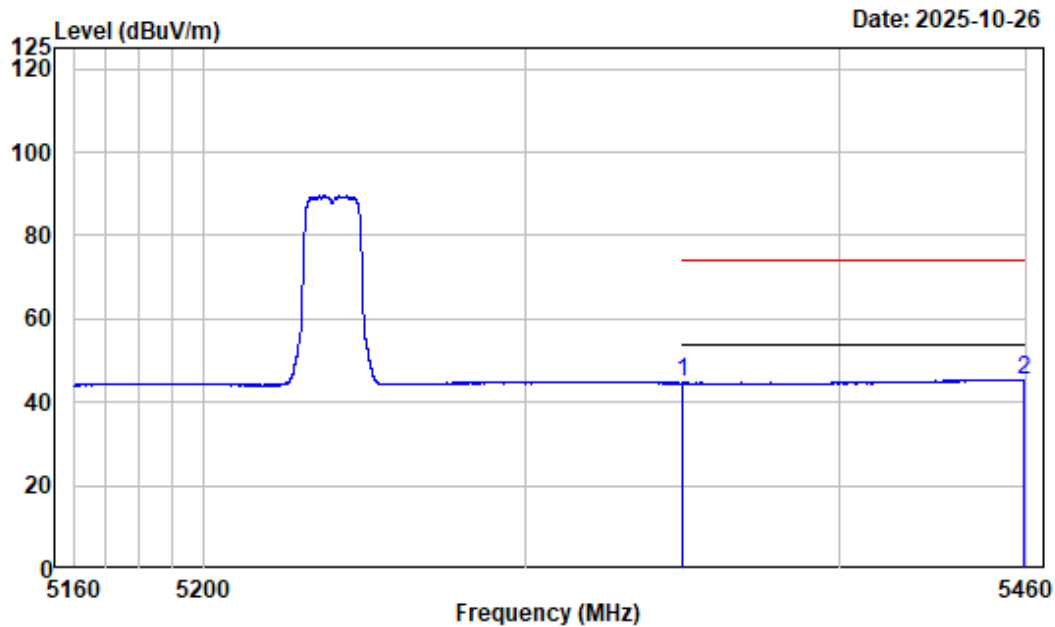

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_A_ANT1_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.21	44.58	54.00	-9.42	Average
2	5459.212	8.90	36.62	45.52	54.00	-8.48	Average


Left Band edge_Horizontal_Peak_5GWiFi_B1_AC20_5180MHz

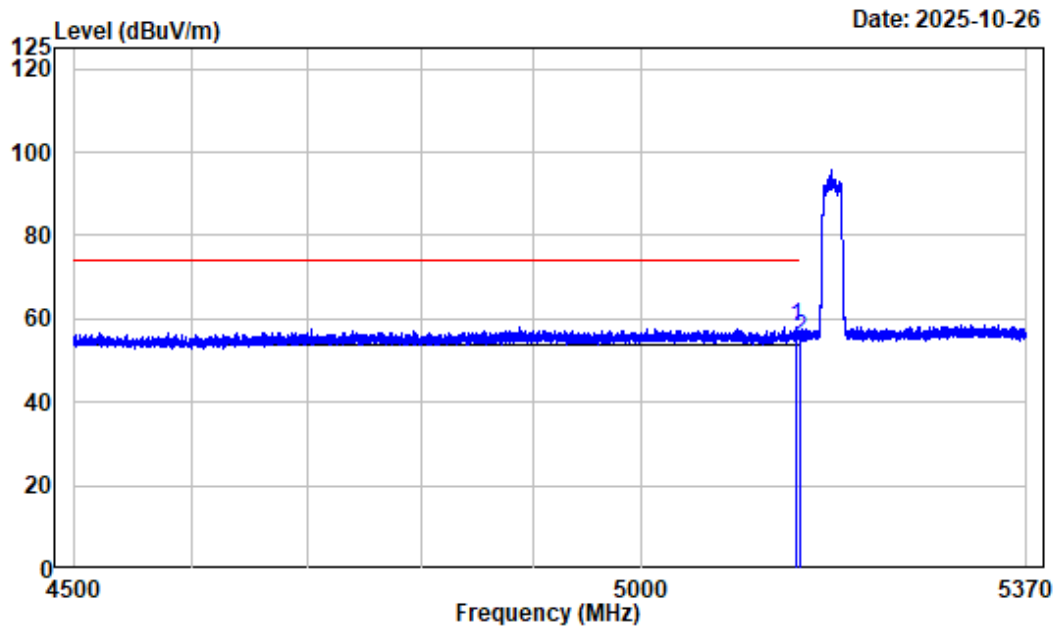

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AC20_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5145.431	7.44	50.75	58.19	74.00	-15.81	Peak
2	5150.000	7.47	47.75	55.22	74.00	-18.78	Peak


Left Band edge_Horizontal_Average_5GWiFi_B1_AC20_5180MHz

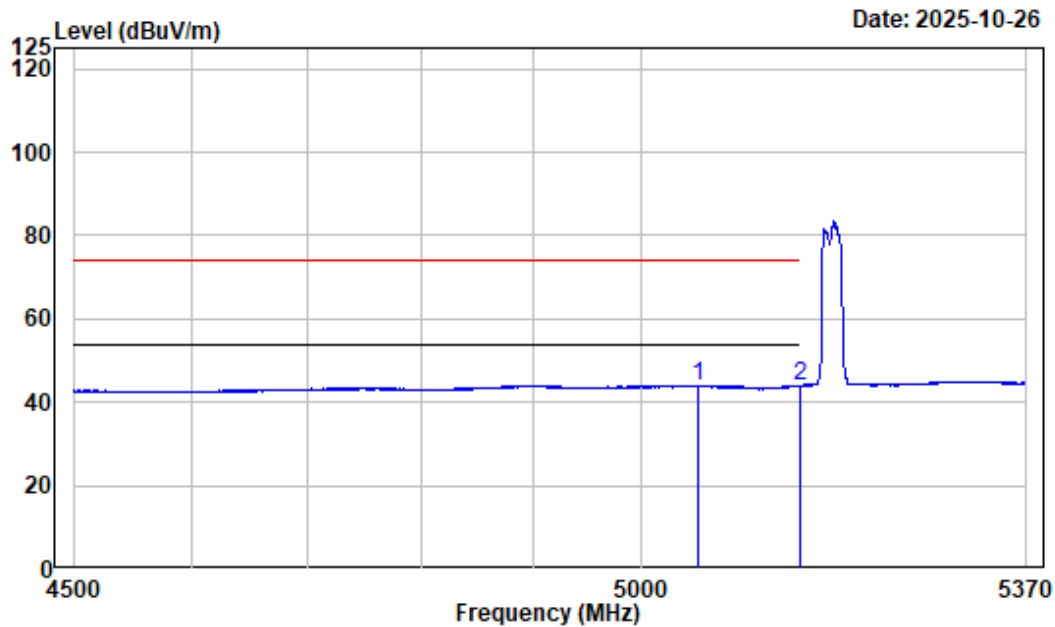

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AC20_5180

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5052.232	7.74	36.32	44.06	54.00	-9.94	Average
2	5150.000	7.47	36.44	43.91	54.00	-10.09	Average


Left Band edge_Vertical_Peak_5GWiFi_B1_AC20_5180MHz

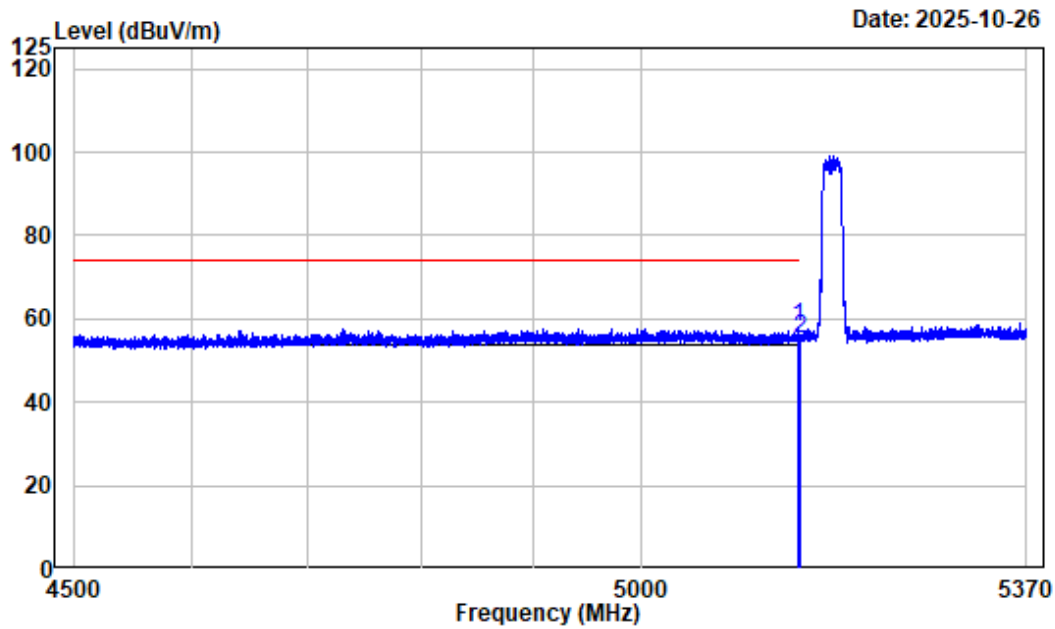

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AC20_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.715	7.46	50.50	57.96	74.00	-16.04	Peak
2	5150.000	7.47	47.87	55.34	74.00	-18.66	Peak


Left Band edge_Vertical_Average_5GWiFi_B1_AC20_5180MHz

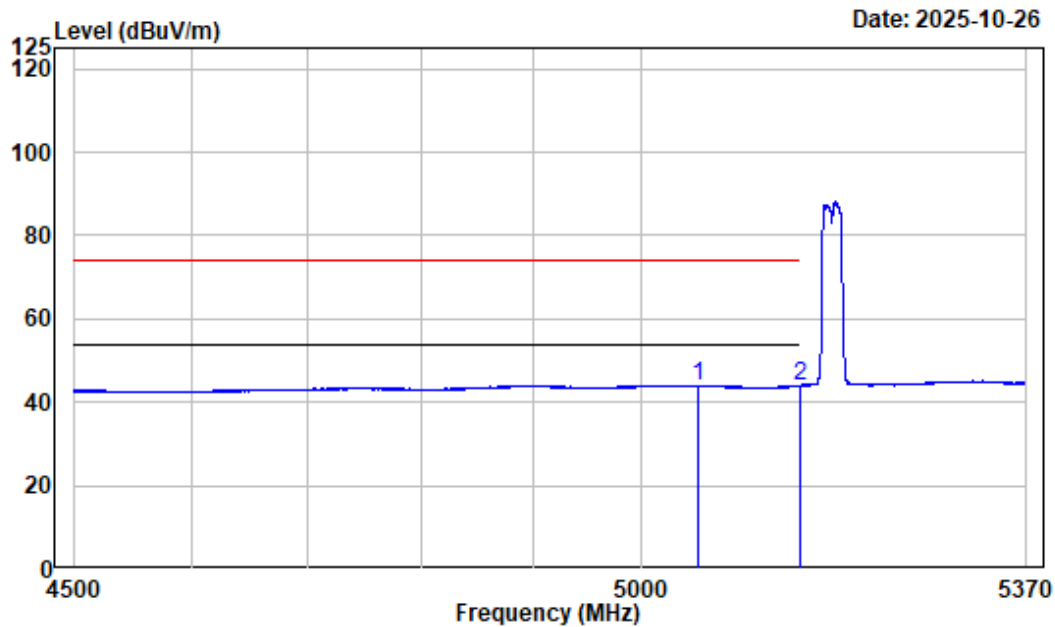

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AC20_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5052.232	7.74	36.32	44.06	54.00	-9.94	Average
2	5150.000	7.47	36.55	44.02	54.00	-9.98	Average


Right Band edge_Horizontal_Peak_5GWiFi_B1-AC20_5240MHz

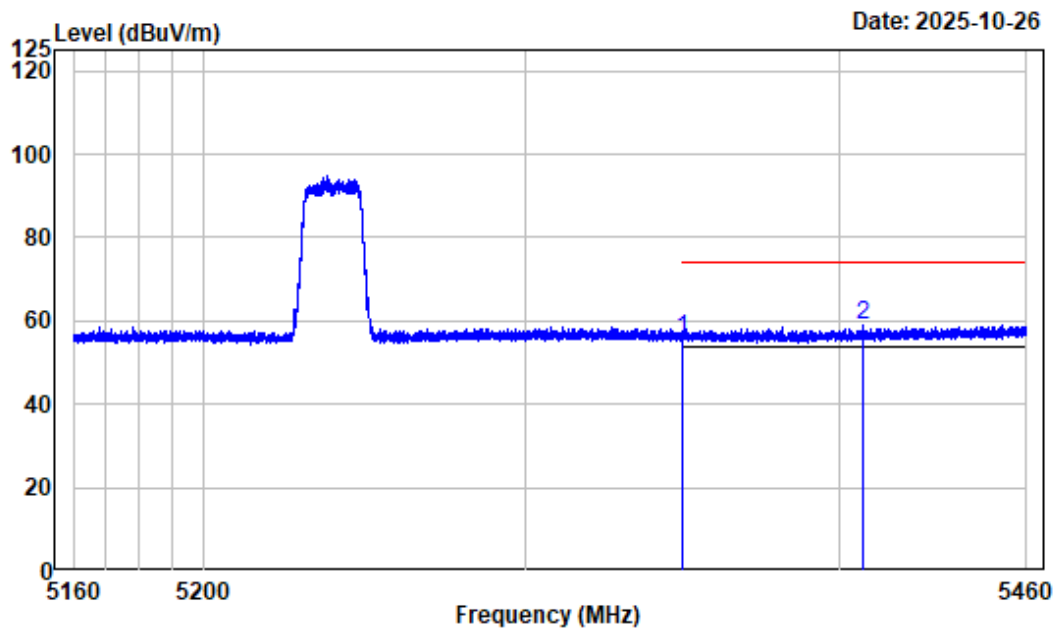

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AC20_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	47.26	55.63	74.00	-18.37	Peak
2	5407.500	8.61	50.44	59.05	74.00	-14.95	Peak


Right Band edge_Horizontal_Average_5GWiFi_B1-AC20_5240MHz

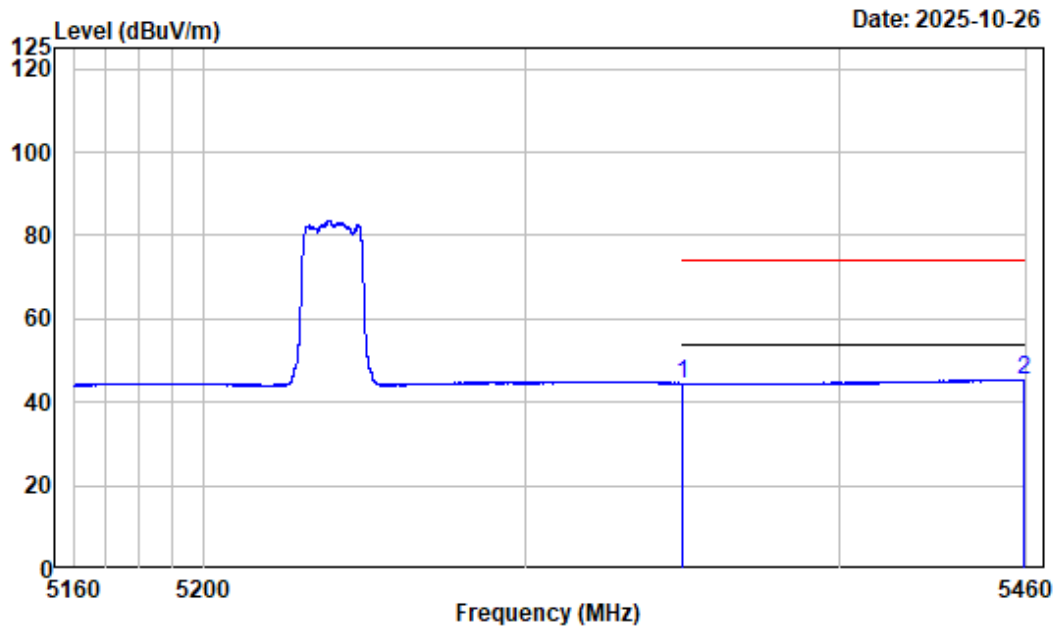

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AC20_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.17	44.54	54.00	-9.46	Average
2	5459.438	8.90	36.53	45.43	54.00	-8.57	Average


Right Band edge_Vertical_Peak_5GWiFi_B1-AC20_5240MHz

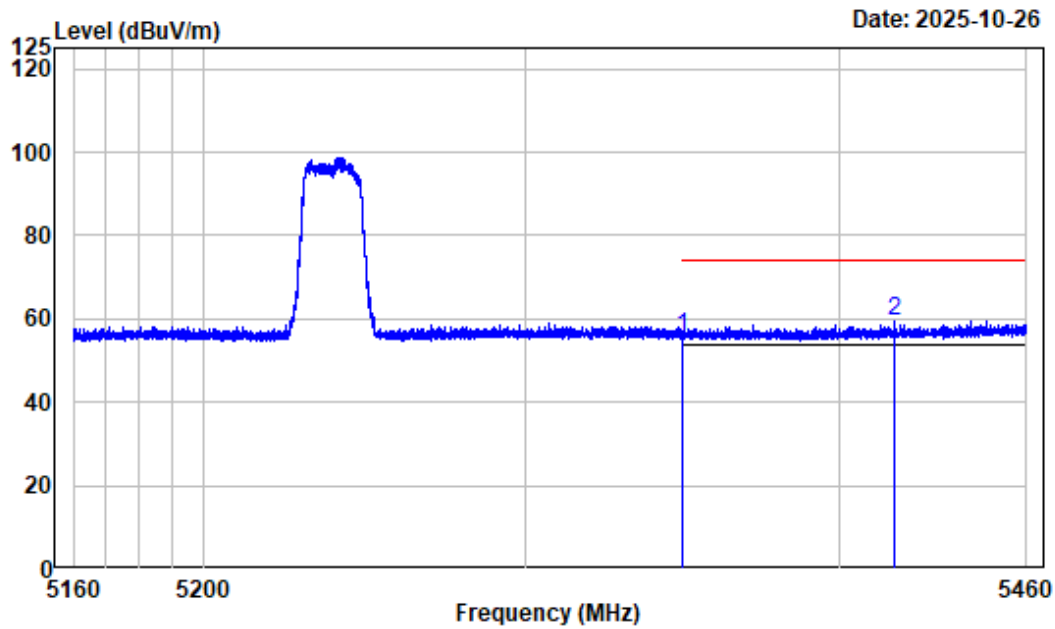

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AC20_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	47.52	55.89	74.00	-18.11	Peak
2	5417.475	8.70	50.89	59.59	74.00	-14.41	Peak


Right Band edge_Vertical_Average_5GWiFi_B1-AC20_5240MHz

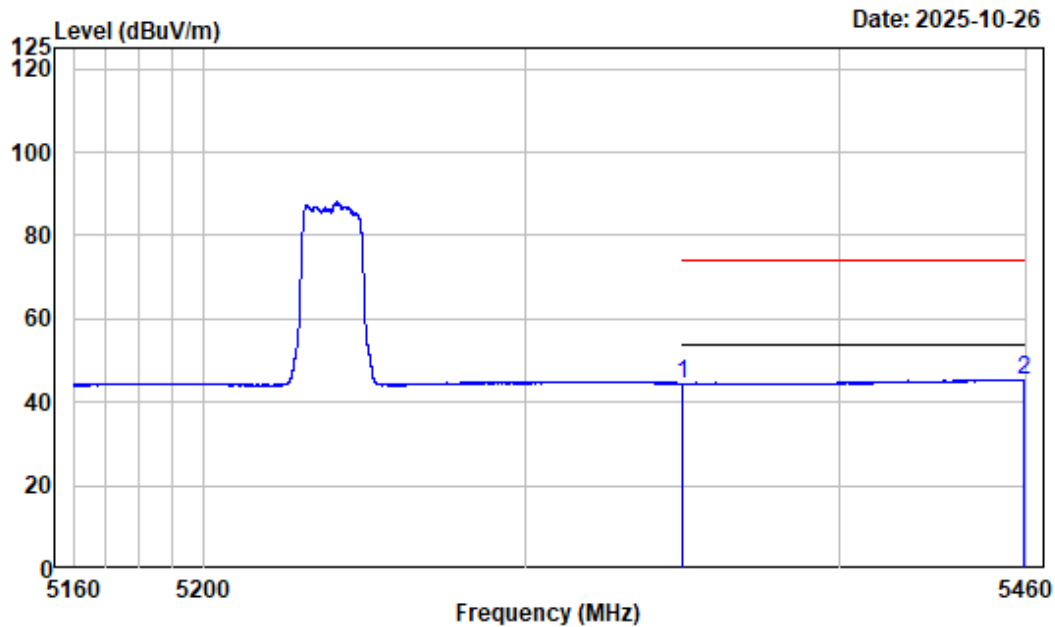

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AC20_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.13	44.50	54.00	-9.50	Average
2	5459.175	8.90	36.61	45.51	54.00	-8.49	Average


Left Band edge_Horizontal_Peak_5GWiFi_B1_AC40_5190MHz

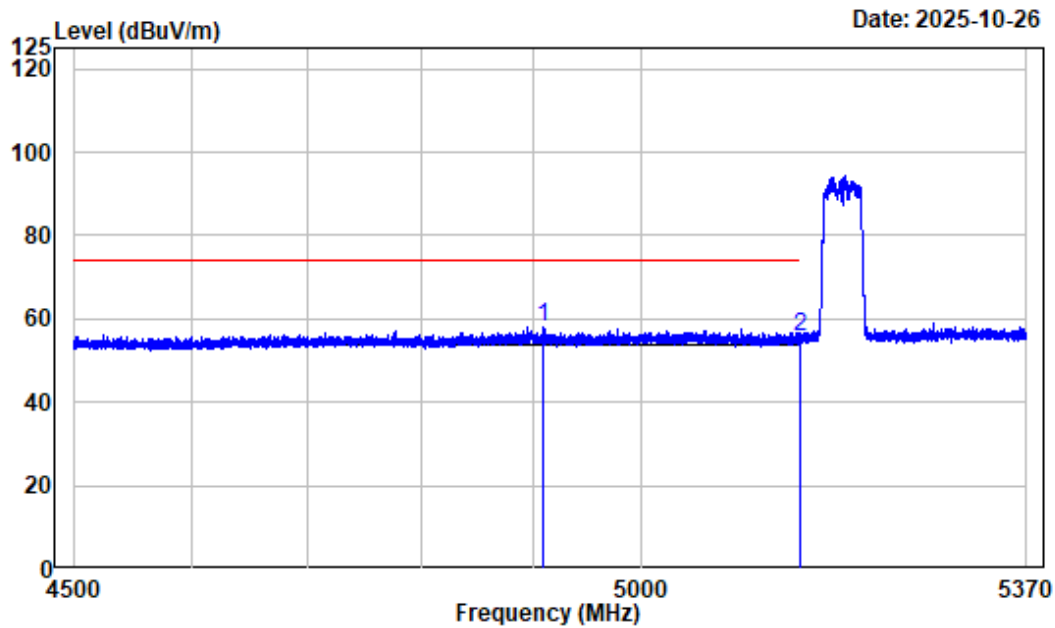

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AC40_5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4909.009	7.39	50.72	58.11	74.00	-15.89	Peak
2	5150.000	7.47	48.09	55.56	74.00	-18.44	Peak


Left Band edge_Horizontal_Average_5GWiFi_B1_AC40_5190MHz

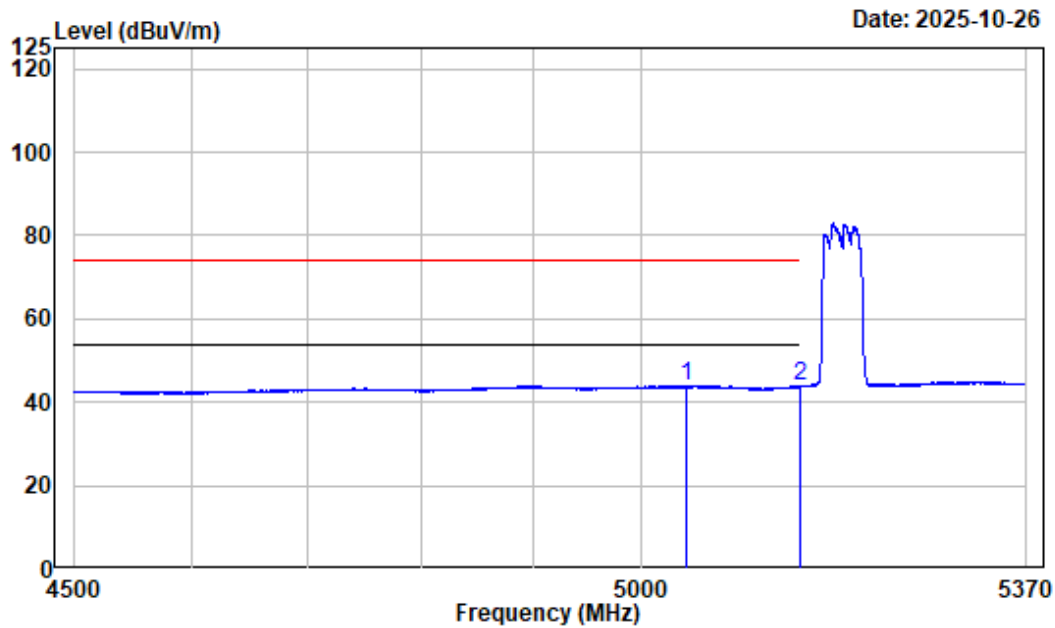

Condition : Horizontal
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
 Note : 5GWiFi_Band1_AC40_5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5042.554	7.63	36.28	43.91	54.00	-10.09	Average
2	5150.000	7.47	36.30	43.77	54.00	-10.23	Average


Left Band edge_Vertical_Peak_5GWiFi_B1_AC40_5190MHz

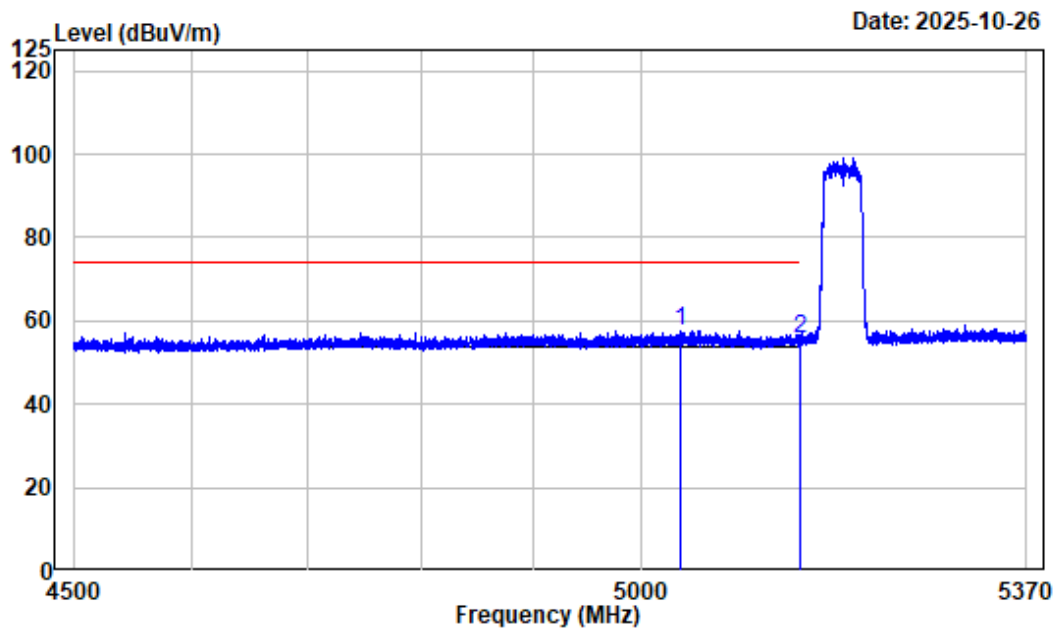

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AC40_5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5035.811	7.54	50.15	57.69	74.00	-16.31	Peak
2	5150.000	7.47	48.09	55.56	74.00	-18.44	Peak


Left Band edge_Vertical_Average_5GWiFi_B1_AC40_5190MHz

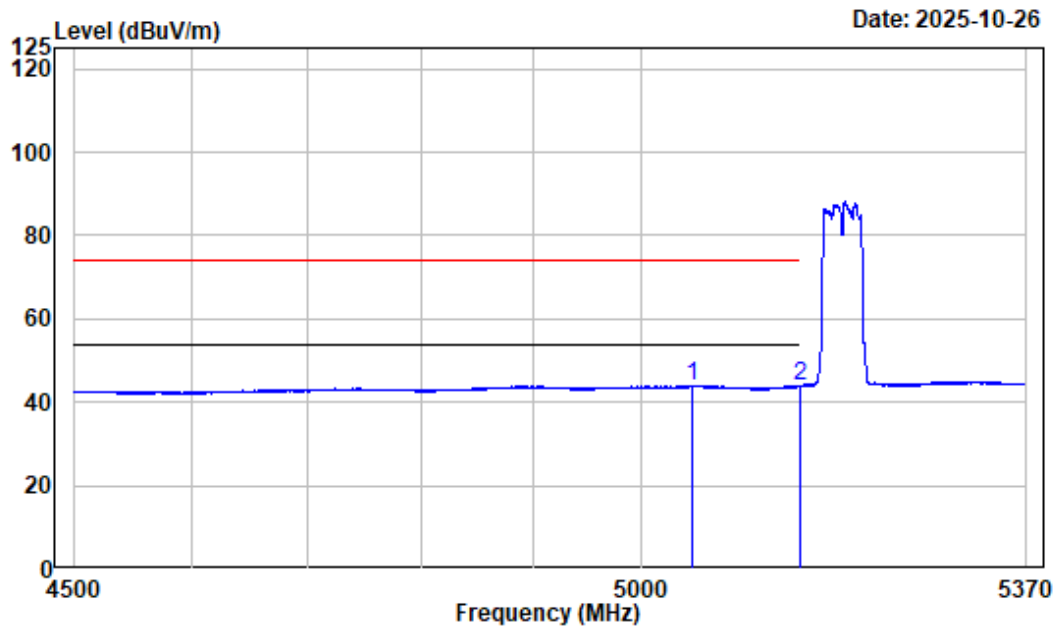

Condition : Vertical
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
 Note : 5GWiFi_Band1_AC40_5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5047.665	7.70	36.26	43.96	54.00	-10.04	Average
2	5150.000	7.47	36.39	43.86	54.00	-10.14	Average


Right Band edge_Horizontal_Peak_5GWiFi_B1_AC40_5230MHz

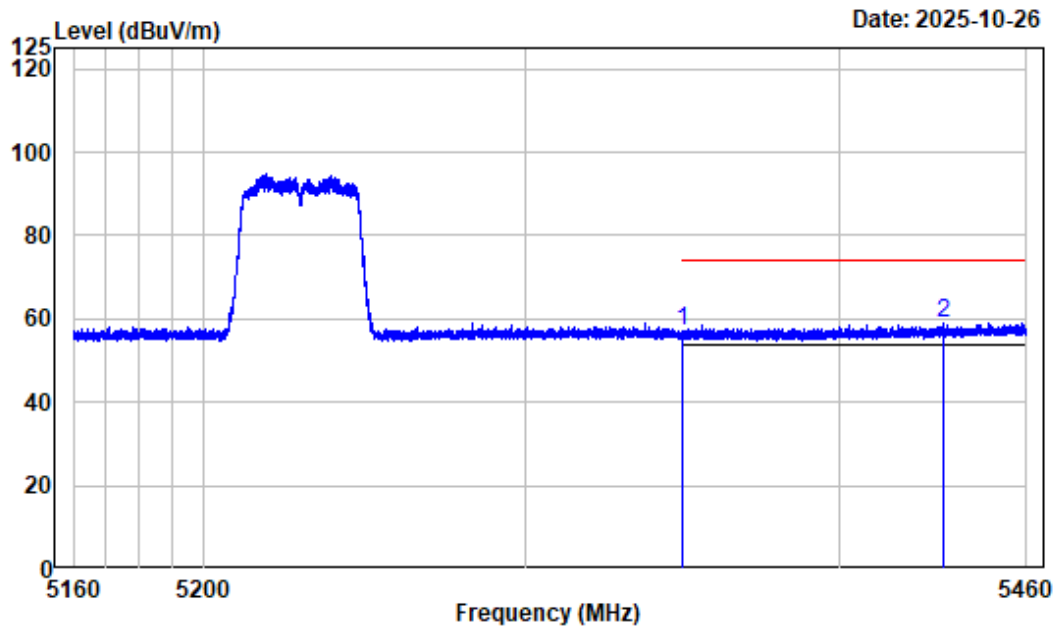

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AC40_5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	48.55	56.92	74.00	-17.08	Peak
2	5433.487	8.68	50.08	58.76	74.00	-15.24	Peak


Right Band edge_Horizontal_Average_5GWiFi_B1_AC40_5230MHz

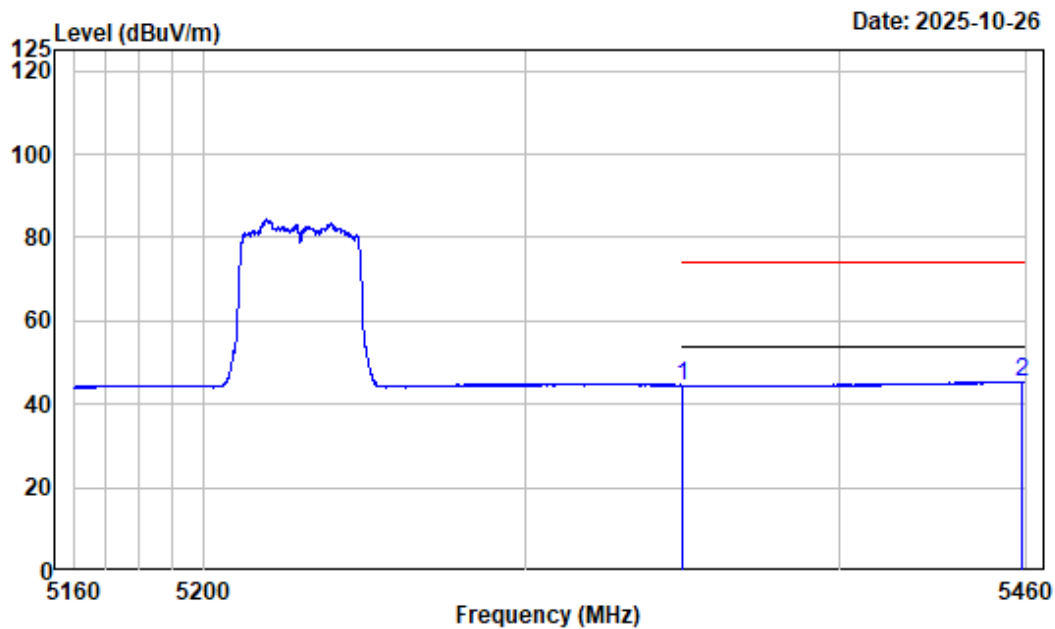

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AC40_5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.08	44.45	54.00	-9.55	Average
2	5458.763	8.87	36.56	45.43	54.00	-8.57	Average


Right Band edge_Vertical_Peak_5GWiFi_B1_AC40_5230MHz

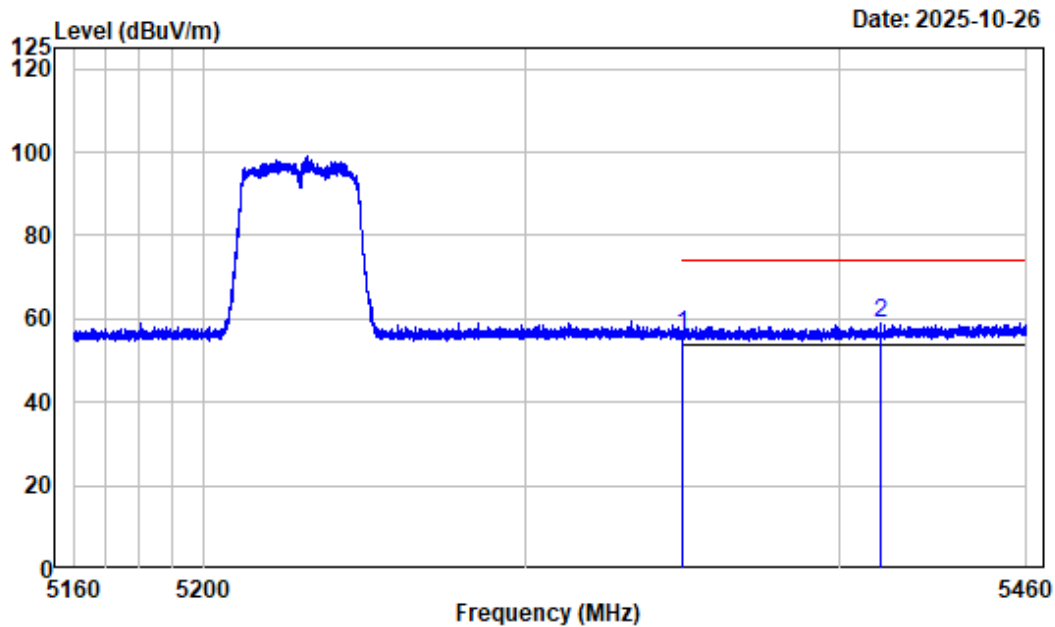

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AC40_5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	47.69	56.06	74.00	-17.94	Peak
2	5413.125	8.64	50.36	59.00	74.00	-15.00	Peak


Right Band edge_Vertical_Average_5GWiFi_B1_AC40_5230MHz

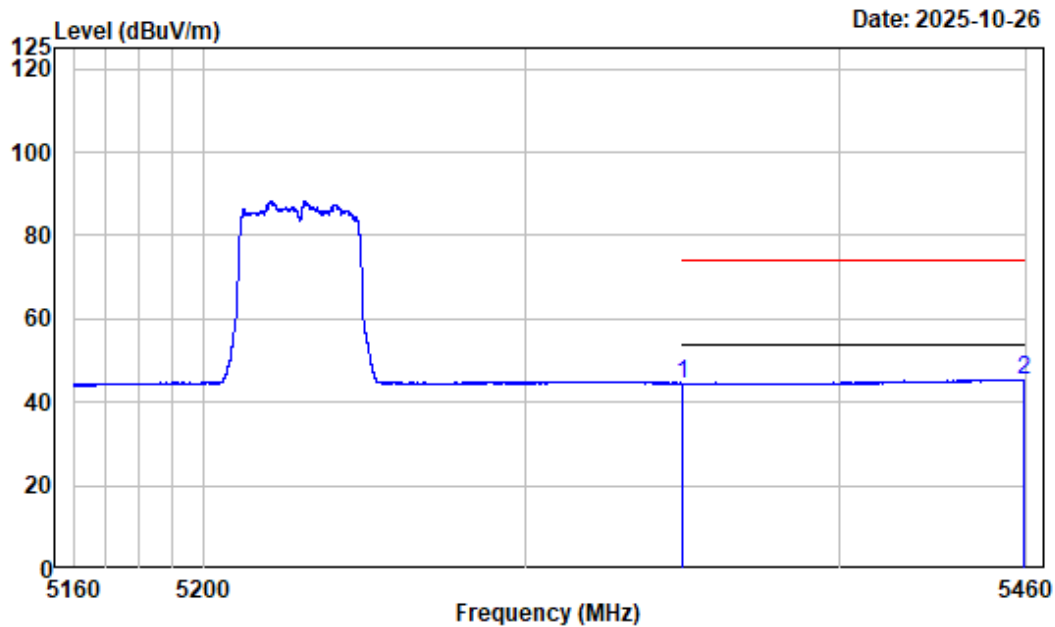

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AC40_5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.04	44.41	54.00	-9.59	Average
2	5459.400	8.90	36.53	45.43	54.00	-8.57	Average


Left Band edge_Horizontal_Peak_5GWiFi_B1_AC80_5210MHz

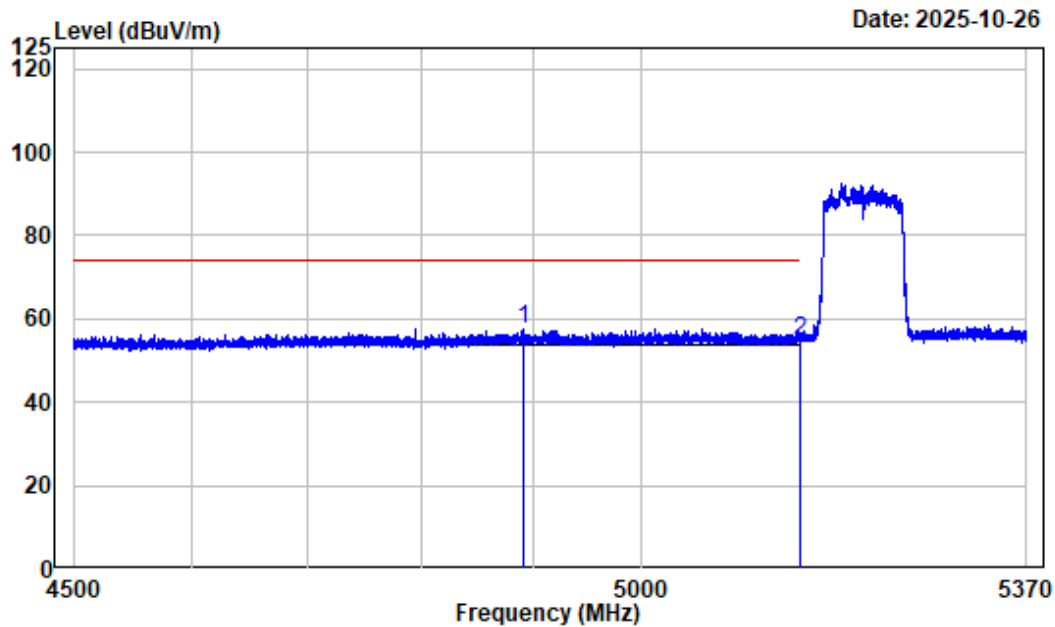

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AC80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4891.500	7.35	50.37	57.72	74.00	-16.28	Peak
2	5150.000	7.47	47.04	54.51	74.00	-19.49	Peak


Left Band edge_Horizontal_Average_5GWiFi_B1_AC80_5210MHz

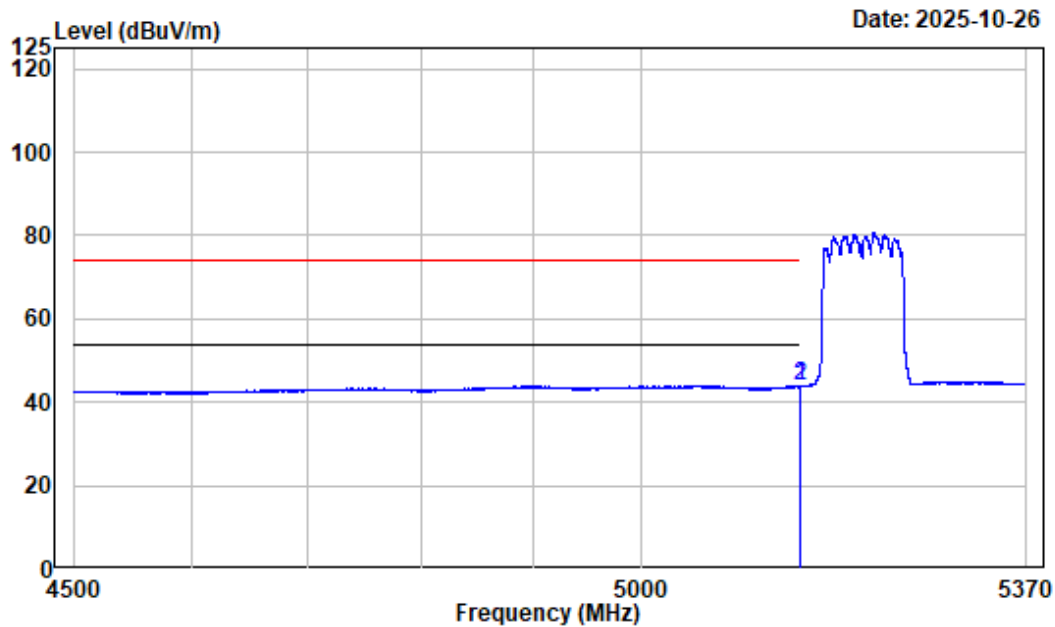

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AC80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.781	7.47	36.51	43.98	54.00	-10.02	Average
2	5150.000	7.47	36.32	43.79	54.00	-10.21	Average


Left Band edge_Vertical_Peak_5GWiFi_B1_AC80_5210MHz

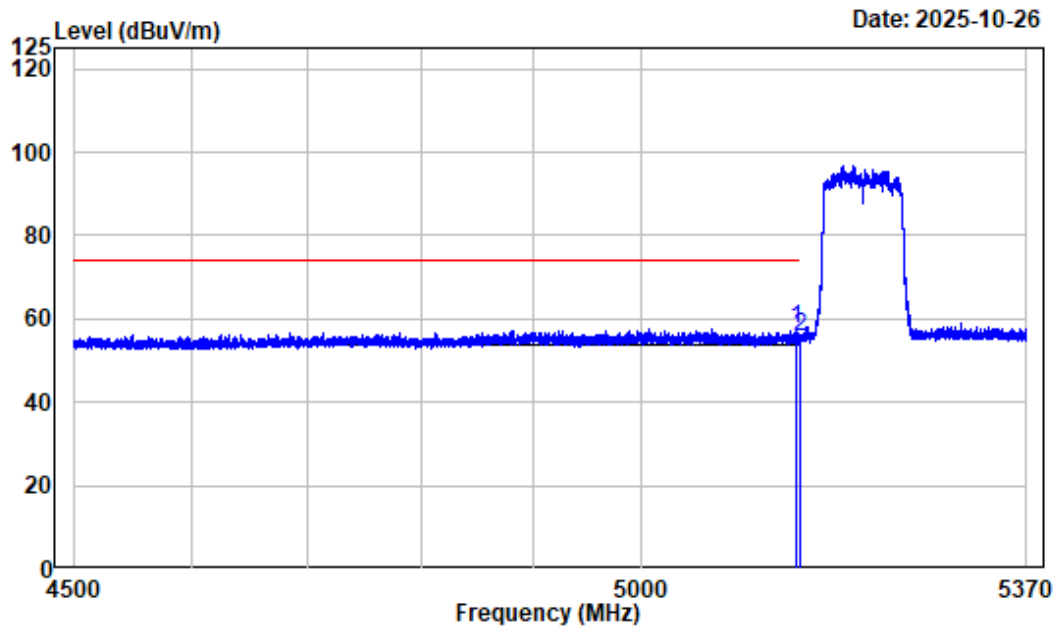

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AC80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5146.301	7.45	50.17	57.62	74.00	-16.38	Peak
2	5150.000	7.47	48.06	55.53	74.00	-18.47	Peak


Left Band edge_Vertical_Average_5GWiFi_B1_AC80_5210MHz

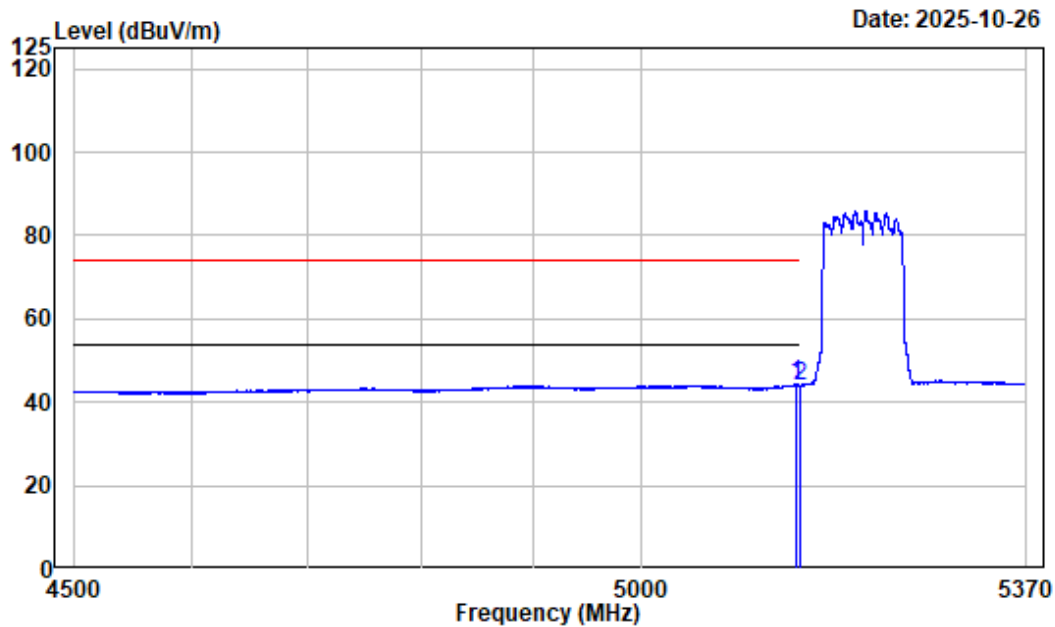

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AC80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5144.996	7.43	36.81	44.24	54.00	-9.76	Average
2	5150.000	7.47	36.47	43.94	54.00	-10.06	Average


Right Band edge_Horizontal_Peak_5GWiFi_B1_AC80_5210MHz

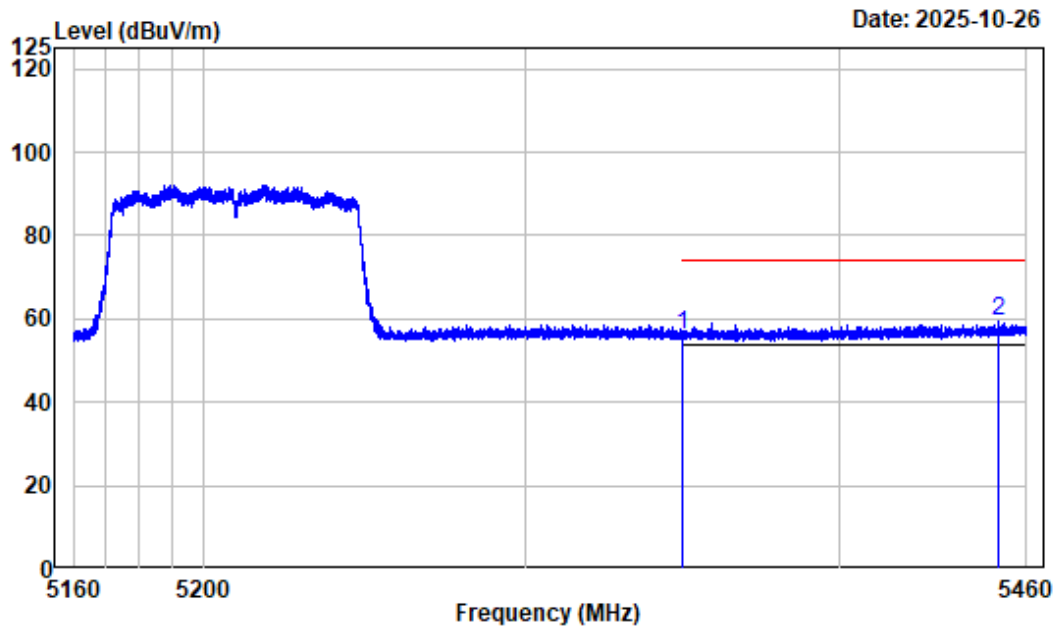

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AC80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	47.85	56.22	74.00	-17.78	Peak
2	5450.775	8.79	50.69	59.48	74.00	-14.52	Peak


Right Band edge_Horizontal_Average_5GWiFi_B1_AC80_5210MHz

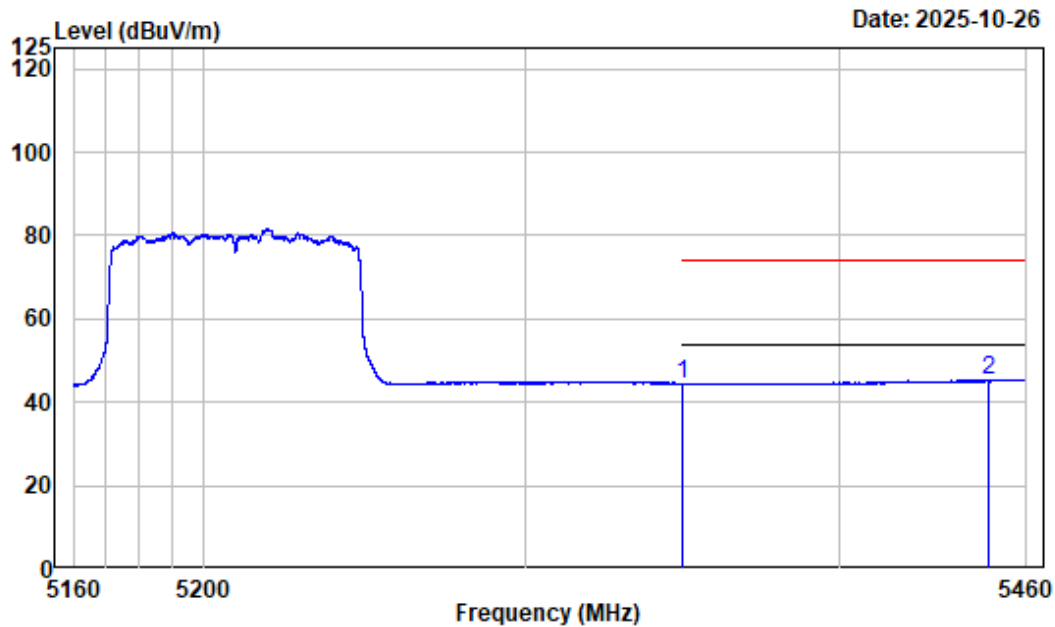

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AC80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.11	44.48	54.00	-9.52	Average
2	5448.000	8.79	36.61	45.40	54.00	-8.60	Average


Right Band edge_Vertical_Peak_5GWiFi_B1_AC80_5210MHz

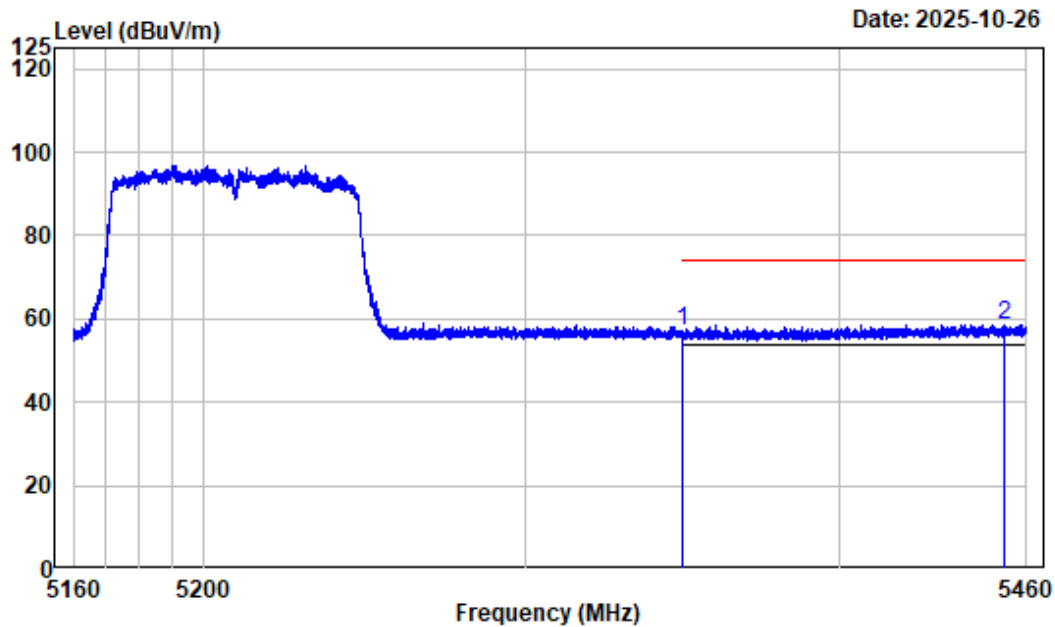

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AC80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	48.58	56.95	74.00	-17.05	Peak
2	5452.650	8.83	49.75	58.58	74.00	-15.42	Peak


Right Band edge_Vertical_Average_5GWiFi_B1_AC80_5210MHz

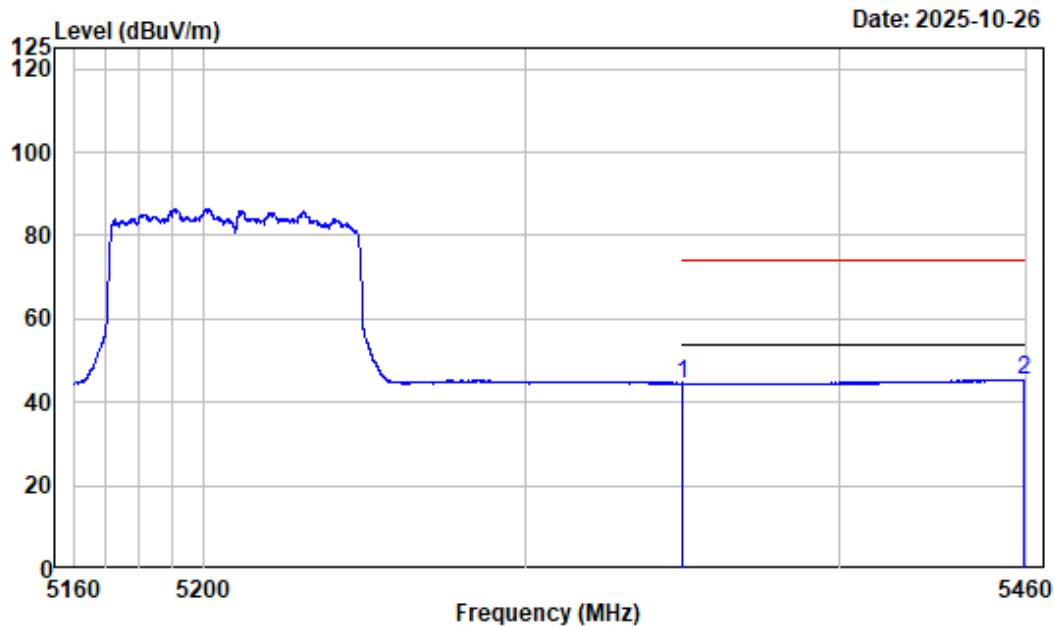

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AC80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.04	44.41	54.00	-9.59	Average
2	5459.212	8.90	36.54	45.44	54.00	-8.56	Average


Left Band edge_Horizontal_Peak_5GWiFi_B1_AX20_5180MHz

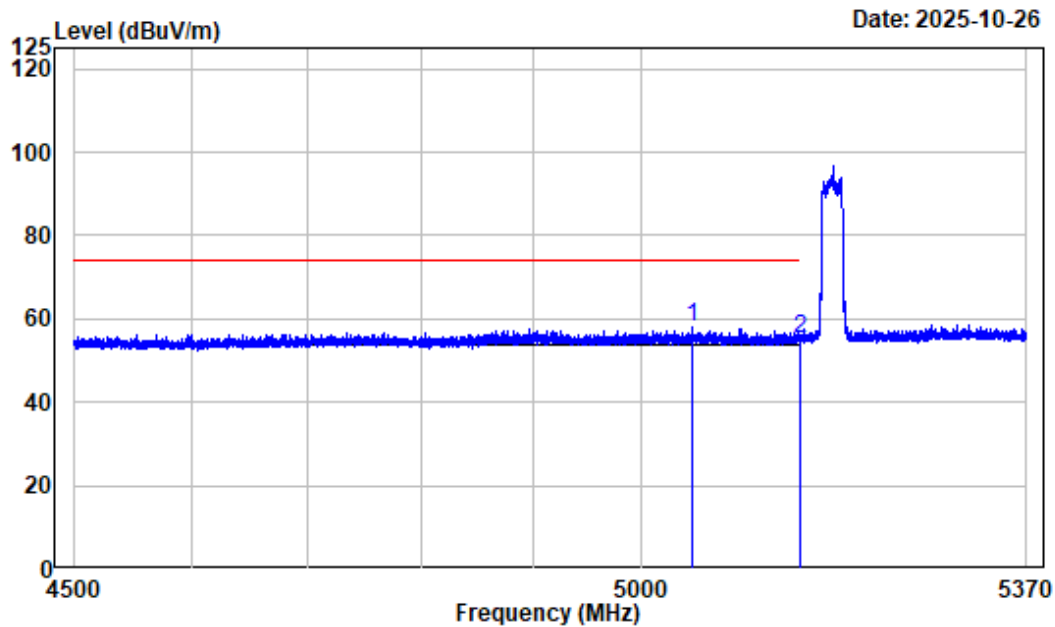

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AX20_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5047.556	7.70	50.14	57.84	74.00	-16.16	Peak
2	5150.000	7.47	47.95	55.42	74.00	-18.58	Peak


Left Band edge_Horizontal_Average_5GWiFi_B1_AX20_5180MHz

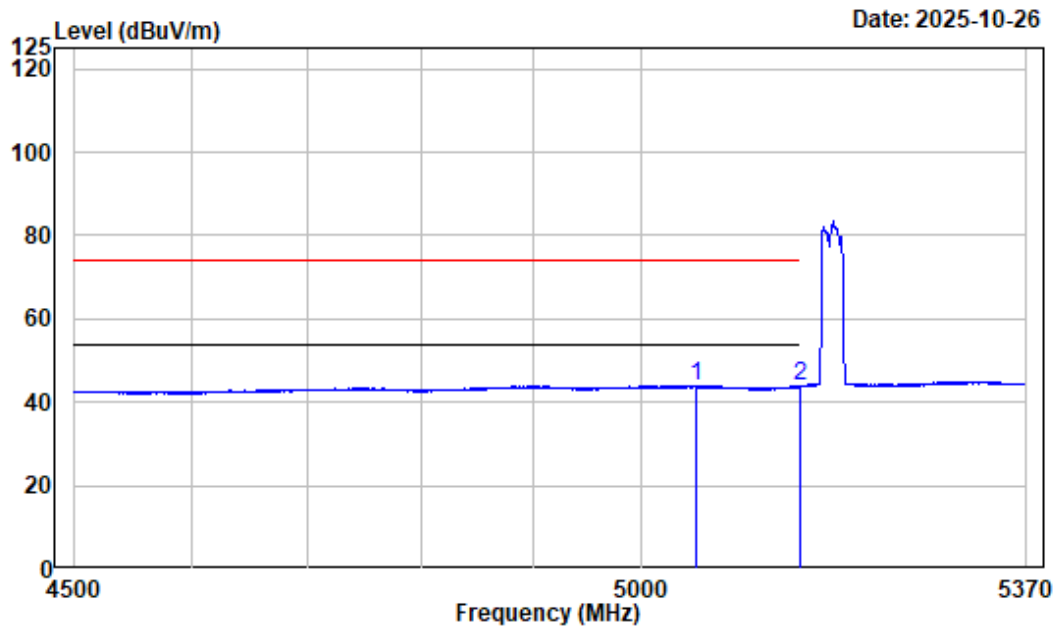

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AX20_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5051.036	7.75	36.12	43.87	54.00	-10.13	Average
2	5150.000	7.47	36.23	43.70	54.00	-10.30	Average


Left Band edge_Vertical_Peak_5GWiFi_B1_AX20_5180MHz

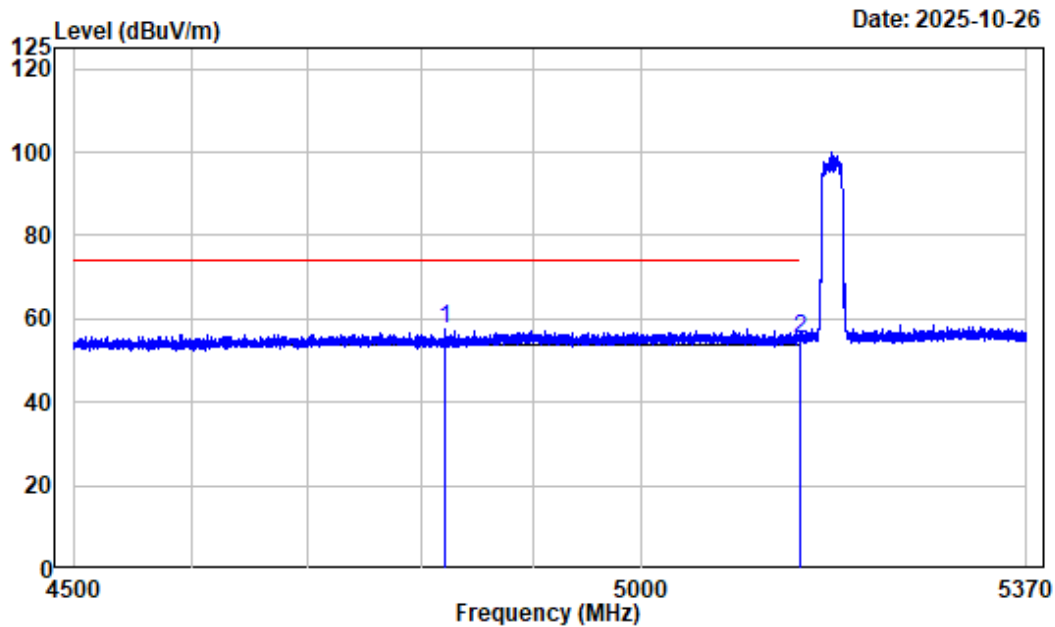

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AX20_5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4821.248	6.98	50.52	57.50	74.00	-16.50	Peak
2	5150.000	7.47	47.60	55.07	74.00	-18.93	Peak


Left Band edge_Vertical_Average_5GWiFi_B1_AX20_5180MHz

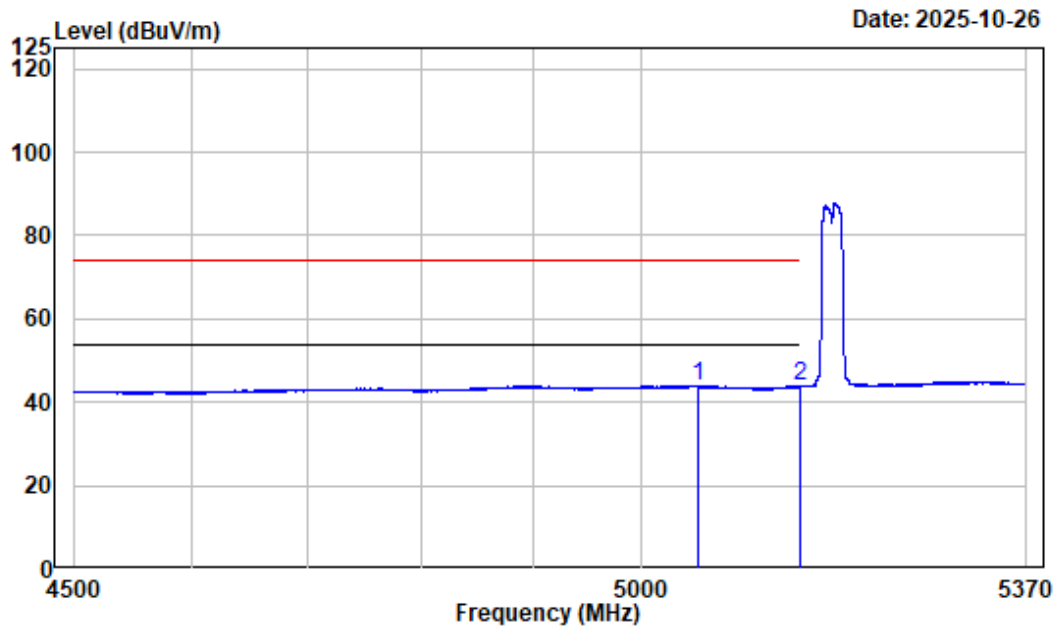

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AX20_5180

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5052.124	7.74	36.15	43.89	54.00	-10.11	Average
2	5150.000	7.47	36.27	43.74	54.00	-10.26	Average


Right Band edge_Horizontal_Peak_5GWiFi_B1_AX20_5240MHz

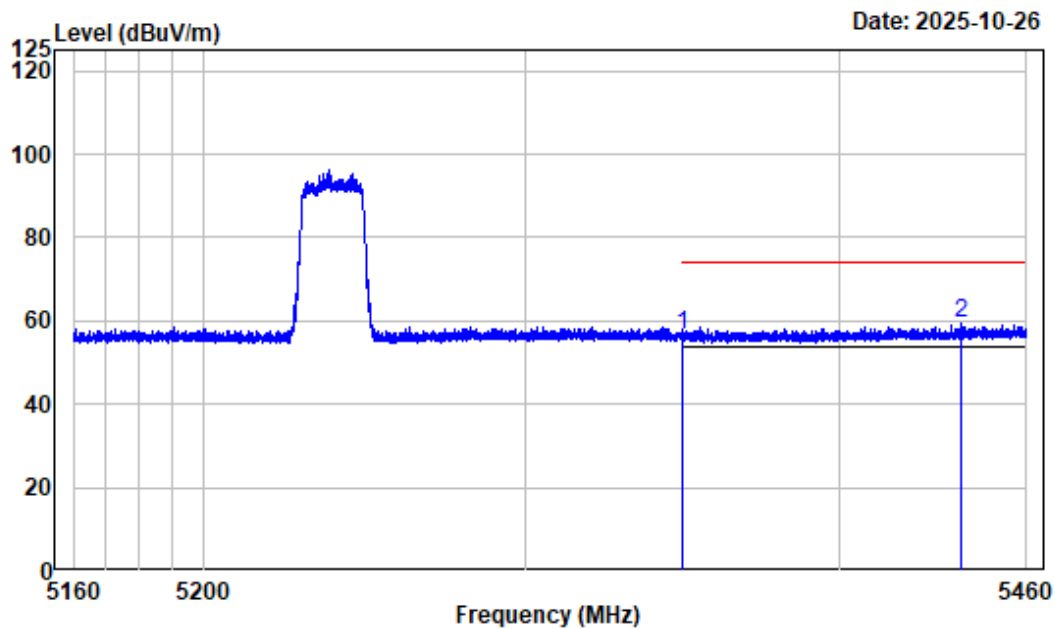

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AX20_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	48.14	56.51	74.00	-17.49	Peak
2	5438.700	8.76	50.49	59.25	74.00	-14.75	Peak


Right Band edge_Horizontal_Average_5GWiFi_B1_AX20_5240MHz

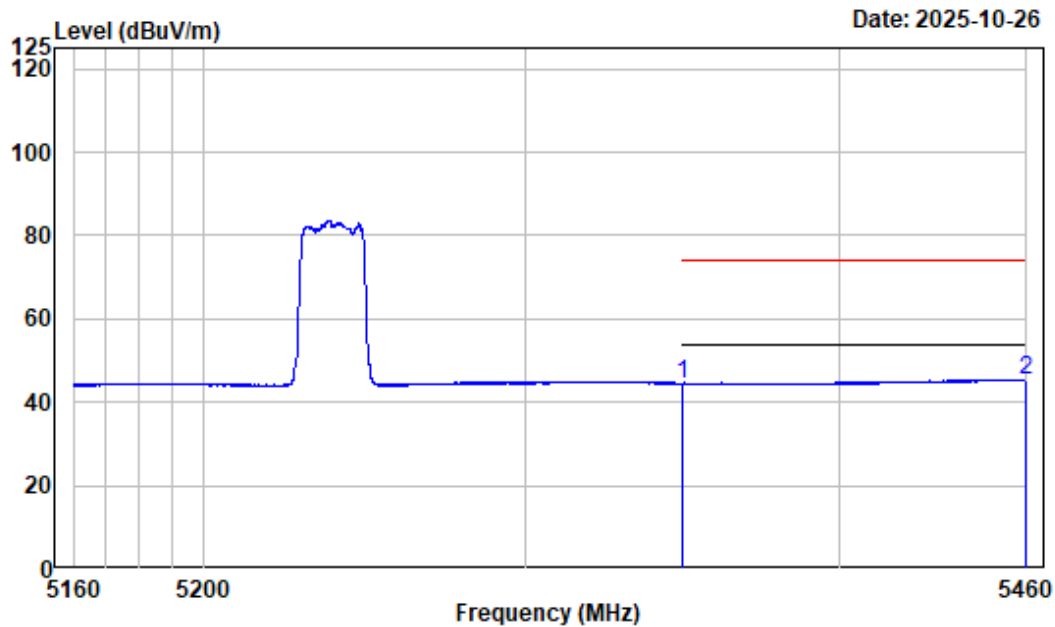

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AX20_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.12	44.49	54.00	-9.51	Average
2	5459.587	8.90	36.61	45.51	54.00	-8.49	Average


Right Band edge_Vertical_Peak_5GWiFi_B1_AX20_5240MHz

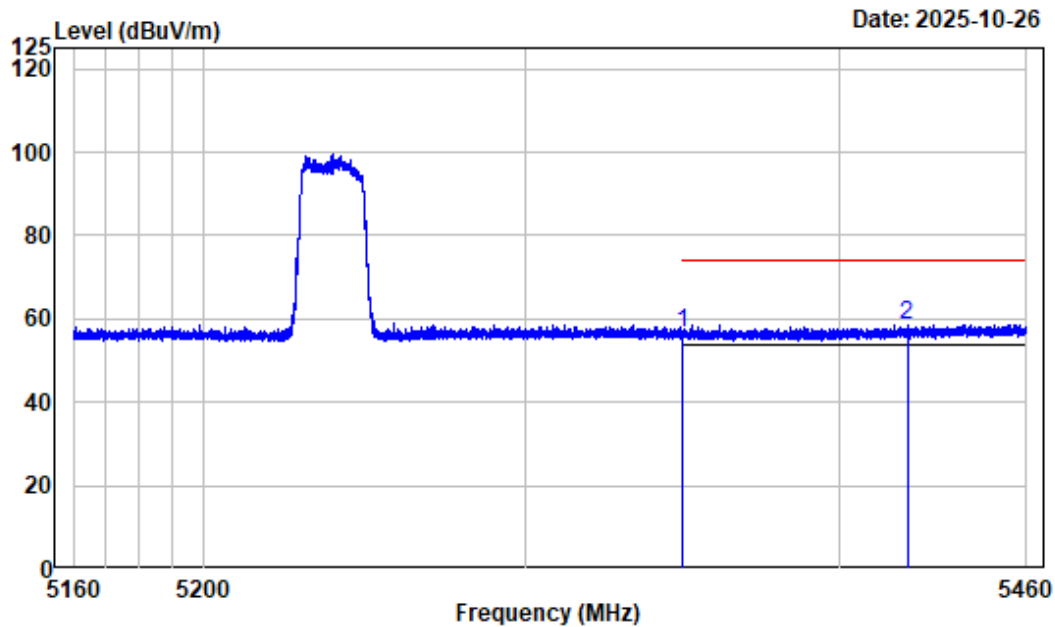

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AX20_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	48.02	56.39	74.00	-17.61	Peak
2	5421.525	8.71	50.01	58.72	74.00	-15.28	Peak


Right Band edge_Vertical_Average_5GWiFi_B1_AX20_5240MHz

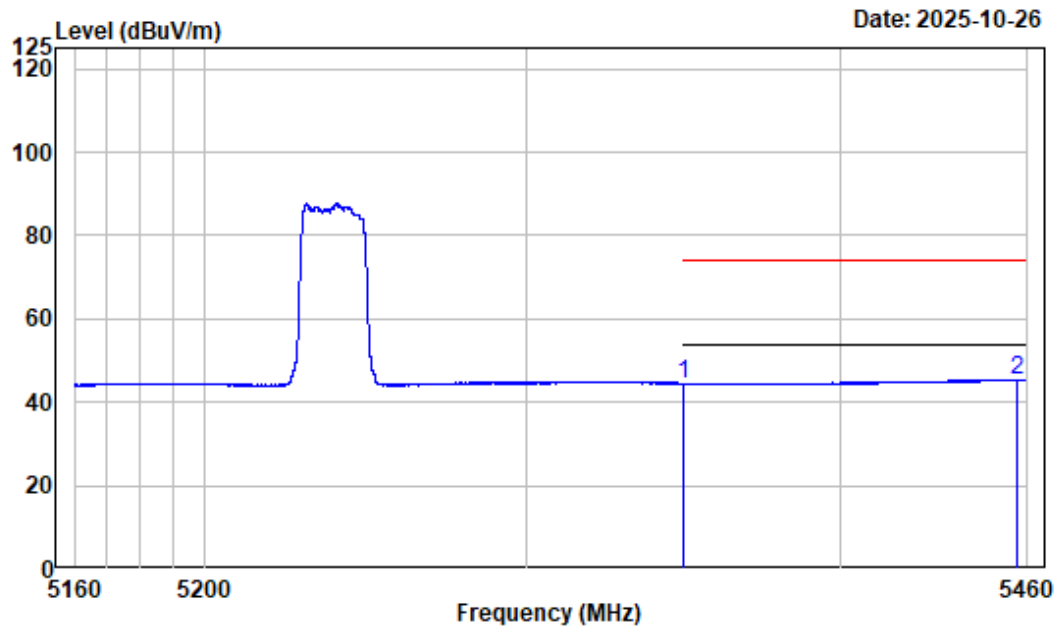

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AX20_5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.02	44.39	54.00	-9.61	Average
2	5456.513	8.86	36.58	45.44	54.00	-8.56	Average


Left Band edge_Horizontal_Peak_5GWiFi_B1_AX40_5190MHz

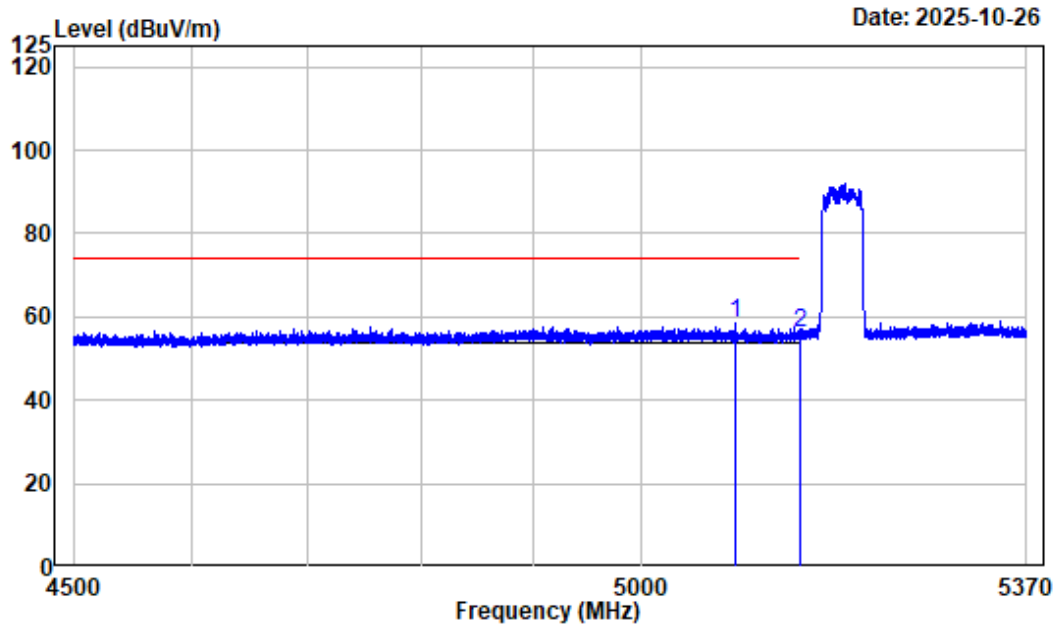

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AX40_5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5088.337	7.71	50.67	58.38	74.00	-15.62	Peak
2	5150.000	7.47	48.54	56.01	74.00	-17.99	Peak


Left Band edge_Horizontal_Average_5GWiFi_B1_AX40_5190MHz

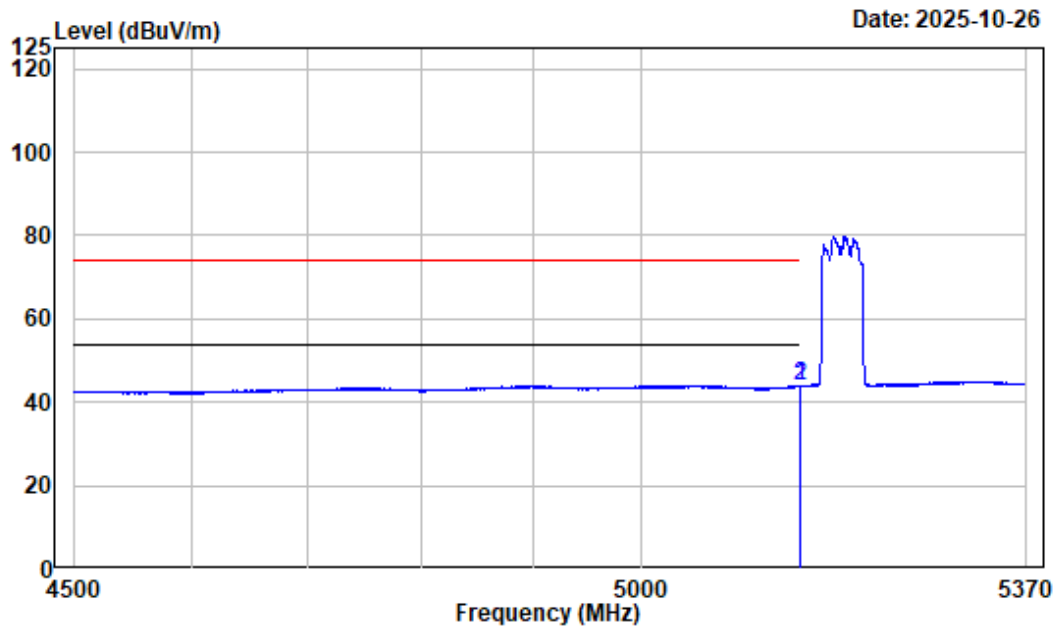

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AX40_5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.564	7.47	36.48	43.95	54.00	-10.05	Average
2	5150.000	7.47	36.28	43.75	54.00	-10.25	Average


Left Band edge_Vertical_Peak_5GWiFi_B1_AX40_5190MHz

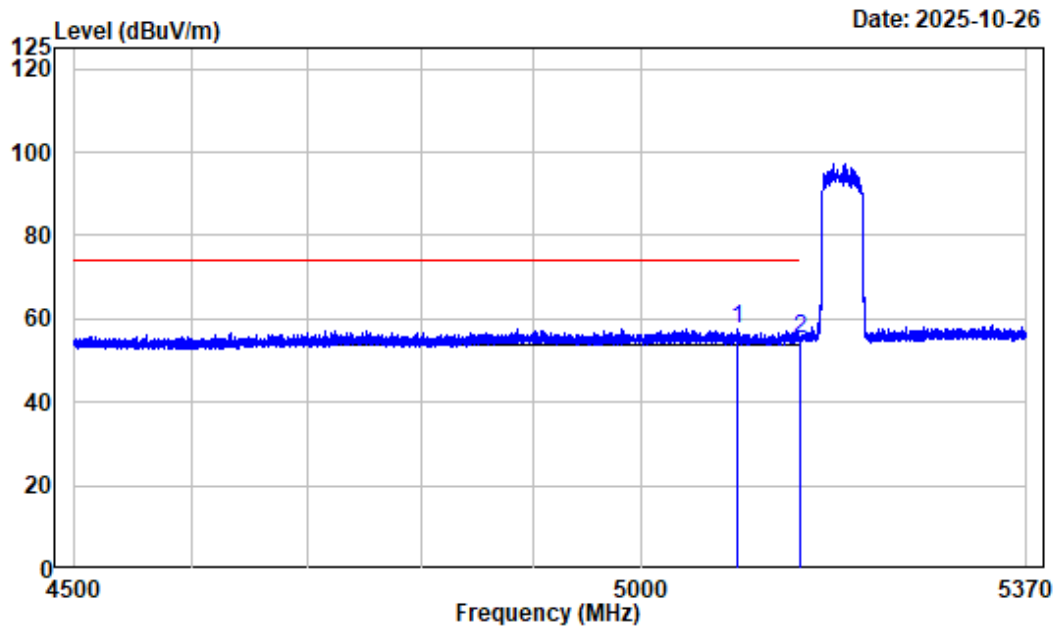

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AX40_5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5090.513	7.71	49.93	57.64	74.00	-16.36	Peak
2	5150.000	7.47	47.59	55.06	74.00	-18.94	Peak


Left Band edge_Vertical_Average_5GWiFi_B1_AX40_5190MHz

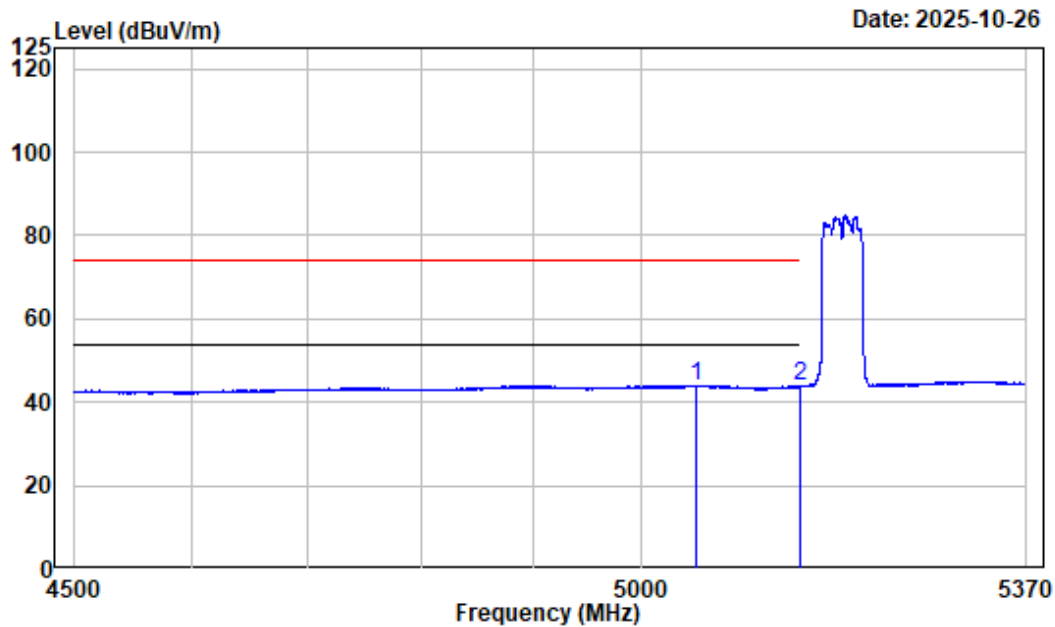

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AX40_5190

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5050.493	7.75	36.25	44.00	54.00	-10.00	Average
2	5150.000	7.47	36.27	43.74	54.00	-10.26	Average


Right Band edge_Horizontal_Peak_5GWiFi_B1_AX40_5230MHz

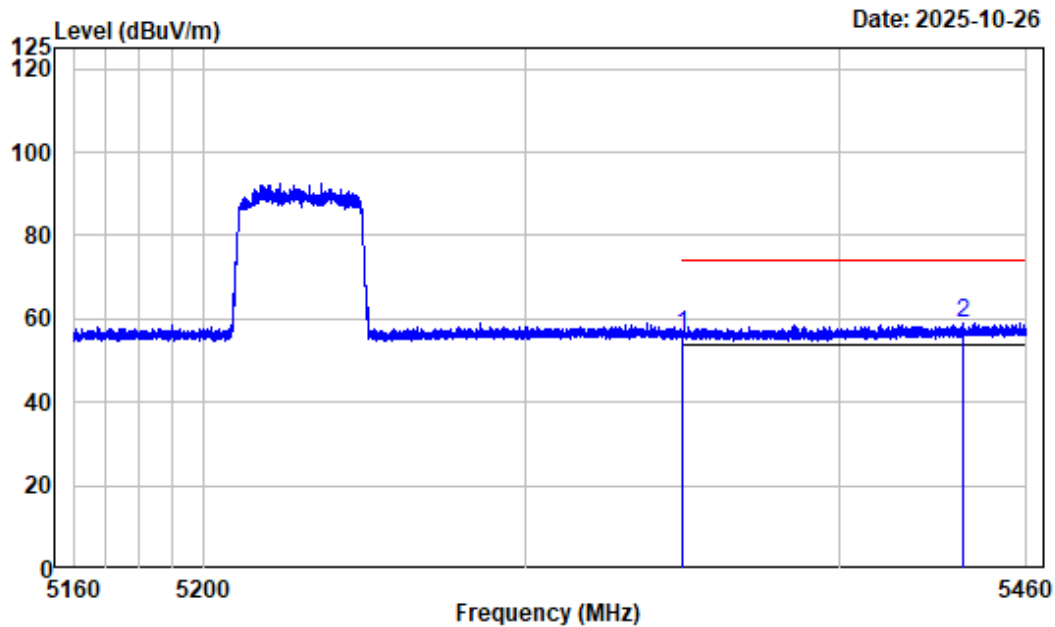

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AX40_5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	47.58	55.95	74.00	-18.05	Peak
2	5439.263	8.76	50.20	58.96	74.00	-15.04	Peak


Right Band edge_Horizontal_Average_5GWiFi_B1_AX40_5230MHz

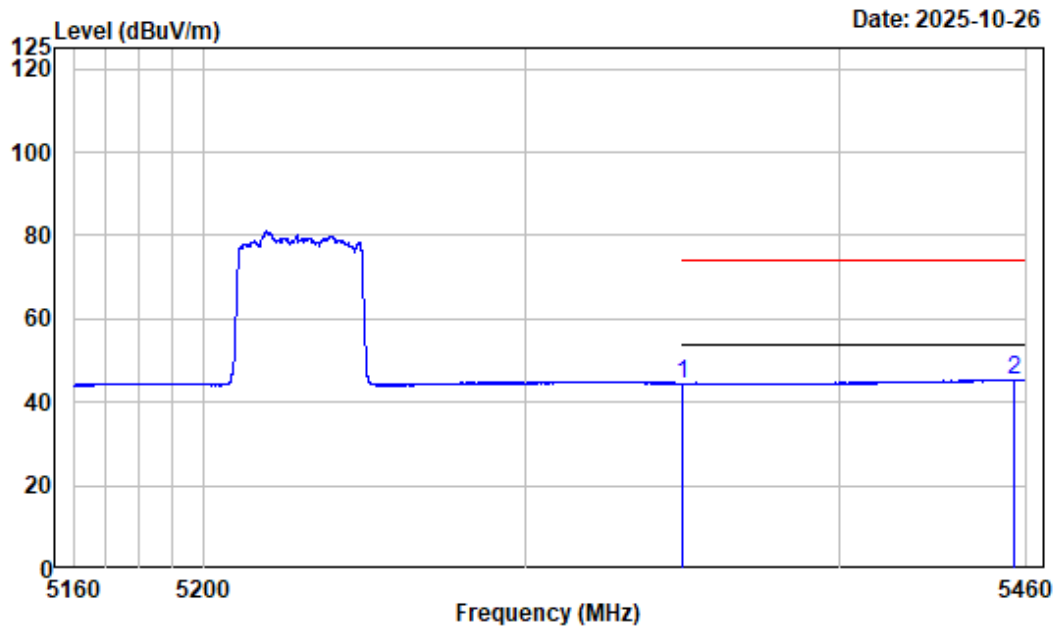

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AX40_5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.11	44.48	54.00	-9.52	Average
2	5455.987	8.86	36.57	45.43	54.00	-8.57	Average


Right Band edge_Vertical_Peak_5GWiFi_B1_AX40_5230MHz

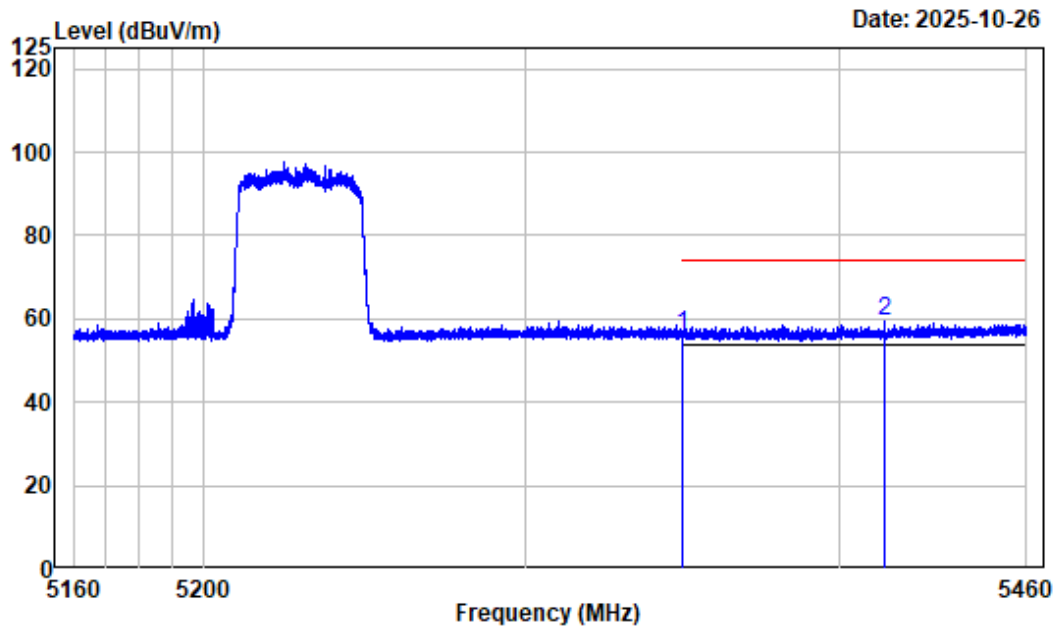

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AX40_5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	47.73	56.10	74.00	-17.90	Peak
2	5414.475	8.66	50.71	59.37	74.00	-14.63	Peak


Right Band edge_Vertical_Average_5GWiFi_B1_AX40_5230MHz

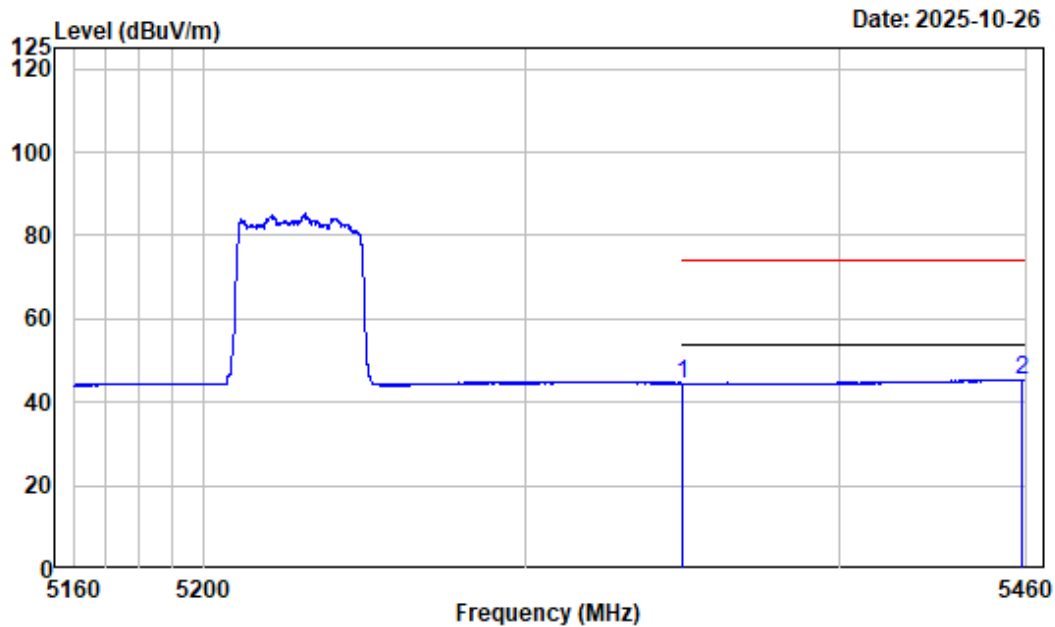

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AX40_5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.10	44.47	54.00	-9.53	Average
2	5458.350	8.87	36.62	45.49	54.00	-8.51	Average


Left Band edge_Horizontal_Peak_5GWiFi_B1_AX80_5210MHz

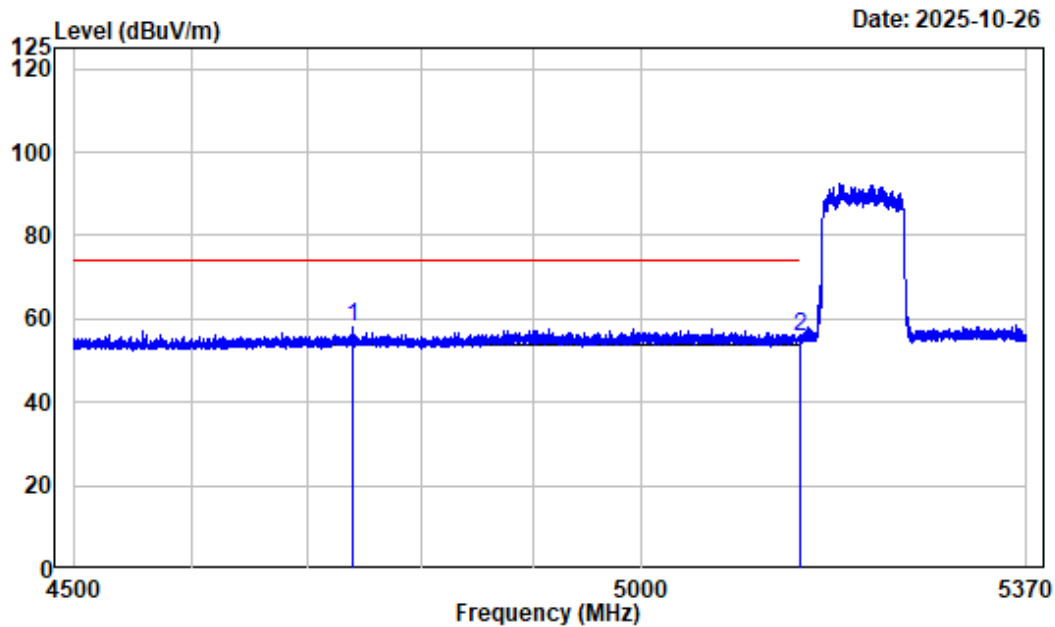

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AX80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4738.706	7.12	50.78	57.90	74.00	-16.10	Peak
2	5150.000	7.47	48.29	55.76	74.00	-18.24	Peak


Left Band edge_Horizontal_Average_5GWiFi_B1_AX80_5210MHz

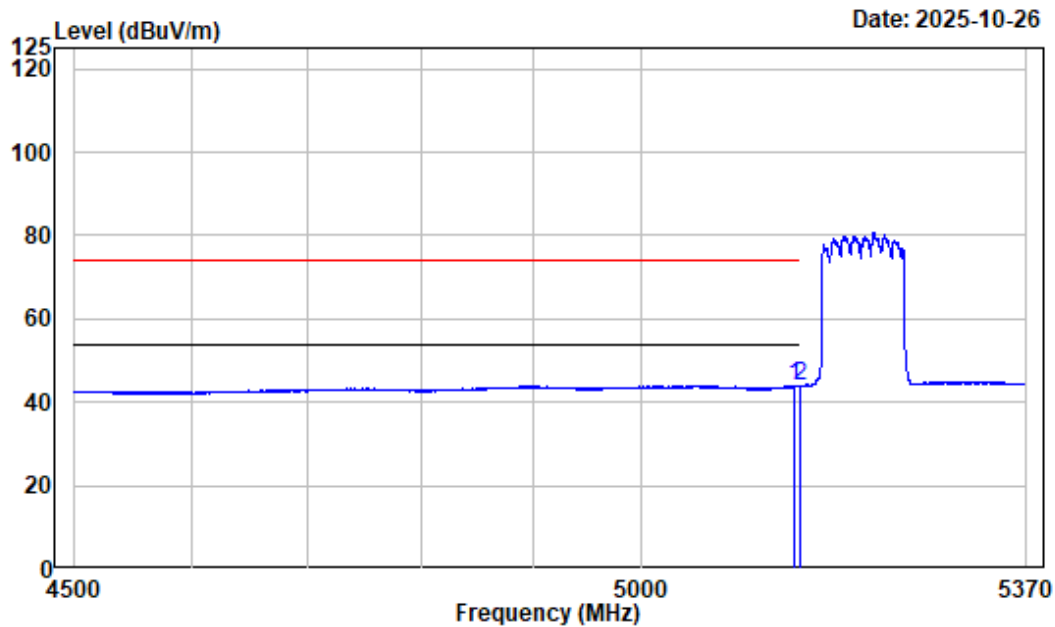

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AX80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5144.235	7.43	36.55	43.98	54.00	-10.02	Average
2	5150.000	7.47	36.29	43.76	54.00	-10.24	Average


Left Band edge_Vertical_Peak_5GWiFi_B1_AX80_5210MHz

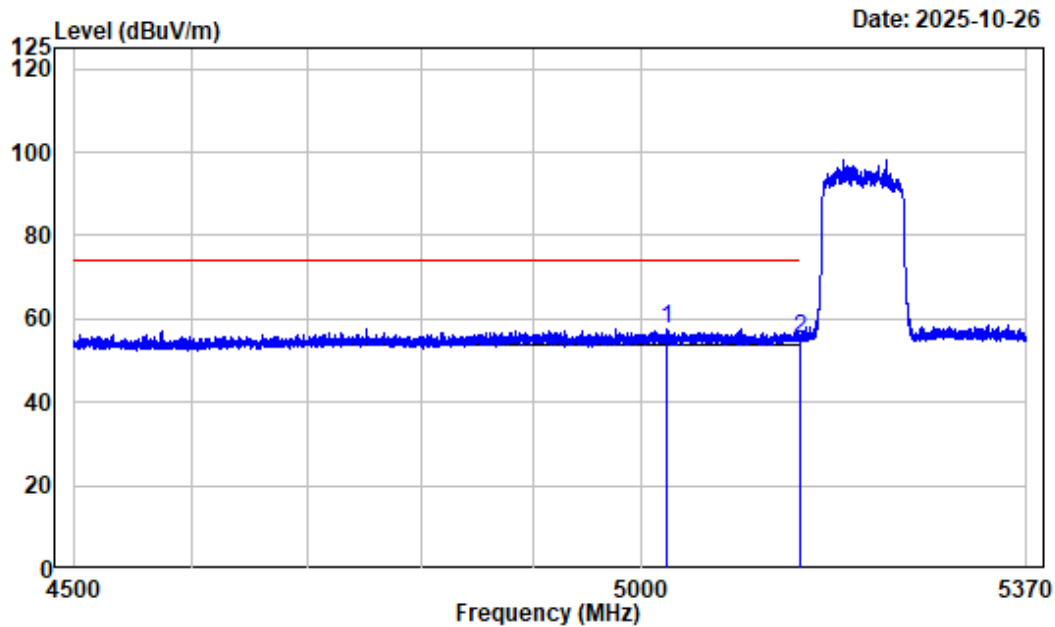

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AX80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5023.849	7.51	50.11	57.62	74.00	-16.38	Peak
2	5150.000	7.47	47.86	55.33	74.00	-18.67	Peak


Left Band edge_ Vertical _Average_5GWiFi_B1_AX80_5210MHz

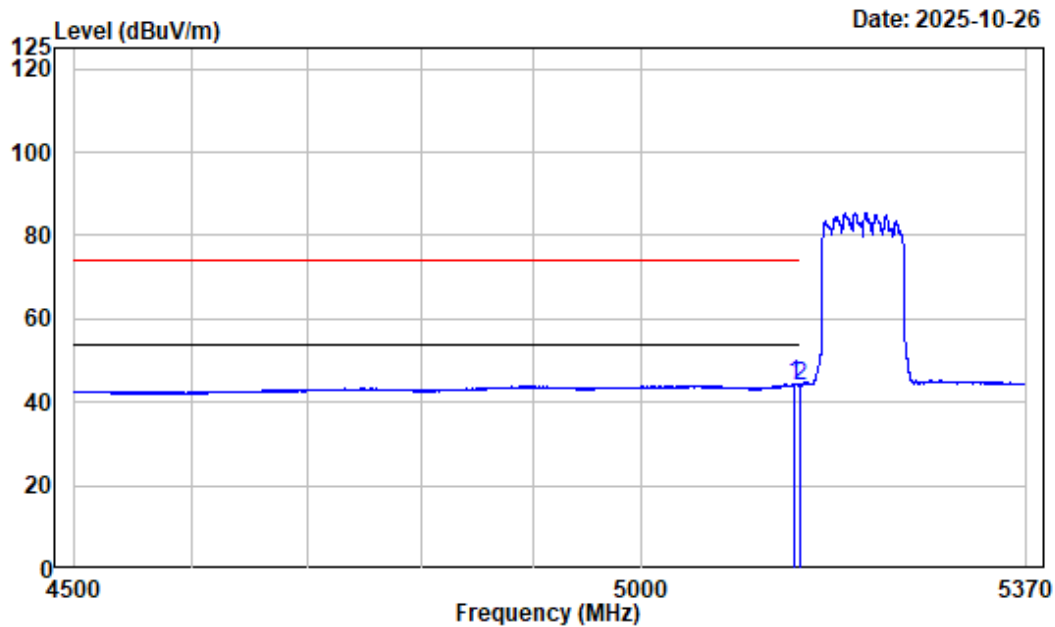

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AX80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5144.561	7.43	36.97	44.40	54.00	-9.60	Average
2	5150.000	7.47	36.47	43.94	54.00	-10.06	Average


Right Band edge_Horizontal_Peak_5GWiFi_B1_AX80_5210MHz

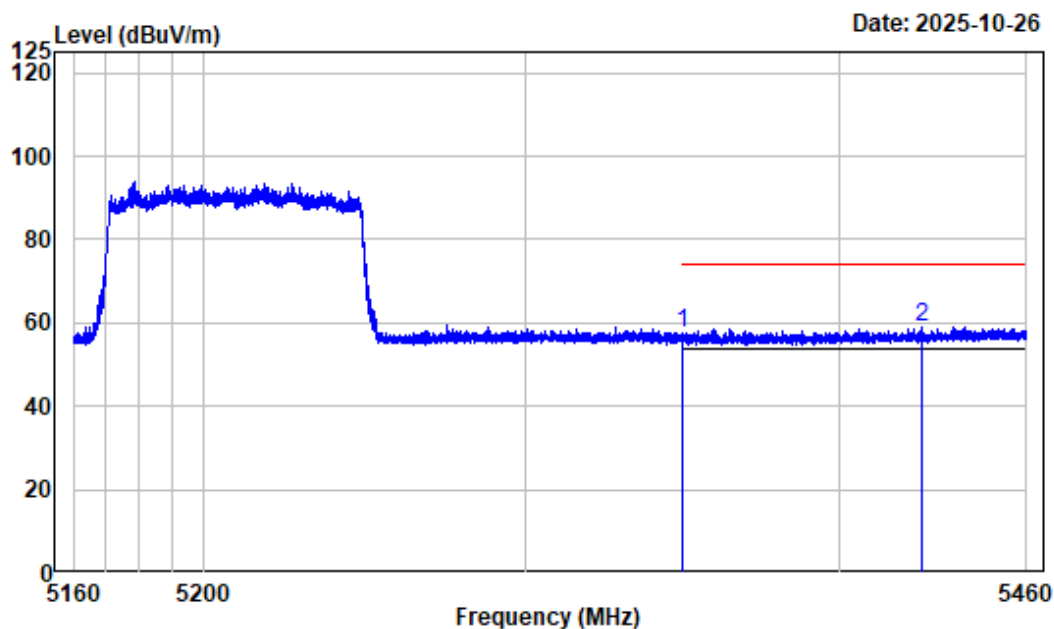

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AX80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	49.06	57.43	74.00	-16.57	Peak
2	5426.288	8.66	50.21	58.87	74.00	-15.13	Peak


Right Band edge_ Horizontal _Average_5GWiFi_B1_AX80_5210MHz

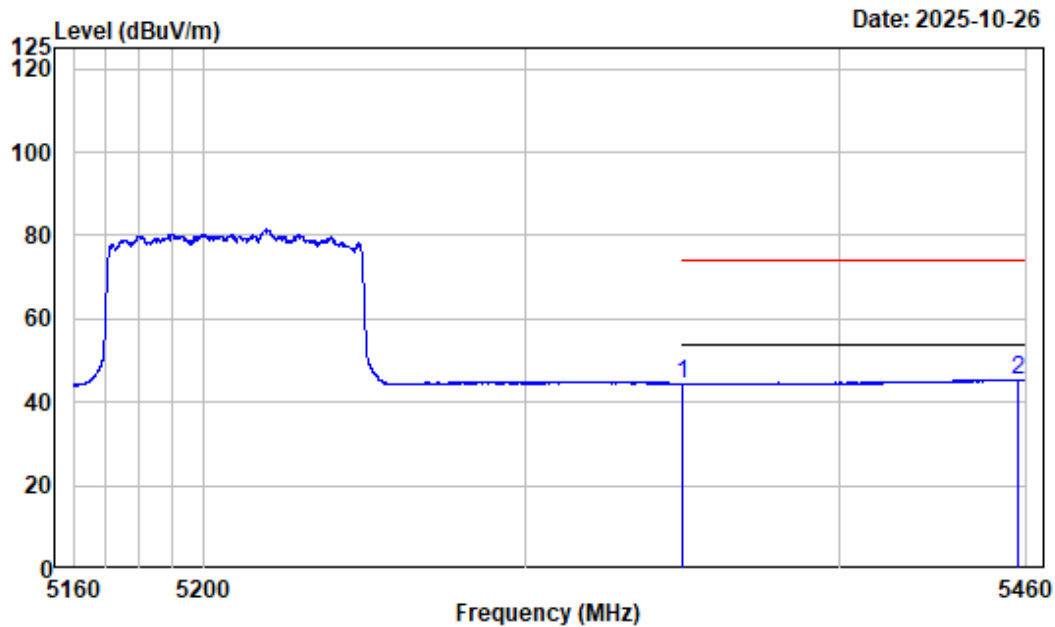

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AX80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.09	44.46	54.00	-9.54	Average
2	5457.563	8.87	36.53	45.40	54.00	-8.60	Average


Right Band edge_Vertical_Peak_5GWiFi_B1_AX80_5210MHz

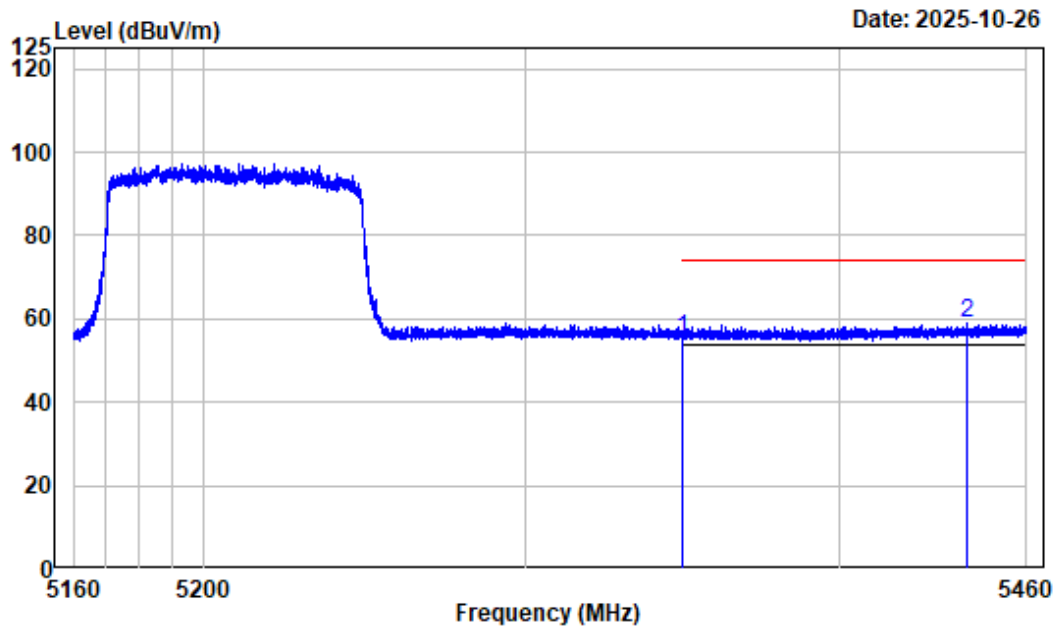

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi_Band1_AX80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	46.96	55.33	74.00	-18.67	Peak
2	5440.688	8.77	50.01	58.78	74.00	-15.22	Peak


Right Band edge_Vertical_Average_5GWiFi_B1_AX80_5210MHz

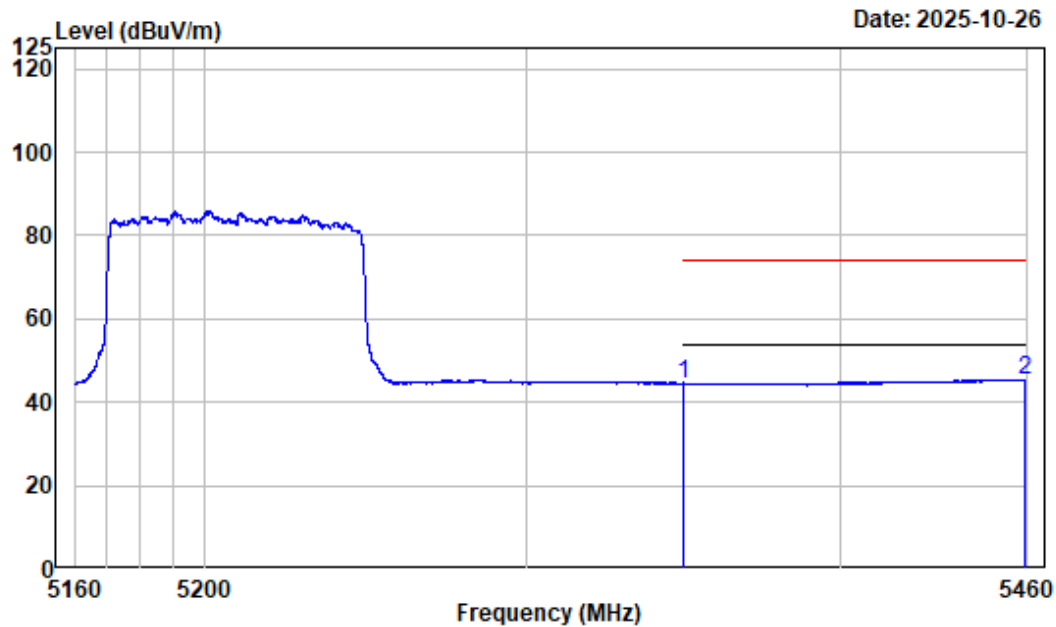

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi_Band1_AX80_5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.04	44.41	54.00	-9.59	Average
2	5459.325	8.90	36.54	45.44	54.00	-8.56	Average


Left Band edge_Horizontal_Peak_5GWiFi_Band2_A_ANT0_5260MHz

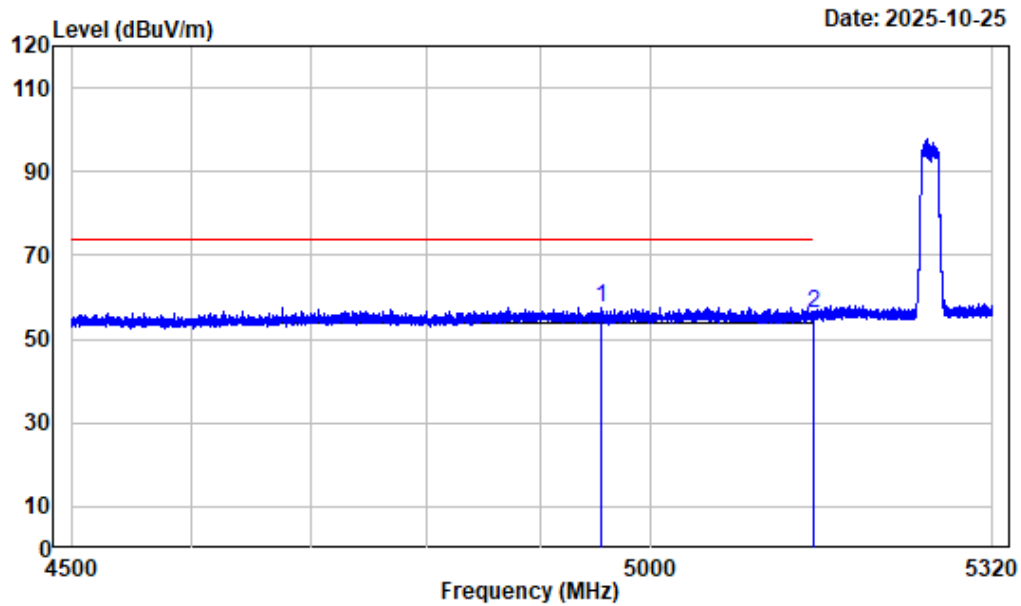

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	4954.075	7.38	50.27	57.65	74.00	-16.35 Peak
2	5150.000	7.47	48.65	56.12	74.00	-17.88 Peak


Left Band edge_Horizontal_Average_5GWiFi_Band2_A_ANT0_5260MHz

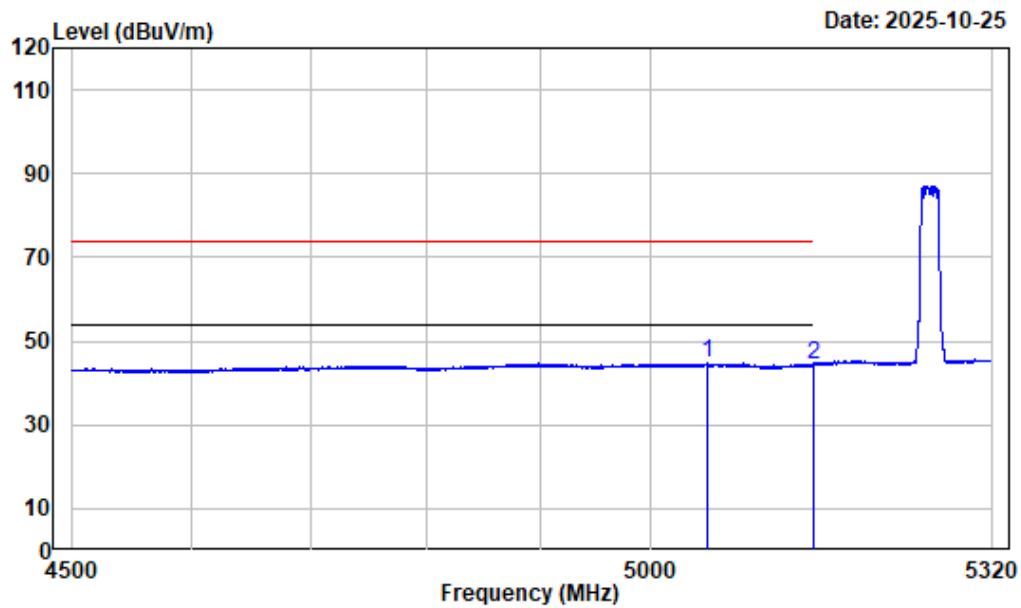

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5260

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5050.835	7.75	36.99	44.74	54.00	-9.26 Average
2	5150.000	7.47	36.94	44.41	54.00	-9.59 Average


Left Band edge_Vertical_Peak_5GWiFi_Band2_A_ANT0_5260MHz

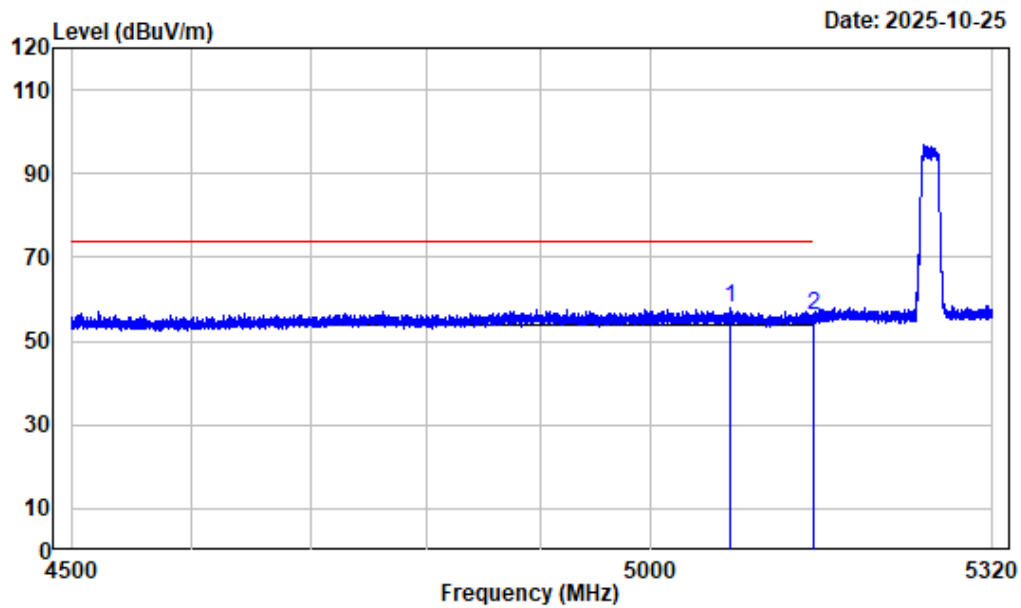

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5071.848	7.68	50.30	57.98	74.00	-16.02	Peak
2 5150.000	7.47	48.64	56.11	74.00	-17.89	Peak


Left Band edge_Vertical_Average_5GWiFi_Band2_A_ANT0_5260MHz

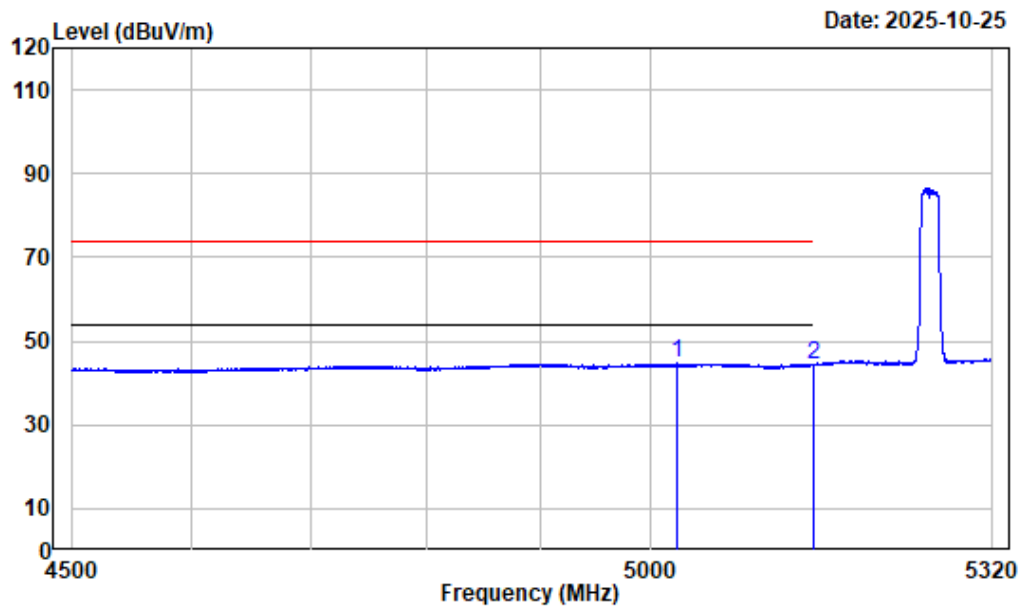

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5260

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5023.467	7.51	37.15	44.66	54.00	-9.34 Average
2	5150.000	7.47	36.85	44.32	54.00	-9.68 Average


Right Band edge_Horizontal_Peak_5GWiFi_Band2_A_ANT0_5320MHz

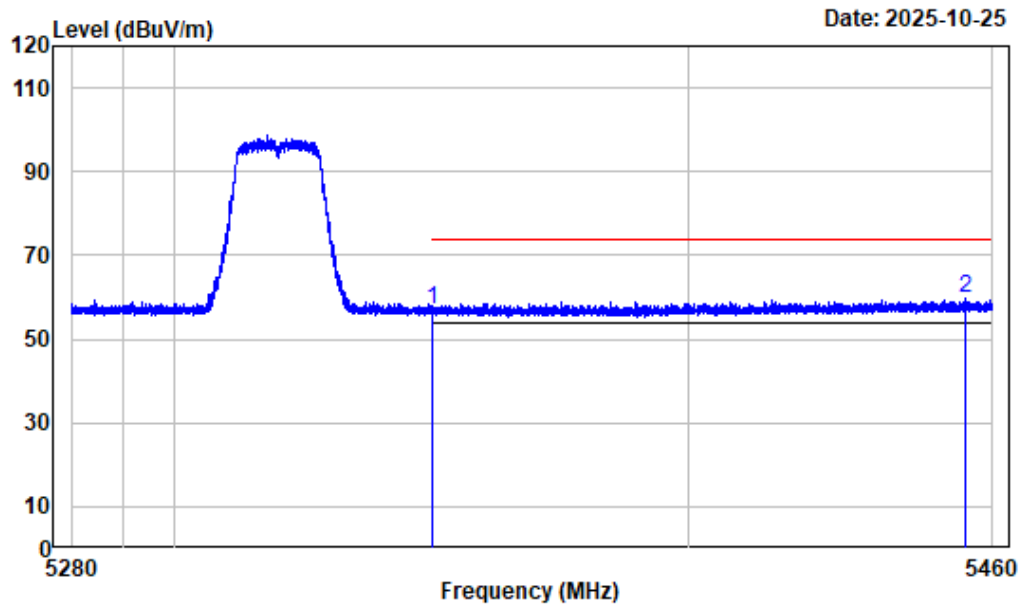

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5320

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	48.86	57.23	74.00	-16.77 Peak
2	5454.780	8.84	50.75	59.59	74.00	-14.41 Peak


Right Band edge_Horizontal_Average_5GWiFi_Band2_A_ANT0_5320MHz

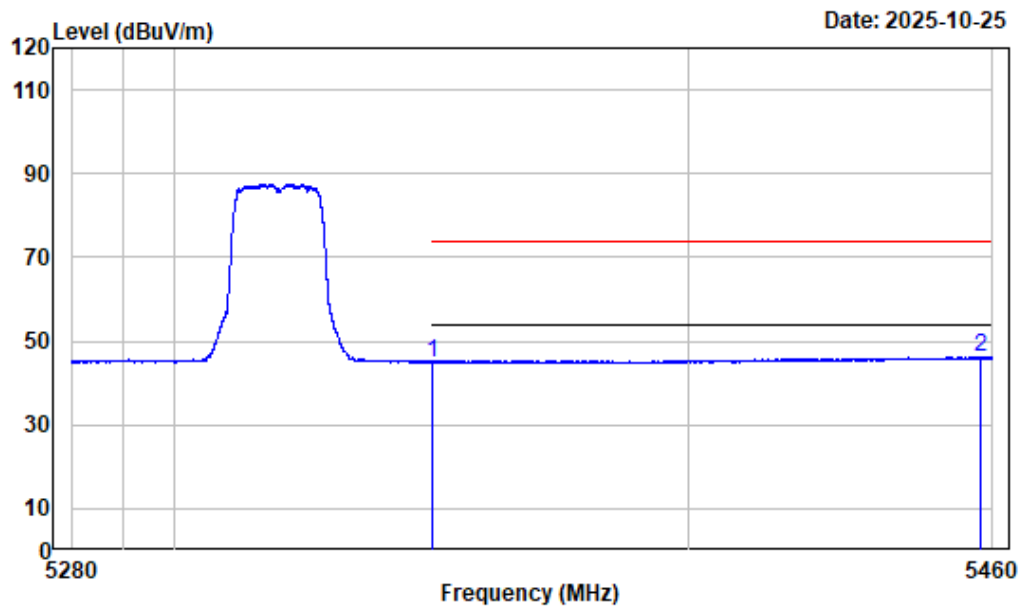

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	36.64	45.01	54.00	-8.99	Average
2	5457.547	8.87	37.28	46.15	54.00	-7.85	Average


Right Band edge_Vertical_Peak_5GWiFi_Band2_A_ANT0_5320MHz

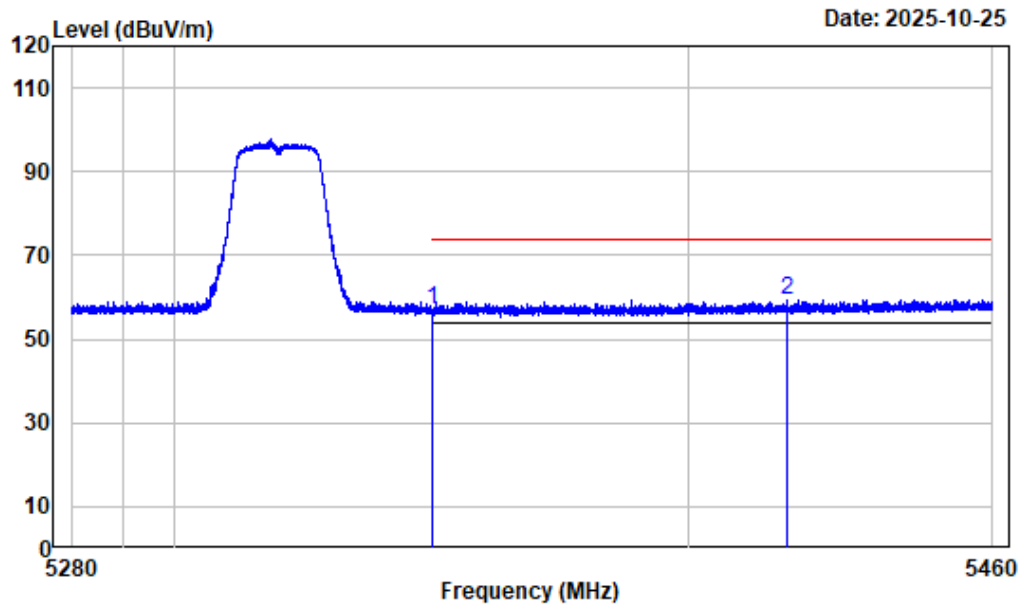

Condition : Vertical
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band2-A_ANT0-5320

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	48.54	56.91	74.00	-17.09 Peak
2	5419.252	8.72	50.81	59.53	74.00	-14.47 Peak


Right Band edge_Vertical_Average_5GWiFi_Band2_A_ANT0_5320MHz

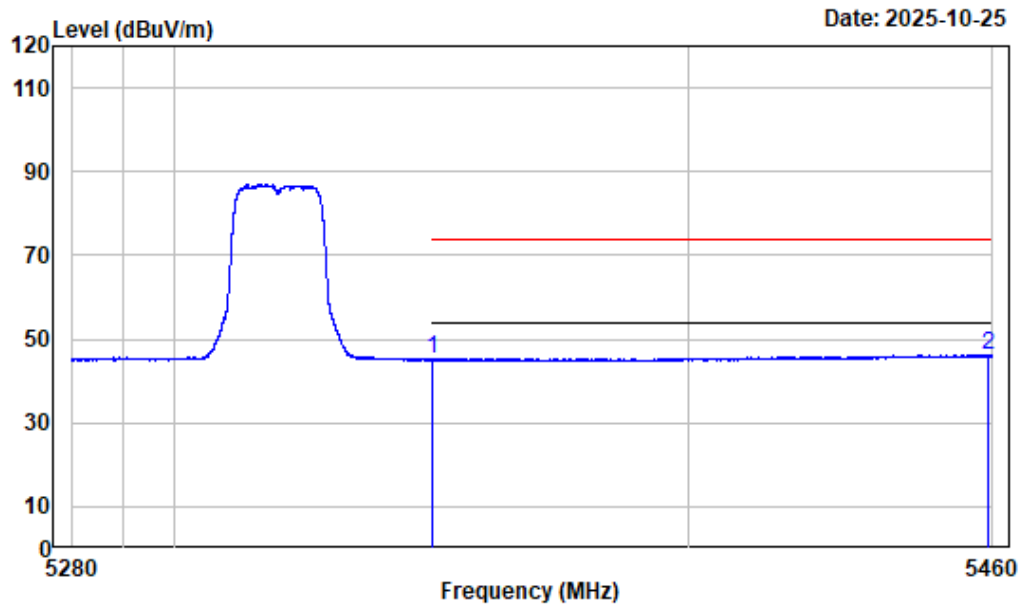

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-A_ANT0-5320

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	36.74	45.11	54.00	-8.89 Average
2	5459.055	8.89	37.34	46.23	54.00	-7.77 Average


Left Band edge_Horizontal_Peak_5GWiFi_Band2_A_ANT1_5260MHz

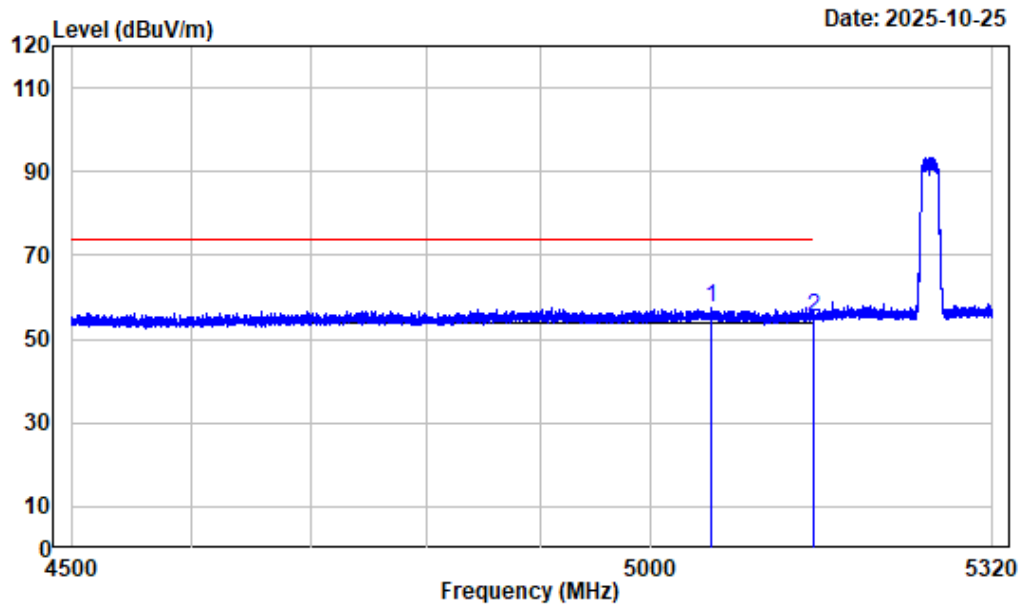

Condition : Horizontal
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band2-A_ANT1-5260

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5054.422	7.72	49.98	57.70	74.00	-16.30	Peak
2 5150.000	7.47	47.96	55.43	74.00	-18.57	Peak


Left Band edge_Horizontal_Average_5GWiFi_Band2_A_ANT1_5260MHz

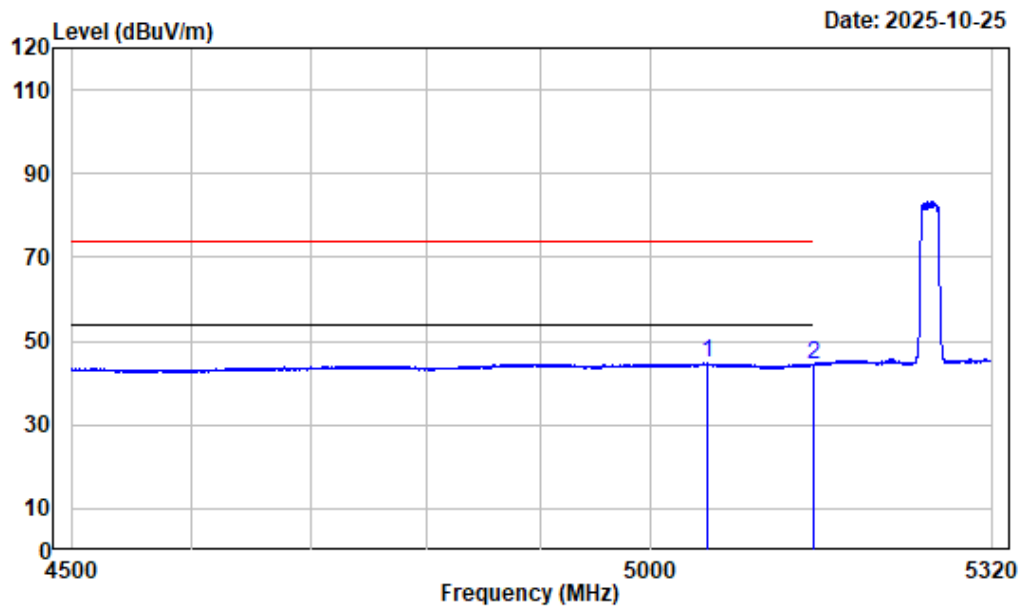

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5260

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5050.938	7.75	36.90	44.65	54.00	-9.35	Average
2 5150.000	7.47	36.87	44.34	54.00	-9.66	Average


Left Band edge_Veritical_Peak_5GWiFi_Band2_A_ANT1_5260MHz

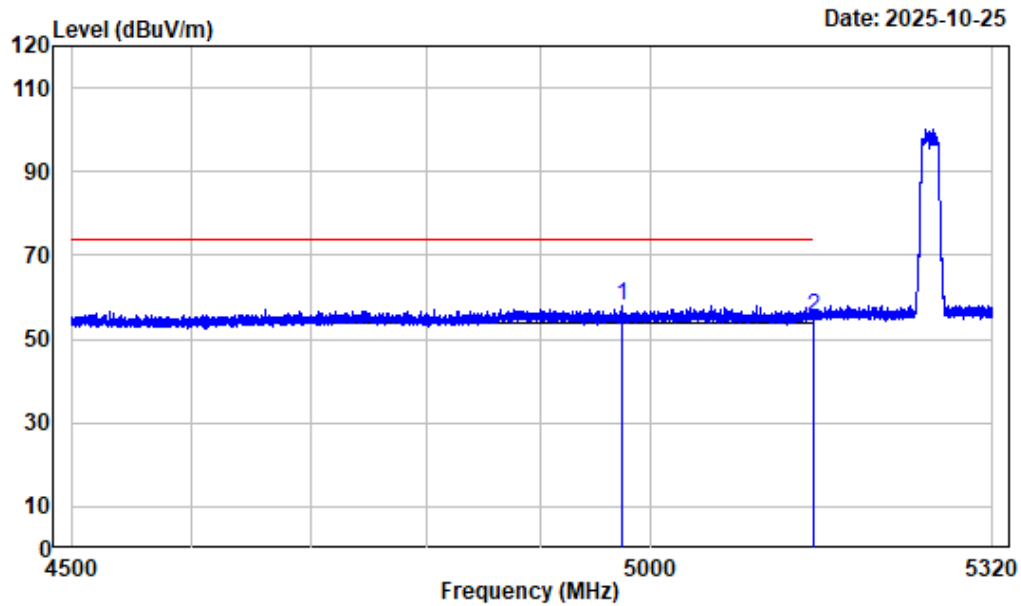

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	4973.960	7.49	50.53	58.02	74.00	-15.98 Peak
2	5150.000	7.47	47.59	55.06	74.00	-18.94 Peak


Left Band edge_Vertical_Average_5GWiFi_Band2_A_ANT1_5260MHz

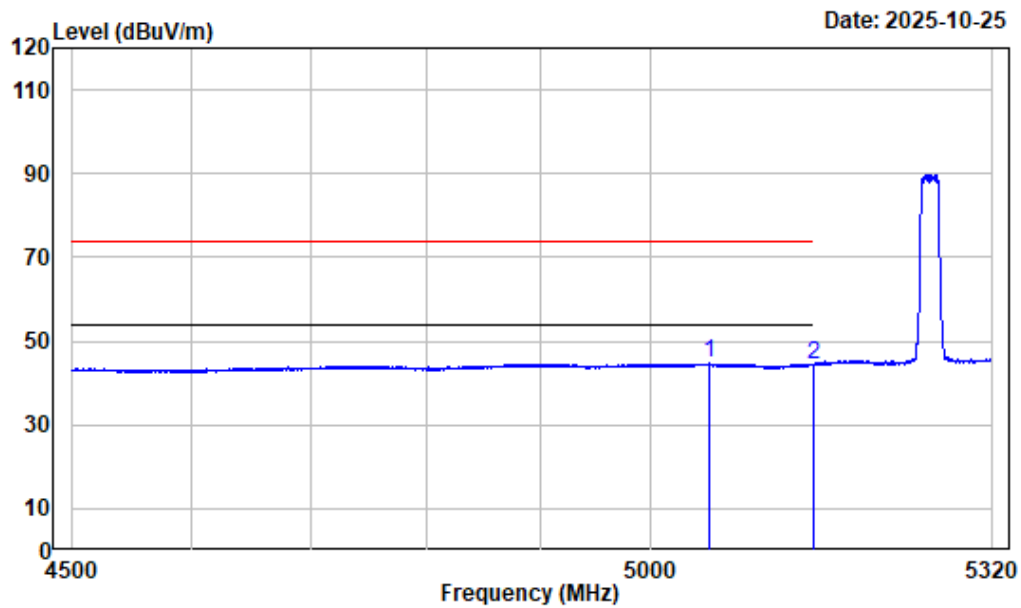

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5260

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5053.397	7.74	36.90	44.64	54.00	-9.36 Average
2	5150.000	7.47	36.95	44.42	54.00	-9.58 Average


Right Band edge_Horizontal_Peak_5GWiFi_Band2_A_ANT1_5320MHz

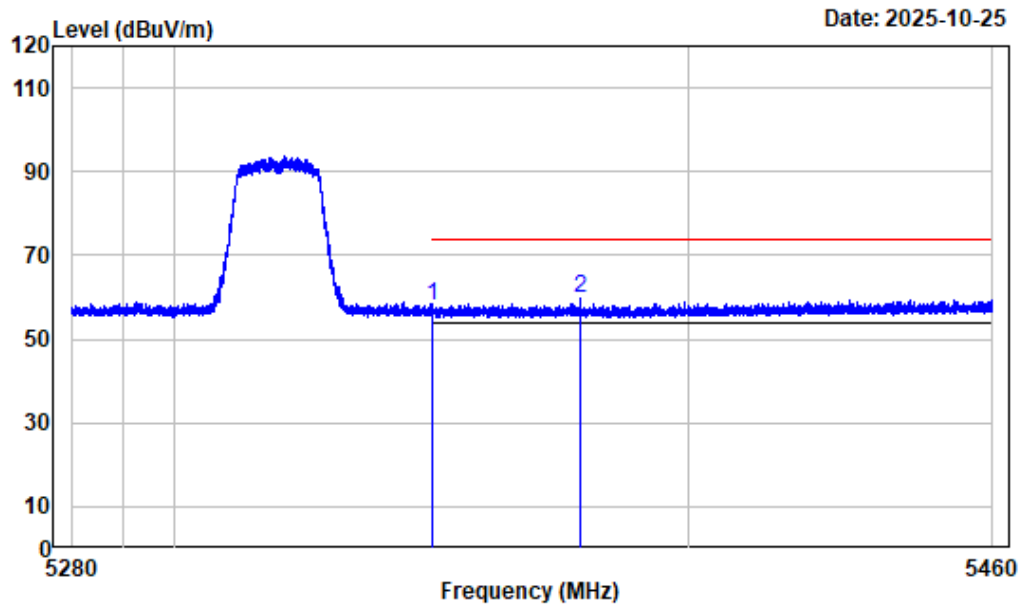

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5320

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	49.45	57.82	74.00	-16.18	Peak
2	5378.730	8.53	51.10	59.63	74.00	-14.37	Peak


Right Band edge_Horizontal_Average_5GWiFi_Band2_A_ANT1_5320MHz

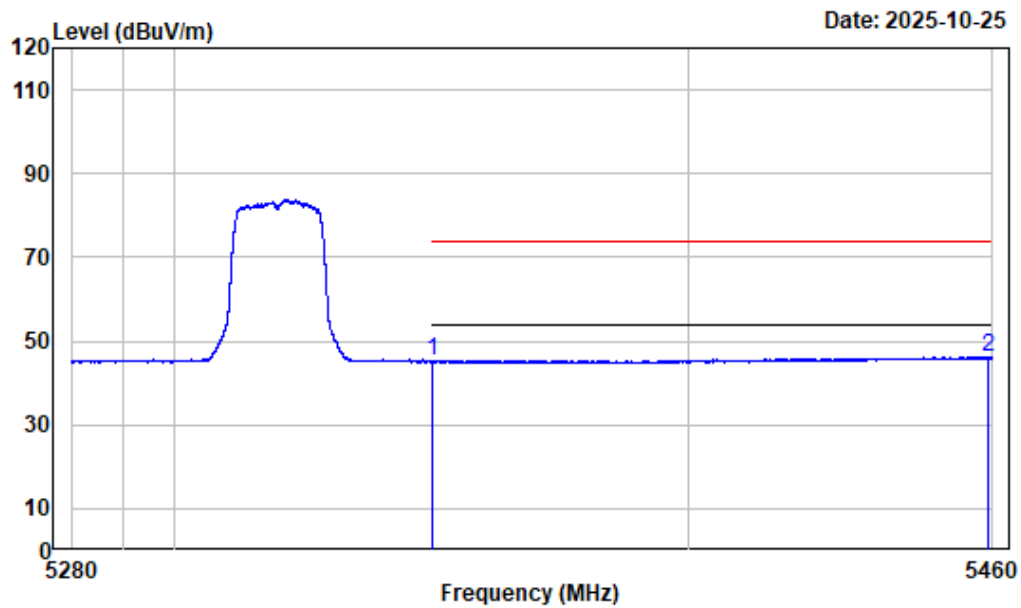

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5320

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	36.72	45.09	54.00	-8.91 Average
2	5459.100	8.89	37.28	46.17	54.00	-7.83 Average


Right Band edge_Vertical_Peak_5GWiFi_Band2_A_ANT1_5320MHz

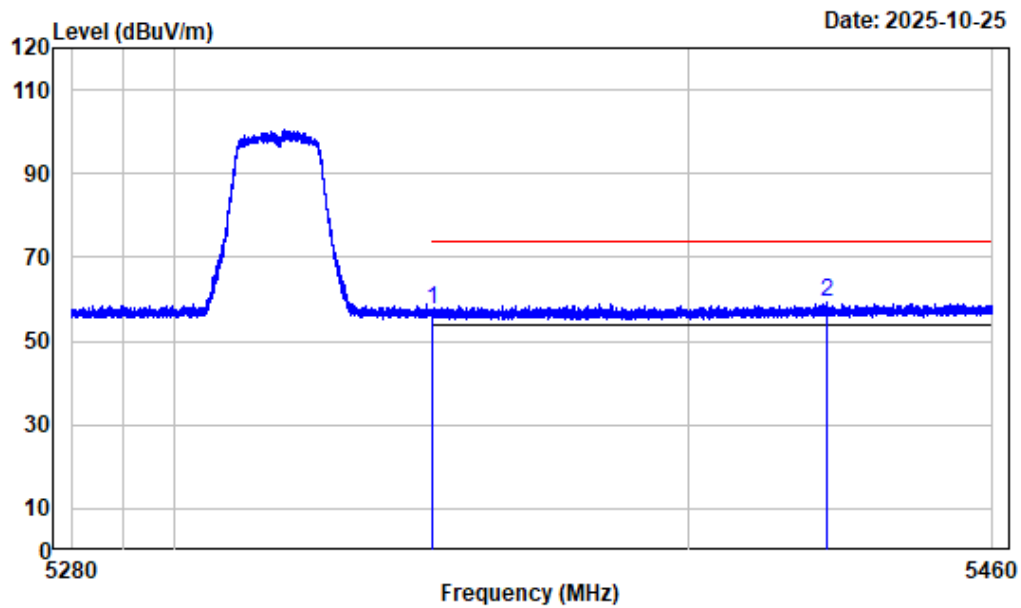

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A_ANT1-5320

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	49.20	57.57	74.00	-16.43 Peak
2	5427.263	8.66	50.58	59.24	74.00	-14.76 Peak


Right Band edge_Vertical_Average_5GWiFi_Band2_A_ANT1_5320MHz

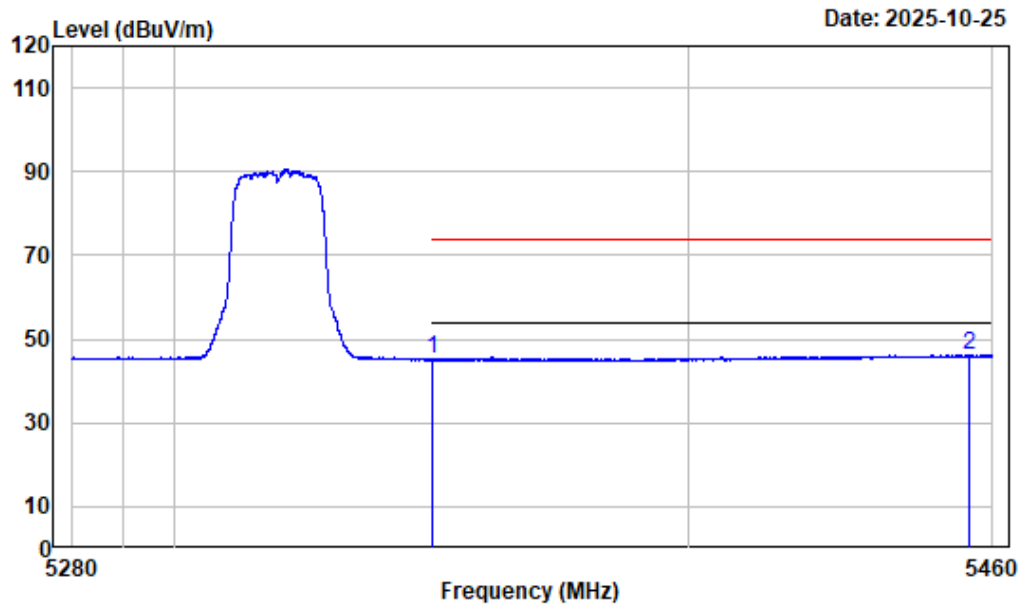

Condition : Vertical
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
 Note : 5GWiFi-Band2-A_ANT1-5320

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	8.37	36.75	45.12	54.00	-8.88	Average
2 5455.297	8.84	37.40	46.24	54.00	-7.76	Average


Left Band edge_Horizontal_Peak_5GWiFi-Band2_AC20_5260MHz

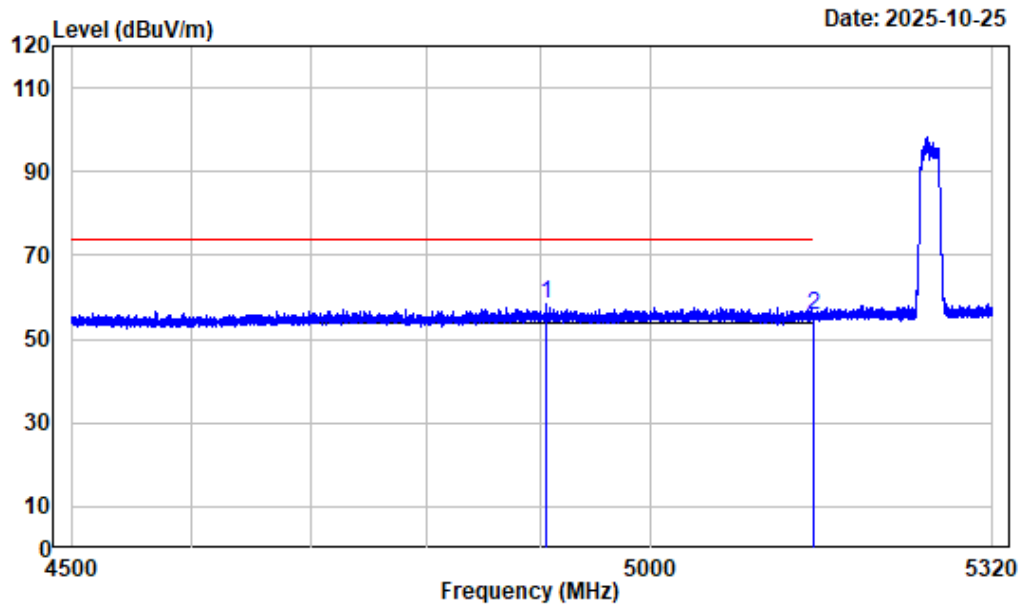

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4905.490	7.40	51.06	58.46	74.00	-15.54	Peak
2 5150.000	7.47	48.02	55.49	74.00	-18.51	Peak


Left Band edge_Horizontal_Average_5GWiFi-Band2_AC20_5260MHz

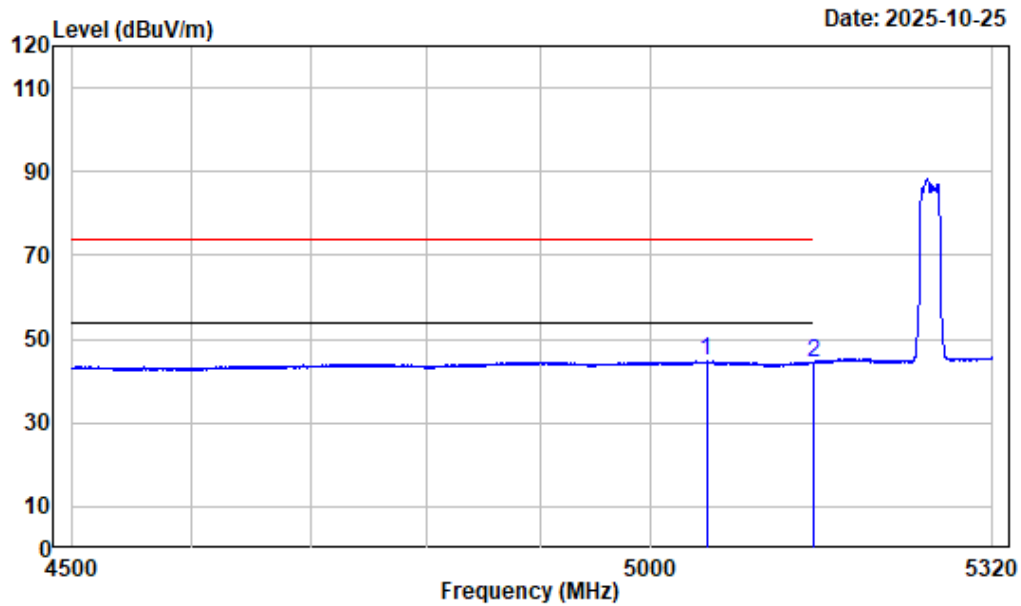

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5050.527	7.75	36.88	44.63	54.00	-9.37	Average
2 5150.000	7.47	36.95	44.42	54.00	-9.58	Average


Left Band edge_Vertical_Peak_5GWiFi-Band2_AC20_5260MHz

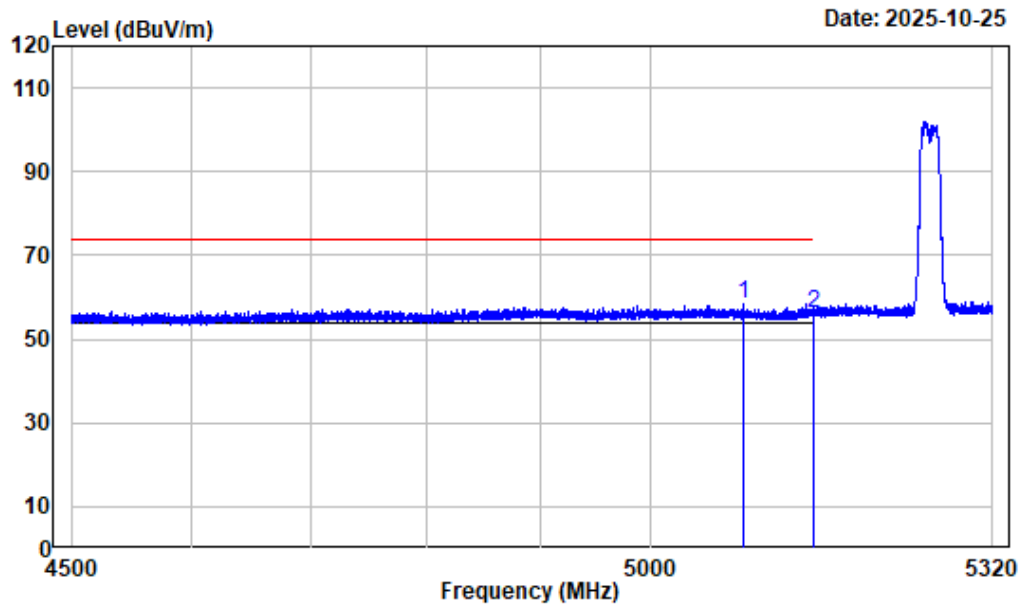

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5084.763	7.69	50.83	58.52	74.00	-15.48 Peak
2	5150.000	7.47	48.79	56.26	74.00	-17.74 Peak


Left Band edge_Vertical_Average_5GWiFi-Band2_AC20_5260MHz

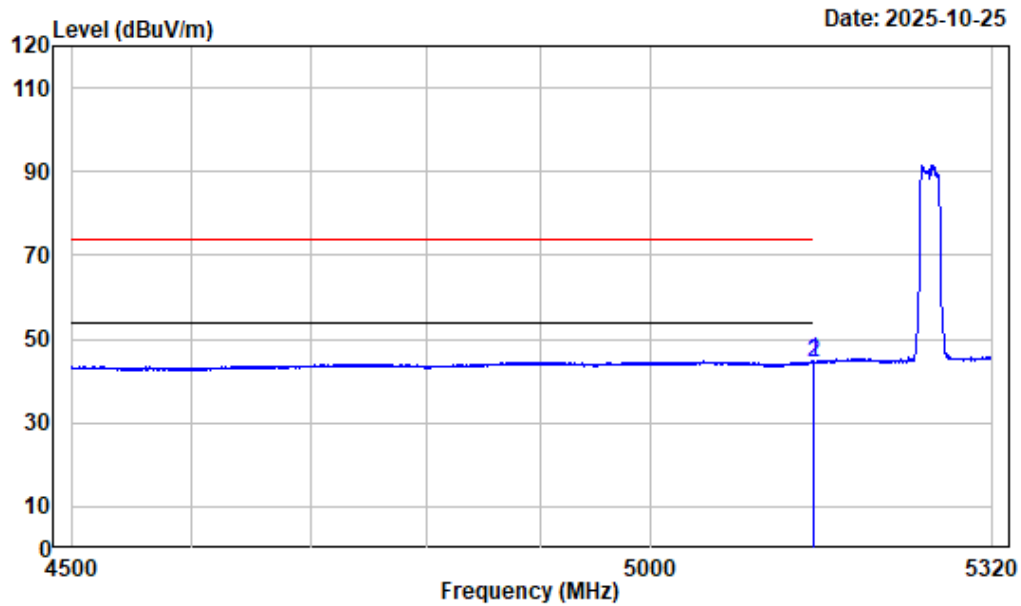

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC20-5260

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.132	7.47	37.35	44.82	54.00	-9.18 Average
2	5150.000	7.47	36.88	44.35	54.00	-9.65 Average


Right Band edge_Horizontal_Peak_5GWiFi_Band2_AC20_5320MHz

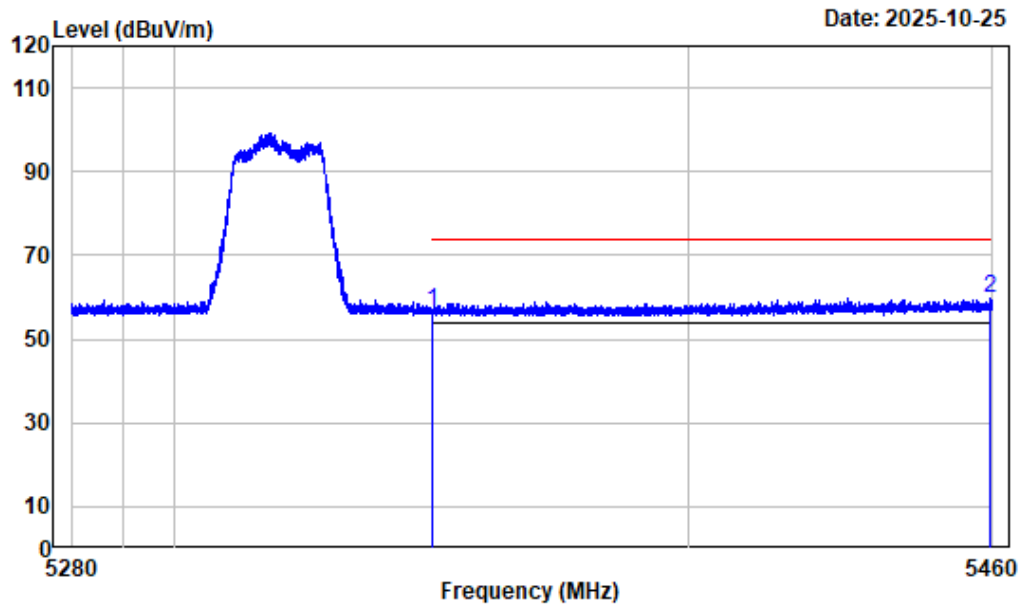

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	48.33	56.70	74.00	-17.30 Peak
2	5459.663	8.90	51.00	59.90	74.00	-14.10 Peak


Right Band edge_Horizontal_Average_5GWiFi_Band2_AC20_5320MHz

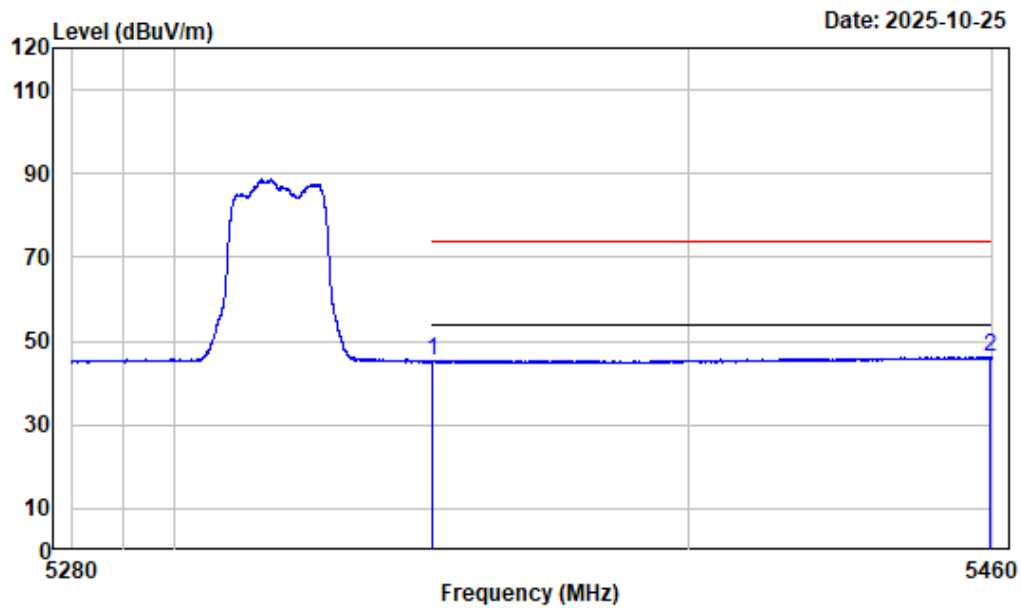

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	8.37	36.74	45.11	54.00	-8.89	Average
2 5459.595	8.90	37.31	46.21	54.00	-7.79	Average


Right Band edge_Vertical_Peak_5GWiFi_Band2_AC20_5320MHz

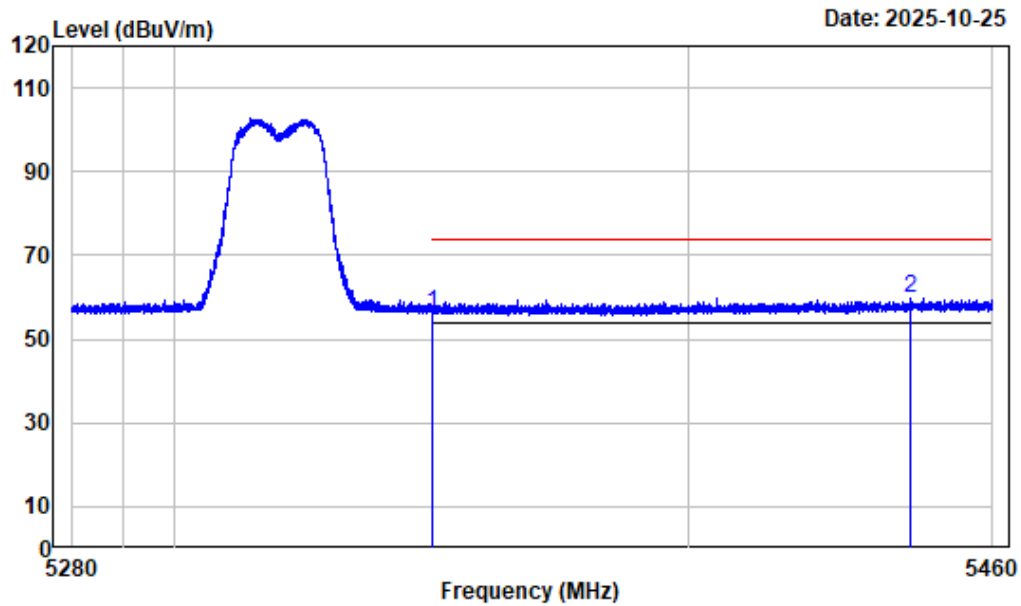

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	47.63	56.00	74.00	-18.00 Peak
2	5443.822	8.77	50.91	59.68	74.00	-14.32 Peak


Right Band edge_Vertical_Average_5GWiFi_Band2_AC20_5320MHz

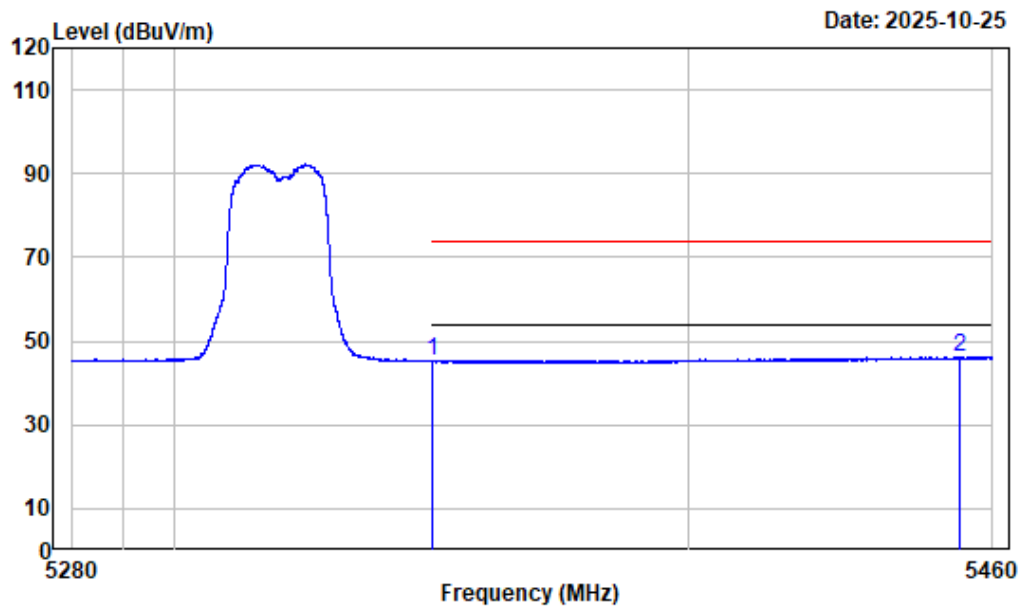

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC20-5320

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	36.76	45.13	54.00	-8.87 Average
2	5453.362	8.83	37.45	46.28	54.00	-7.72 Average


Left Band edge_Horizontal_Peak_5GWiFi_Band2_AC40_5270MHz

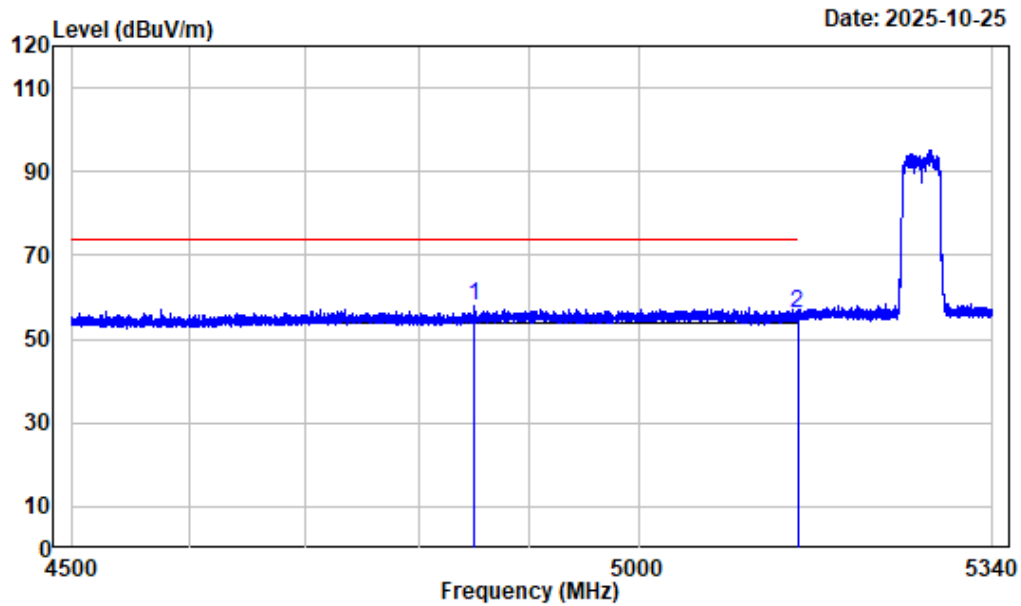

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4849.755	7.09	50.75	57.84	74.00	-16.16	Peak
2 5150.000	7.47	48.51	55.98	74.00	-18.02	Peak


Left Band edge_Horizontal_Average_5GWiFi_Band2_AC40_5270MHz

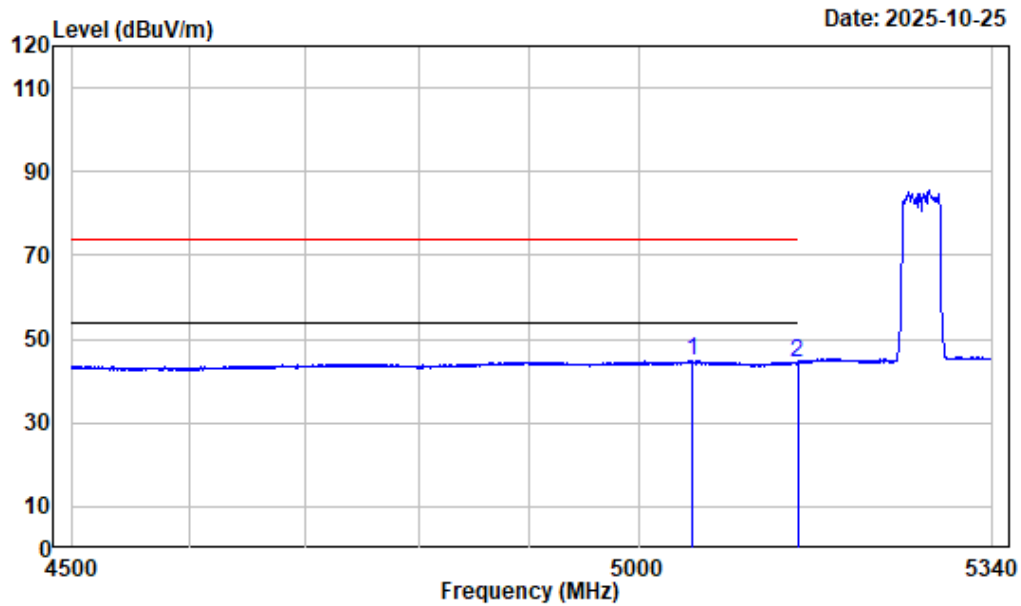

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5049.885	7.75	37.02	44.77	54.00	-9.23	Average
2	5150.000	7.47	36.82	44.29	54.00	-9.71	Average


Left Band edge_Vertical_Peak_5GWiFi_Band2_AC40_5270MHz

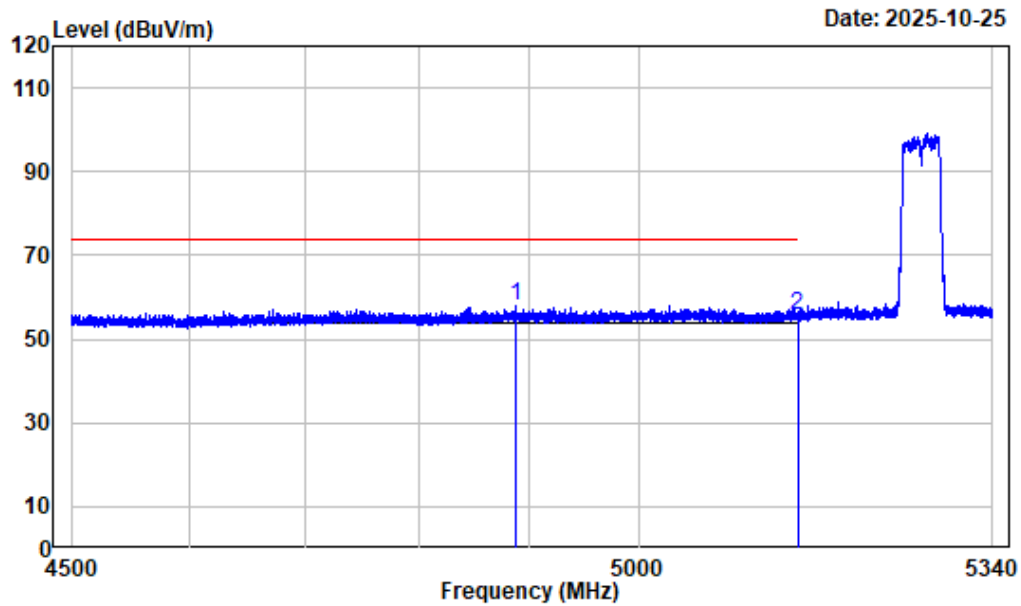

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4888.080	7.33	50.74	58.07	74.00	-15.93	Peak
2 5150.000	7.47	48.03	55.50	74.00	-18.50	Peak


Left Band edge_Vertical_Average_5GWiFi_Band2_AC40_5270MHz

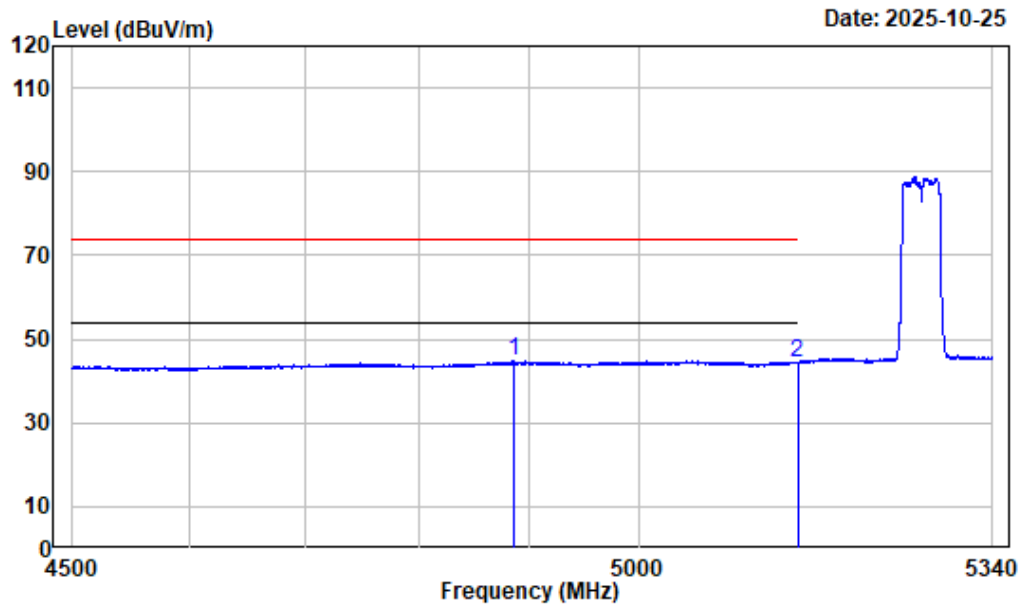

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC40-5270

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	4885.770	7.32	37.38	44.70	54.00	-9.30 Average
2	5150.000	7.47	37.06	44.53	54.00	-9.47 Average


Right Band edge_Horizontal_Peak_5GWiFi_Band2_AC40_5310MHz

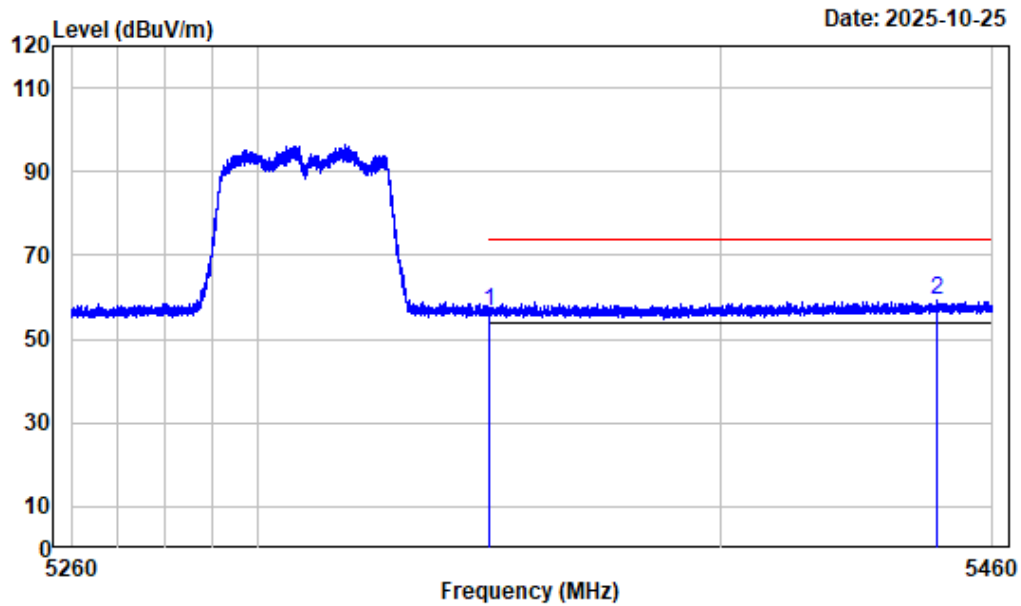

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	48.04	56.41	74.00	-17.59 Peak
2	5447.925	8.79	50.35	59.14	74.00	-14.86 Peak


Right Band edge_Horizontal_Average_5GWiFi_Band2_AC40_5310MHz

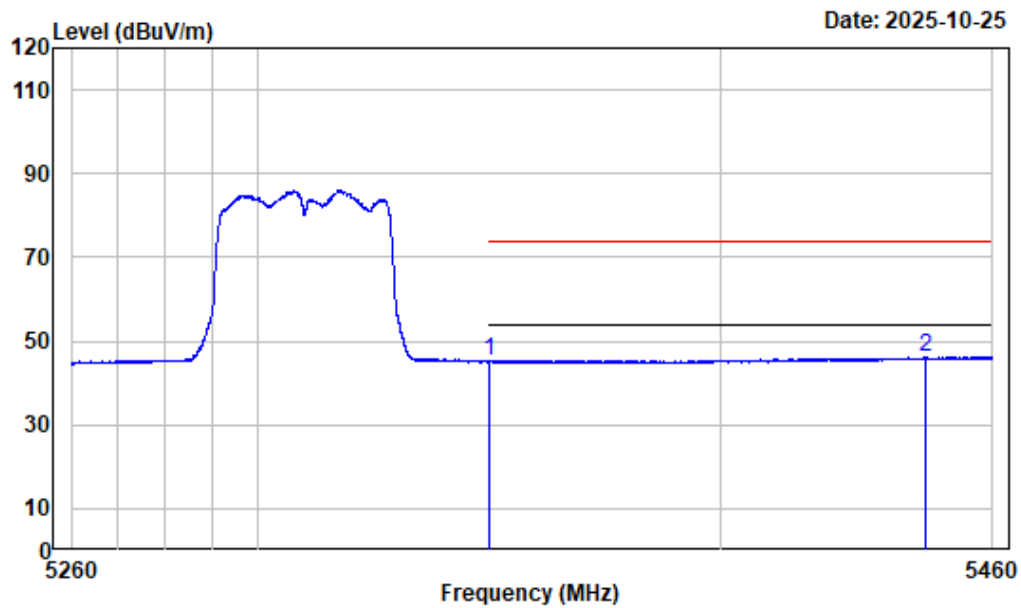

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	36.89	45.26	54.00	-8.74 Average
2	5445.325	8.79	37.46	46.25	54.00	-7.75 Average


Right Band edge_Vertical_Peak_5GWiFi_Band2_AC40_5310MHz

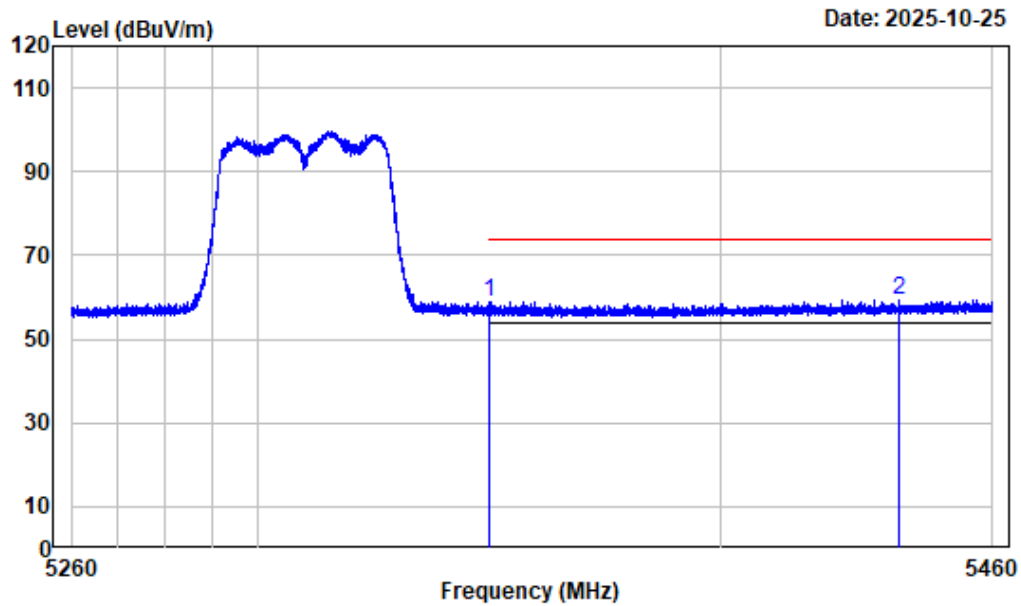

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	50.58	58.95	74.00	-15.05 Peak
2	5439.525	8.77	50.67	59.44	74.00	-14.56 Peak


Right Band edge_Vertical_Average_5GWiFi_Band2_AC40_5310MHz

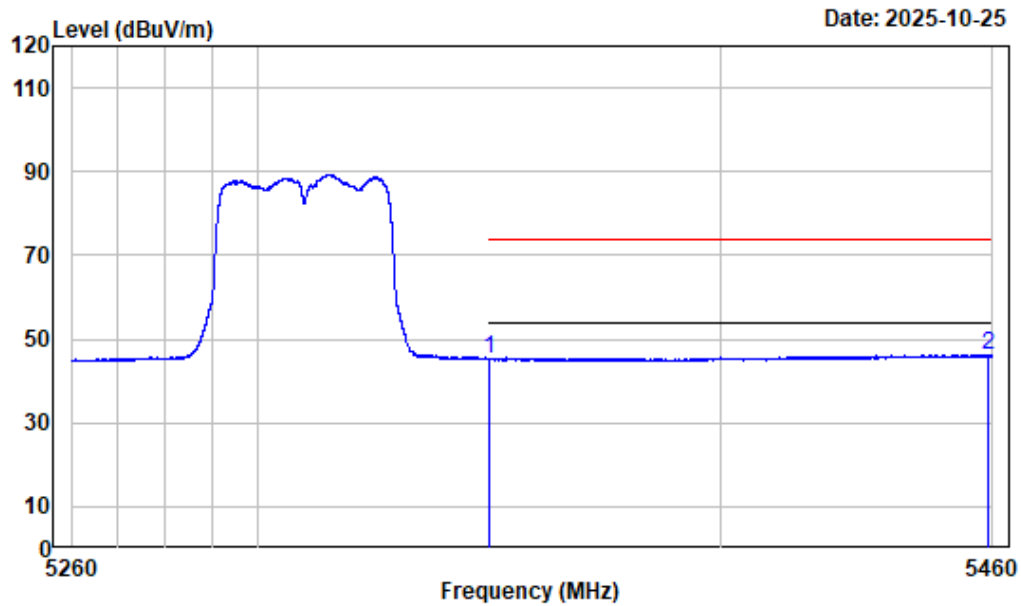

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC40-5310

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	36.78	45.15	54.00	-8.85 Average
2	5459.150	8.89	37.38	46.27	54.00	-7.73 Average


Left Band edge_Horizontal_Peak_5GWiFi_Band2_AC80_5290MHz

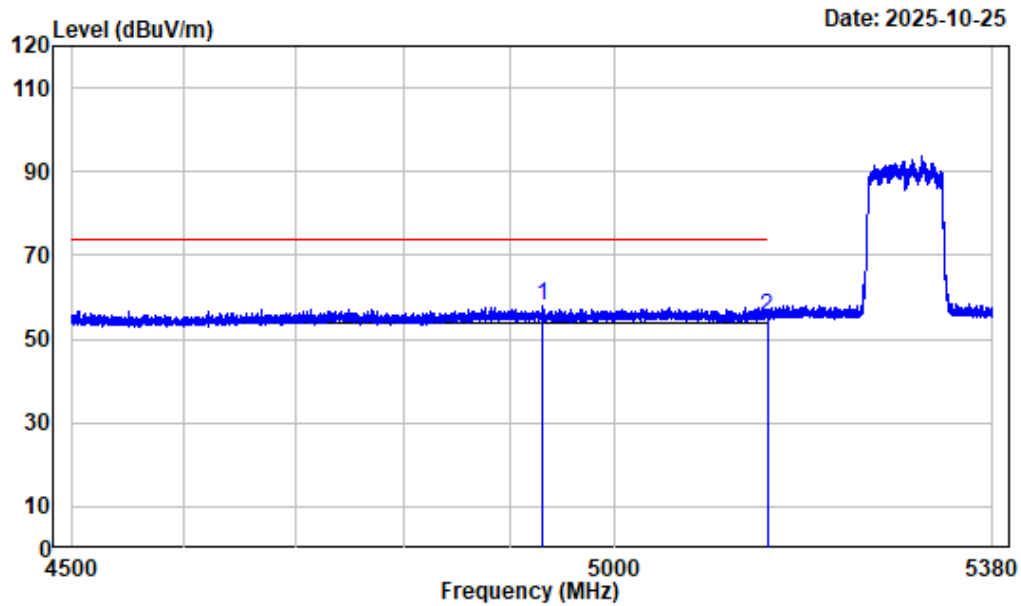

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	4930.210	7.38	50.79	58.17	74.00	-15.83 Peak
2	5150.000	7.47	47.77	55.24	74.00	-18.76 Peak


Left Band edge_Horizontal_Average_5GWiFi_Band2_AC80_5290MHz

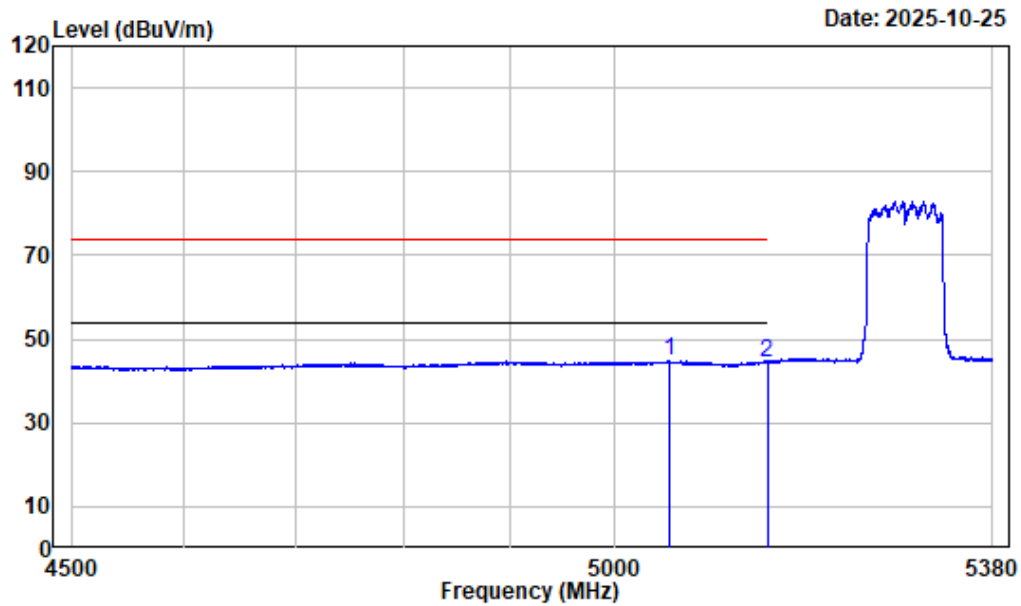

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5052.970	7.74	37.08	44.82	54.00	-9.18 Average
2	5150.000	7.47	36.95	44.42	54.00	-9.58 Average


Left Band edge_Vertical_Peak_5GWiFi_Band2_AC80_5290MHz

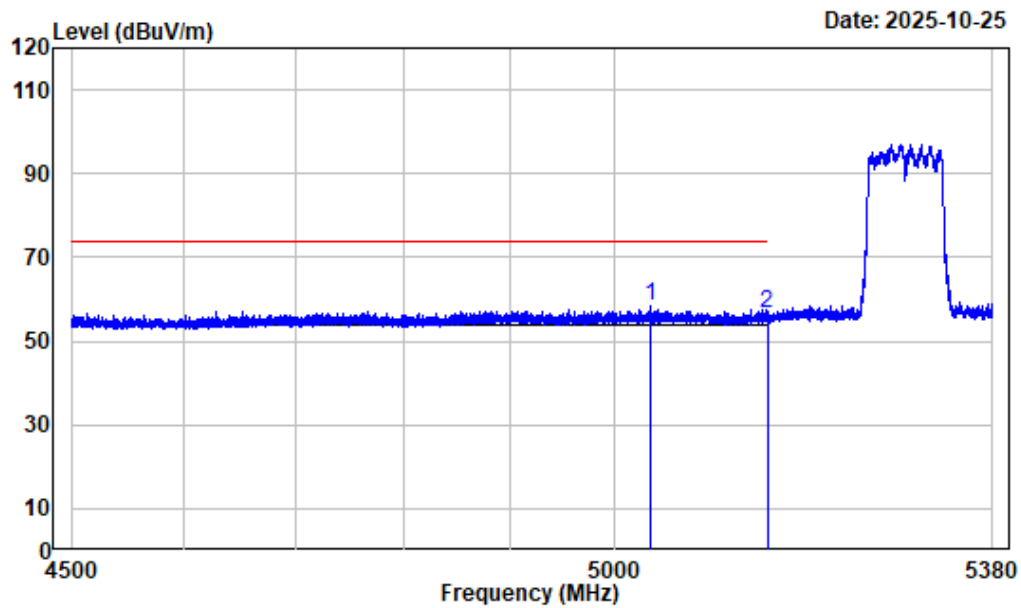

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5035.040	7.53	50.67	58.20	74.00	-15.80	Peak
2	5150.000	7.47	48.95	56.42	74.00	-17.58	Peak


Left Band edge_Vertical_Average_5GWiFi_Band2_AC80_5290MHz

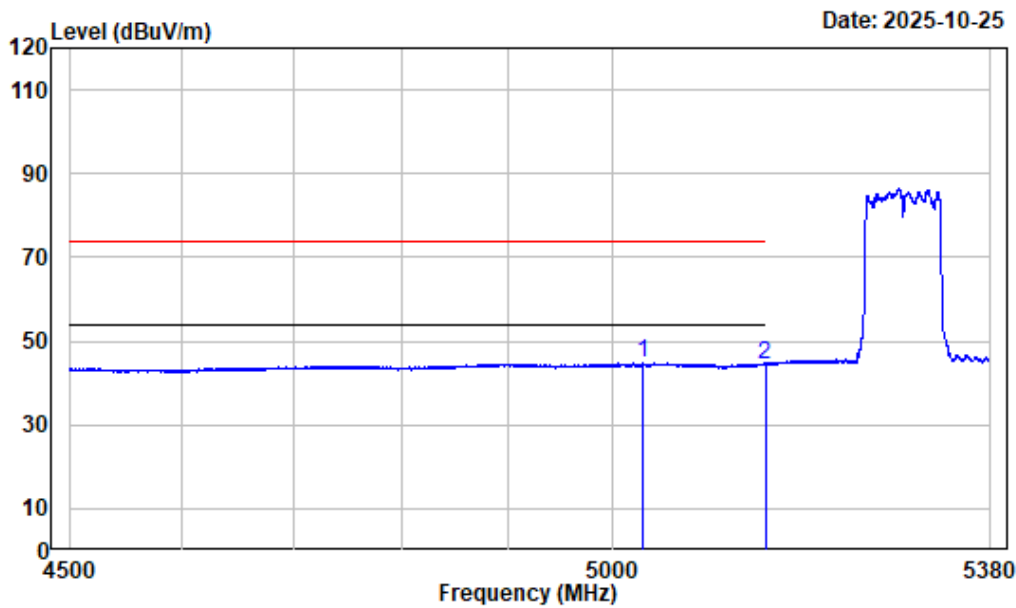

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5029.760	7.46	37.25	44.71	54.00	-9.29 Average
2	5150.000	7.47	37.02	44.49	54.00	-9.51 Average


Right Band edge_Horizontal_Peak_5GWiFi_Band2_AC80_5290MHz

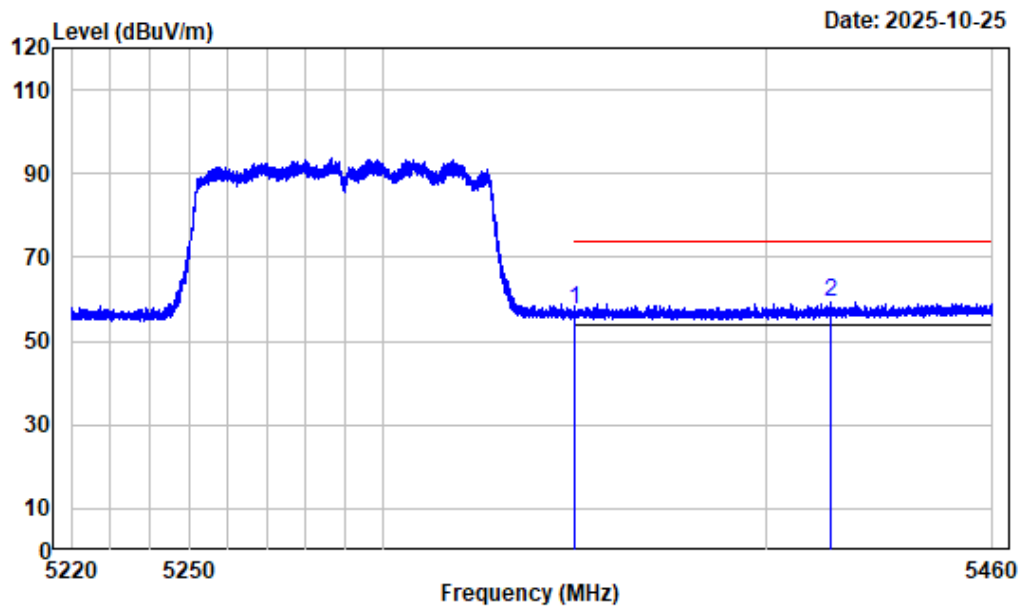

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	8.37	49.02	57.39	74.00	-16.61	Peak
2 5416.890	8.69	50.60	59.29	74.00	-14.71	Peak


Right Band edge_Horizontal_Average_5GWiFi_Band2_AC80_5290MHz

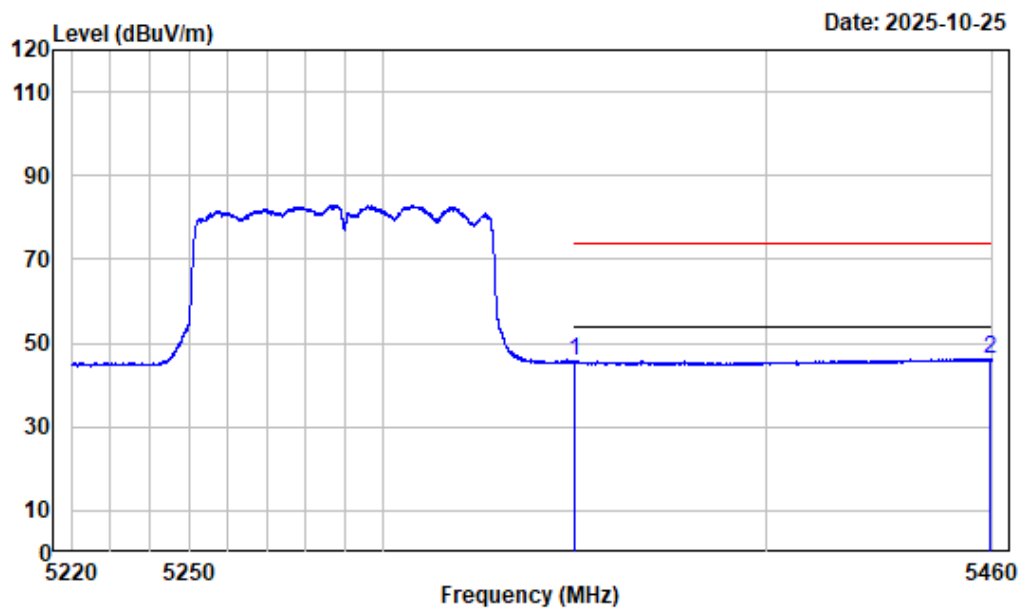

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	37.20	45.57	54.00	-8.43 Average
2	5459.430	8.90	37.47	46.37	54.00	-7.63 Average


Right Band edge_Vertical_Peak_5GWiFi_Band2_AC80_5290MHz

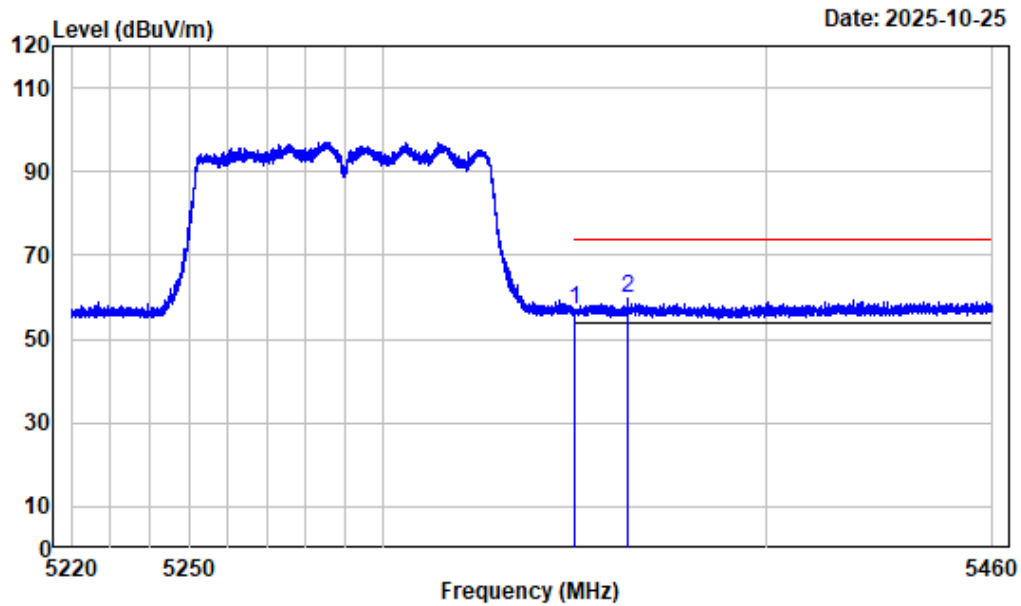

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	48.54	56.91	74.00	-17.09 Peak
2	5363.820	8.42	51.18	59.60	74.00	-14.40 Peak


Right Band edge_Vertical_Average_5GWiFi_Band2_AC80_5290MHz

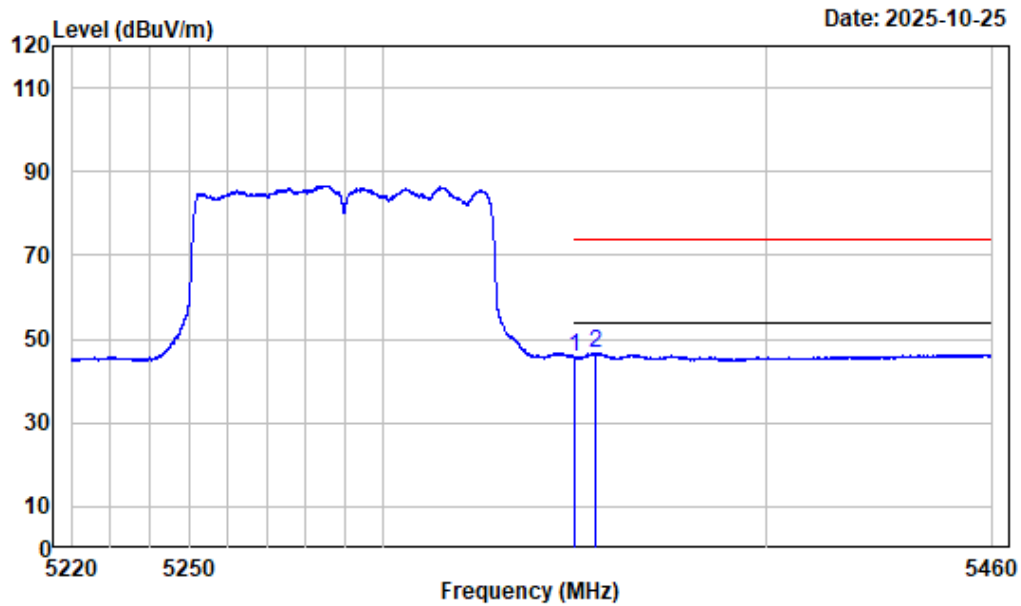

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC80-5290

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	37.26	45.63	54.00	-8.37 Average
2	5355.120	8.40	38.21	46.61	54.00	-7.39 Average


Left Band edge_Horizontal_Peak_5GWiFi_Band2_AC160_5250MHz

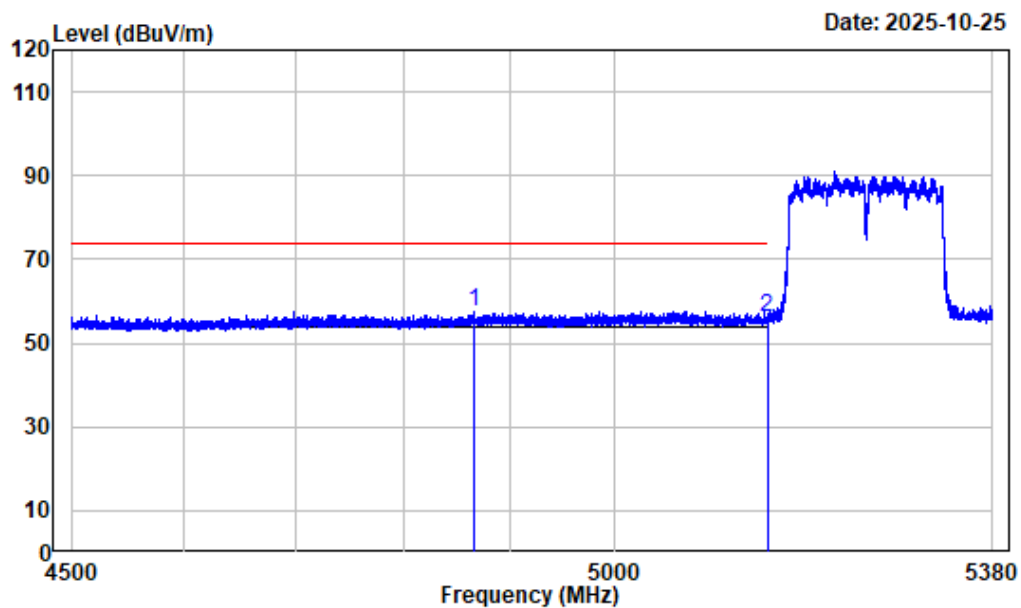

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC160-5250

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4865.090	7.18	50.52	57.70	74.00	-16.30	Peak
2	5150.000	7.47	48.59	56.06	74.00	-17.94	Peak


Left Band edge_Horizontal_Average_5GWiFi_Band2_AC160_5250MHz

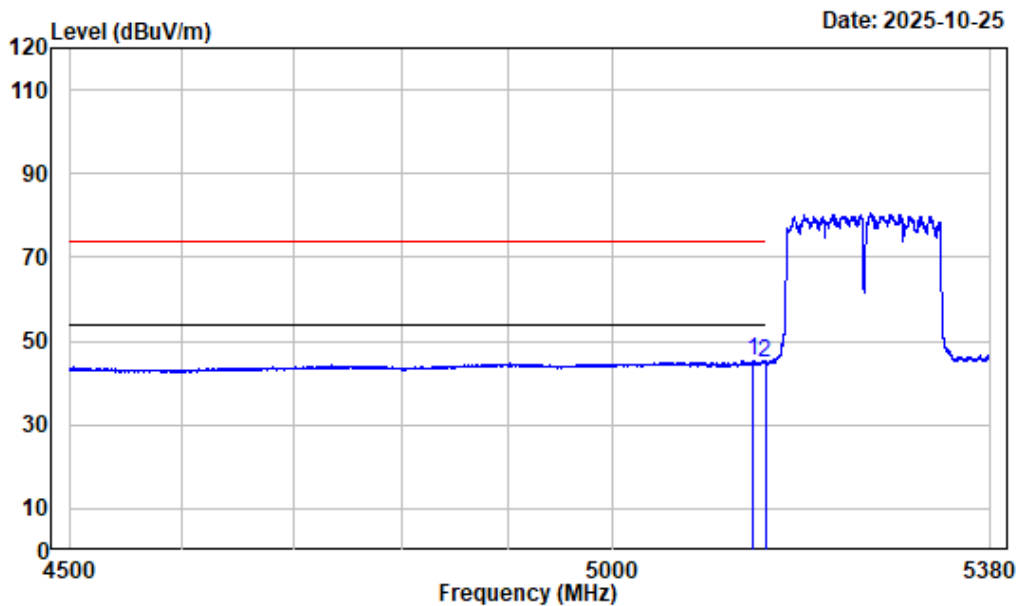

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC160-5250

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5137.230	7.40	37.92	45.32	54.00	-8.68 Average
2	5150.000	7.47	37.31	44.78	54.00	-9.22 Average


Left Band edge_Vertical_Peak_5GWiFi_Band2_AC160_5250MHz

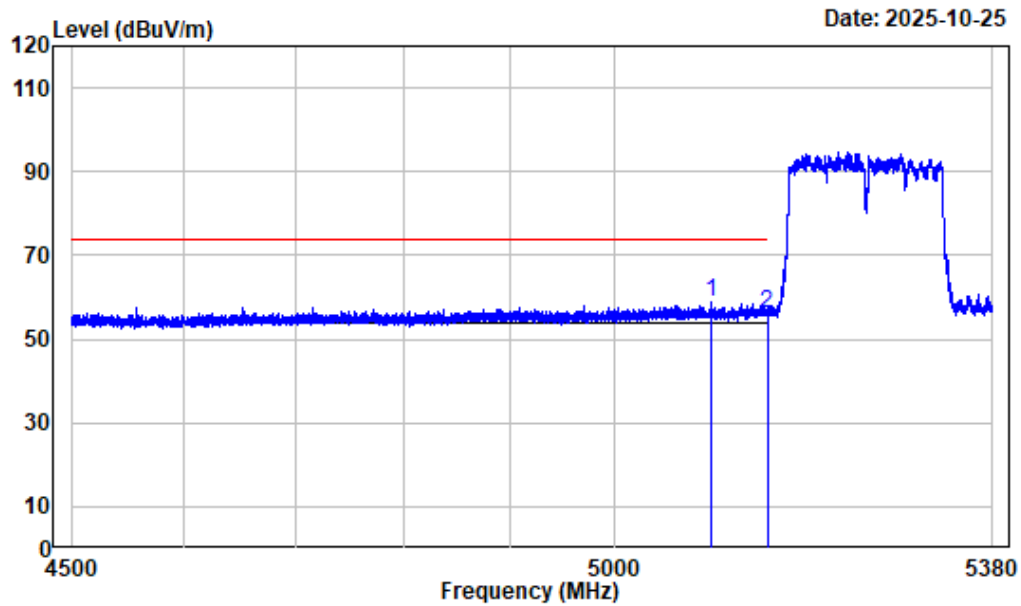

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC160-5250

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5094.770	7.64	51.11	58.75	74.00	-15.25	Peak
2 5150.000	7.47	48.74	56.21	74.00	-17.79	Peak


Left Band edge_Vertical_Average_5GWiFi_Band2_AC160_5250MHz

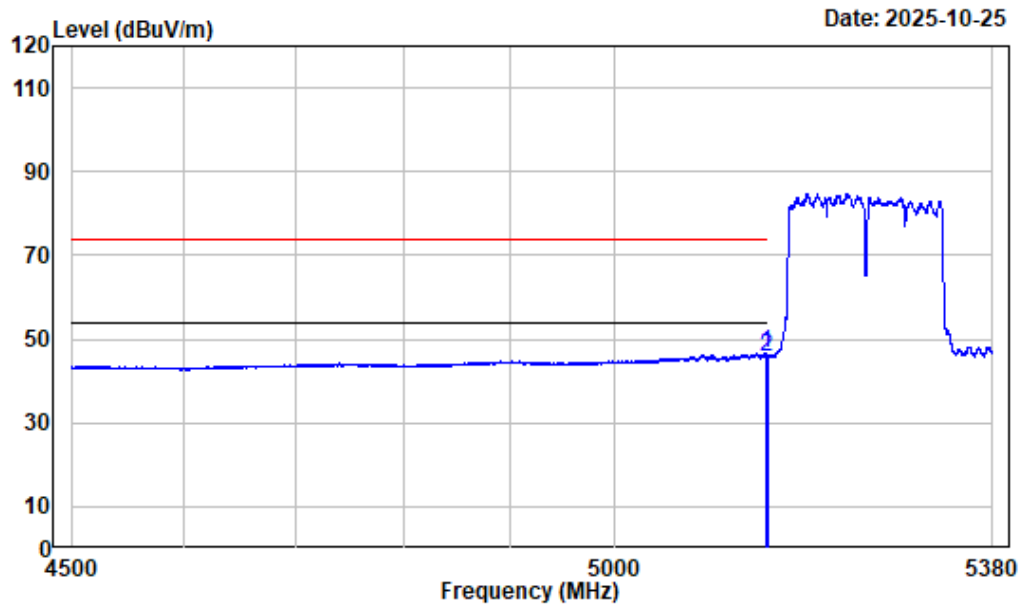

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC160-5250

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5149.000	7.46	39.12	46.58	54.00	-7.42 Average
2	5150.000	7.47	38.48	45.95	54.00	-8.05 Average


Right Band edge_Horizontal_Peak_5GWiFi_Band2_AC160_5250MHz

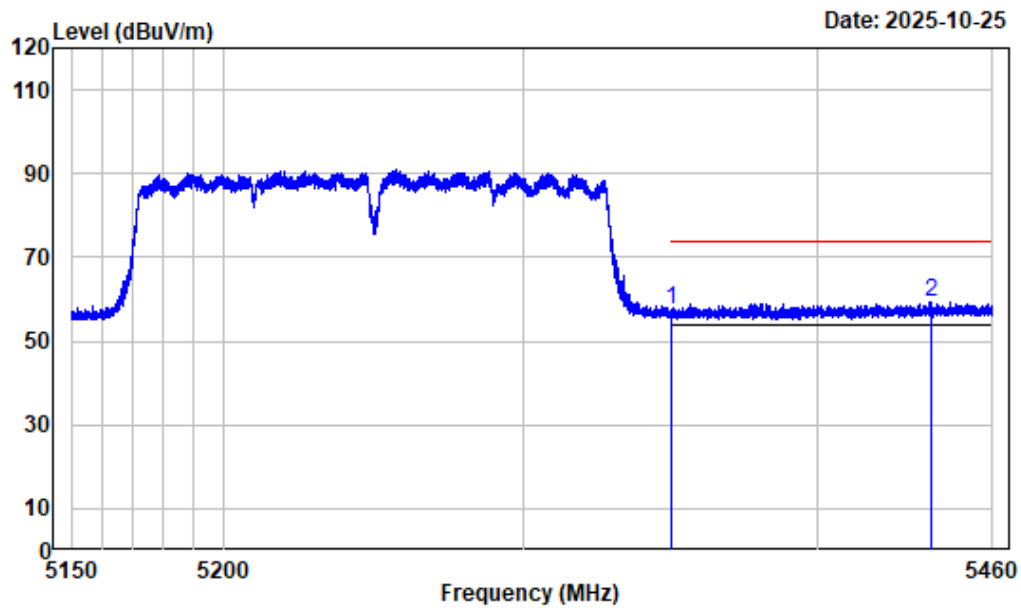

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC160-5250

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	49.11	57.48	74.00	-16.52 Peak
2	5438.959	8.76	50.40	59.16	74.00	-14.84 Peak


Right Band edge_Horizontal_Average_5GWiFi_Band2_AC160_5250MHz

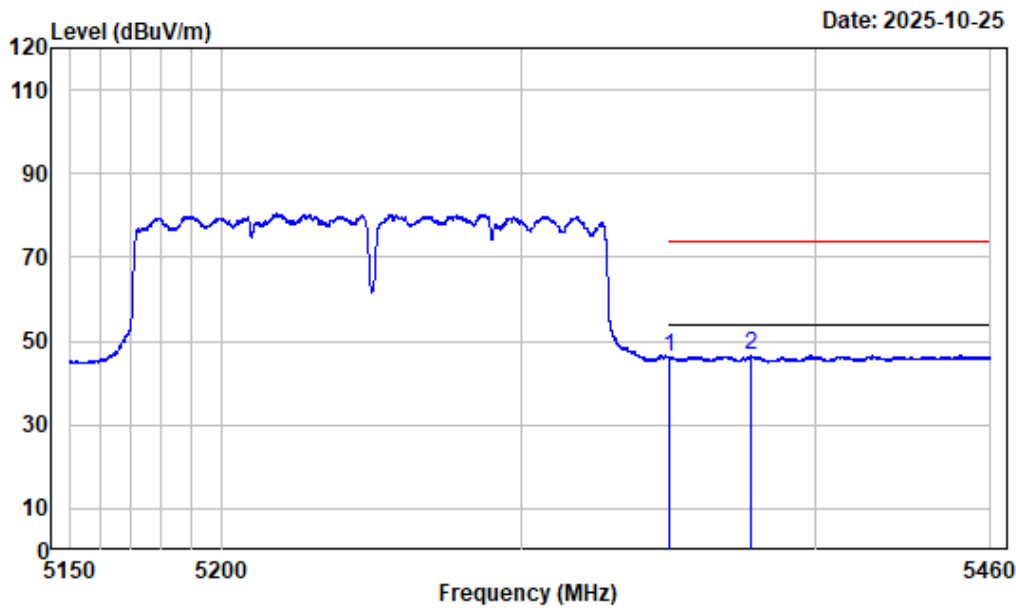

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC160-5250

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	8.37	37.70	46.07	54.00	-7.93	Average
2 5377.695	8.53	37.95	46.48	54.00	-7.52	Average


Right Band edge_Vertical_Peak_5GWiFi_Band2_AC160_5250MHz

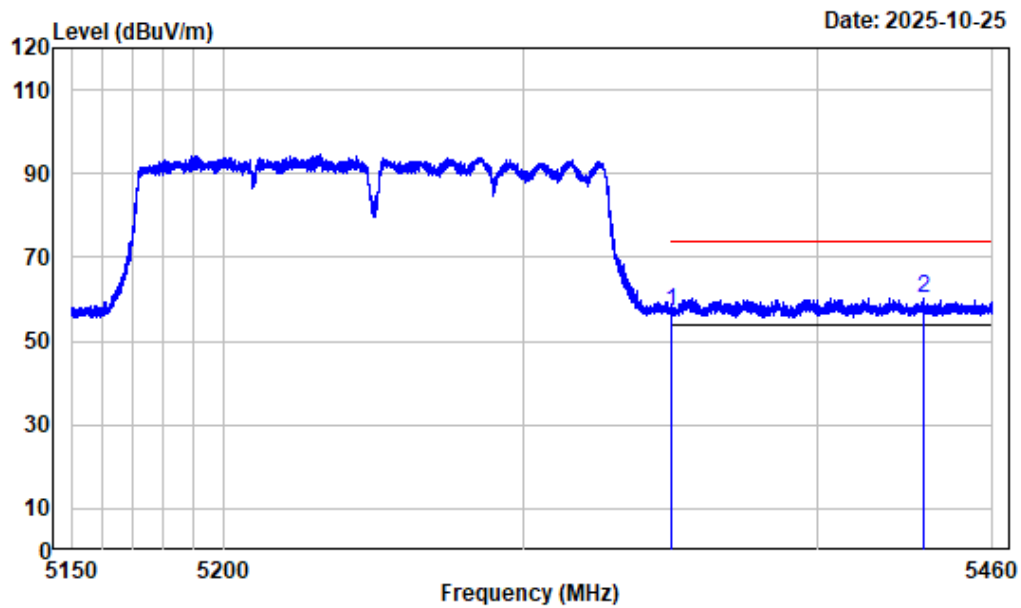

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AC160-5250

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	8.37	48.46	56.83	74.00	-17.17 Peak
2	5436.169	8.71	51.69	60.40	74.00	-13.60 Peak


Right Band edge_Vertical_Average_5GWiFi_Band2_AC160_5250MHz

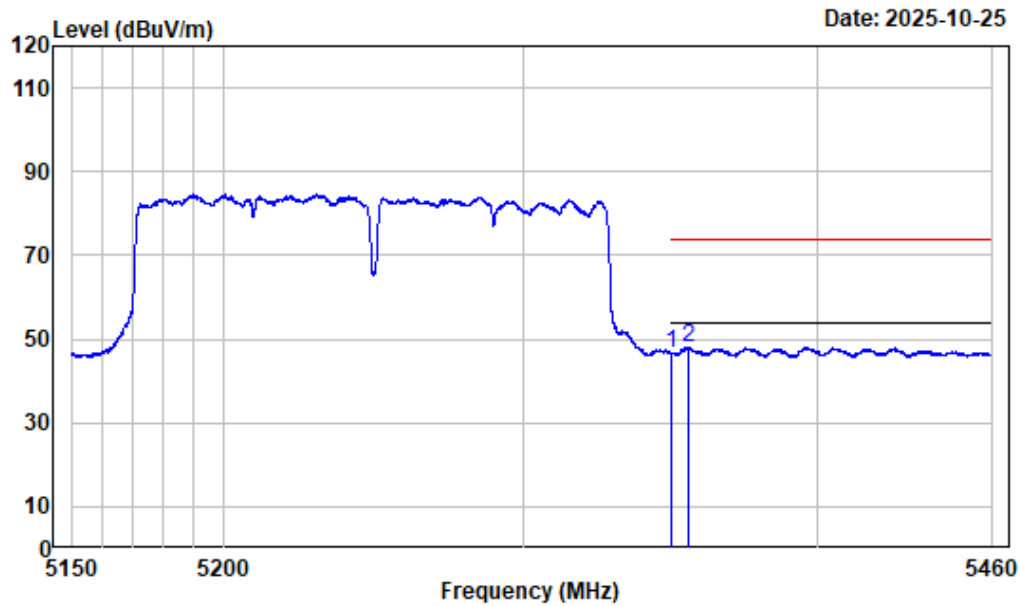

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AC160-5250

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	38.45	46.82	54.00	-7.18 Average
2	5355.607	8.40	39.57	47.97	54.00	-6.03 Average


Left Band edge_Horizontal_Peak_5GWiFi_Band2_AX20_5260MHz

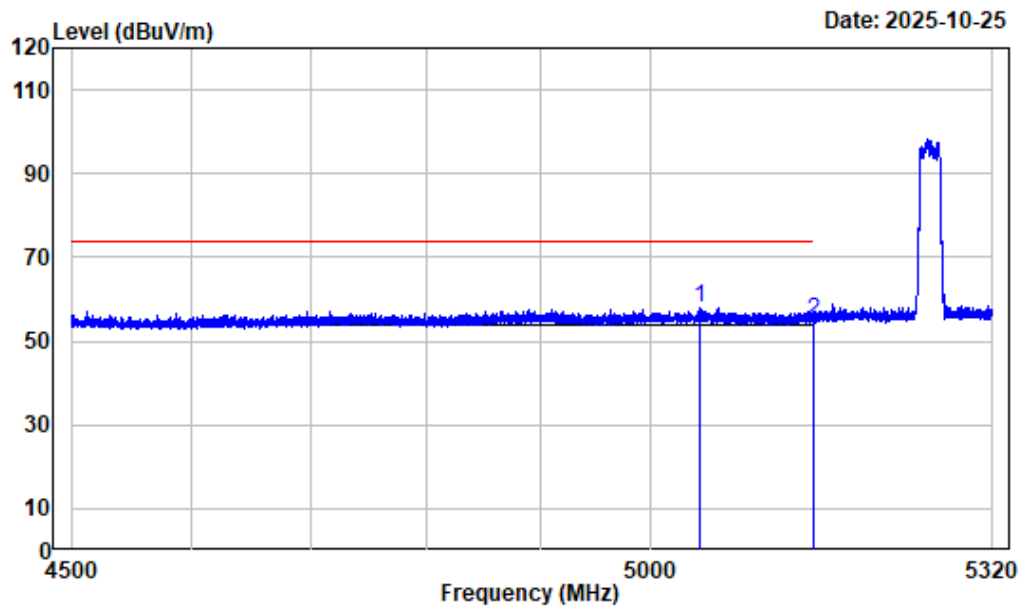

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5044.480	7.66	50.13	57.79	74.00	-16.21	Peak
2 5150.000	7.47	47.53	55.00	74.00	-19.00	Peak


Left Band edge_Horizontal_Average_5GWiFi_Band2_AX20_5260MHz

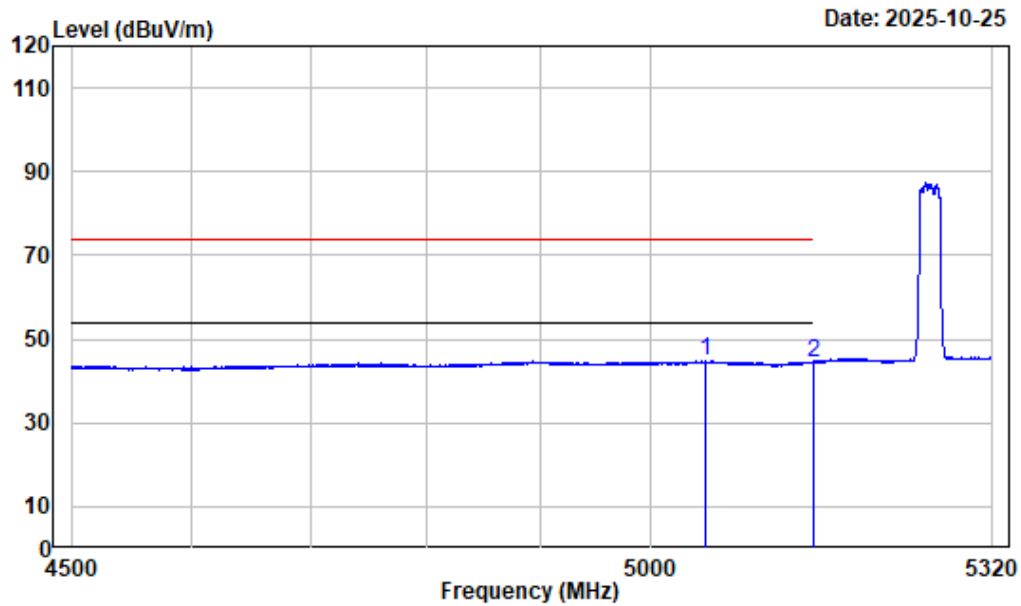

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5050.322	7.75	36.96	44.71	54.00	-9.29	Average
2	5150.000	7.47	37.02	44.49	54.00	-9.51	Average


Left Band edge_Vertical_Peak_5GWiFi_Band2_AX20_5260MHz

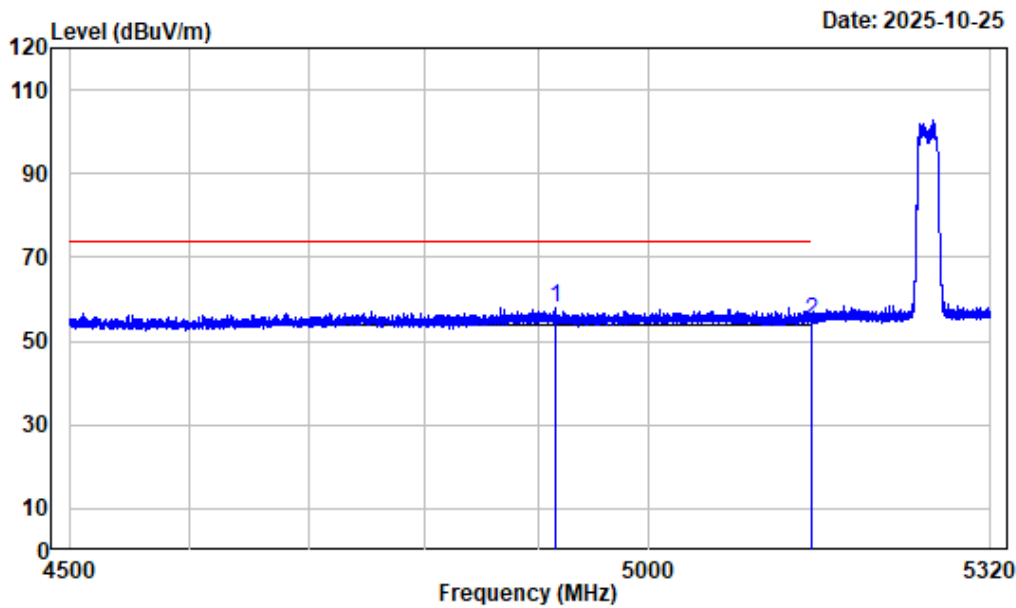

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4915.740	7.39	50.60	57.99	74.00	-16.01	Peak
2 5150.000	7.47	47.46	54.93	74.00	-19.07	Peak


Left Band edge_Vertical_Average_5GWiFi_Band2_AX20_5260MHz

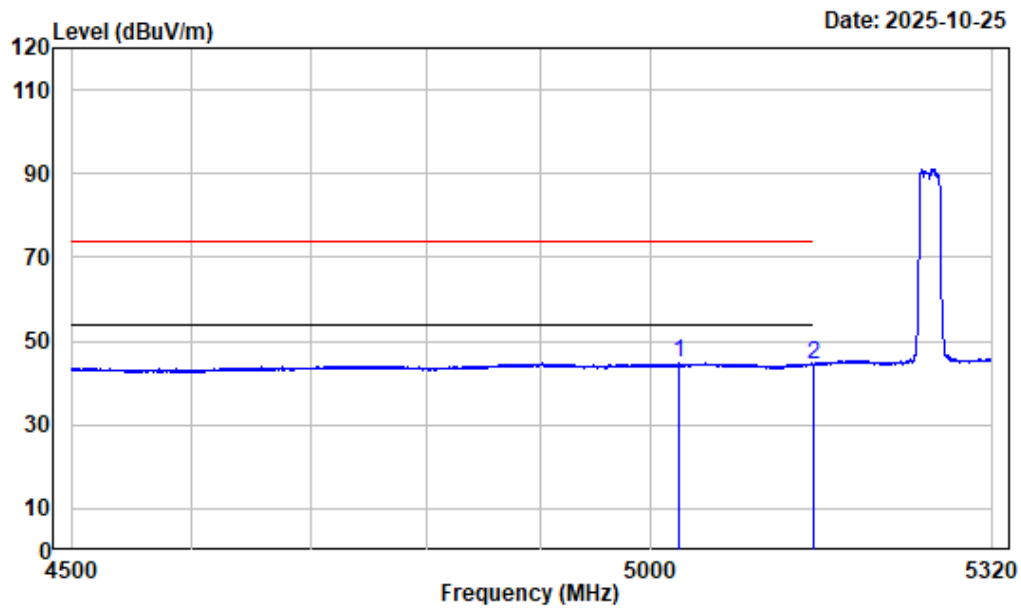

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX20-5260

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5026.132	7.50	37.24	44.74	74.00	-29.26 Average
2	5150.000	7.47	36.79	44.26	74.00	-29.74 Average


Right Band edge_Horizontal_Peak_5GWiFi_Band2_AX20_5320MHz

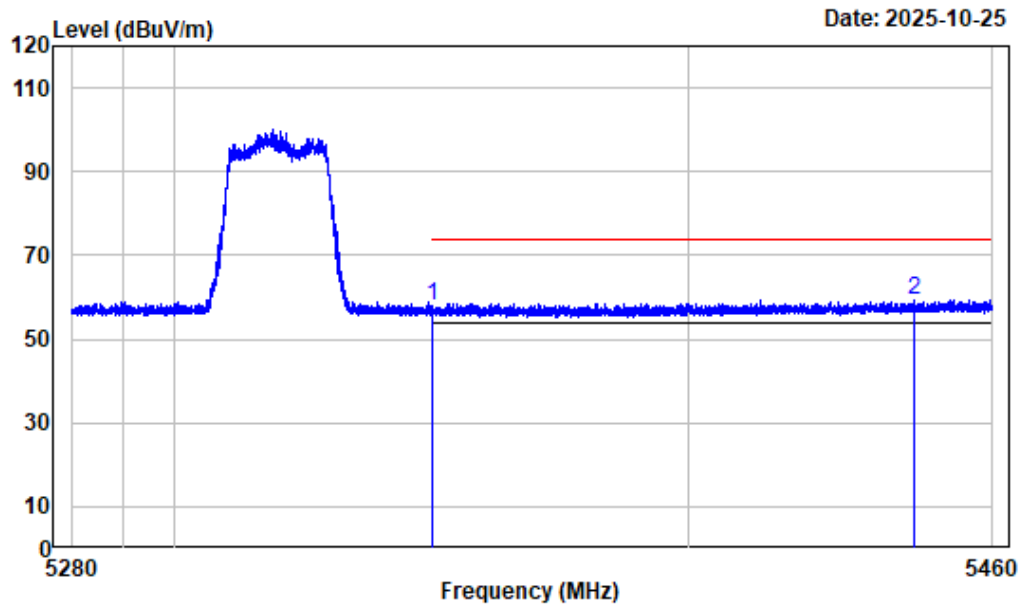

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	8.37	49.40	57.77	74.00	-16.23	Peak
2 5444.317	8.78	50.68	59.46	74.00	-14.54	Peak


Right Band edge_Horizontal_Average_5GWiFi_Band2_AX20_5320MHz

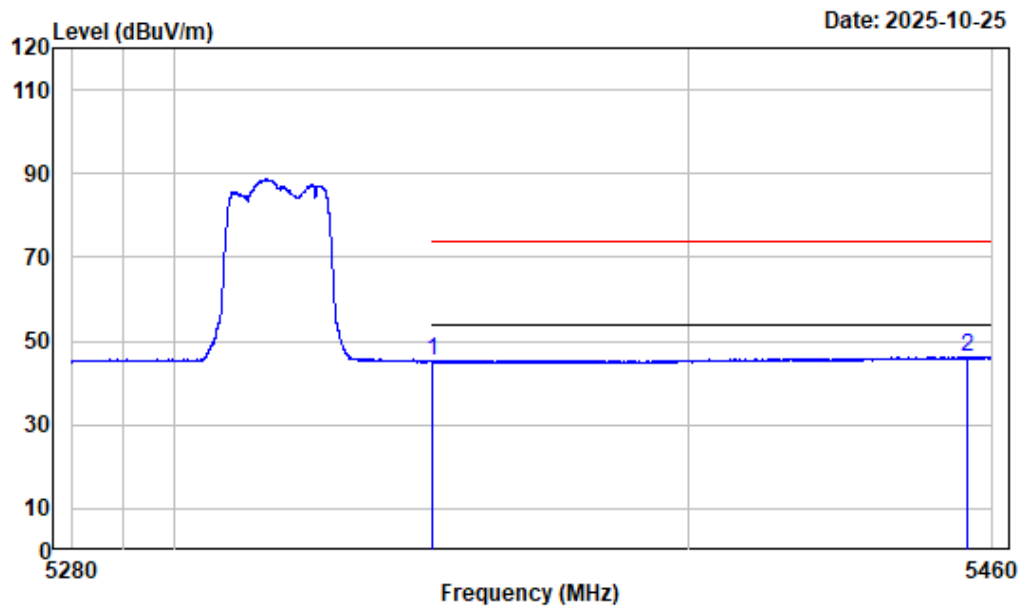

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	8.37	36.81	45.18	54.00	-8.82	Average
2 5454.960	8.84	37.51	46.35	54.00	-7.65	Average


Right Band edge_Vertical_Peak_5GWiFi_Band2_AX20_5320MHz

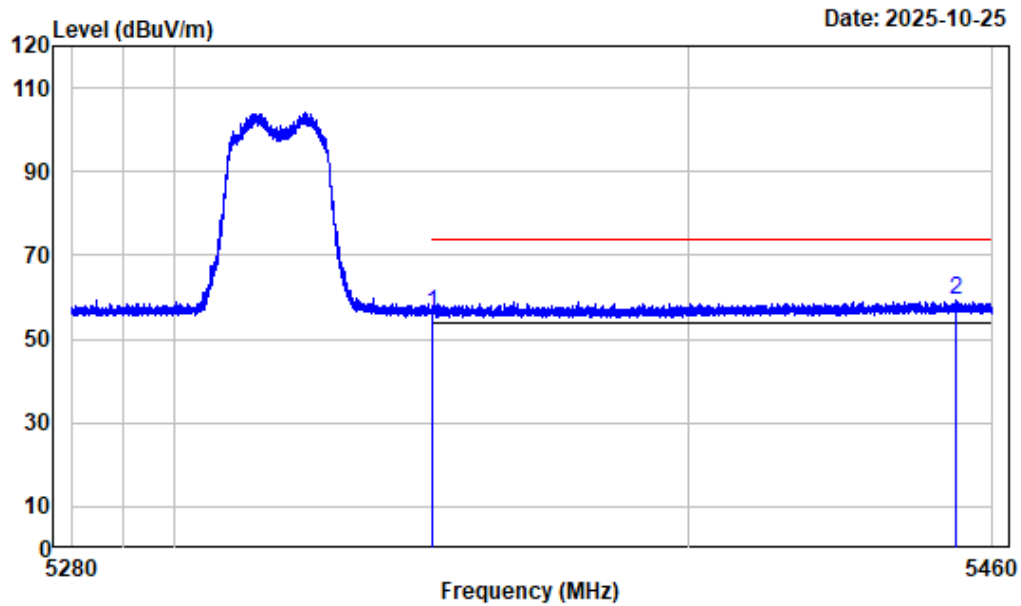

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	47.65	56.02	74.00	-17.98 Peak
2	5452.777	8.83	50.39	59.22	74.00	-14.78 Peak


Right Band edge_Vertical_Average_5GWiFi_Band2_AX20_5320MHz

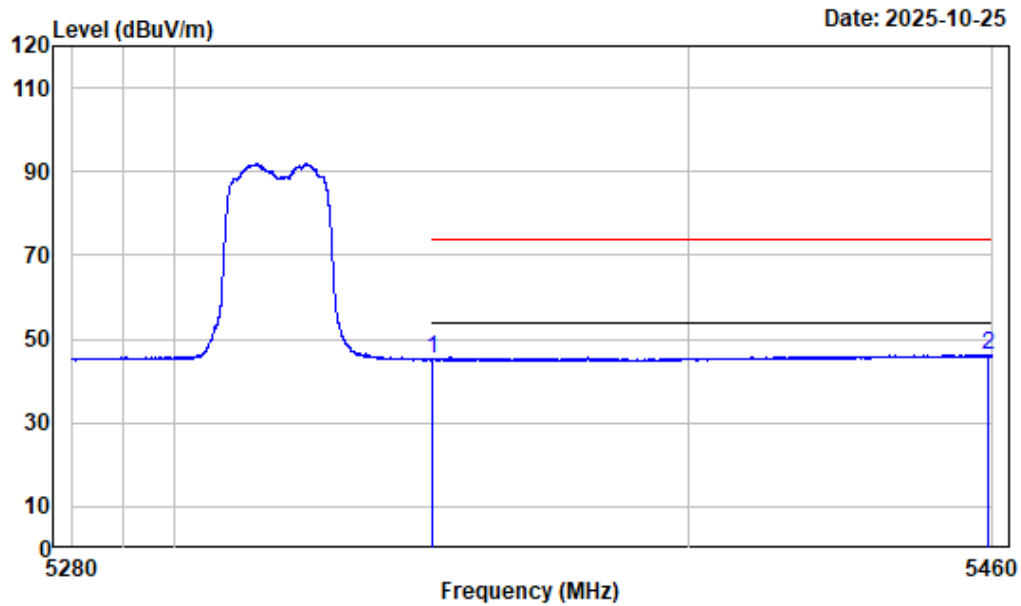

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX20-5320

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	36.80	45.17	54.00	-8.83 Average
2	5459.123	8.89	37.32	46.21	54.00	-7.79 Average


Left Band edge_Horizontal_Peak_5GWiFi_Band2_AX40_5270MHz

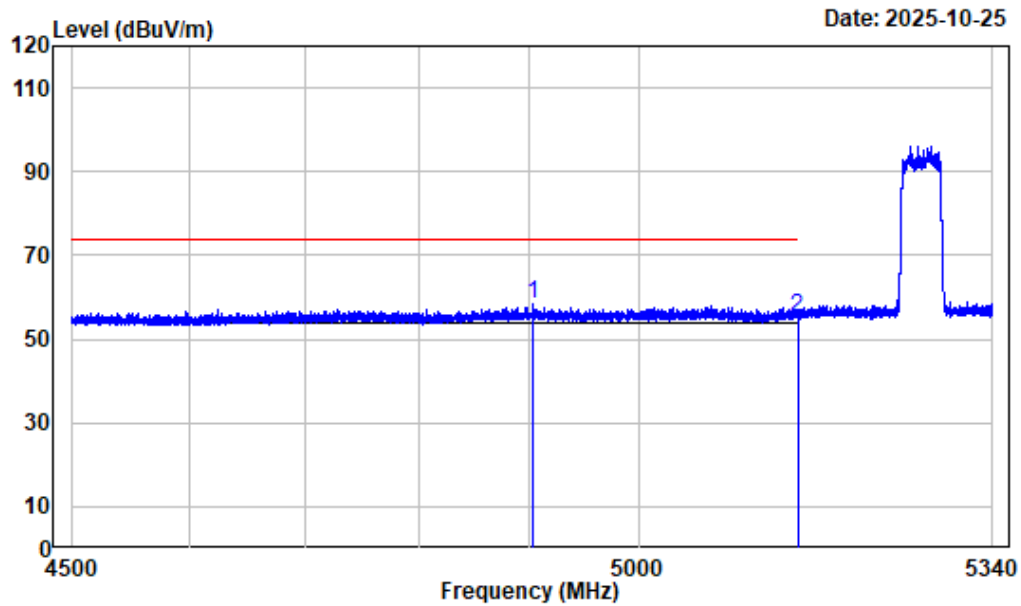

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4903.725	7.40	50.94	58.34	74.00	-15.66	Peak
2	5150.000	7.47	47.76	55.23	74.00	-18.77	Peak


Left Band edge_Horizontal_Average_5GWiFi_Band2_AX40_5270MHz

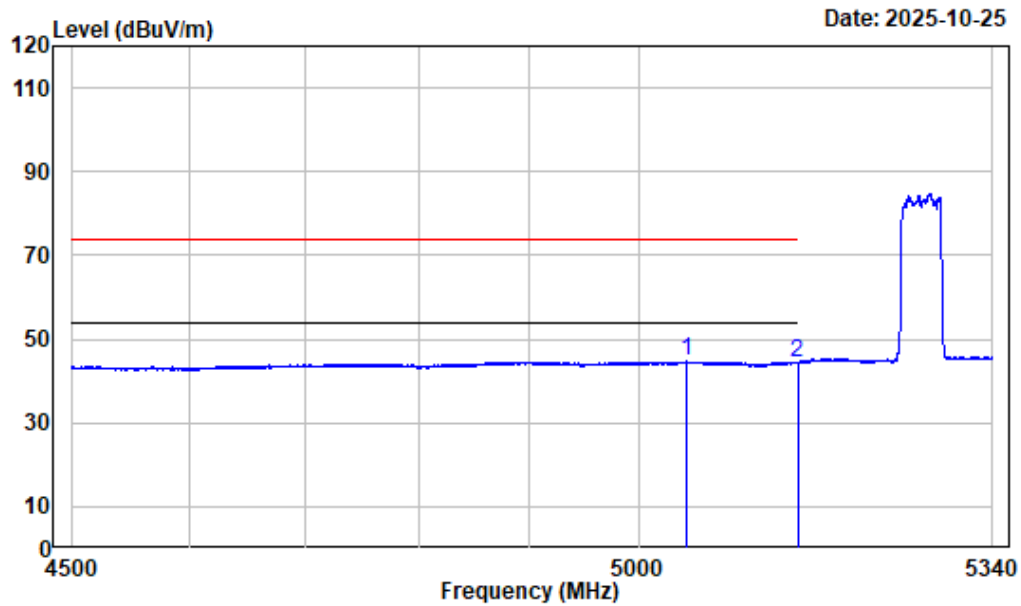

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5044.320	7.66	37.09	44.75	54.00	-9.25 Average
2	5150.000	7.47	36.80	44.27	54.00	-9.73 Average


Left Band edge_Vertical_Peak_5GWiFi_Band2_AX40_5270MHz

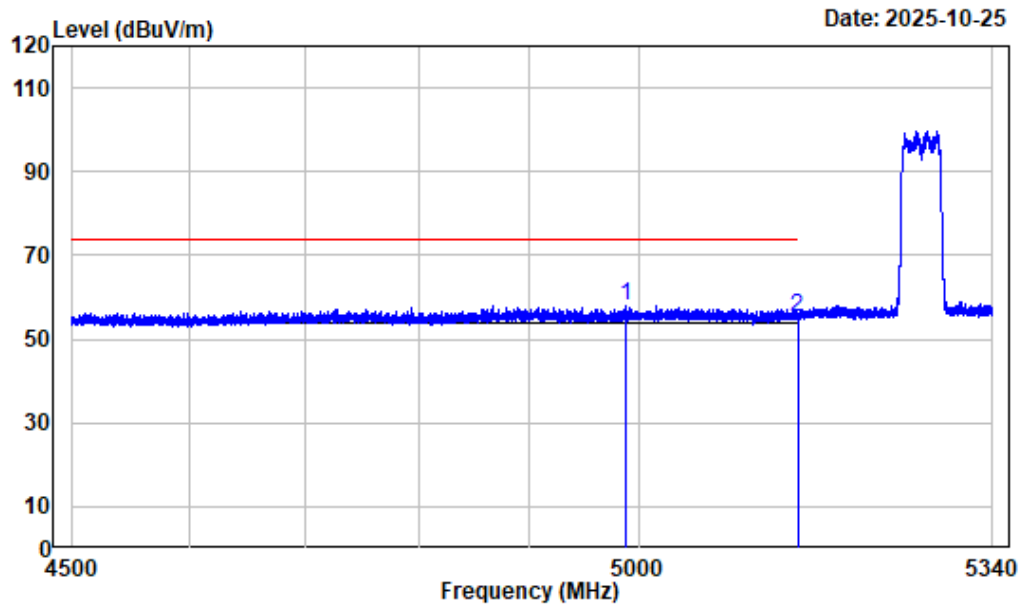

Condition : Vertical
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band2-AX40-5270

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4987.935	7.57	50.51	58.08	74.00	-15.92	Peak
2 5150.000	7.47	47.99	55.46	74.00	-18.54	Peak


Left Band edge_Vertical_Average_5GWiFi_Band2_AX40_5270MHz

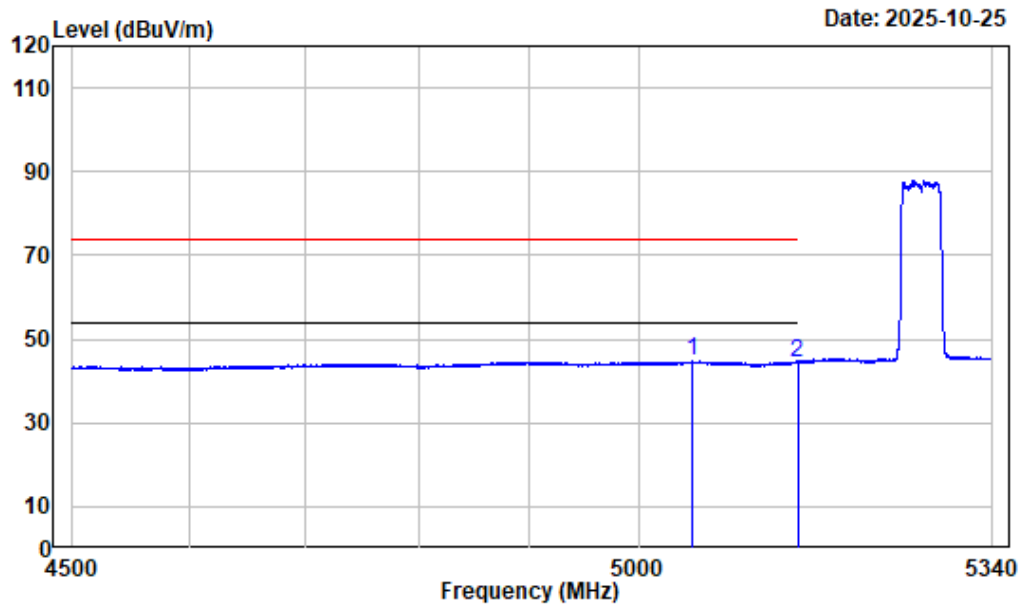

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX40-5270

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5050.410	7.75	37.02	44.77	54.00	-9.23 Average
2	5150.000	7.47	37.00	44.47	54.00	-9.53 Average


Right Band edge_Horizontal_Peak_5GWiFi_Band2_AX40_5310MHz

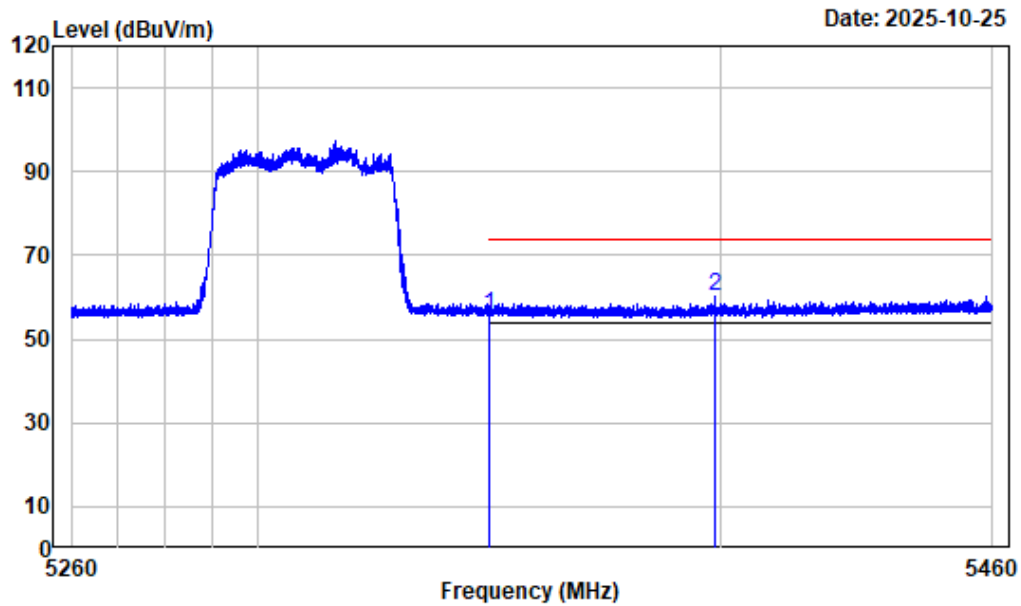

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	47.35	55.72	74.00	-18.28 Peak
2	5398.825	8.64	51.48	60.12	74.00	-13.88 Peak


Right Band edge_Horizontal_Average_5GWiFi_Band2_AX40_5310MHz

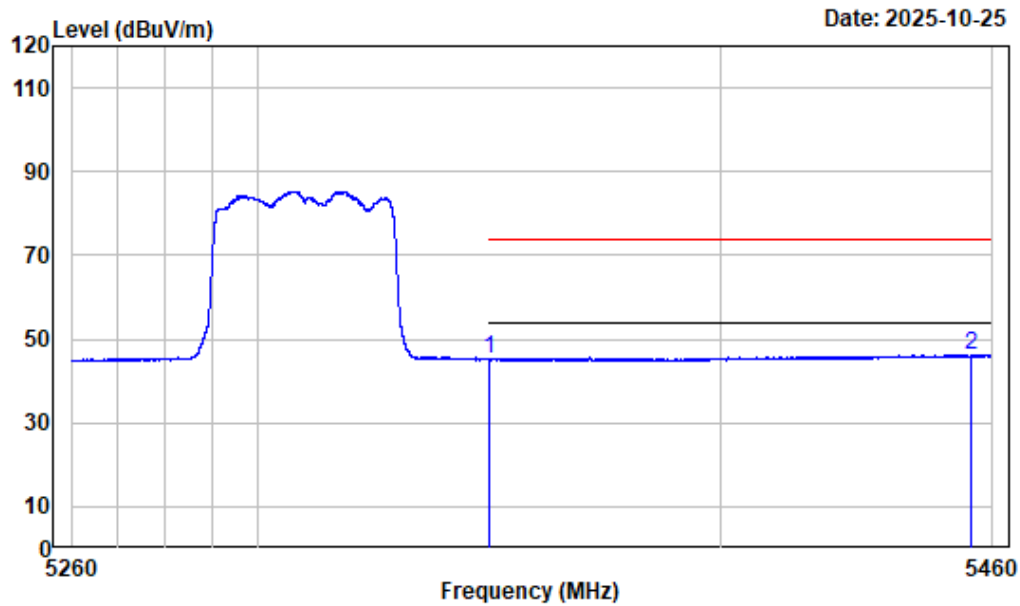

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	36.87	45.24	54.00	-8.76 Average
2	5455.450	8.85	37.38	46.23	54.00	-7.77 Average


Right Band edge_Vertical_Peak_5GWiFi_Band2_AX40_5310MHz

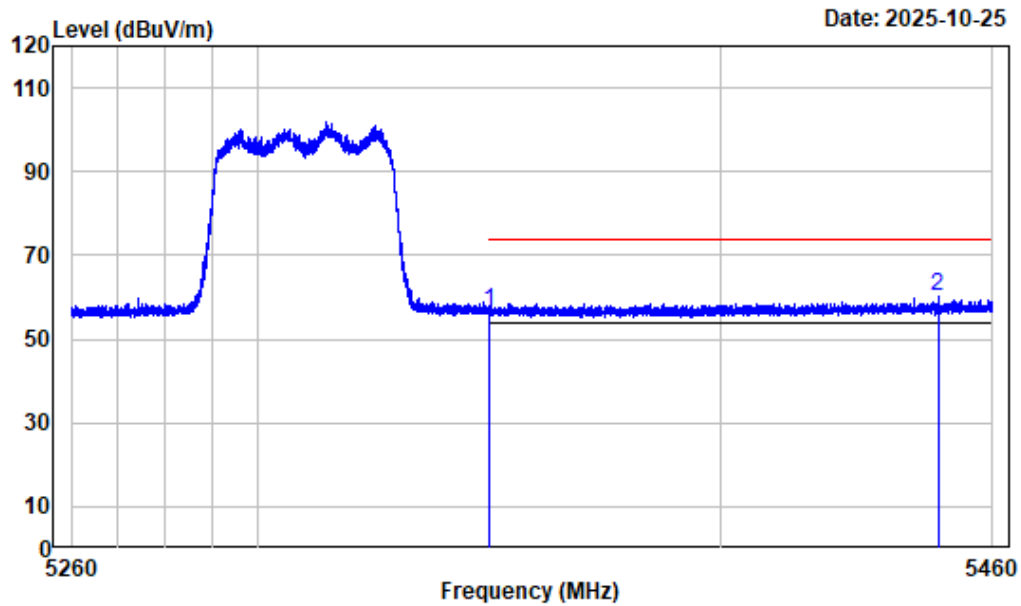

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	8.37	48.10	56.47	74.00	-17.53	Peak
2 5447.950	8.79	51.59	60.38	74.00	-13.62	Peak


Right Band edge_Vertical_Average_5GWiFi_Band2_AX40_5310MHz

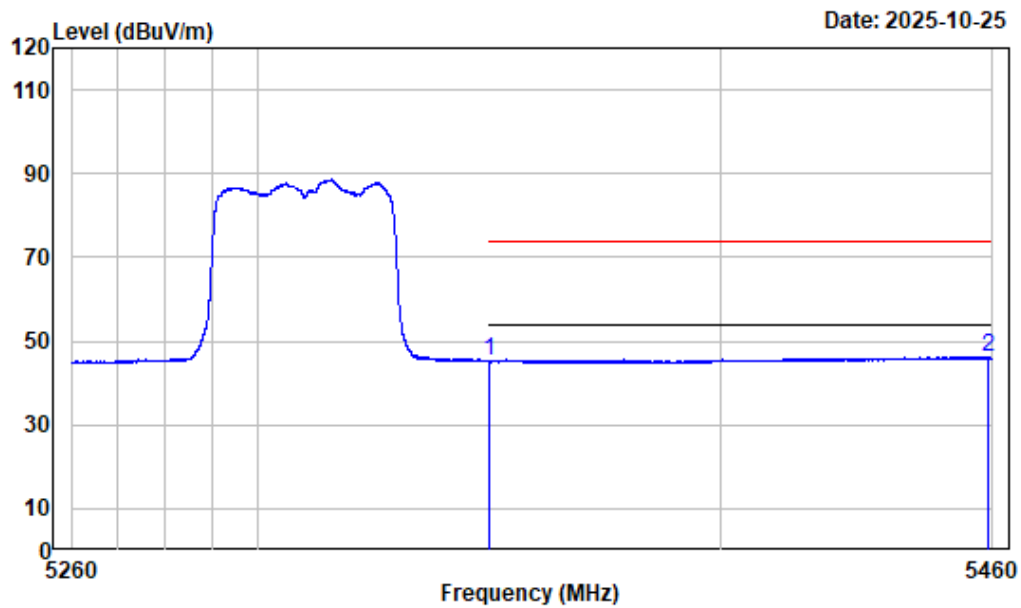

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX40-5310

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	36.85	45.22	54.00	-8.78 Average
2	5459.225	8.90	37.32	46.22	54.00	-7.78 Average


Left Band edge_Horizontal_Peak_5GWiFi_Band2_AX80_5290MHz

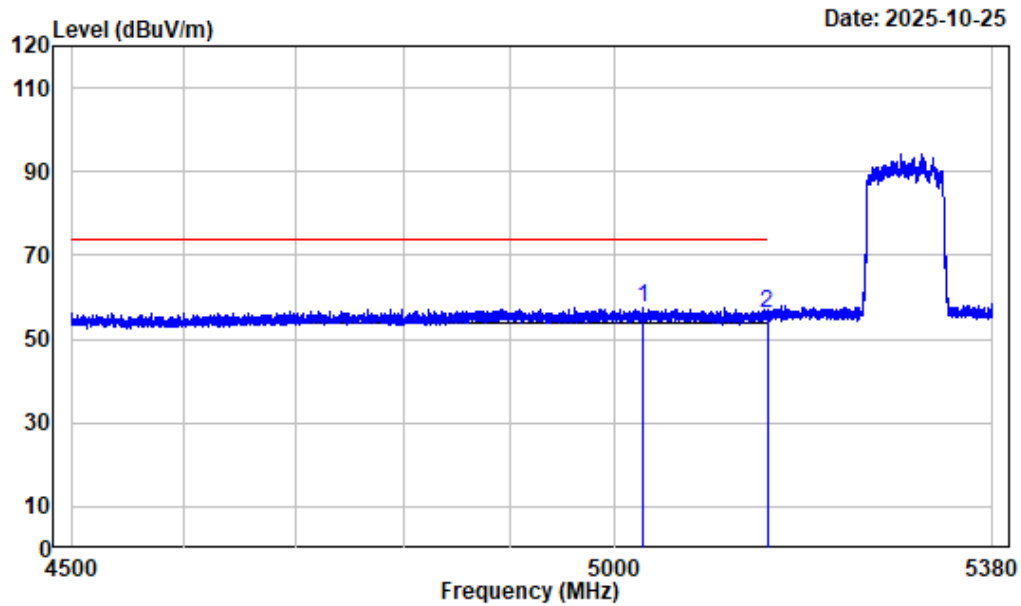

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5026.680	7.50	50.18	57.68	74.00	-16.32 Peak
2	5150.000	7.47	48.67	56.14	74.00	-17.86 Peak


Left Band edge_Horizontal_Average_5GWiFi_Band2_AX80_5290MHz

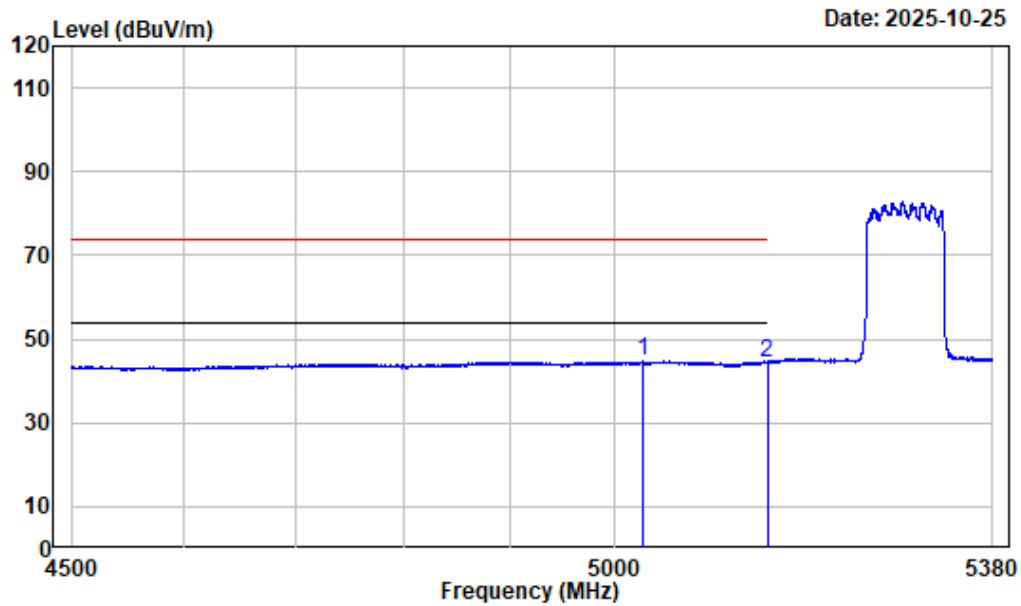

Condition : Horizontal
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
 Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5027.560	7.49	37.26	44.75	54.00	-9.25	Average
2 5150.000	7.47	36.74	44.21	54.00	-9.79	Average


Left Band edge_Vertical_Peak_5GWiFi_Band2_AX80_5290MHz

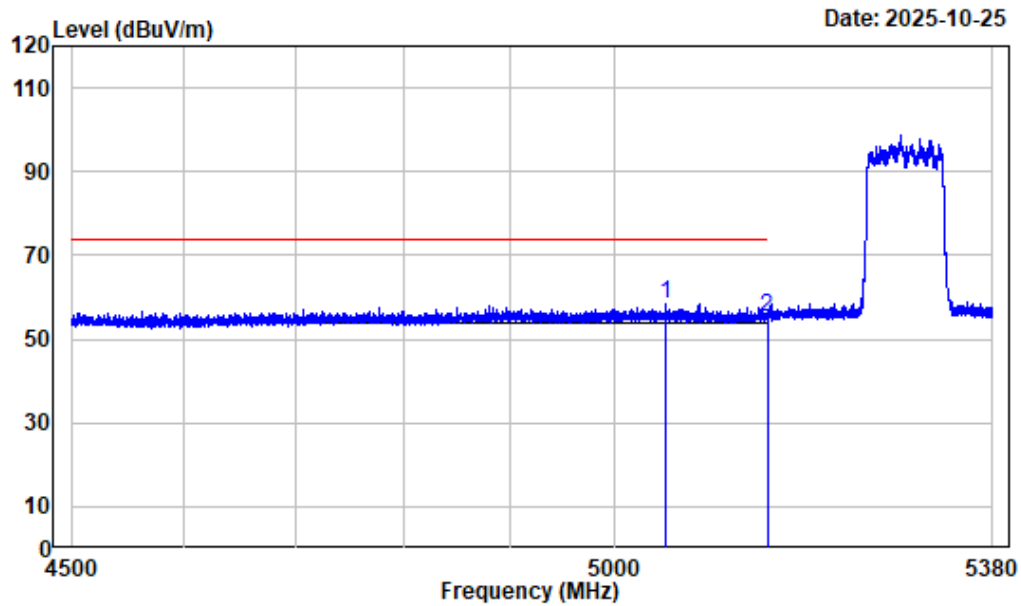

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5049.340	7.74	50.67	58.41	74.00	-15.59 Peak
2	5150.000	7.47	47.93	55.40	74.00	-18.60 Peak


Left Band edge_Vertical_Average_5GWiFi_Band2_AX80_5290MHz

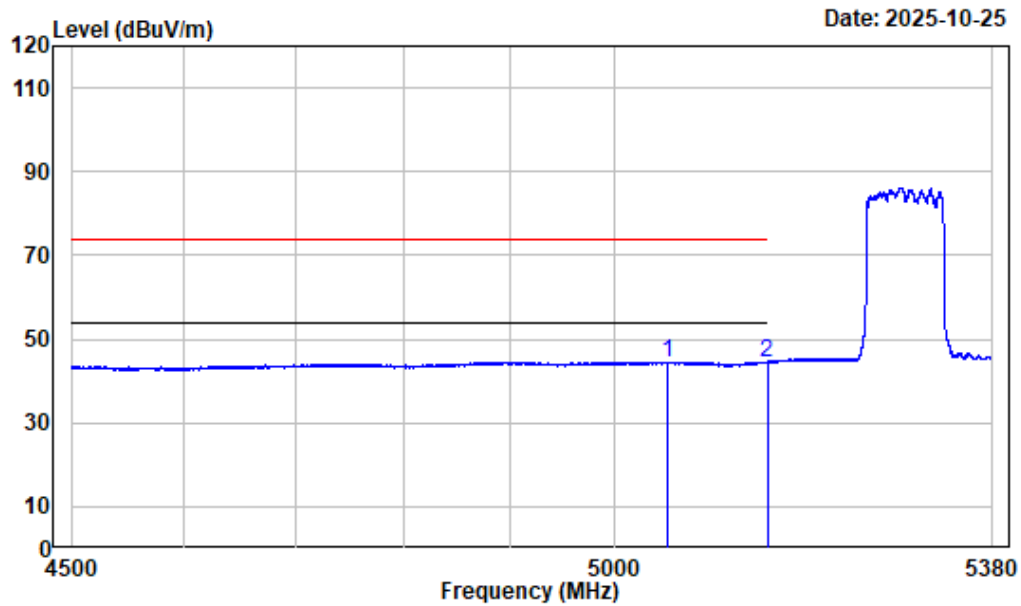

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5051.320	7.74	36.86	44.60	54.00	-9.40 Average
2	5150.000	7.47	36.93	44.40	54.00	-9.60 Average


Right Band edge_Horizontal_Peak_5GWiFi_Band2_AX80_5290MHz

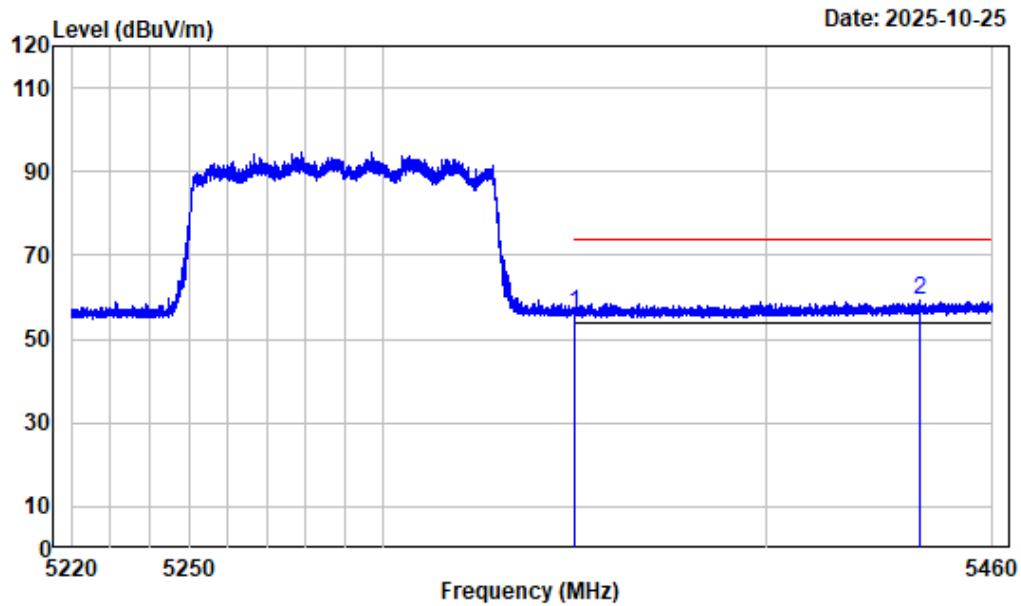

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	8.37	47.62	55.99	74.00	-18.01	Peak
2 5440.920	8.77	50.48	59.25	74.00	-14.75	Peak


Right Band edge_Horizontal_Average_5GWiFi_Band2_AX80_5290MHz

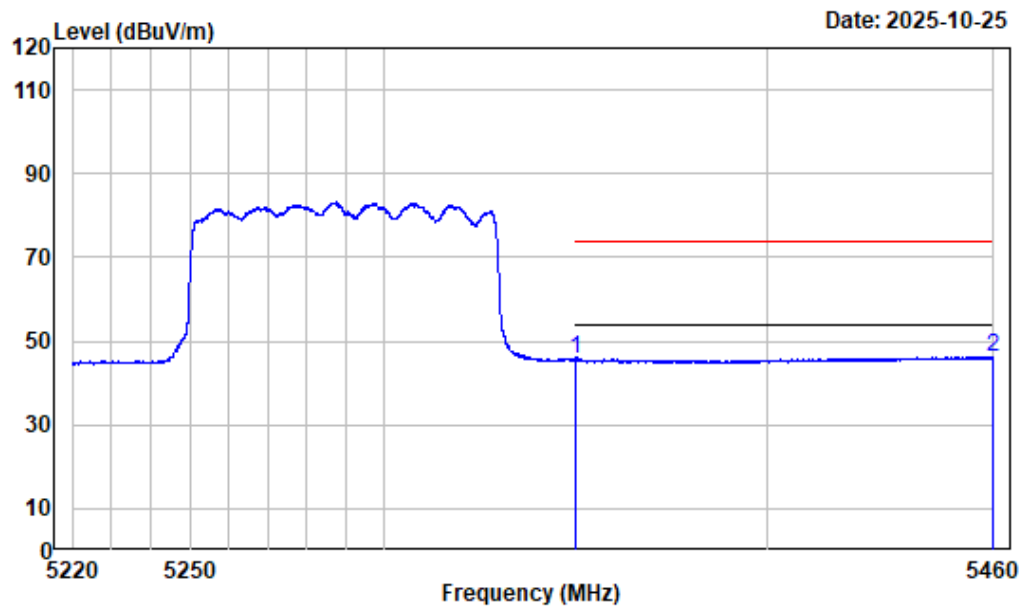

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	8.37	37.34	45.71	54.00	-8.29	Average
2 5459.820	8.90	37.42	46.32	54.00	-7.68	Average


Right Band edge_Vertical_Peak_5GWiFi_Band2_AX80_5290MHz

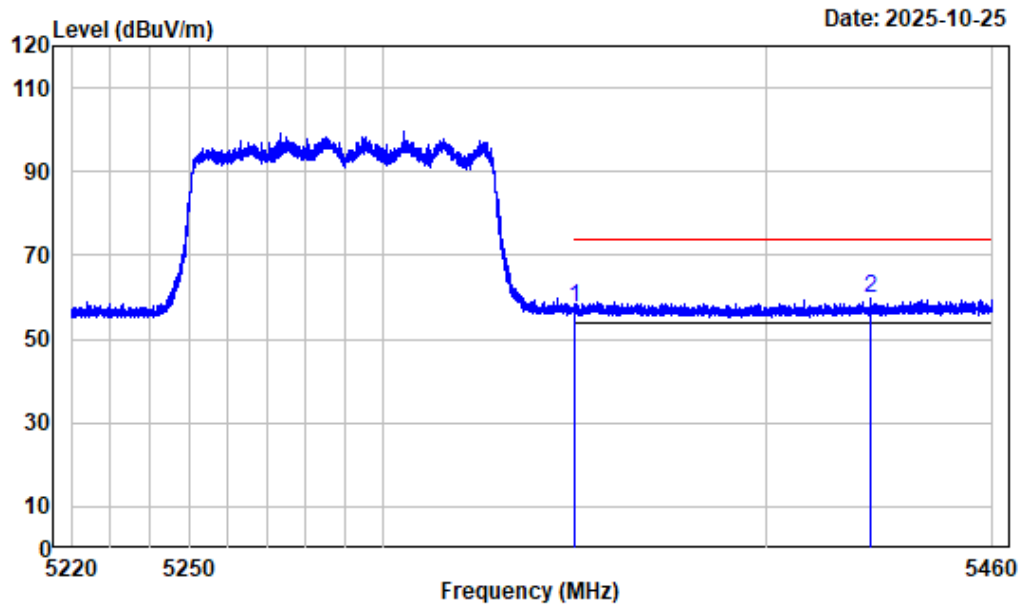

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	49.34	57.71	74.00	-16.29 Peak
2	5427.660	8.66	51.18	59.84	74.00	-14.16 Peak


Right Band edge_Vertical_Average_5GWiFi_Band2_AX80_5290MHz

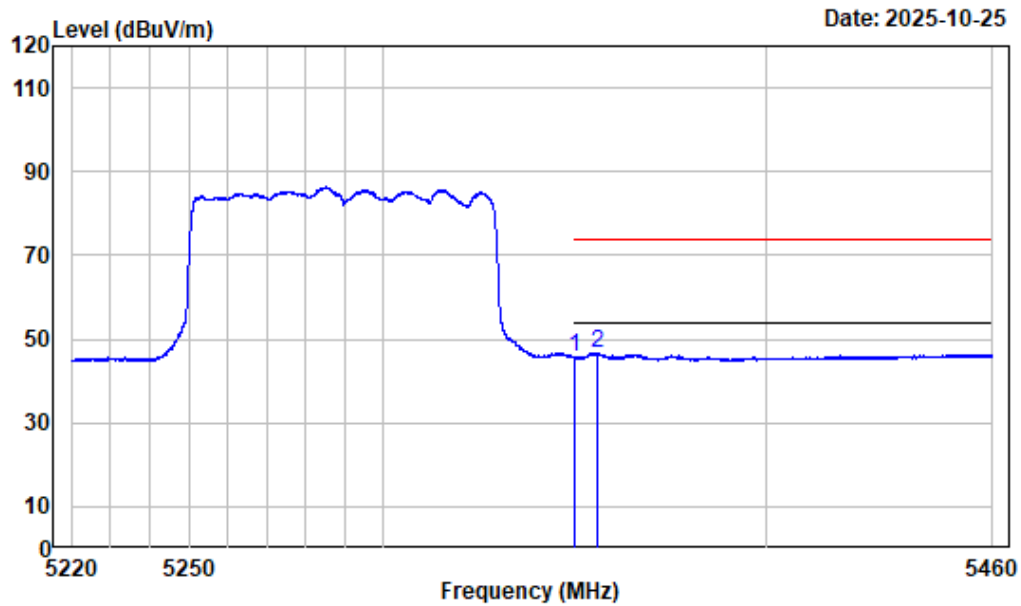

Condition : Vertical
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
 Note : 5GWiFi-Band2-AX80-5290

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	8.37	37.37	45.74	54.00	-8.26	Average
2 5355.690	8.40	38.23	46.63	54.00	-7.37	Average


Left Band edge_Horizontal_Peak_5GWiFi_Band2_AX160_5250MHz

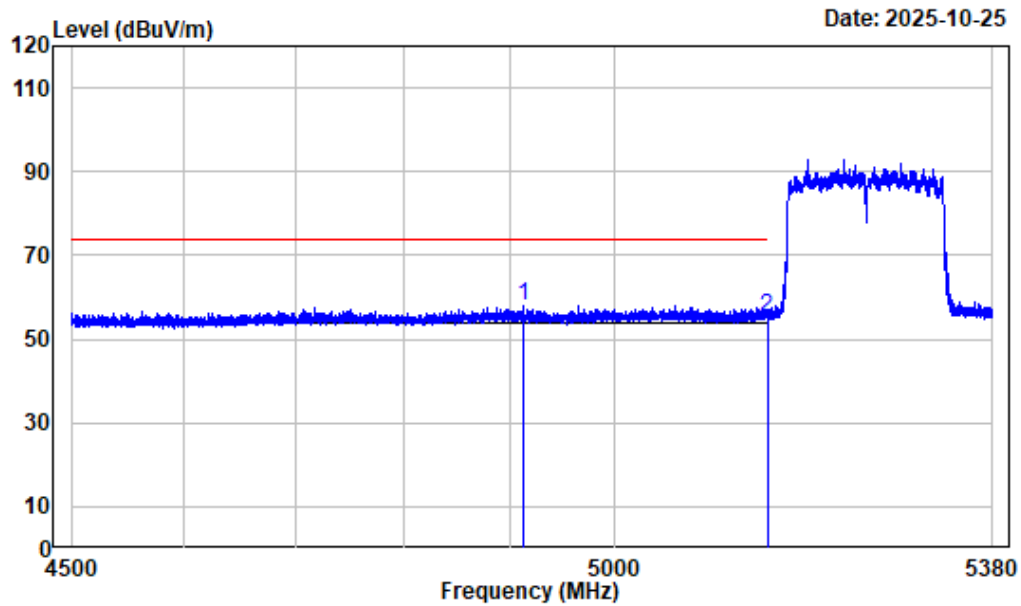

Condition : Horizontal
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band2-AX160-5250

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4911.840	7.39	50.43	57.82	74.00	-16.18	Peak
2 5150.000	7.47	47.90	55.37	74.00	-18.63	Peak


Left Band edge_Horizontal_Average_5GWiFi_Band2_AX160_5250MHz

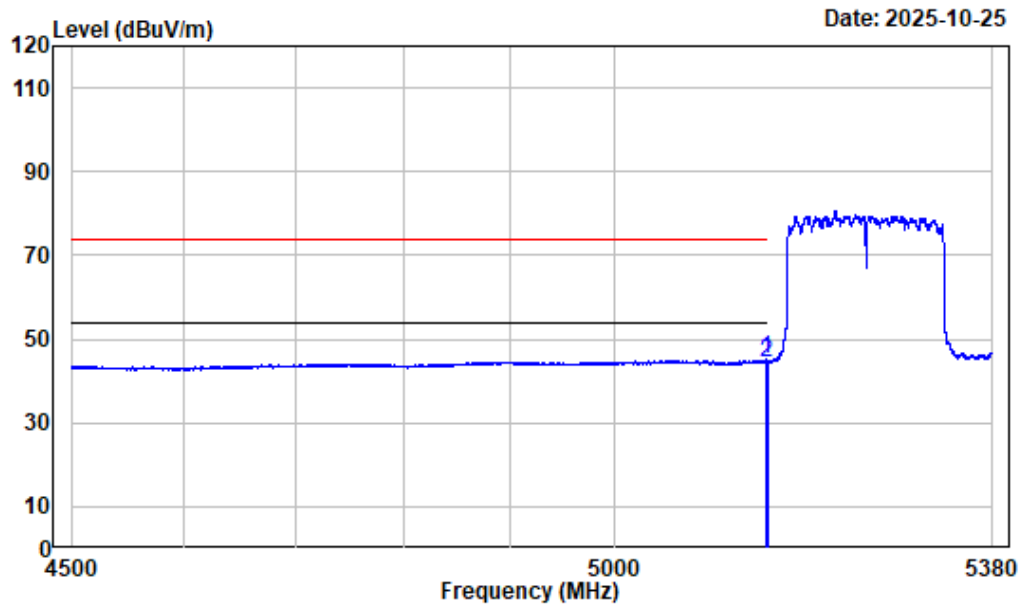

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX160-5250

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5148.670	7.46	37.62	45.08	54.00	-8.92 Average
2	5150.000	7.47	37.13	44.60	54.00	-9.40 Average


Left Band edge_Vertical_Peak_5GWiFi_Band2_AX160_5250MHz

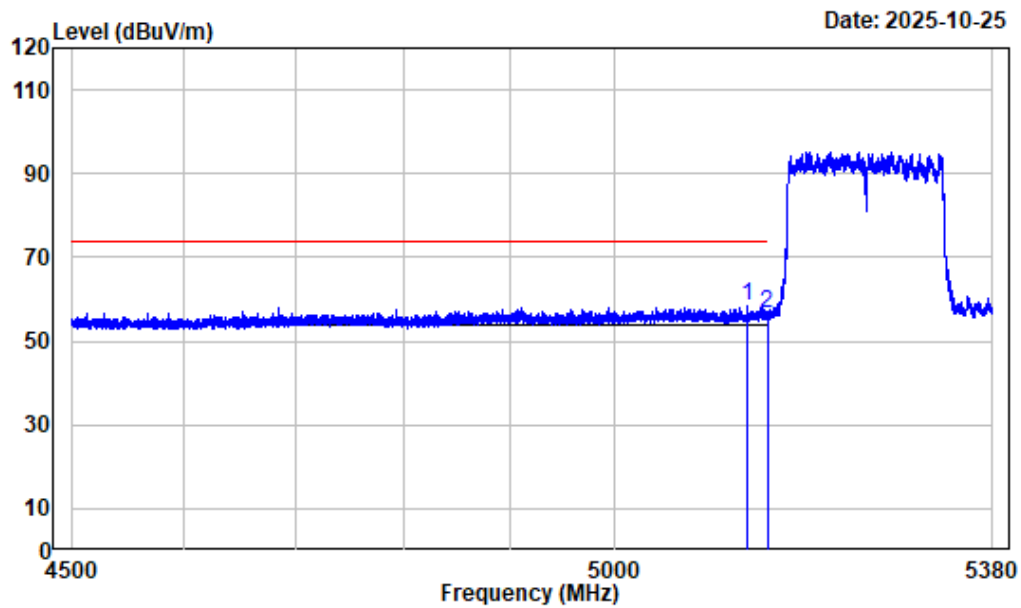

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX160-5250

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5129.530	7.36	50.90	58.26	74.00	-15.74 Peak
2	5150.000	7.47	49.22	56.69	74.00	-17.31 Peak


Left Band edge_Vertical_Average_5GWiFi_Band2_AX160_5250MHz

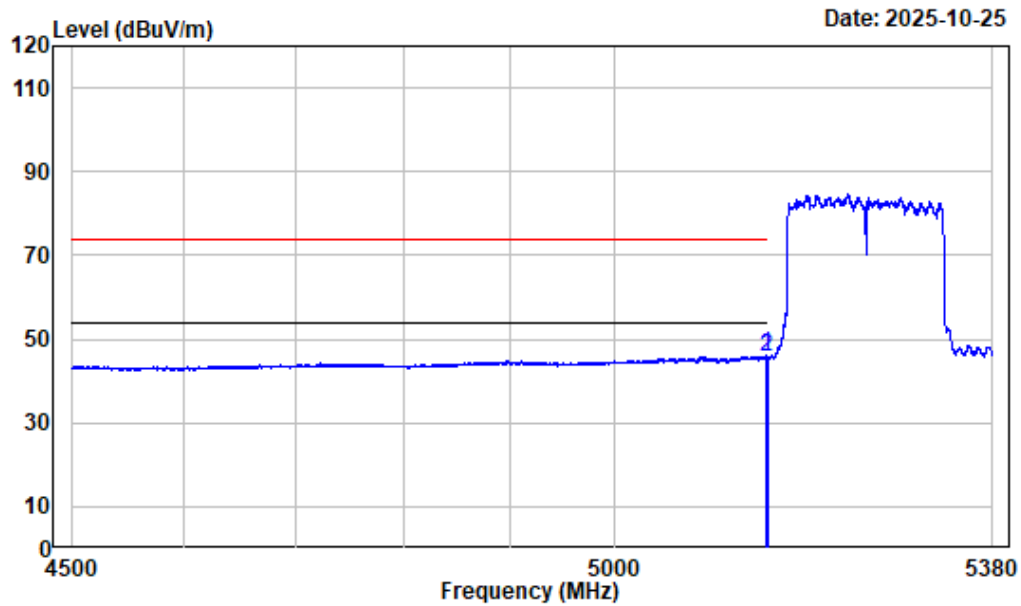

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX160-5250

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1 5149.220	7.47	38.71	46.18	54.00	-7.82	Average
2 5150.000	7.47	38.10	45.57	54.00	-8.43	Average


Right Band edge_Horizontal_Peak_5GWiFi_Band2_AX160_5250MHz

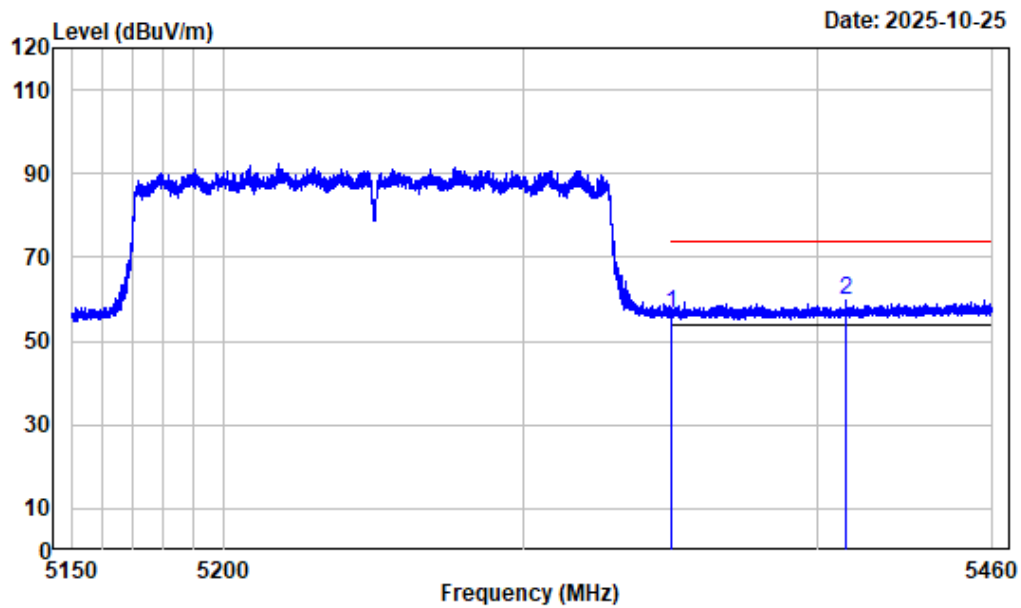

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX160-5250

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	48.41	56.78	74.00	-17.22 Peak
2	5409.431	8.60	51.16	59.76	74.00	-14.24 Peak


Right Band edge_Horizontal_Average_5GWiFi_Band2_AX160_5250MHz

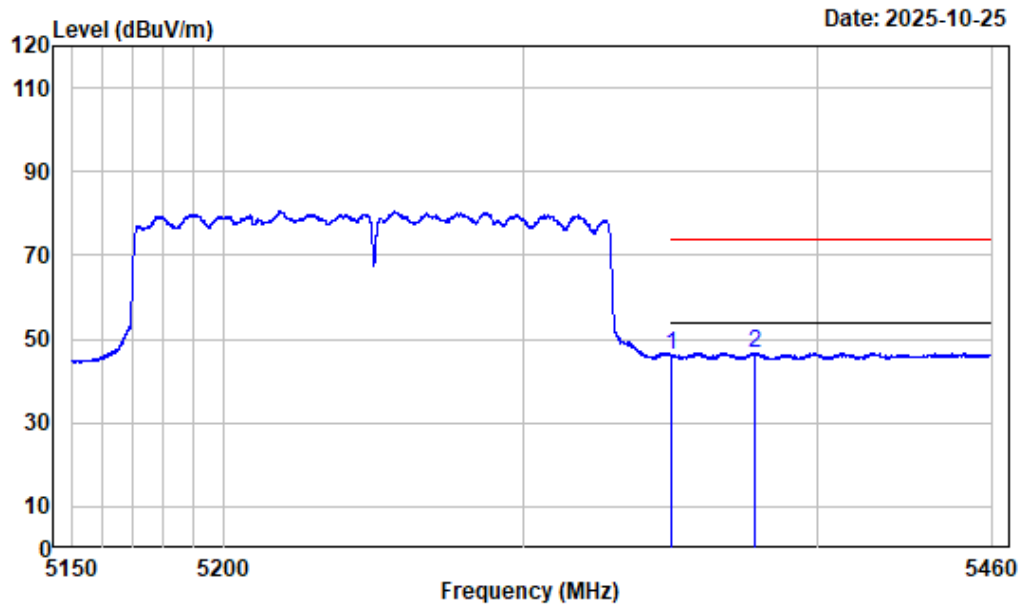

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX160-5250

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	37.82	46.19	54.00	-7.81 Average
2	5378.044	8.53	38.25	46.78	54.00	-7.22 Average


Right Band edge_Vertical_Peak_5GWiFi_Band2_AX160_5250MHz

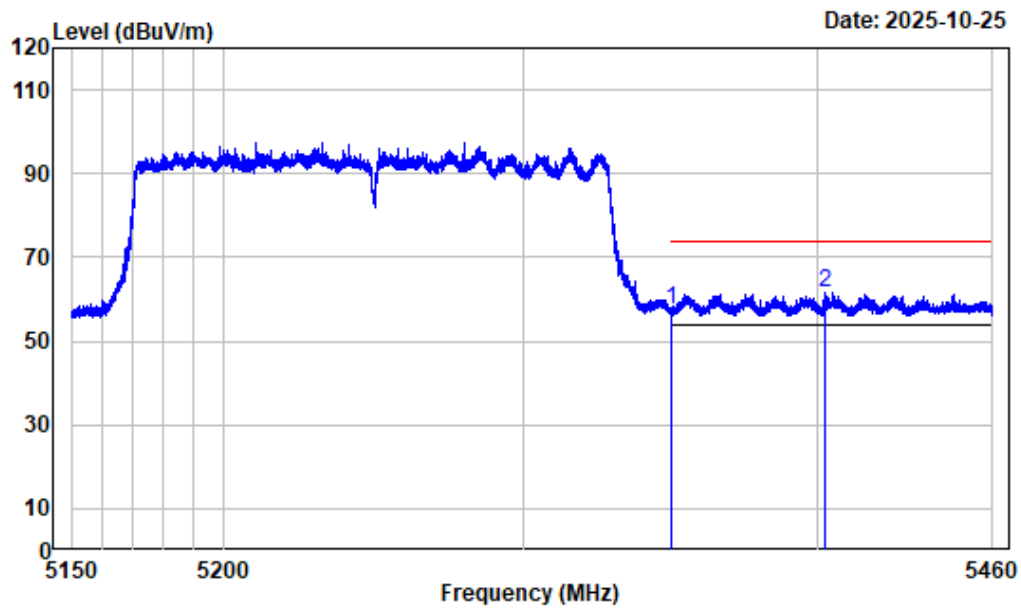

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-AX160-5250

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	8.37	49.10	57.47	74.00	-16.53	Peak
2 5402.263	8.66	52.94	61.60	74.00	-12.40	Peak


Right Band edge_Vertical_Average_5GWiFi_Band2_AX160_5250MHz

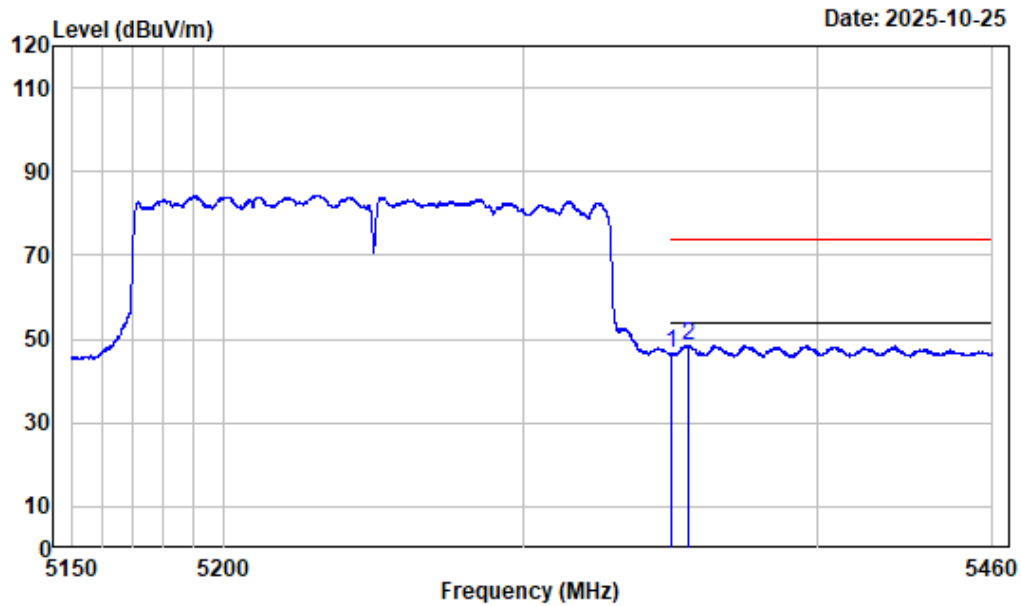

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band2-AX160-5250

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	8.37	38.23	46.60	54.00	-7.40 Average
2	5355.569	8.40	40.17	48.57	54.00	-5.43 Average


Left Band edge_Horizontal_Peak_5GWiFi_Band3_A_ANT0_5500MHz

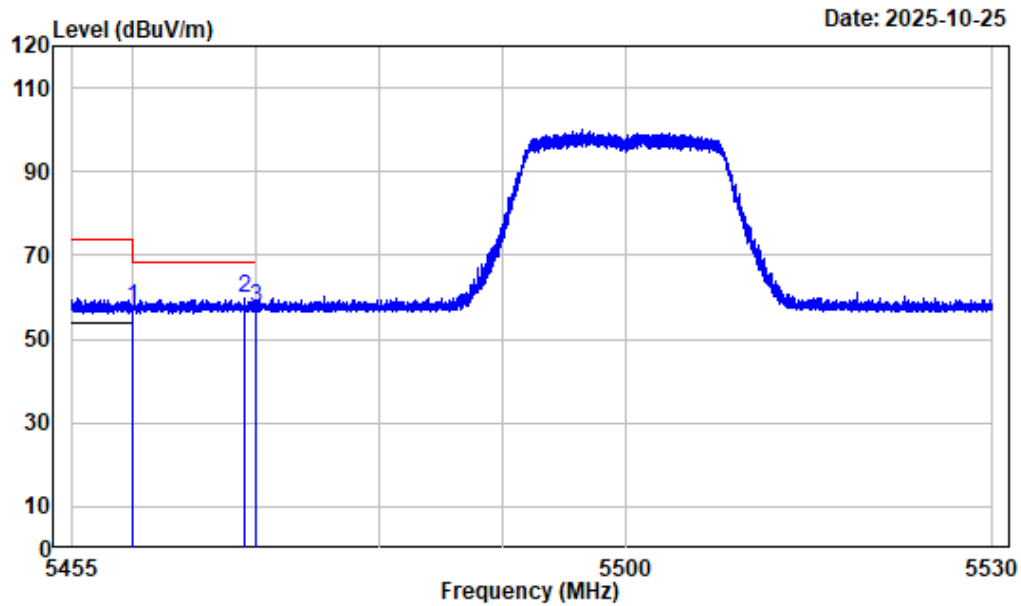

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT0-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	48.52	57.42	74.00	-16.58 Peak
2 5469.006	9.01	50.67	59.68	68.20	-8.52 Peak
3 5470.000	9.03	48.48	57.51	68.20	-10.69 Peak


Left Band edge_Horizontal_Average_5GWiFi_Band3_A_ANT0_5500MHz

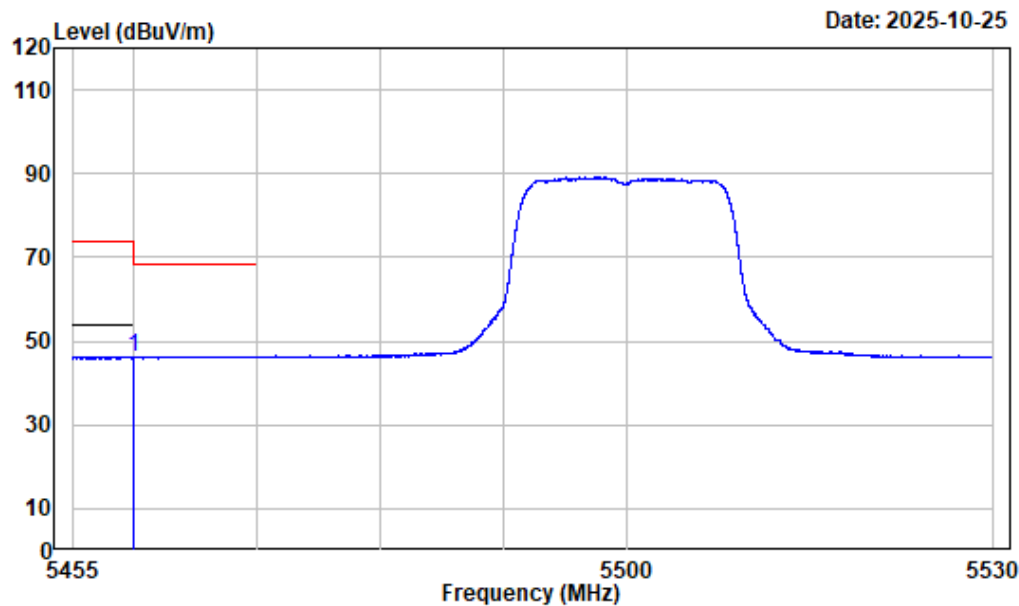

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-A_ANT0-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	8.90	37.20	46.10	54.00	-7.90	Average


Left Band edge_Vertical_Peak_5GWiFi_Band3_A_ANT0_5500MHz

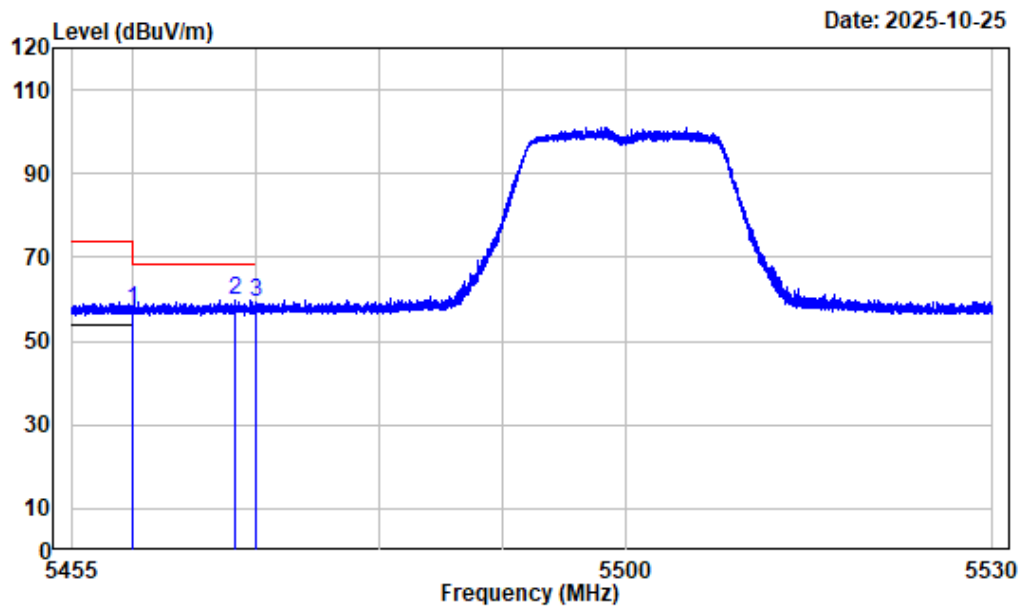

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT0-5500

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	8.90	48.71	57.61	74.00	-16.39	Peak
2	5468.266	9.00	50.91	59.91	68.20	-8.29	Peak
3	5470.000	9.03	50.42	59.45	68.20	-8.75	Peak


Left Band edge_Vertical_Average_5GWiFi_Band3_A_ANT0_5500MHz

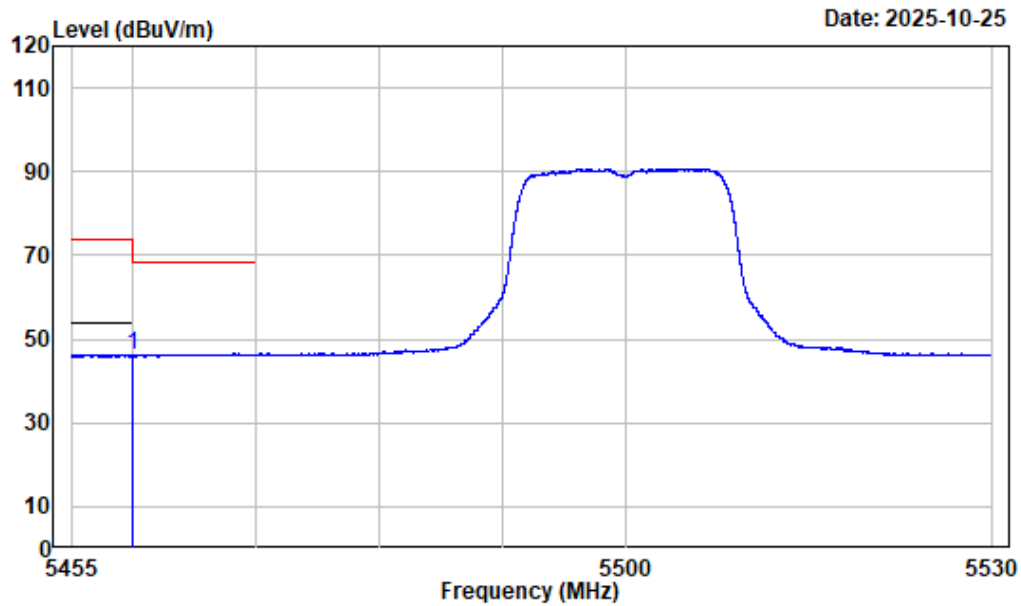

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-A_ANT0-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	37.07	45.97	54.00	-8.03 Average


Right Band edge_Horizontal_Peak_5GWiFi_Band3_A_ANT0_5700MHz

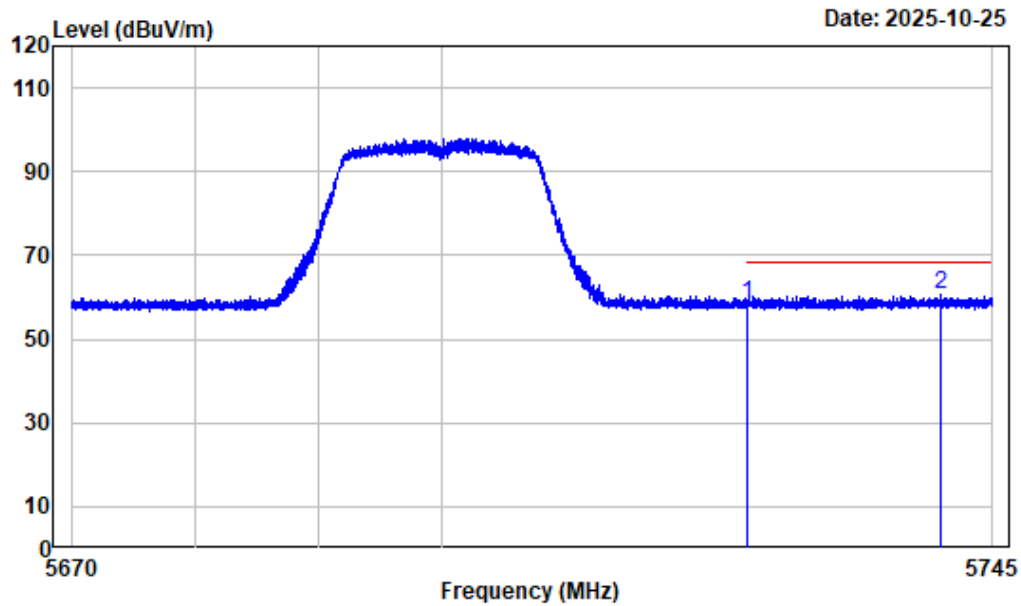

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT0-5700

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5725.000	9.68	48.93	58.61	68.20	-9.59 Peak
2 5740.800	9.89	50.68	60.57	68.20	-7.63 Peak


Right Band edge_Vertical_Peak_5GWiFi_Band3_A_ANT0_5700MHz

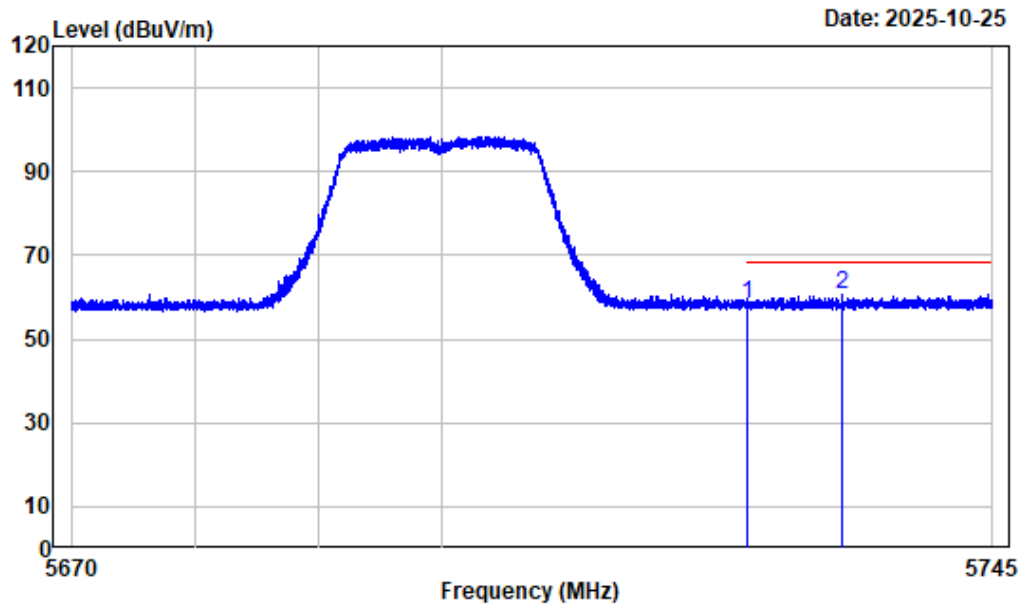

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT0-5700

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	48.75	58.43	68.20	-9.77	Peak
2	5732.728	9.73	50.88	60.61	68.20	-7.59	Peak


Left Band edge_Horizontal_Peak_5GWiFi_Band3_A_ANT1_5500MHz

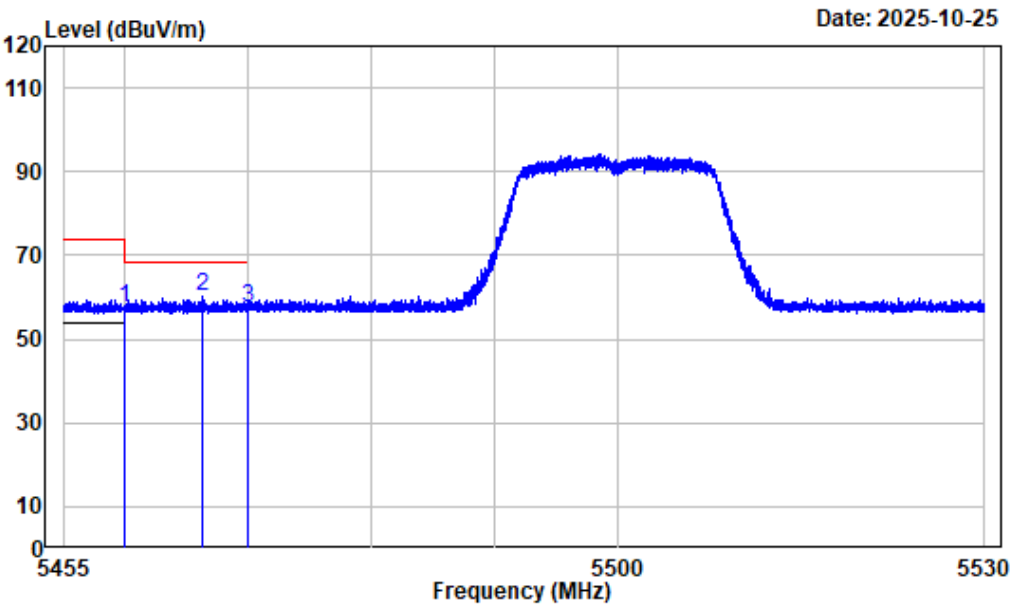

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT1-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	48.47	57.37	74.00	-16.63 Peak
2 5466.278	8.98	51.12	60.10	68.20	-8.10 Peak
3 5470.000	9.03	48.67	57.70	68.20	-10.50 Peak


Left Band edge_Horizontal_Average_5GWiFi_Band3_A_ANT1_5500MHz

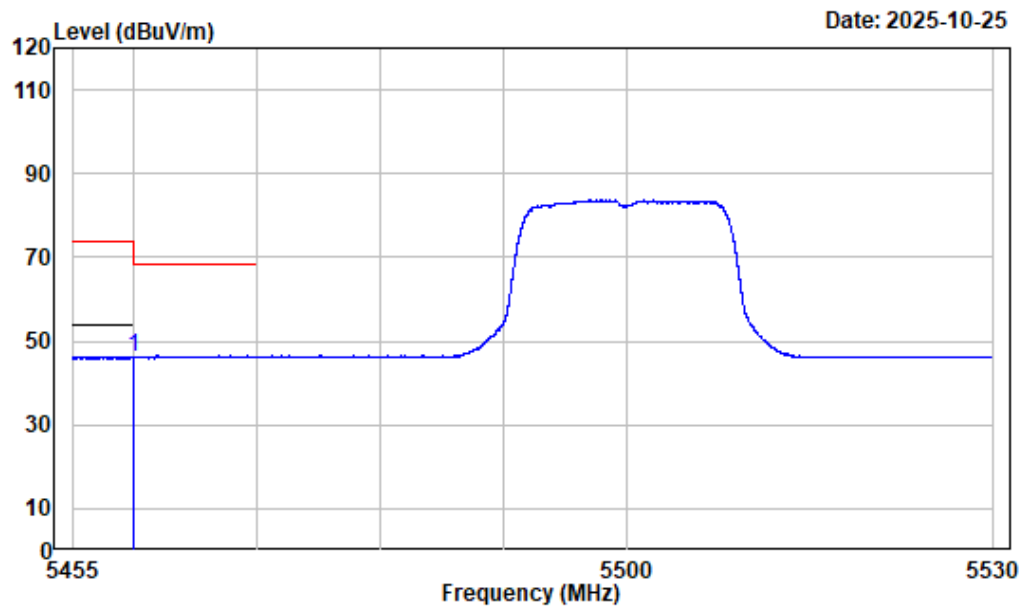

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-A_ANT1-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	8.90	37.14	46.04	54.00	-7.96 Average


Left Band edge_Vertical_Peak_5GWiFi_Band3_A_ANT1_5500MHz

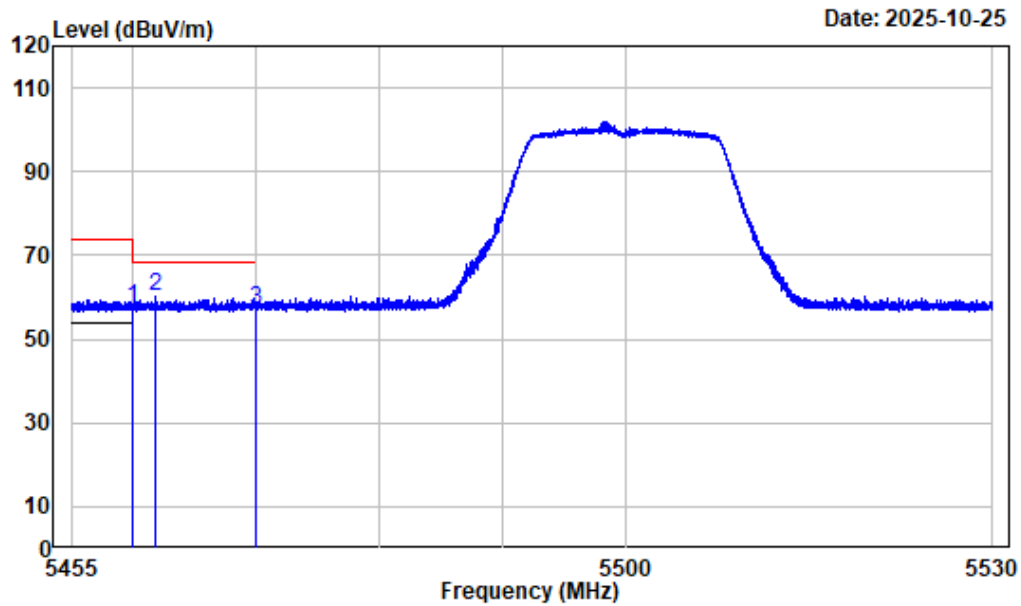

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT1-5500

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	8.90	48.74	57.64	74.00	-16.36	Peak
2 5461.797	8.92	51.31	60.23	68.20	-7.97	Peak
3 5470.000	9.03	48.23	57.26	68.20	-10.94	Peak


Left Band edge_Vertical_Average_5GWiFi_Band3_A_ANT1_5500MHz

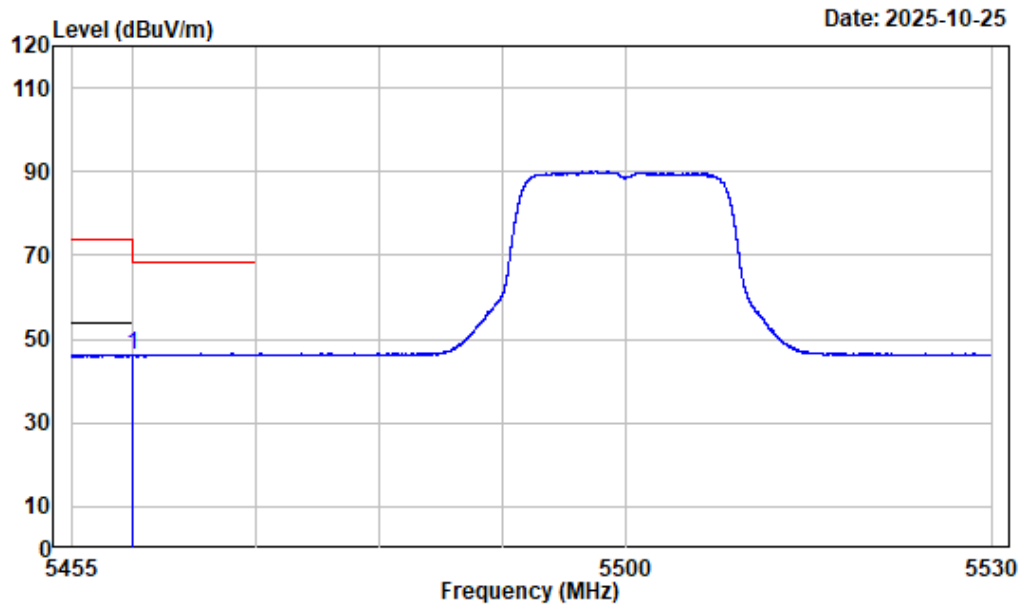

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-A_ANT1-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	8.90	37.33	46.23	54.00	-7.77	Average


Right Band edge_Horizontal_Peak_5GWiFi_Band3_A_ANT1_5700MHz

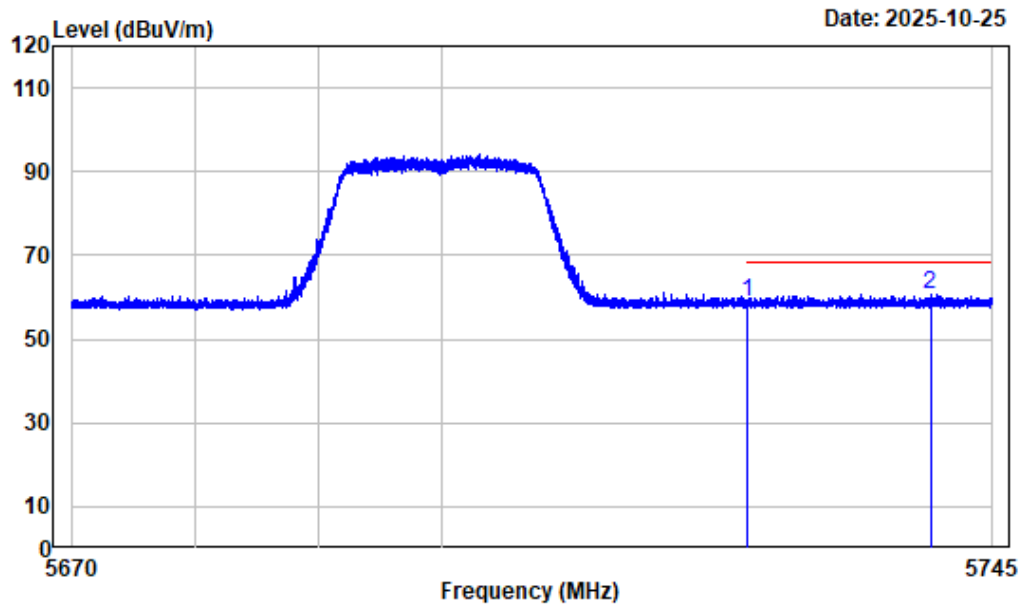

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT1-5700

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	48.99	58.67	68.20	-9.53	Peak
2	5739.909	9.88	50.82	60.70	68.20	-7.50	Peak


Right Band edge_Vertical_Peak_5GWiFi_Band3_A_ANT1_5700MHz

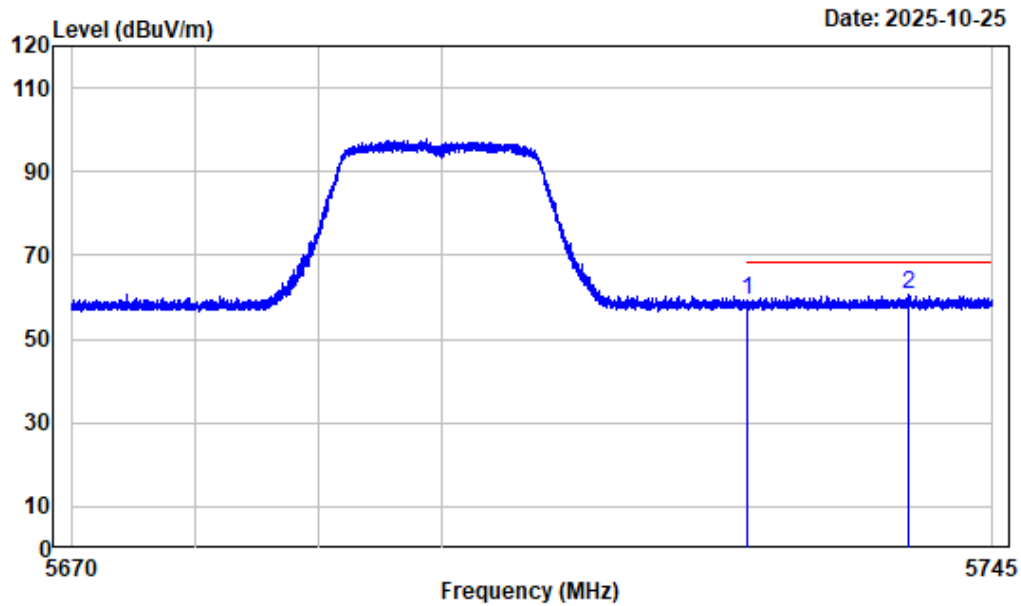

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A_ANT1-5700

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	49.45	59.13	68.20	-9.07	Peak
2	5738.053	9.84	50.86	60.70	68.20	-7.50	Peak


Left Band edge_Horizontal_Peak_5GWiFi_Band3_AC20_5500MHz

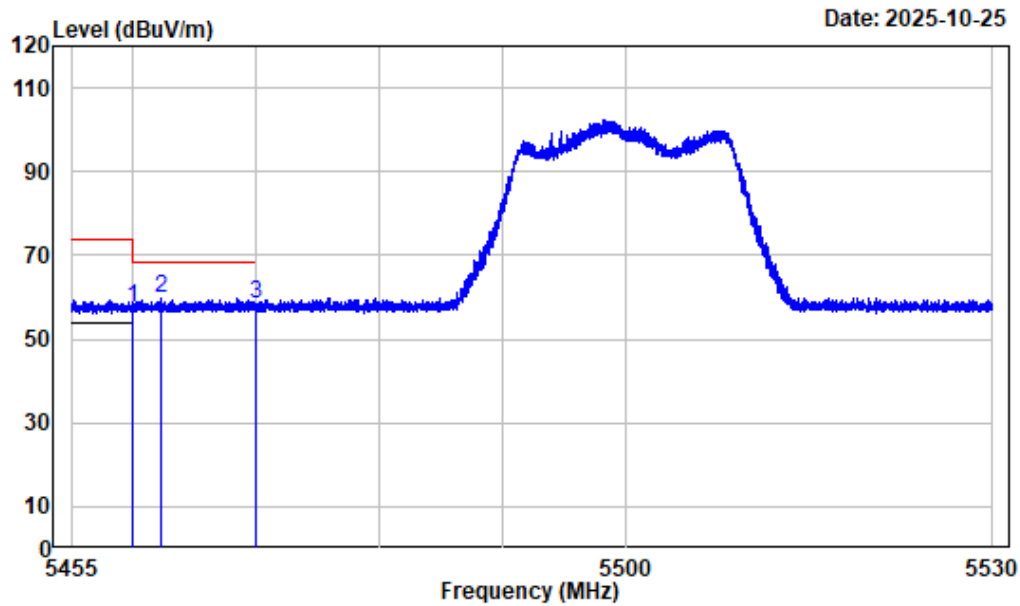

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	48.49	57.39	74.00	-16.61 Peak
2 5462.322	8.92	50.92	59.84	68.20	-8.36 Peak
3 5470.000	9.03	49.26	58.29	68.20	-9.91 Peak


Left Band edge_Horizontal_Average_5GWiFi_Band3_AC20_5500MHz

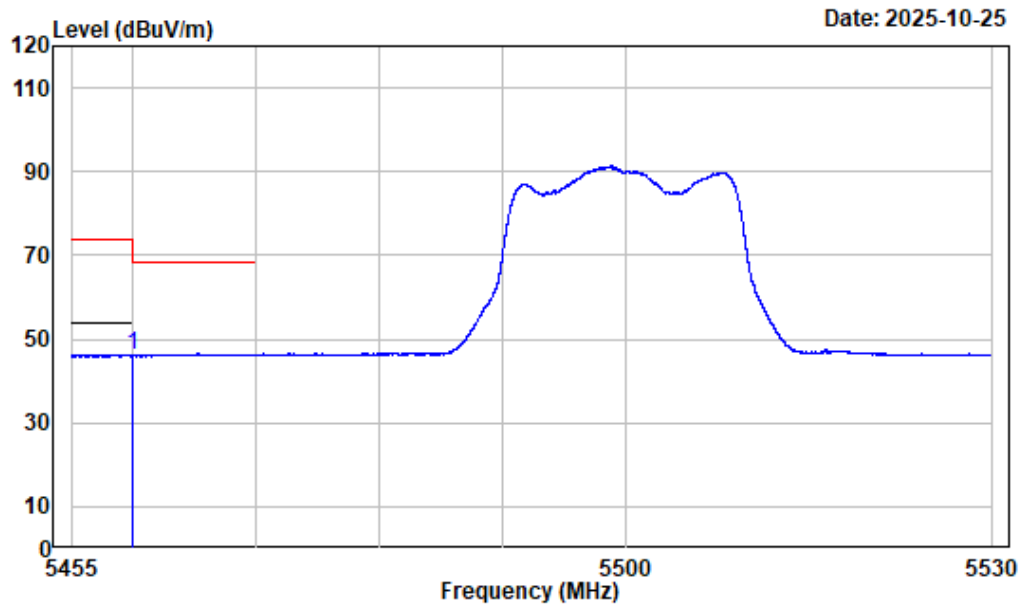

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	8.90	37.15	46.05	54.00	-7.95	Average


Left Band edge_Vertical_Peak_5GWiFi_Band3_AC20_5500MHz

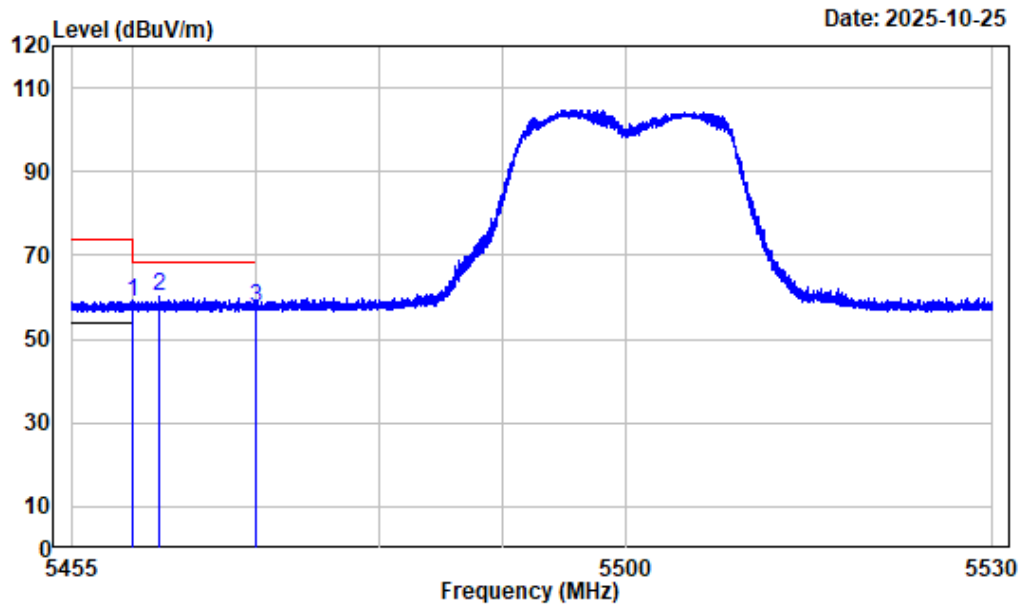

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	49.92	58.82	74.00	-15.18 Peak
2 5462.125	8.92	51.26	60.18	68.20	-8.02 Peak
3 5470.000	9.03	48.60	57.63	68.20	-10.57 Peak


Left Band edge_Vertical_Average_5GWiFi_Band3_AC20_5500MHz

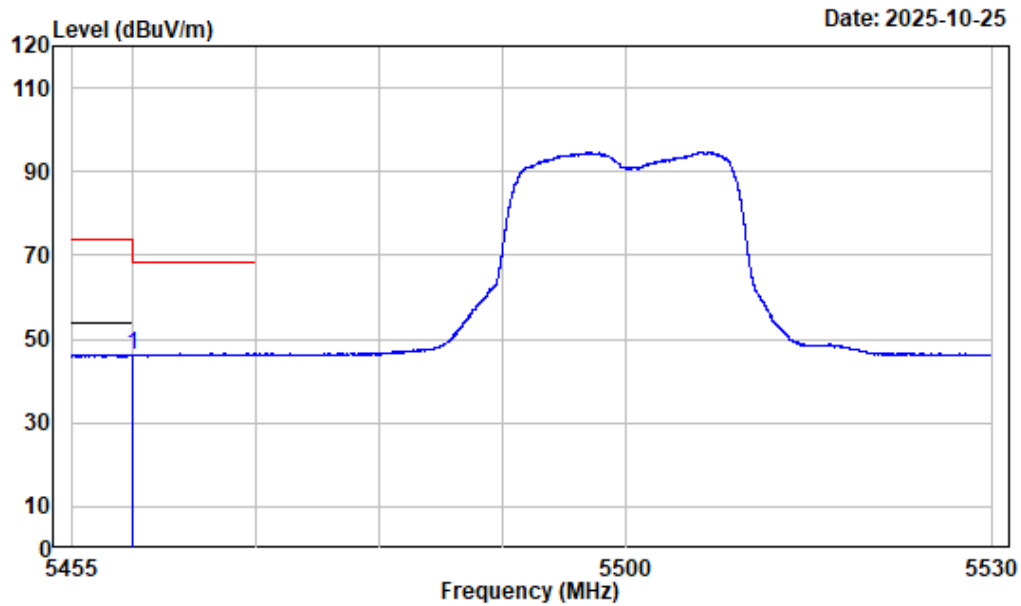

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AC20-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	8.90	37.12	46.02	54.00	-7.98	Average


Right Band edge_Horizontal_Peak_5GWiFi_Band3_AC20_5700MHz

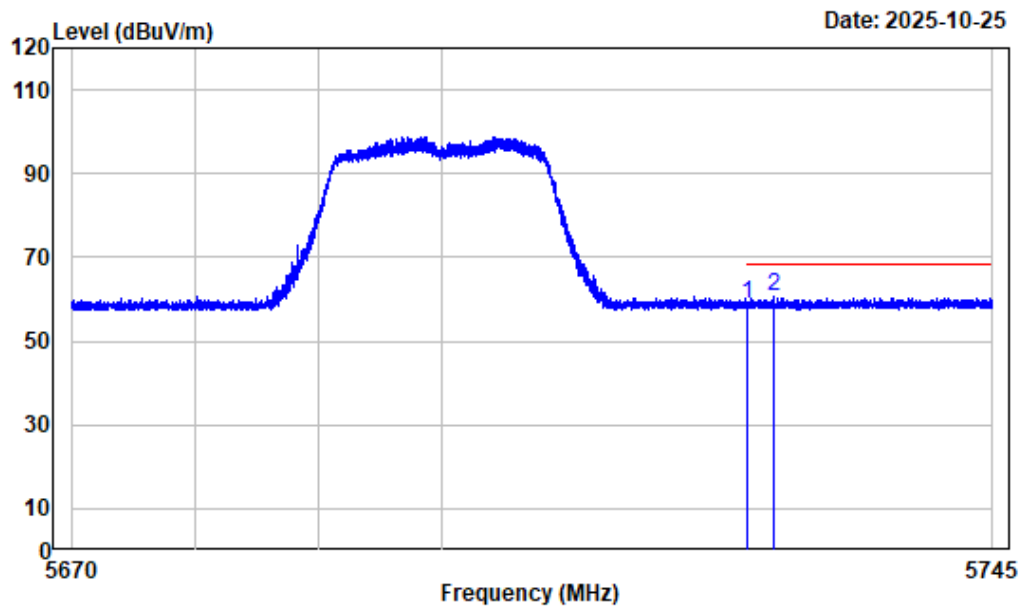

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	49.38	59.06	68.20	-9.14	Peak
2	5727.084	9.68	51.15	60.83	68.20	-7.37	Peak


Right Band edge_Vertical_Peak_5GWiFi_Band3_AC20_5700MHz

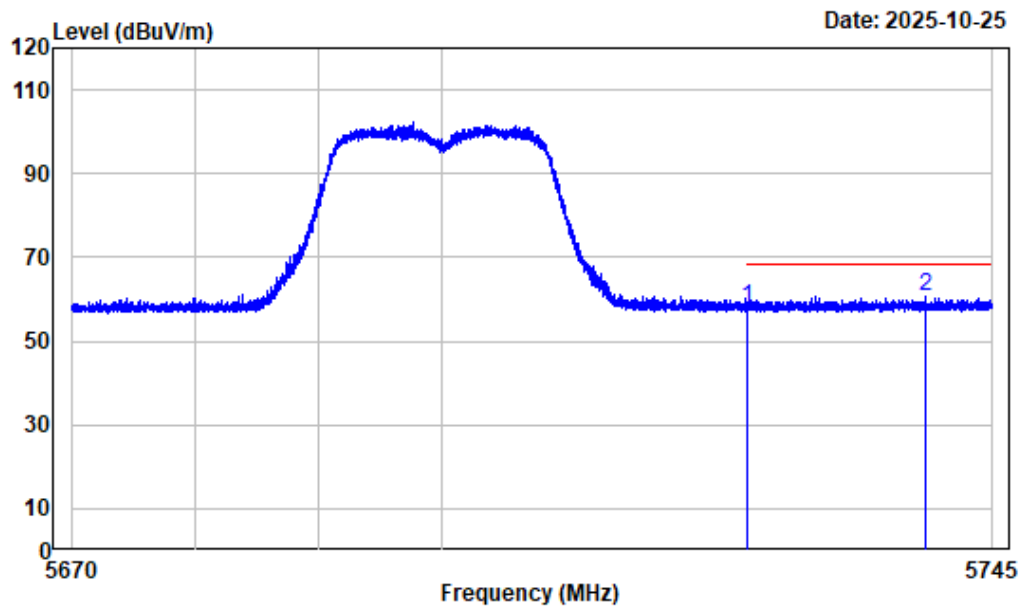

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC20-5700

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	48.32	58.00	68.20	-10.20	Peak
2	5739.478	9.87	50.66	60.53	68.20	-7.67	Peak


Left Band edge_Horizontal_Peak_5GWiFi_Band3_AC40_5510MHz

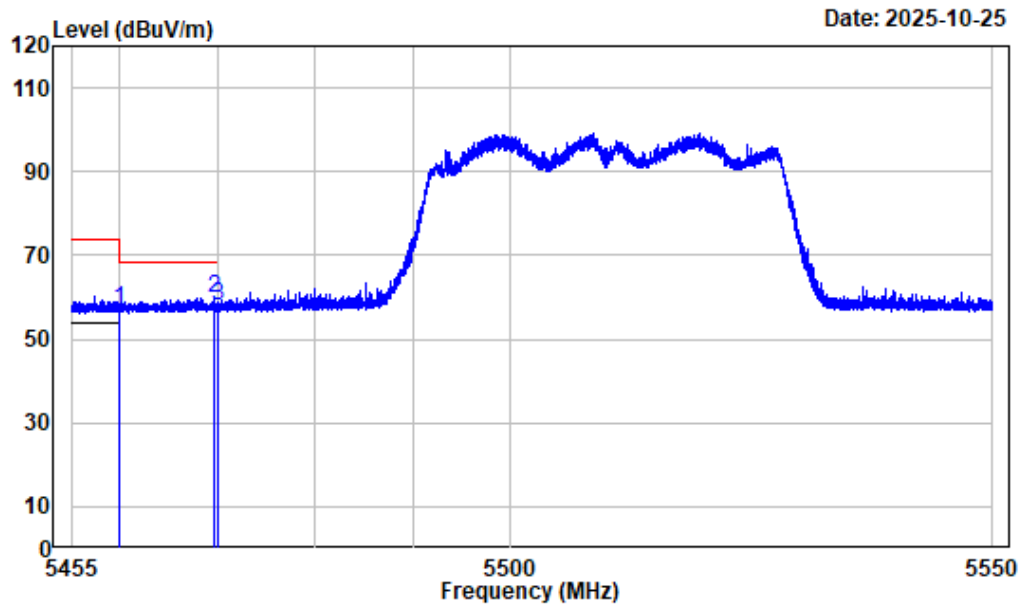

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	48.04	56.94	74.00	-17.06 Peak
2 5469.571	9.02	50.71	59.73	68.20	-8.47 Peak
3 5470.000	9.03	48.87	57.90	68.20	-10.30 Peak


Left Band edge_Horizontal_Average_5GWiFi_Band3_AC40_5510MHz

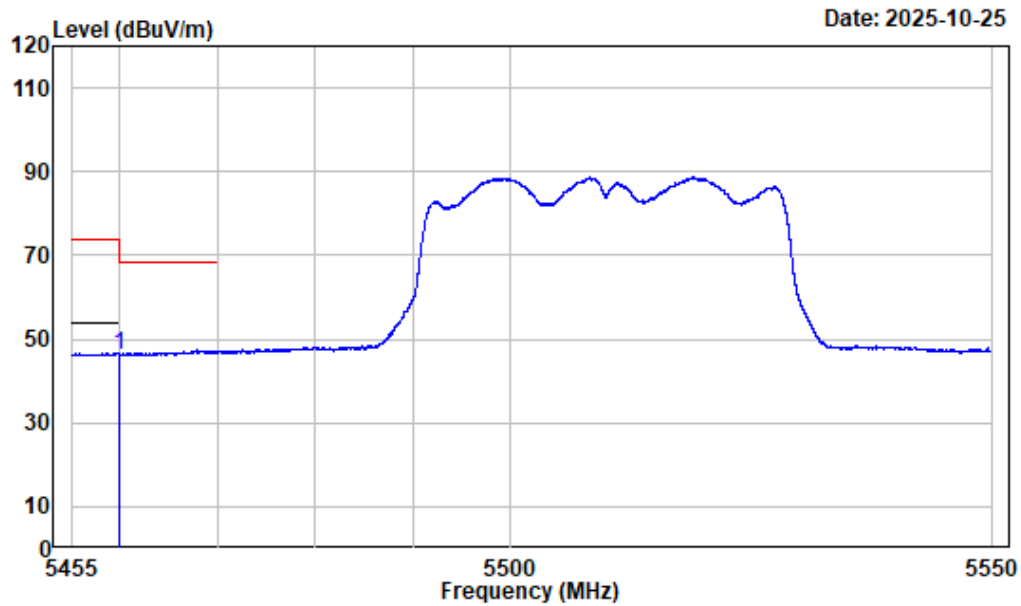

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	8.90	37.24	46.14	54.00	-7.86	Average


Left Band edge_Vertical_Peak_5GWiFi_Band3_AC40_5510MHz

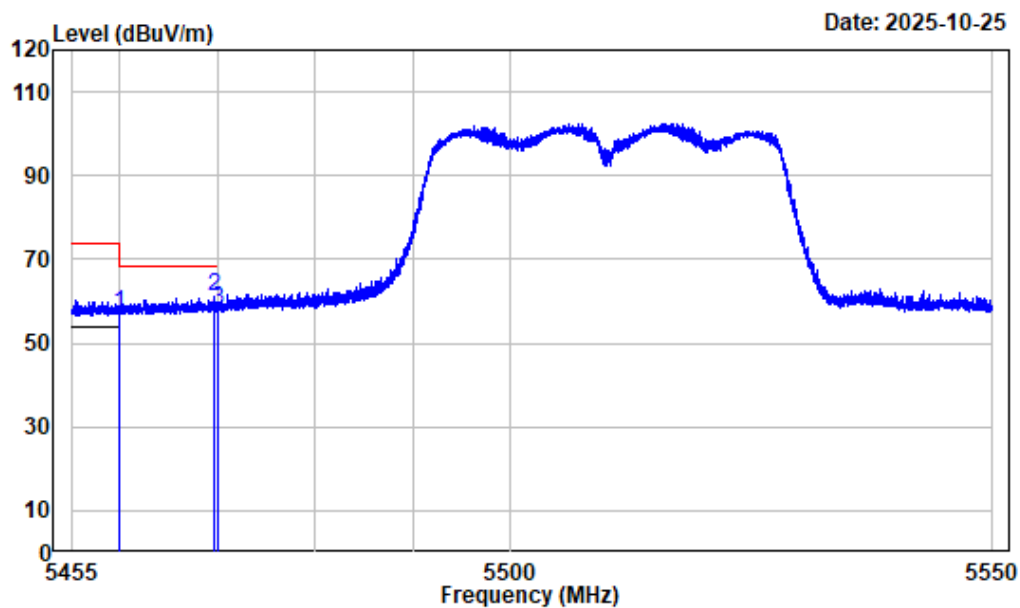

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	48.28	57.18	74.00	-16.82 Peak
2 5469.654	9.03	52.00	61.03	68.20	-7.17 Peak
3 5470.000	9.03	48.74	57.77	68.20	-10.43 Peak


Left Band edge_Vertical_Average_5GWiFi_Band3_AC40_5510MHz

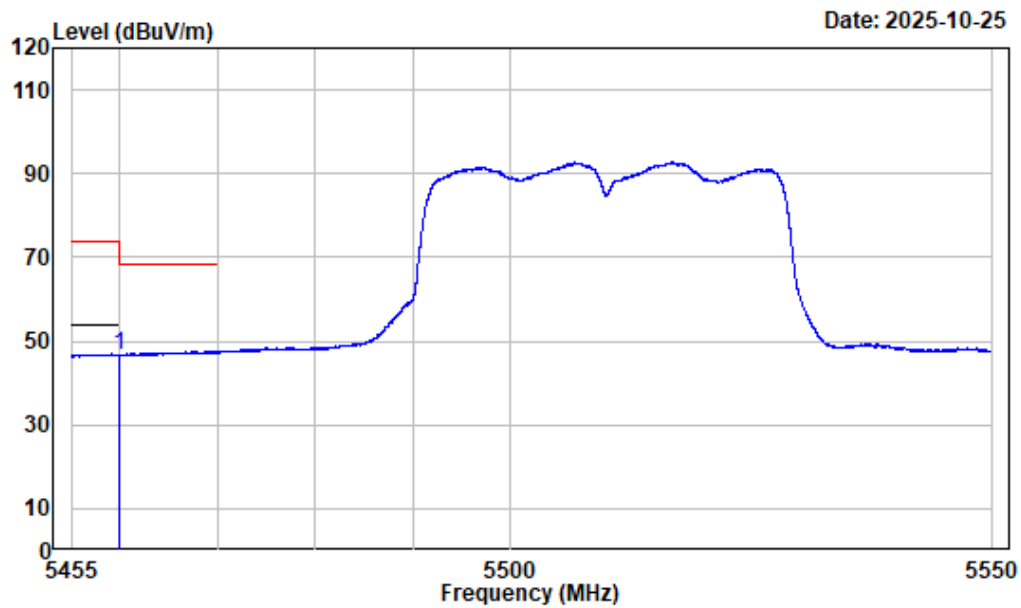

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AC40-5510

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	8.90	37.69	46.59	54.00	-7.41	Average


Right Band edge_Horizontal_Peak_5GWiFi_Band3_AC40_5670MHz

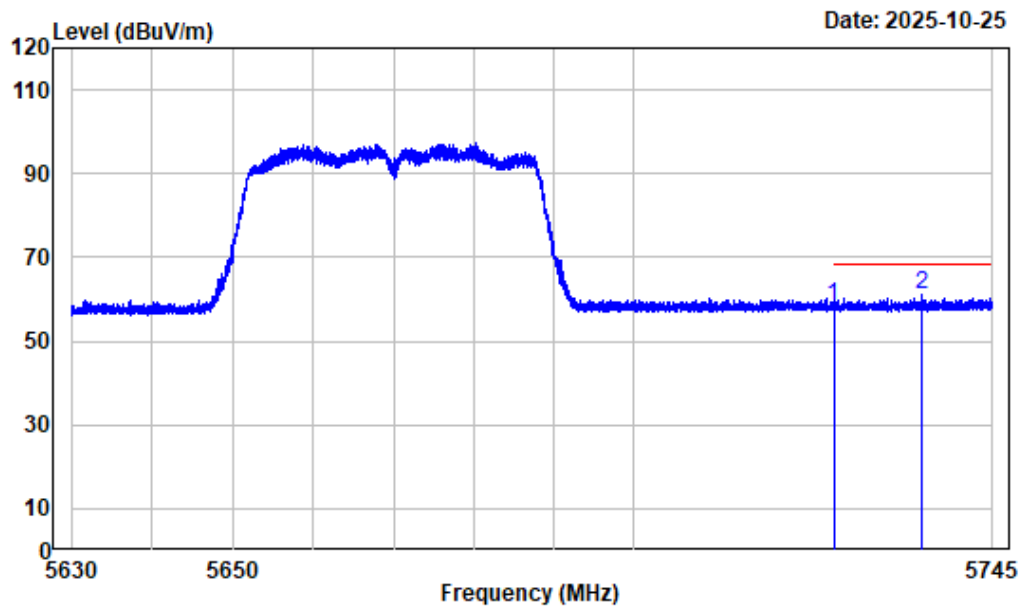

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	9.68	48.80	58.48	68.20	-9.72	Peak
2 5736.044	9.80	51.38	61.18	68.20	-7.02	Peak


Right Band edge_Vertical_Peak_5GWiFi_Band3_AC40_5670MHz

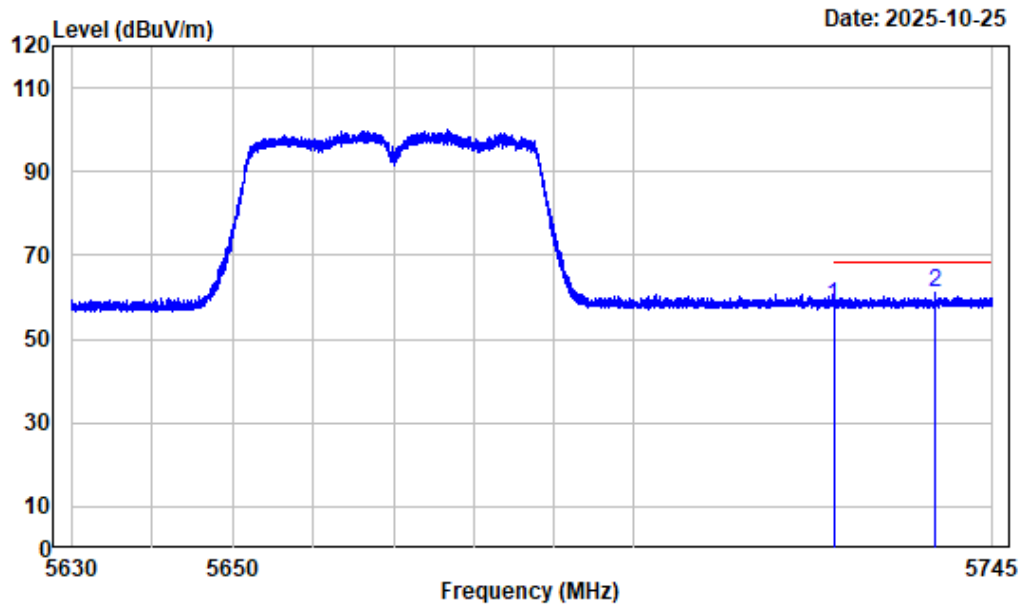

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC40-5670

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	48.30	57.98	68.20	-10.22	Peak
2	5737.755	9.84	51.28	61.12	68.20	-7.08	Peak


Left Band edge_Horizontal_Peak_5GWiFi_Band3_AC80_5530MHz

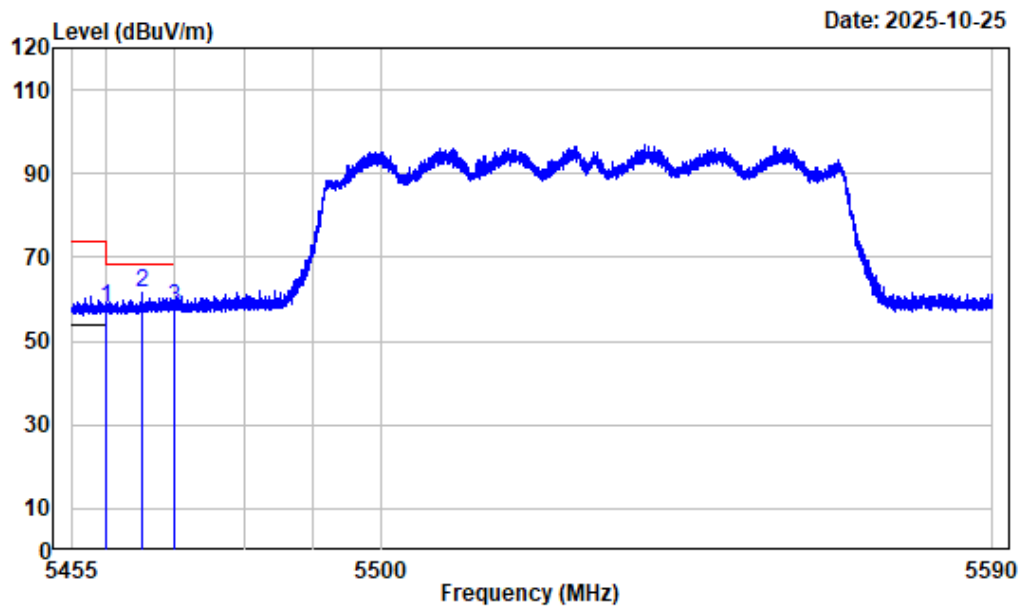

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	48.98	57.88	74.00	-16.12 Peak
2 5465.125	8.96	52.85	61.81	68.20	-6.39 Peak
3 5470.000	9.03	49.02	58.05	68.20	-10.15 Peak


Left Band edge_Horizontal_Average_5GWiFi_Band3_AC80_5530MHz

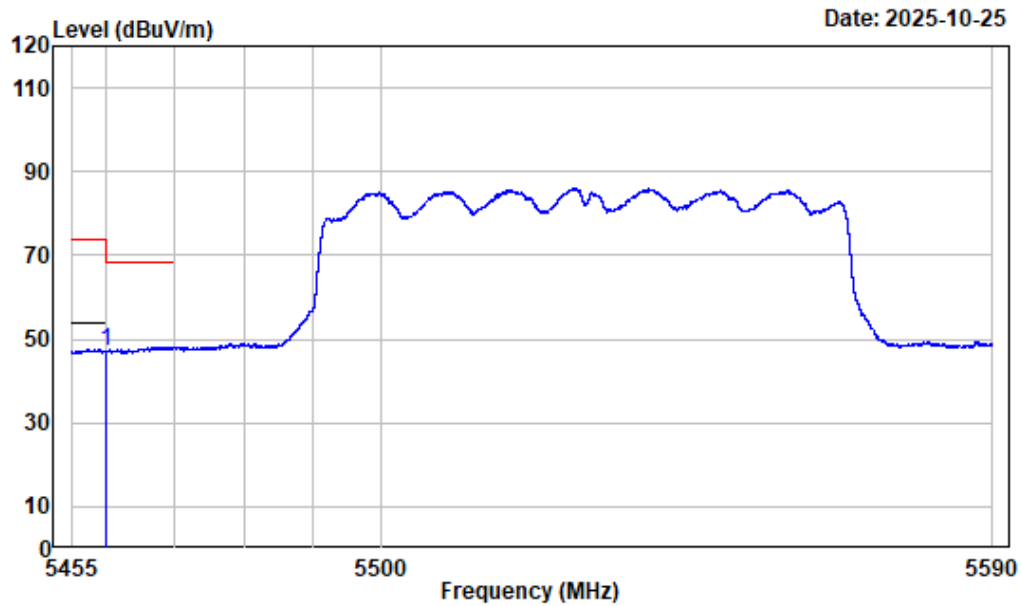

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	38.35	47.25	54.00	-6.75 Average


Left Band edge_Vertical_Peak_5GWiFi_Band3_AC80_5530MHz

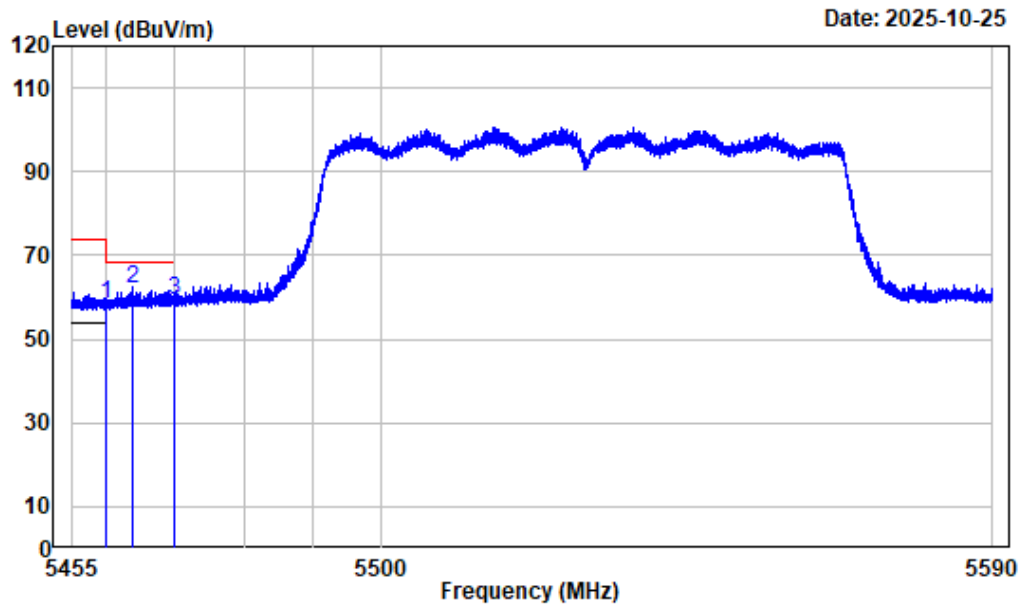

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	8.90	49.63	58.53	74.00	-15.47	Peak
2	5463.927	8.95	53.20	62.15	68.20	-6.05	Peak
3	5470.000	9.03	50.32	59.35	68.20	-8.85	Peak


Left Band edge_Vertical_Average_5GWiFi_Band3_AC80_5530MHz

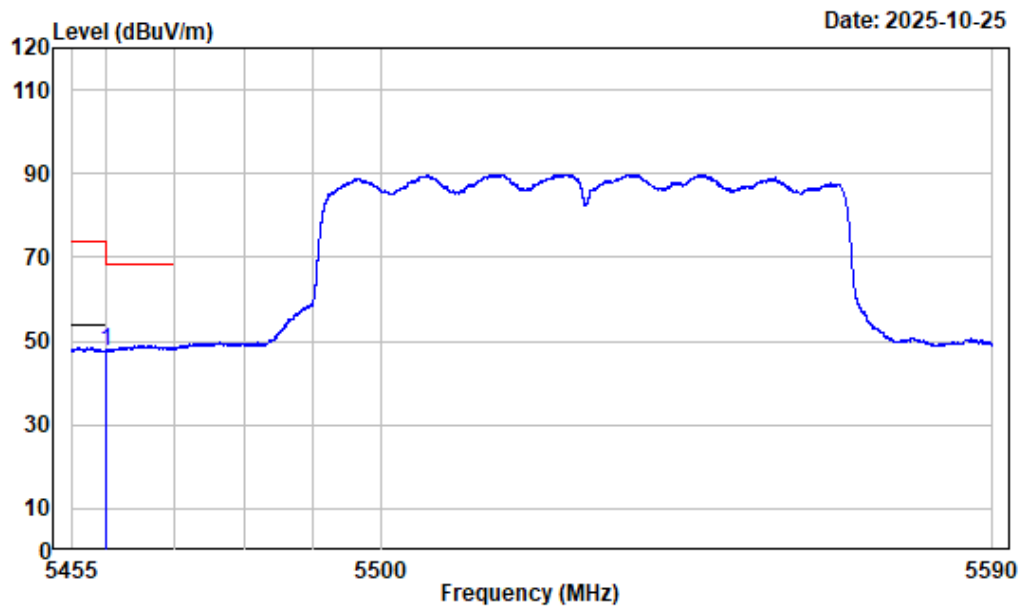

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AC80-5530

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	38.77	47.67	54.00	-6.33 Average


Right Band edge_Horizontal_Peak_5GWiFi_Band3_AC80_5610MHz

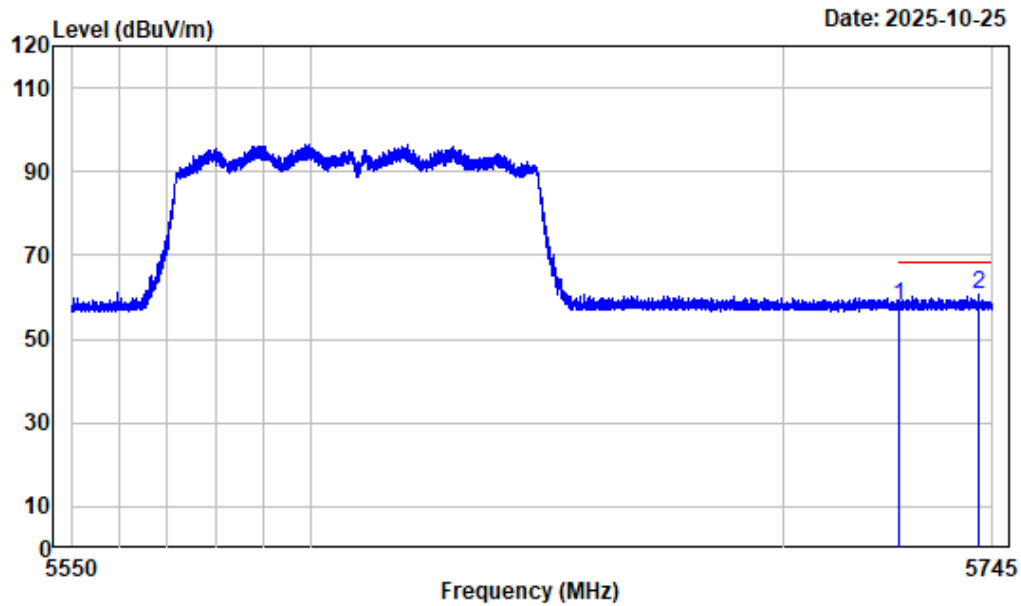

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5610

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	48.44	58.12	68.20	-10.08	Peak
2	5742.002	9.90	50.88	60.78	68.20	-7.42	Peak


Right Band edge_Vertical_Peak_5GWiFi_Band3_AC80_5610MHz

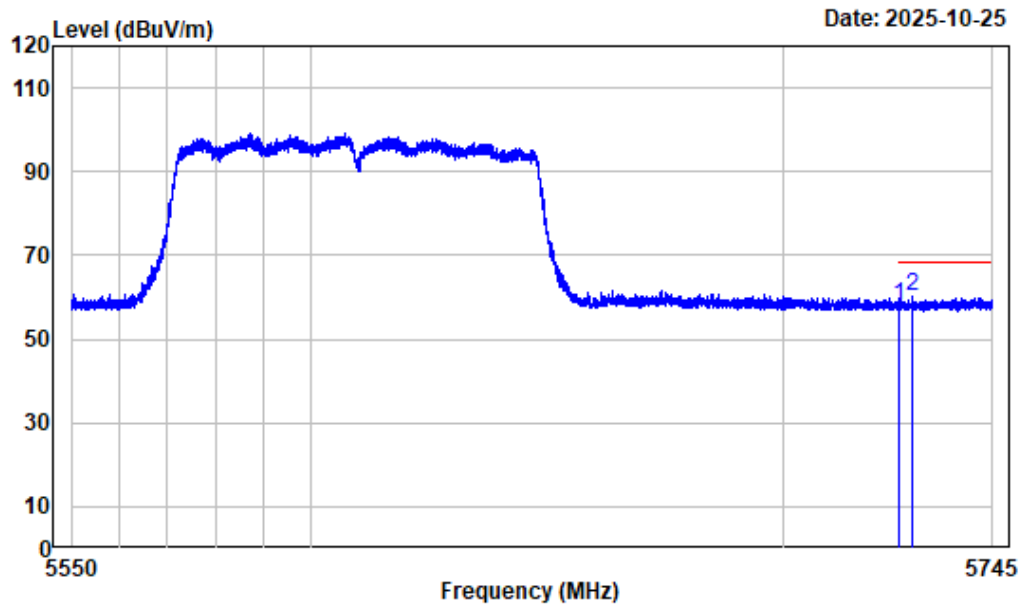

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC80-5610

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	48.21	57.89	68.20	-10.31	Peak
2	5727.645	9.68	50.35	60.03	68.20	-8.17	Peak


Left Band edge_Horizontal_Peak_5GWiFi_Band3_AC160_5570MHz

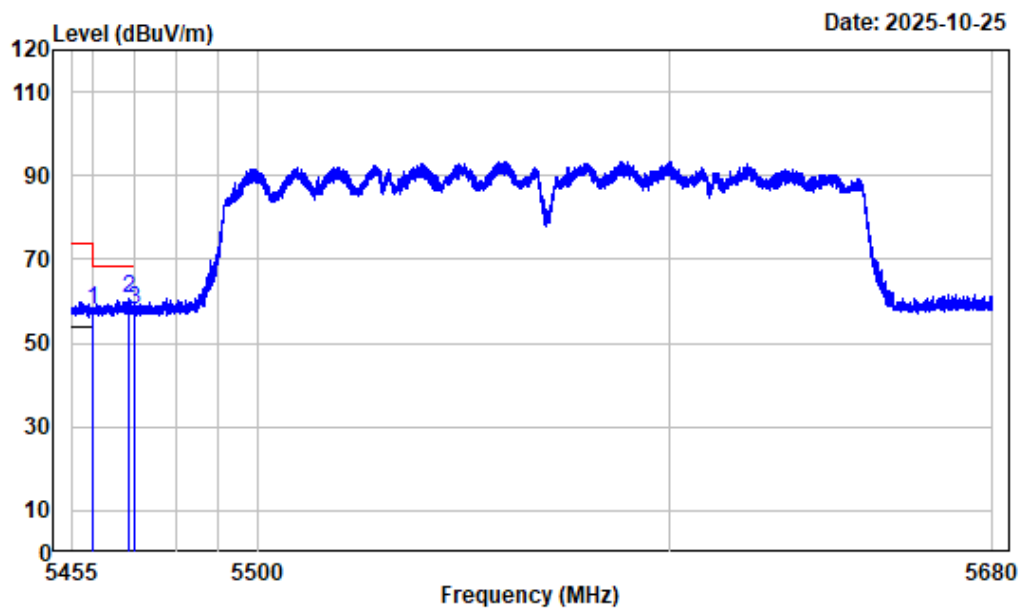

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC160-5570

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	49.05	57.95	74.00	-16.05 Peak
2 5468.810	9.01	51.57	60.58	68.20	-7.62 Peak
3 5470.000	9.03	49.02	58.05	68.20	-10.15 Peak


Left Band edge_Horizontal_Average_5GWiFi_Band3_AC160_5570MHz

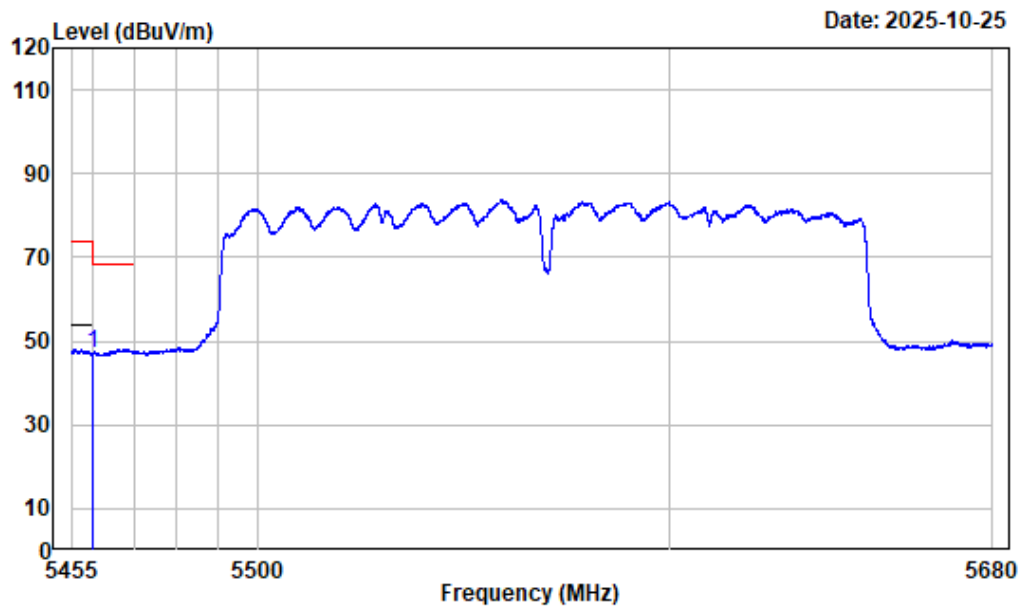

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AC160-5570

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	38.02	46.92	54.00	-7.08 Average


Left Band edge_Vertical_Peak_5GWiFi_Band3_AC160_5570MHz

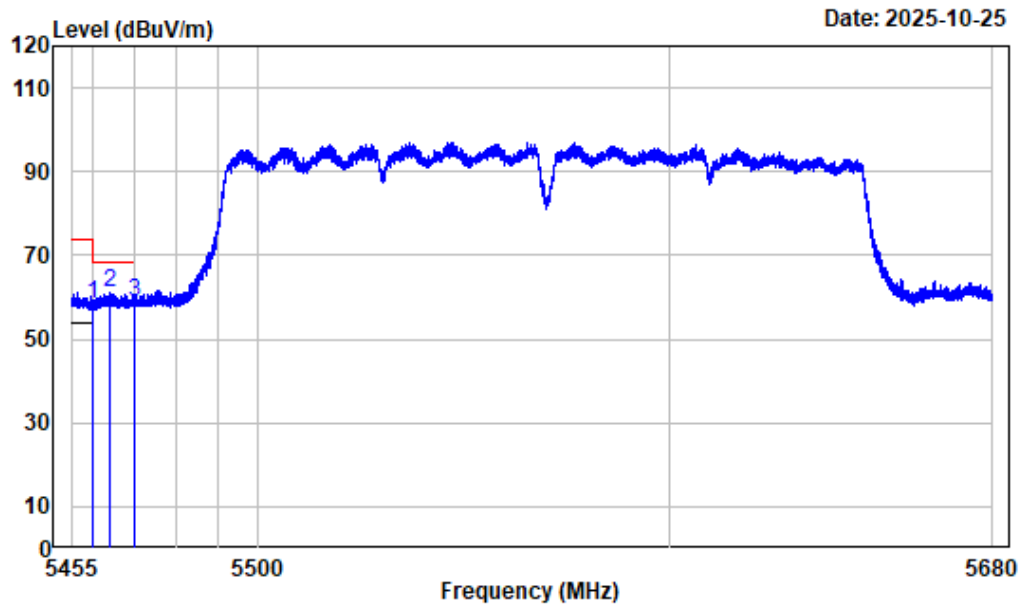

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC160-5570

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	49.64	58.54	74.00	-15.46 Peak
2 5464.422	8.95	52.07	61.02	68.20	-7.18 Peak
3 5470.000	9.03	49.90	58.93	68.20	-9.27 Peak


Left Band edge_Vertical_Average_5GWiFi_Band3_AC160_5570MHz

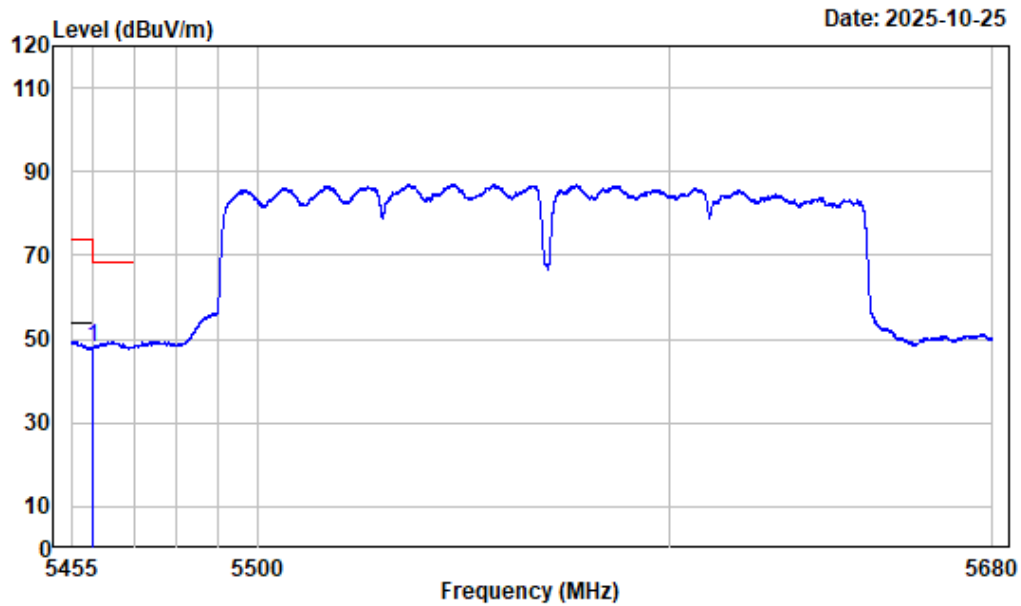

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AC160-5570

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	8.90	39.01	47.91	54.00	-6.09	Average


Right Band edge_Horizontal_Peak_5GWiFi_Band3_AC160_5570MHz

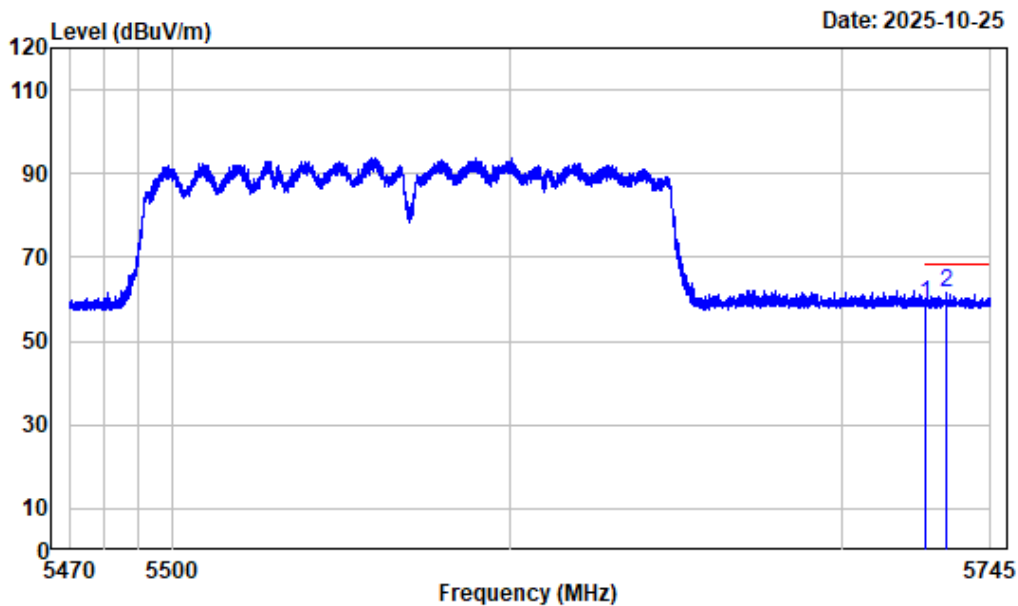

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC160-5570

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	49.22	58.90	68.20	-9.30 Peak
2	5731.731	9.69	51.78	61.47	68.20	-6.73 Peak


Right Band edge_Vertical_Peak_5GWiFi_Band3_AC160_5570MHz

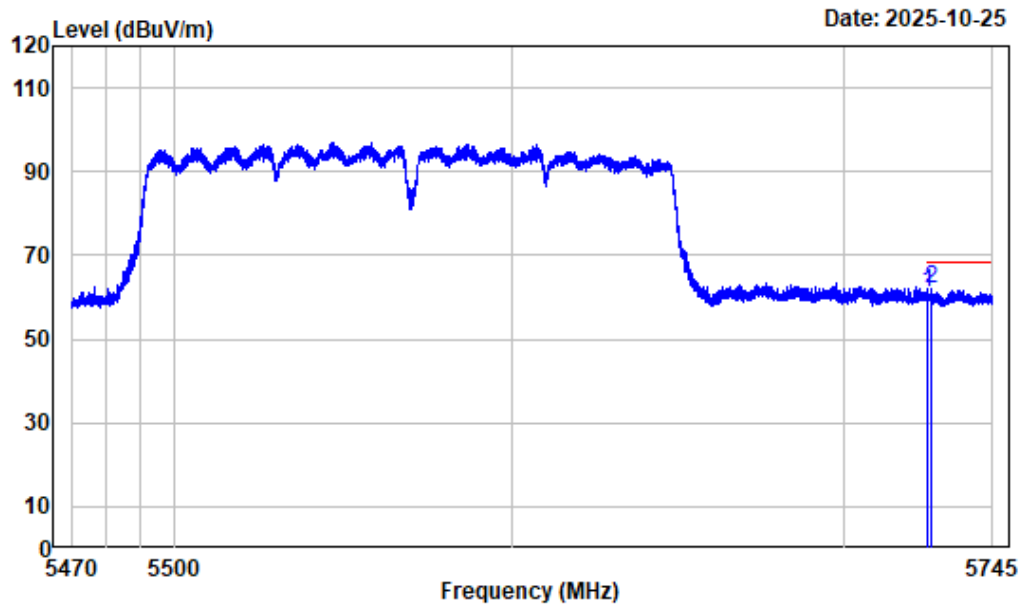

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AC160-5570

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	51.68	61.36	68.20	-6.84	Peak
2	5726.334	9.68	52.46	62.14	68.20	-6.06	Peak


Left Band edge_Horizontal_Peak_5GWiFi_Band3_AX20_5500MHz

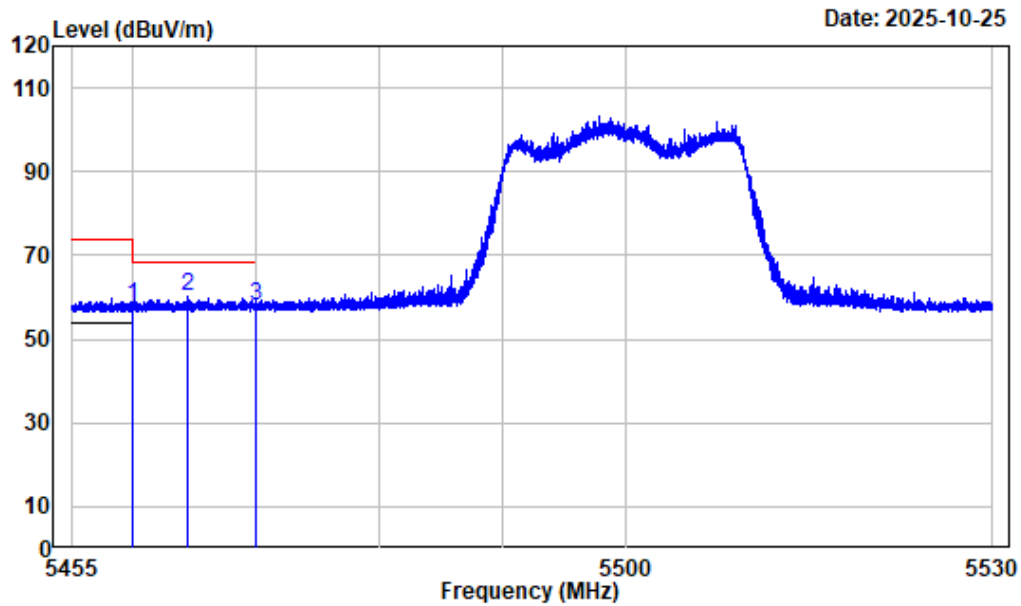

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	48.91	57.81	74.00	-16.19 Peak
2 5464.431	8.95	51.15	60.10	68.20	-8.10 Peak
3 5470.000	9.03	49.03	58.06	68.20	-10.14 Peak


Left Band edge_Horizontal_Average_5GWiFi_Band3_AX20_5500MHz

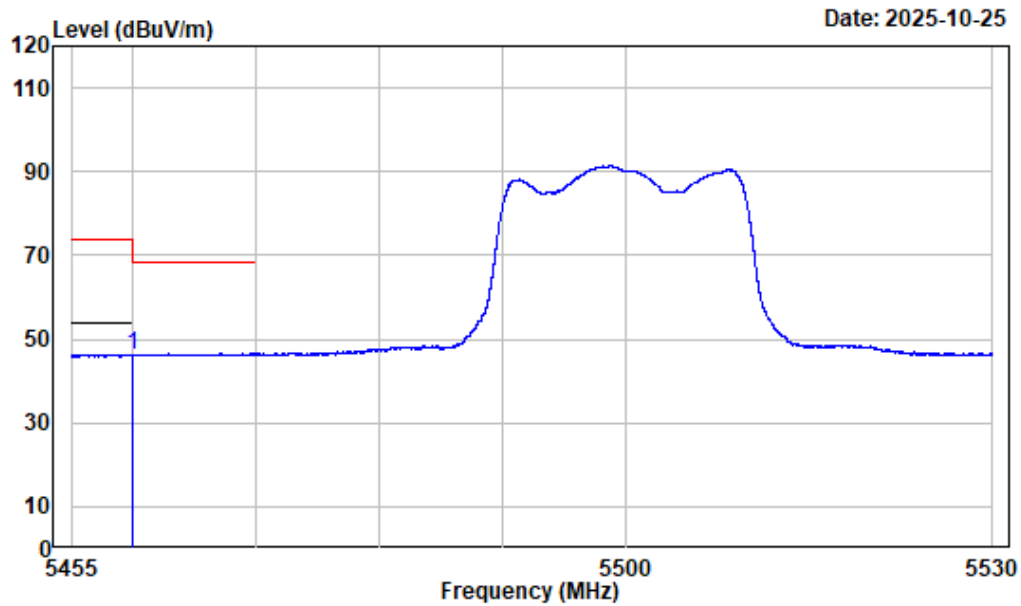

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	8.90	37.34	46.24	54.00	-7.76	Average


Left Band edge_Vertical_Peak_5GWiFi_Band3_AX20_5500MHz

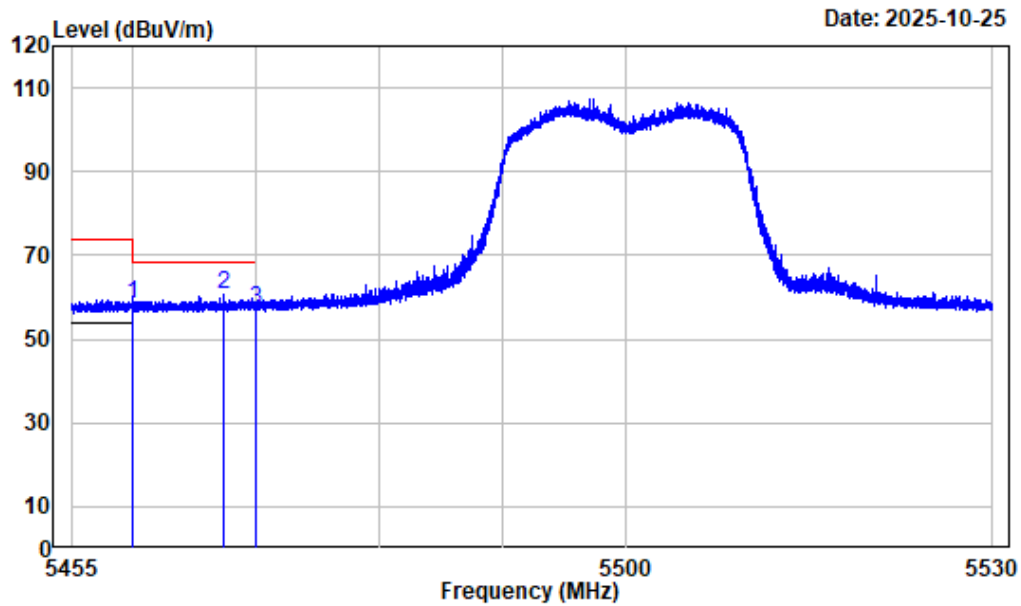

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	49.51	58.41	74.00	-15.59 Peak
2 5467.281	9.00	51.48	60.48	68.20	-7.72 Peak
3 5470.000	9.03	47.94	56.97	68.20	-11.23 Peak


Left Band edge_Vertical_Average_5GWiFi_Band3_AX20_5500MHz

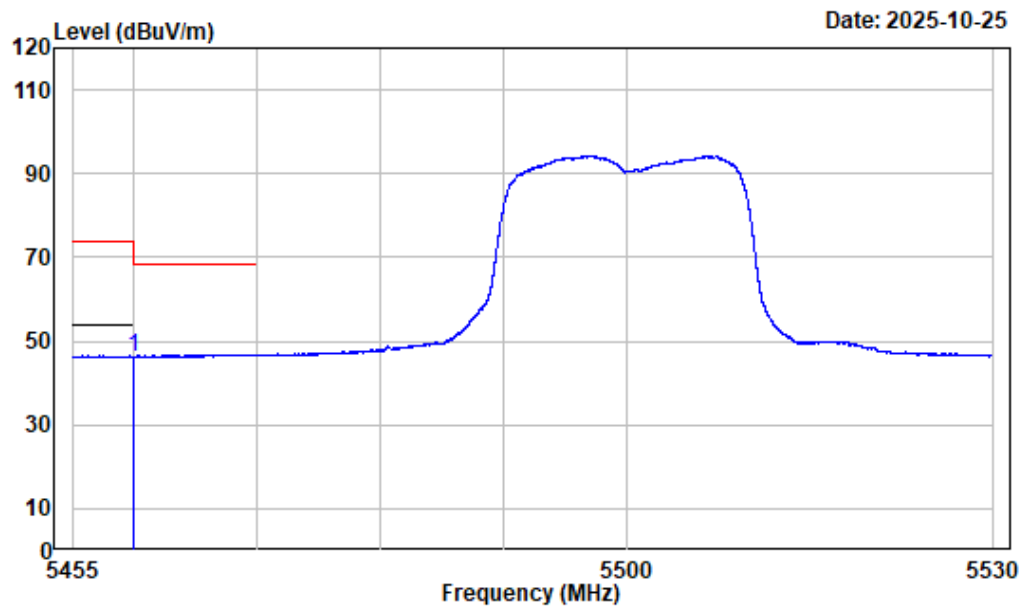

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AX20-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	8.90	37.40	46.30	54.00	-7.70	Average


Right Band edge_Horizontal_Peak_5GWiFi_Band3_AX20_5700MHz

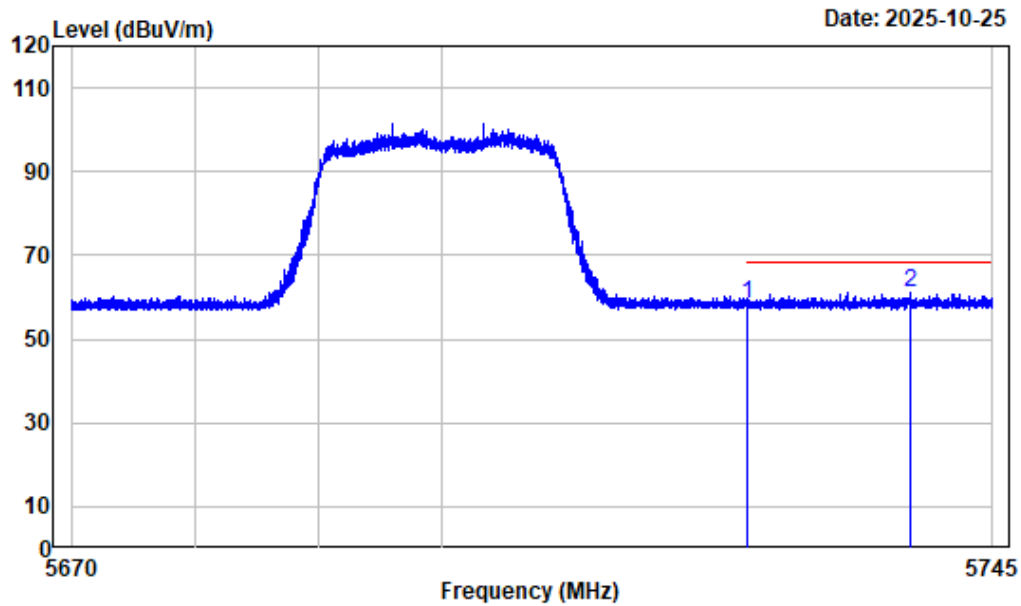

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5700

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	48.93	58.61	68.20	-9.59	Peak
2	5738.315	9.85	51.15	61.00	68.20	-7.20	Peak


Right Band edge_Vertical_Peak_5GWiFi_Band3_AX20_5700MHz

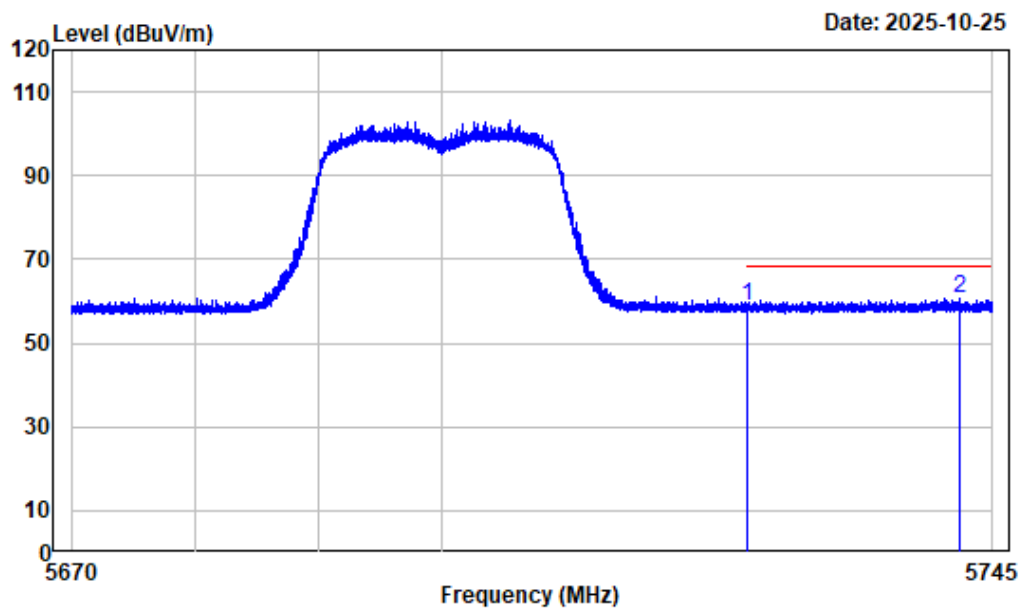

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX20-5700

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	49.36	59.04	68.20	-9.16	Peak
2	5742.253	9.91	50.88	60.79	68.20	-7.41	Peak


Left Band edge_Horizontal_Peak_5GWiFi_Band3_AX40_5510MHz

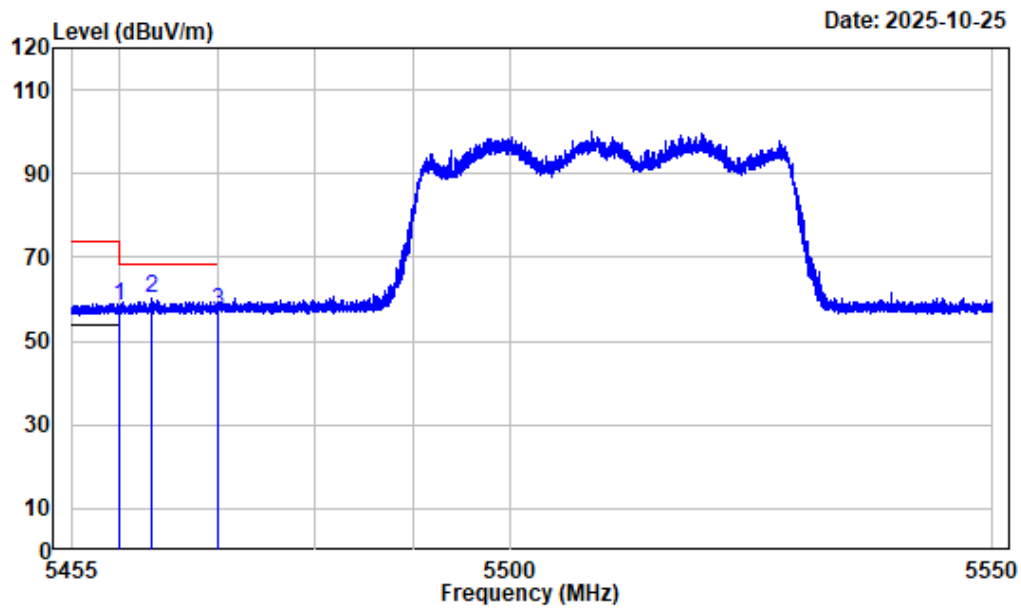

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	49.34	58.24	74.00	-15.76 Peak
2 5463.217	8.94	51.48	60.42	68.20	-7.78 Peak
3 5470.000	9.03	48.09	57.12	68.20	-11.08 Peak


Left Band edge_Horizontal_Average_5GWiFi_Band3_AX40_5510MHz

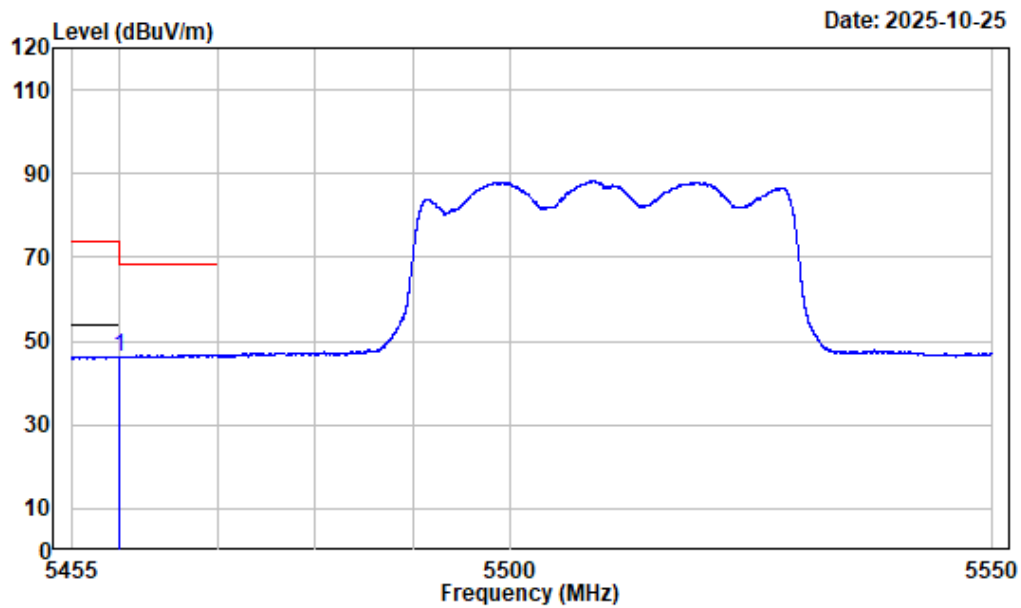

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	8.90	37.40	46.30	54.00	-7.70	Average


Left Band edge_Vertical_Peak_5GWiFi_Band3_AX40_5510MHz

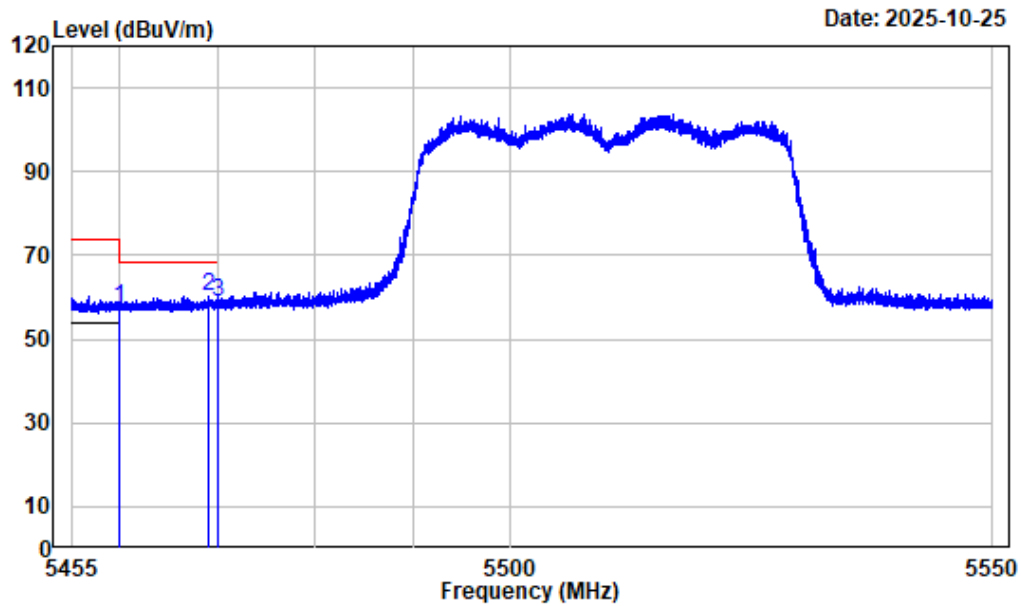

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5510

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	48.57	57.47	74.00	-16.53 Peak
2 5469.072	9.01	51.12	60.13	68.20	-8.07 Peak
3 5470.000	9.03	49.66	58.69	68.20	-9.51 Peak


Left Band edge_Vertical_Average_5GWiFi_Band3_AX40_5510MHz

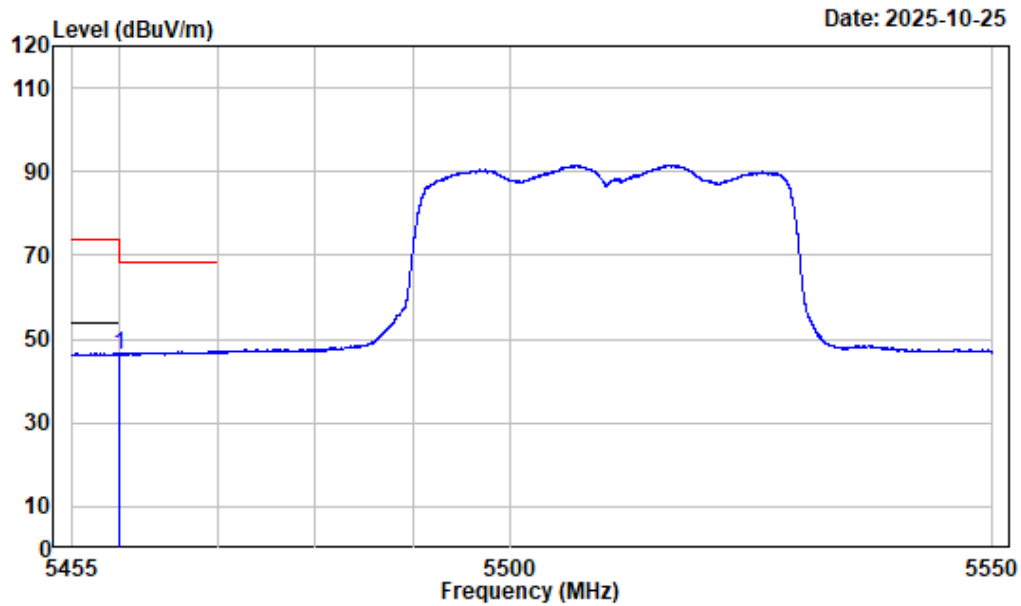

Condition : Vertical
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
 Note : 5GWiFi-Band3-AX40-5510

Freq Factor		Read	Limit	Over	Remark
Level	Level	Line	Limit	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	37.46	46.36	54.00	-7.64 Average


Right Band edge_Horizontal_Peak_5GWiFi_Band3_AX40_5670MHz

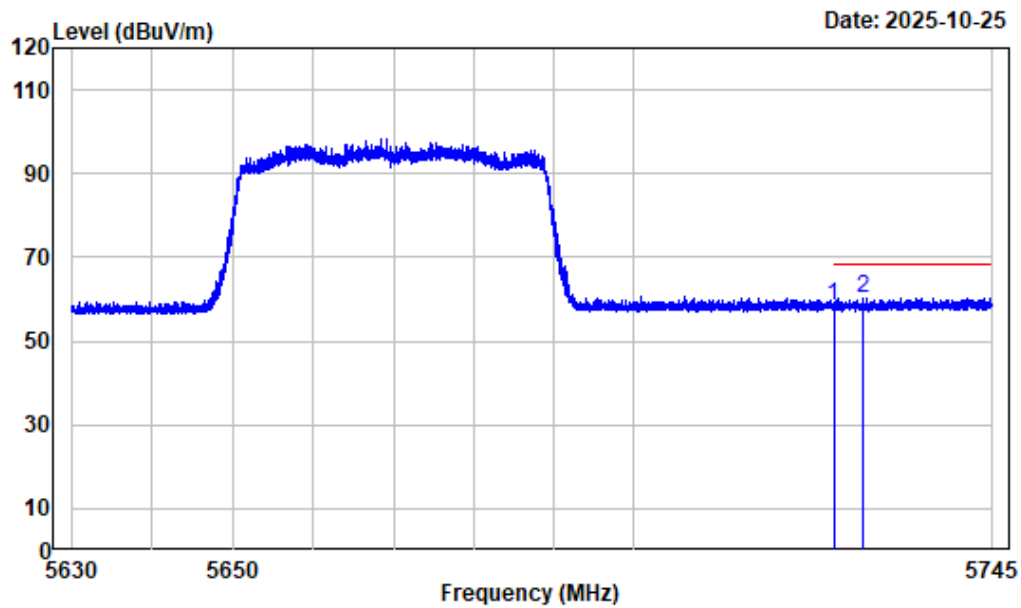

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5670

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	48.61	58.29	68.20	-9.91	Peak
2	5728.627	9.67	50.68	60.35	68.20	-7.85	Peak


Right Band edge_Vertical_Peak_5GWiFi_Band3_AX40_5670MHz

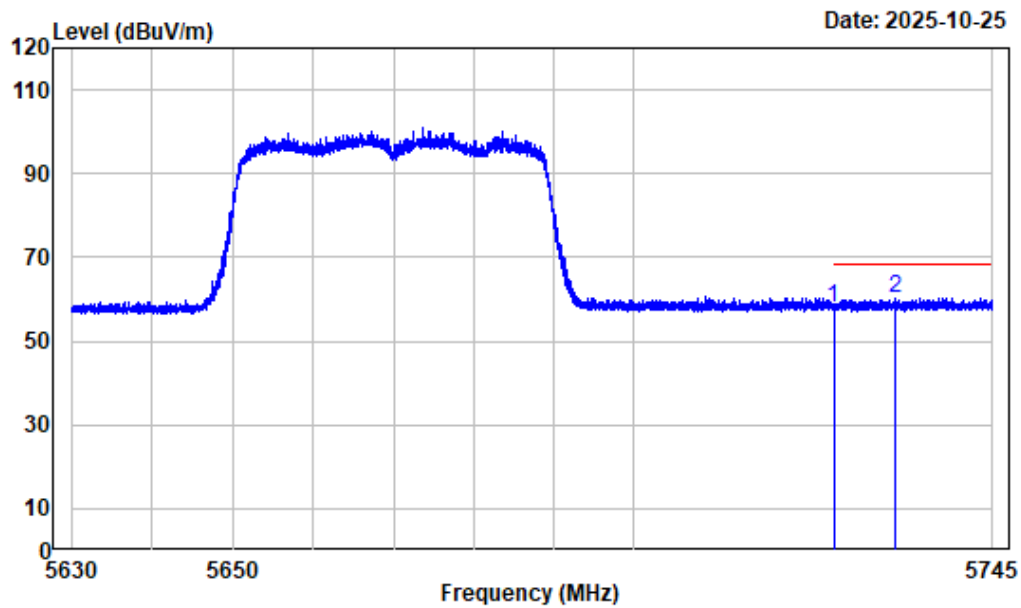

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX40-5670

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	48.24	57.92	68.20	-10.28	Peak
2	5732.652	9.72	50.51	60.23	68.20	-7.97	Peak


Left Band edge_Horizontal_Peak_5GWiFi_Band3_AX80_5530MHz

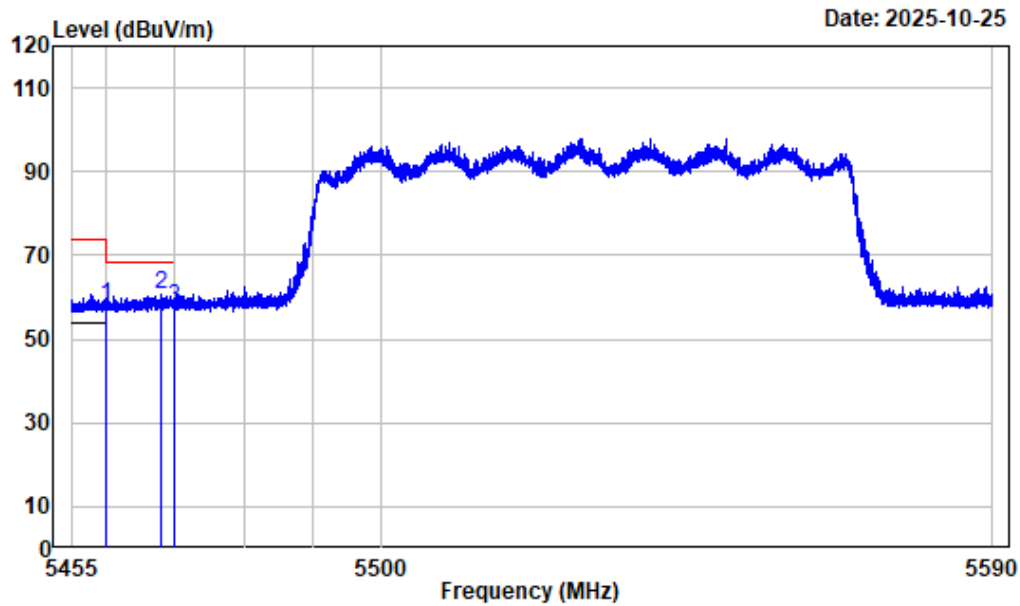

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	49.12	58.02	74.00	-15.98 Peak
2 5467.926	9.00	51.68	60.68	68.20	-7.52 Peak
3 5470.000	9.03	48.33	57.36	68.20	-10.84 Peak


Left Band edge_Horizontal_Average_5GWiFi_Band3_AX80_5530MHz

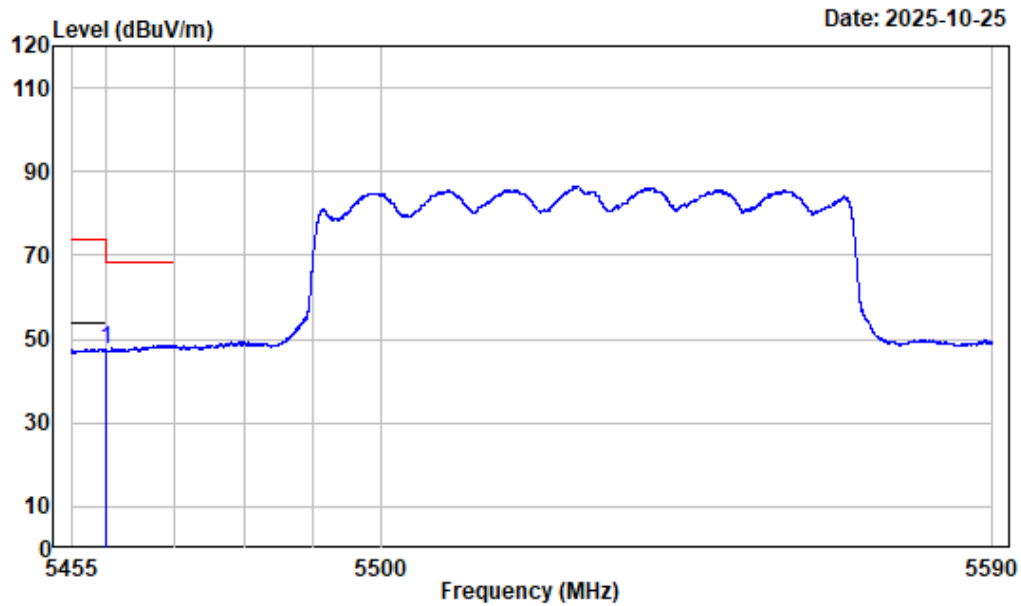

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	38.50	47.40	54.00	-6.60 Average


Left Band edge_Vertical_Peak_5GWiFi_Band3_AX80_5530MHz

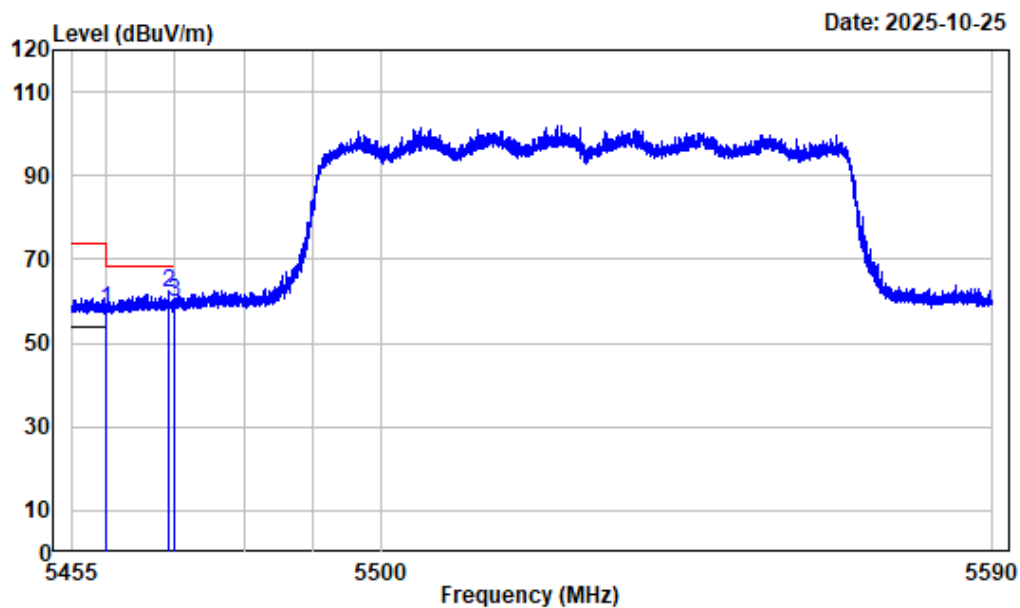

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	49.00	57.90	74.00	-16.10 Peak
2 5469.158	9.01	53.17	62.18	68.20	-6.02 Peak
3 5470.000	9.03	50.63	59.66	68.20	-8.54 Peak


Left Band edge_Vertical_Average_5GWiFi_Band3_AX80_5530MHz

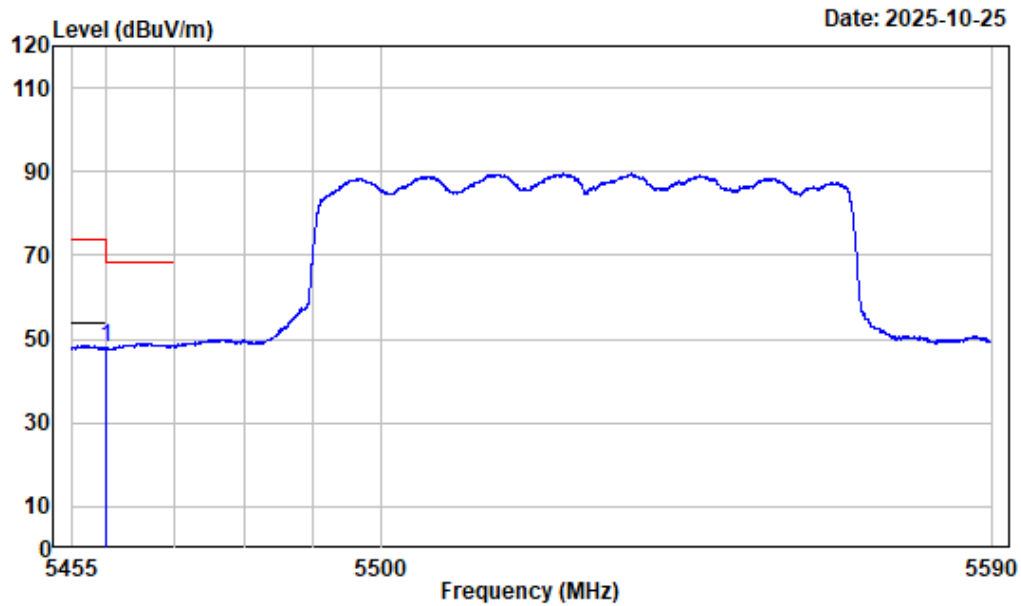

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AX80-5530

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	38.91	47.81	54.00	-6.19 Average


Right Band edge_Horizontal_Peak_5GWiFi_Band3_AX80_5610MHz

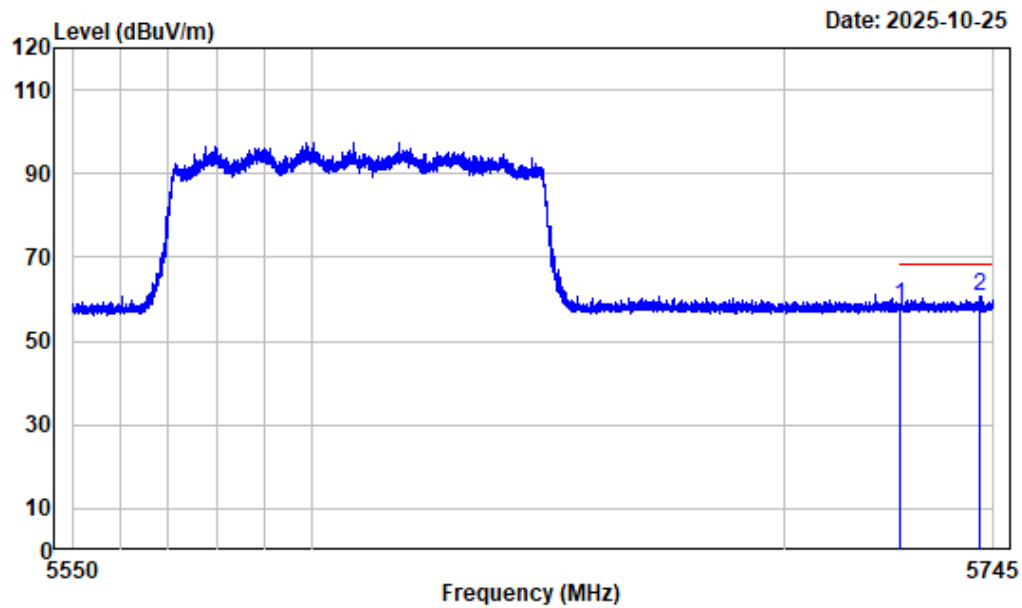

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5610

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	48.83	58.51	68.20	-9.69 Peak
2	5741.978	9.90	50.68	60.58	68.20	-7.62 Peak


Right Band edge_Vertical_Peak_5GWiFi_Band3_AX80_5610MHz

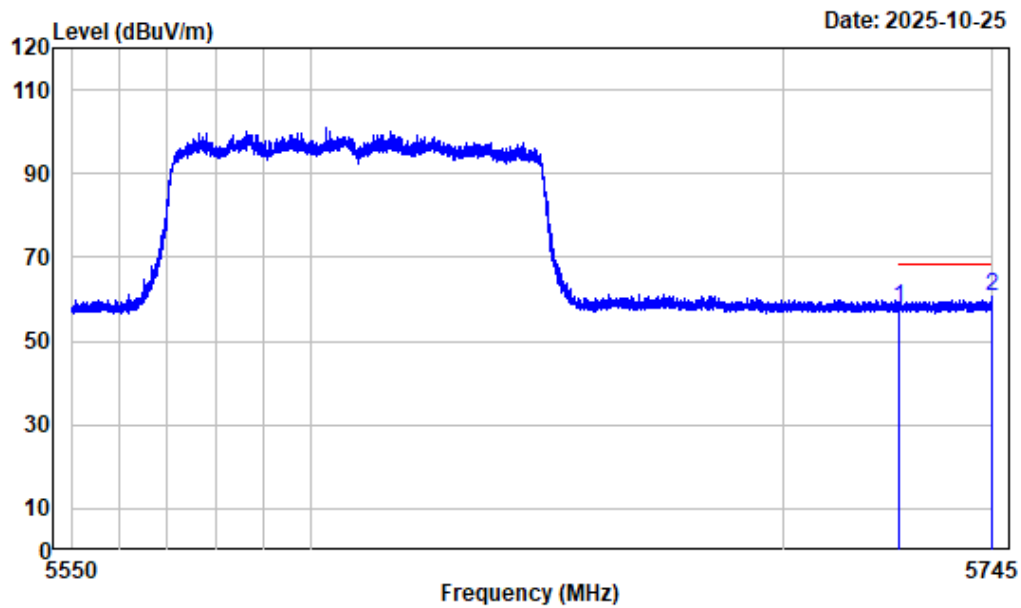

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX80-5610

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5725.000	9.68	48.39	58.07	68.20	-10.13 Peak
2	5744.756	9.94	50.52	60.46	68.20	-7.74 Peak


Left Band edge_Horizontal_Peak_5GWiFi_Band3_AX160_5570MHz

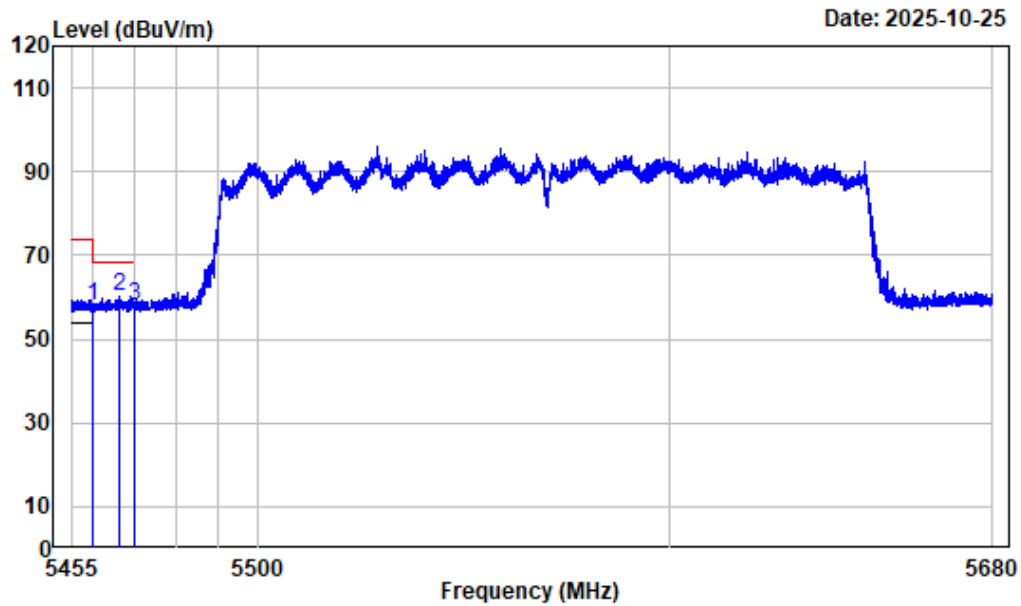

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX160-5570

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	8.90	49.05	57.95	74.00	-16.05	Peak
2	5466.362	8.98	51.21	60.19	68.20	-8.01	Peak
3	5470.000	9.03	48.79	57.82	68.20	-10.38	Peak


Left Band edge_Horizontal_Average_5GWiFi_Band3_AX160_5570MHz

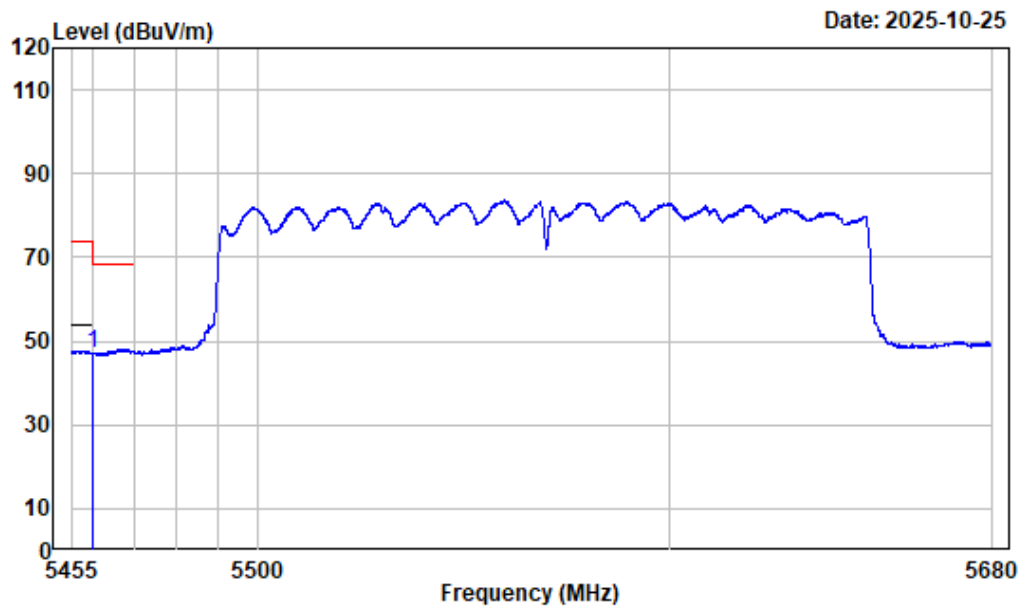

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AX160-5570

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	8.90	38.01	46.91	54.00	-7.09	Average


Left Band edge_Vertical_Peak_5GWiFi_Band3_AX160_5570MHz

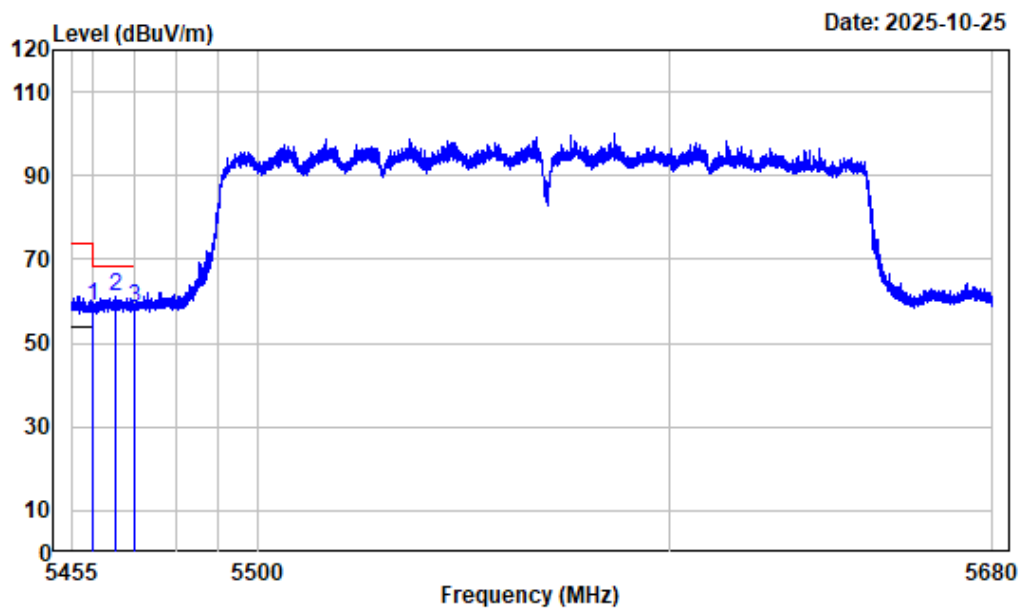

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX160-5570

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	8.90	49.83	58.73	74.00	-15.27 Peak
2 5465.406	8.96	52.13	61.09	68.20	-7.11 Peak
3 5470.000	9.03	49.19	58.22	68.20	-9.98 Peak


Left Band edge_ Vertical _ Average _5GWiFi_Band3_AX160_5570MHz

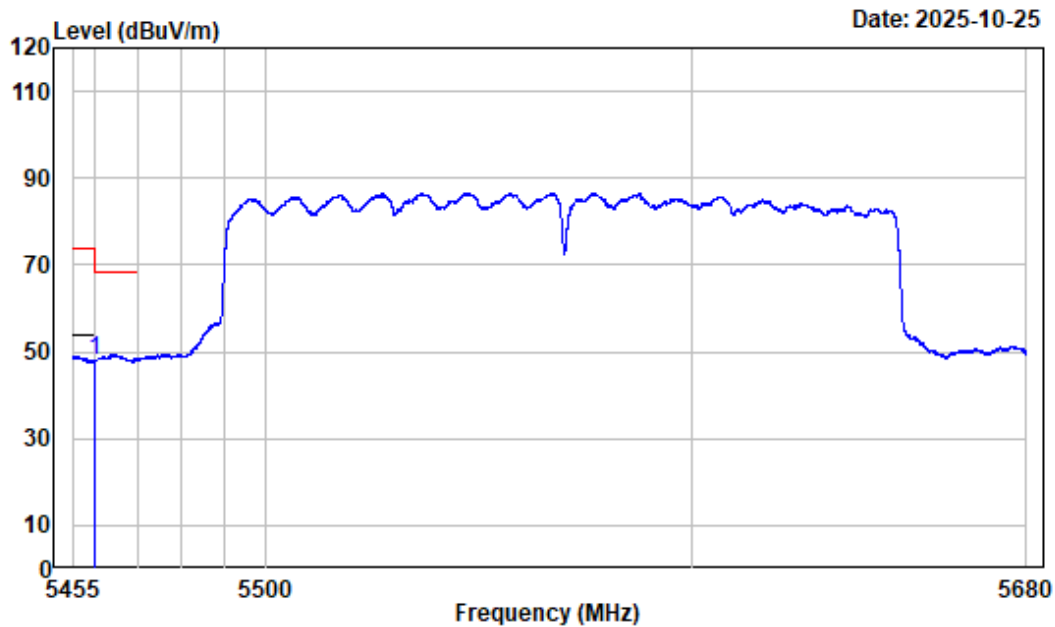

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading:RBW:1MHz VBW:10Hz Detector:Peak
Note : 5GWiFi-Band3-AX160-5570

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	8.90	39.07	47.97	54.00	-6.03	Average


Right Band edge_Horizontal_Peak_5GWiFi_Band3_AX160_5570MHz

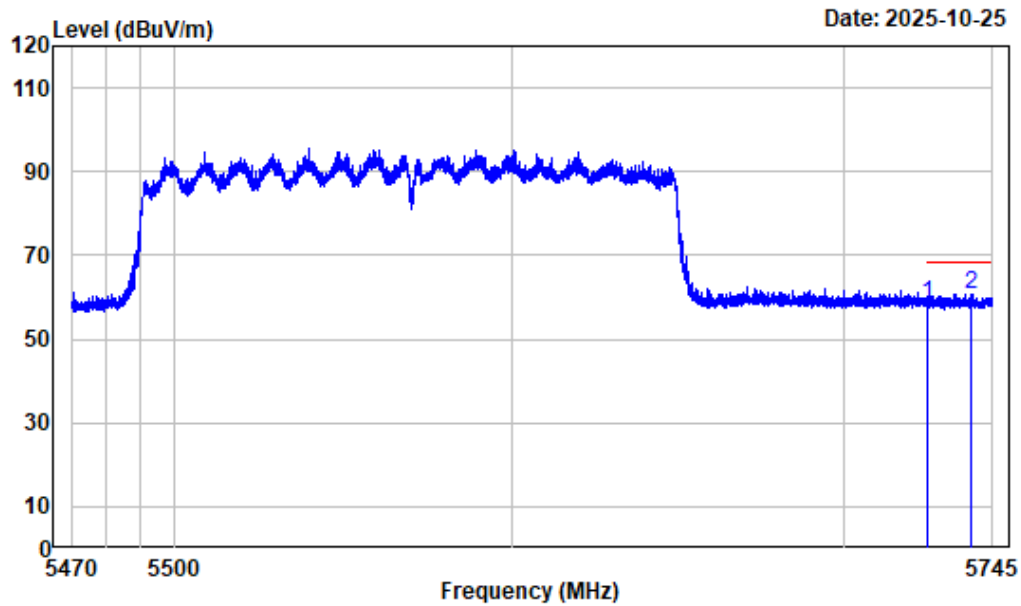

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX160-5570

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	48.61	58.29	68.20	-9.91	Peak
2	5738.194	9.85	51.05	60.90	68.20	-7.30	Peak


Right Band edge_Vertical_Peak_5GWiFi_Band3_AX160_5570MHz

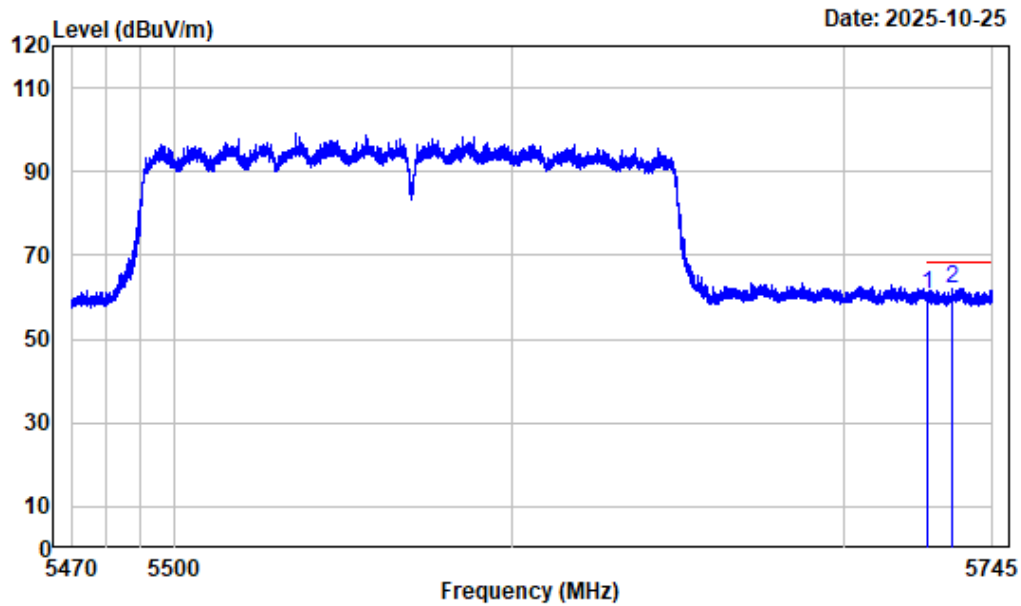

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-AX160-5570

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	9.68	51.17	60.85	68.20	-7.35	Peak
2	5732.659	9.72	52.35	62.07	68.20	-6.13	Peak


Left Band edge_Horizontal_Peak_5GWiFi_B4_A_ANT0_5745MHz

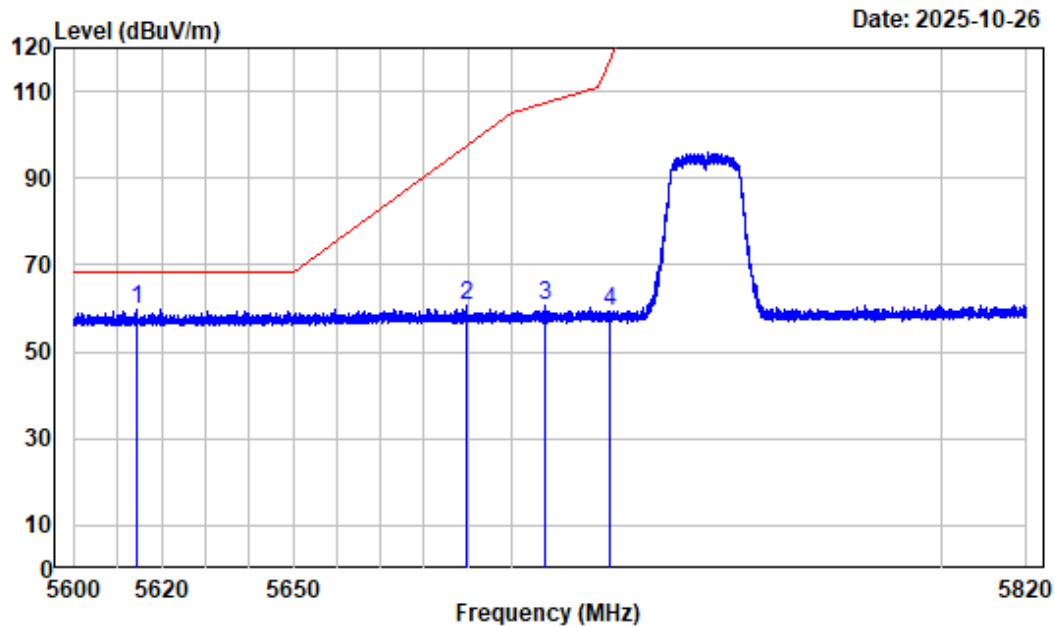

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT0-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5614.493	9.04	50.57	59.61	68.20	-8.59	Peak
2	5689.788	9.50	51.15	60.65	97.67	-37.02	Peak
3	5707.882	9.59	51.10	60.69	107.41	-46.72	Peak
4	5722.815	9.70	49.58	59.28	117.22	-57.94	Peak


Left Band edge_Vertical_Peak_5GWiFi_B4_A_ANT0_5745MHz

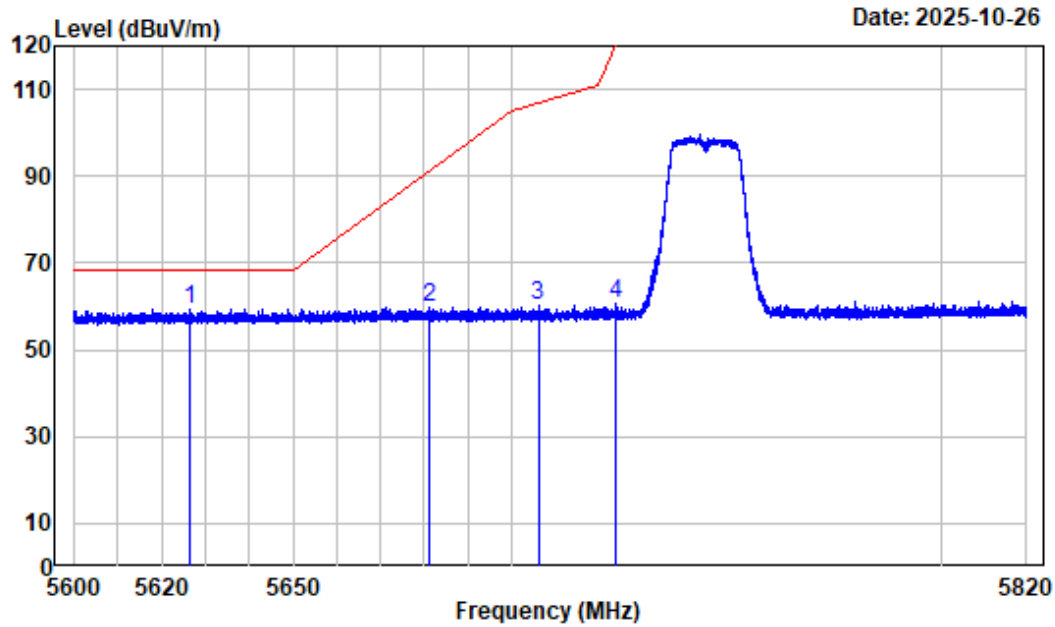

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT0-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5626.400	9.16	50.13	59.29	68.20	-8.91	Peak
2	5681.263	9.54	50.43	59.97	91.37	-31.40	Peak
3	5706.232	9.59	50.63	60.22	106.95	-46.73	Peak
4	5724.300	9.69	51.05	60.74	120.60	-59.86	Peak


Right Band edge_Horizontal_Peak_5GWiFi_B4_A_ANT0_5825MHz

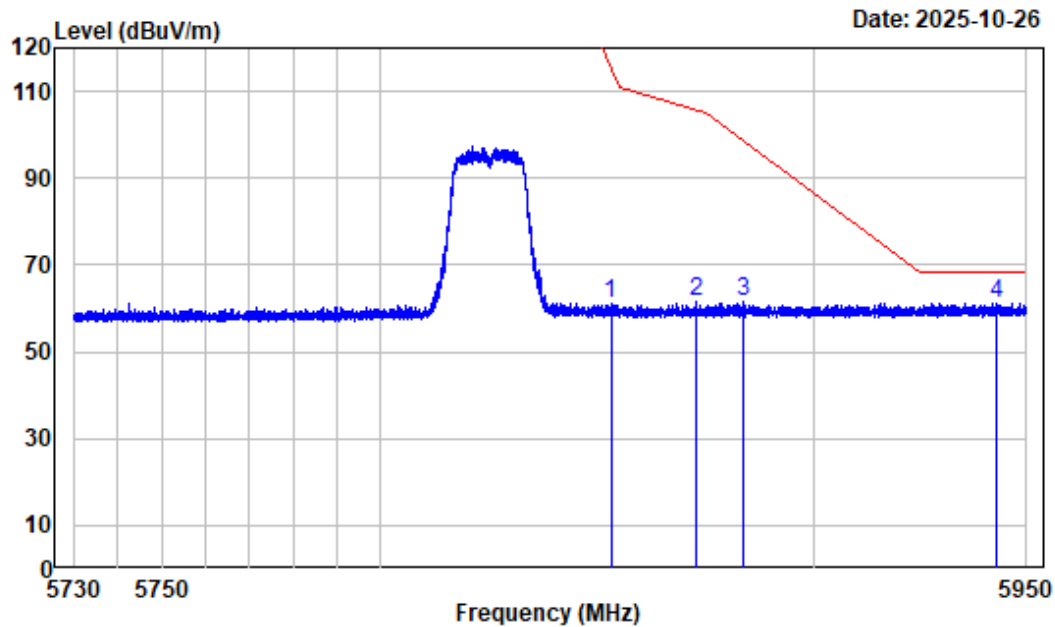

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT0-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5853.035	10.43	50.68	61.11	115.28	-54.17	Peak
2	5872.697	10.58	50.88	61.46	105.84	-44.38	Peak
3	5883.973	10.67	50.81	61.48	98.54	-37.06	Peak
4	5942.822	10.76	50.46	61.22	68.20	-6.98	Peak


Right Band edge_Vertical_Peak_5GWiFi_B4_A_ANT0_5825MHz

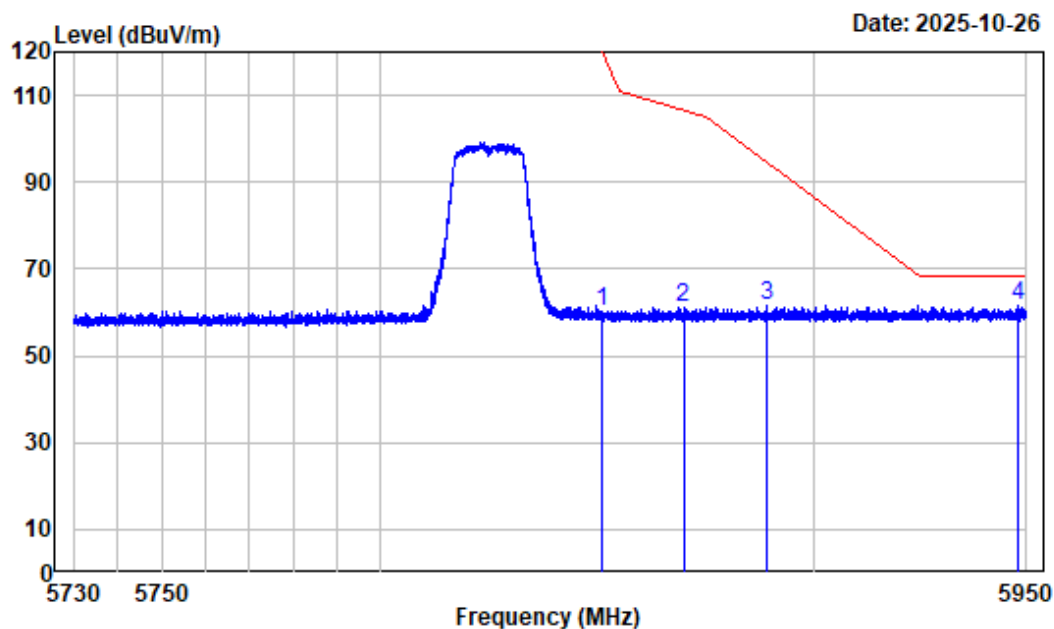

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT0-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.138	10.46	49.86	60.32	119.61	-59.29	Peak
2	5869.865	10.57	50.70	61.27	106.64	-45.37	Peak
3	5889.335	10.74	50.86	61.60	94.56	-32.96	Peak
4	5948.047	10.77	50.93	61.70	68.20	-6.50	Peak


Left Band edge_Horizontal_Peak_5GWiFi_B4_A_ANT1_5745MHz

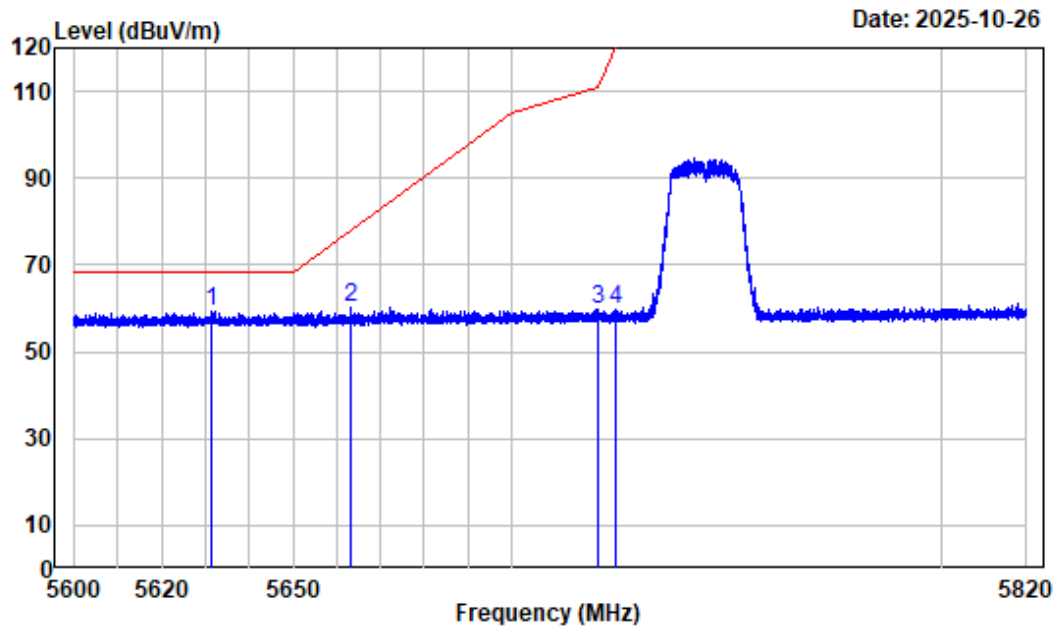

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT1-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5631.130	9.22	50.23	59.45	68.20	-8.75	Peak
2	5663.305	9.48	50.53	60.01	78.08	-18.07	Peak
3	5720.010	9.72	50.12	59.84	110.82	-50.98	Peak
4	5723.942	9.70	49.92	59.62	119.79	-60.17	Peak


Left Band edge_Vertical_Peak_5GWiFi_B4_A_ANT1_5745MHz

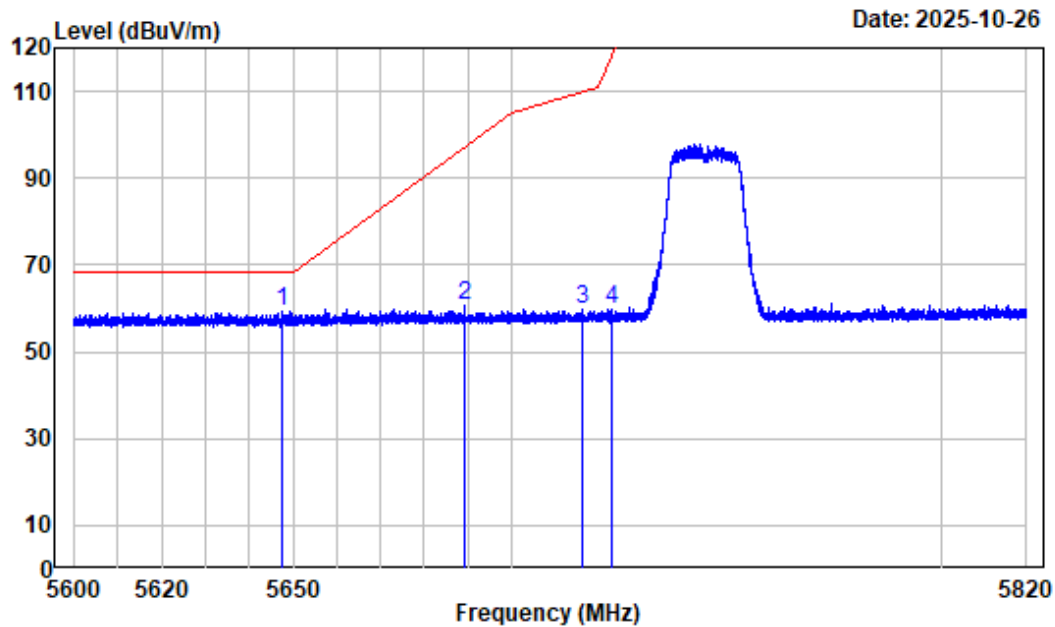

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT1-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5647.547	9.33	50.08	59.41	68.20	-8.79	Peak
2	5689.237	9.50	51.04	60.54	97.26	-36.72	Peak
3	5716.270	9.67	49.92	59.59	109.76	-50.17	Peak
4	5723.337	9.70	49.89	59.59	118.41	-58.82	Peak


Right Band edge_Horizontal_Peak_5GWiFi_B4_A_ANT1_5825MHz

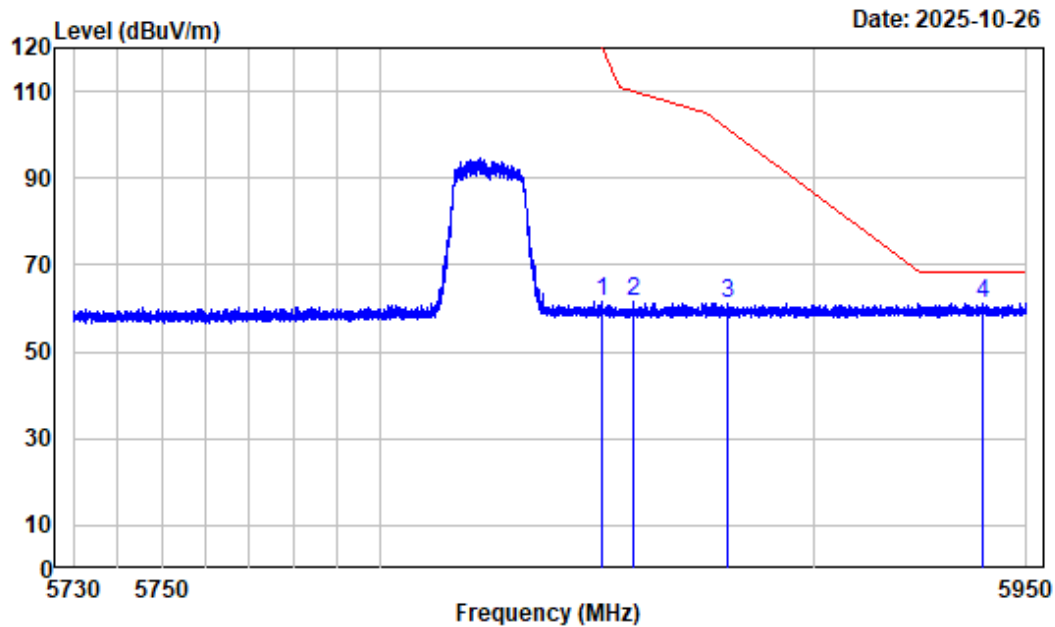

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT1-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.138	10.46	51.16	61.62	119.61	-57.99	Peak
2	5858.315	10.34	51.13	61.47	109.87	-48.40	Peak
3	5880.232	10.62	50.69	61.31	101.31	-40.00	Peak
4	5939.715	10.75	50.39	61.14	68.20	-7.06	Peak


Right Band edge_Vertical_Peak_5GWiFi_B4_A_ANT1_5825MHz

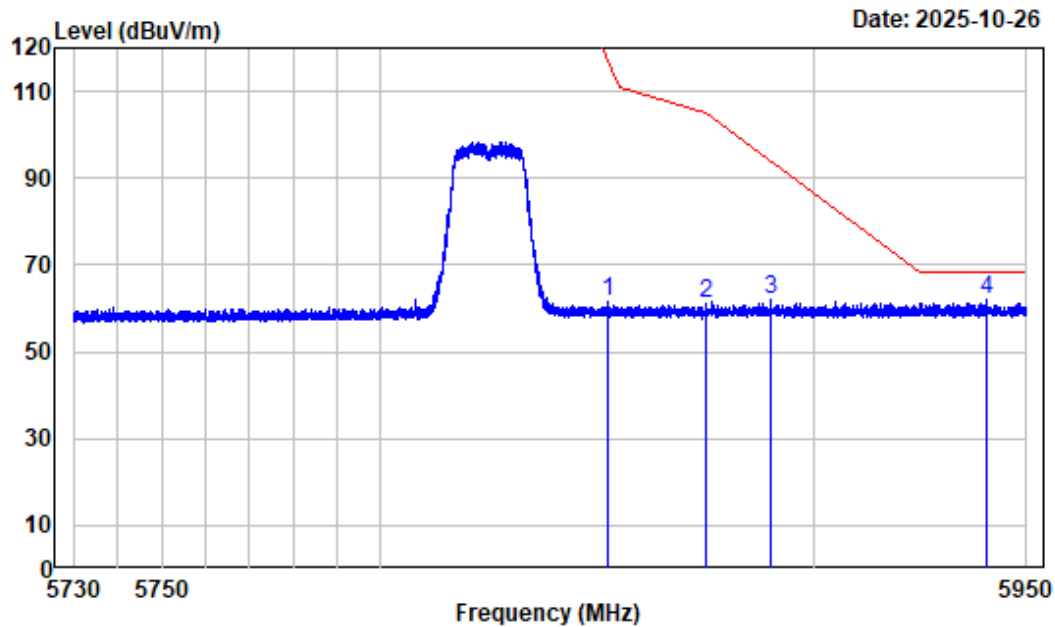

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A_ANT1-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.430	10.44	51.18	61.62	116.66	-55.04	Peak
2	5874.953	10.59	50.45	61.04	105.21	-44.17	Peak
3	5890.325	10.74	51.11	61.85	93.83	-31.98	Peak
4	5940.650	10.76	51.22	61.98	68.20	-6.22	Peak


Left Band edge_Horizontal_Peak_5GWiFi_B4_AC20_5745MHz

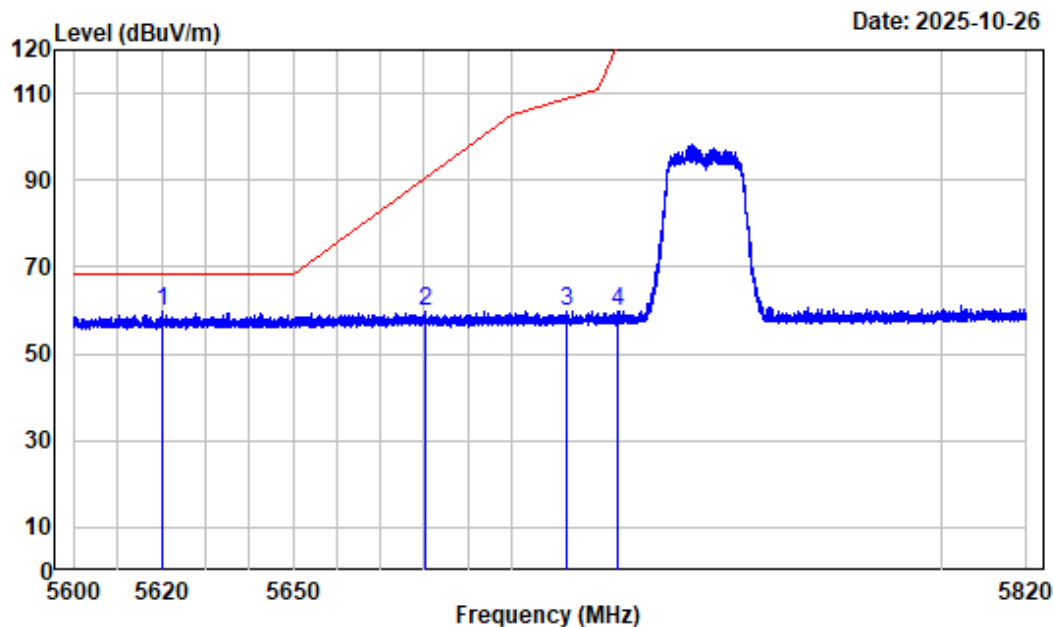

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5620.350	9.09	50.50	59.59	68.20	-8.61	Peak
2	5680.135	9.54	50.35	59.89	90.54	-30.65	Peak
3	5712.915	9.64	50.25	59.89	108.82	-48.93	Peak
4	5724.493	9.69	49.89	59.58	121.04	-61.46	Peak


Left Band edge_Vertical_Peak_5GWiFi_B4_AC20_5745MHz

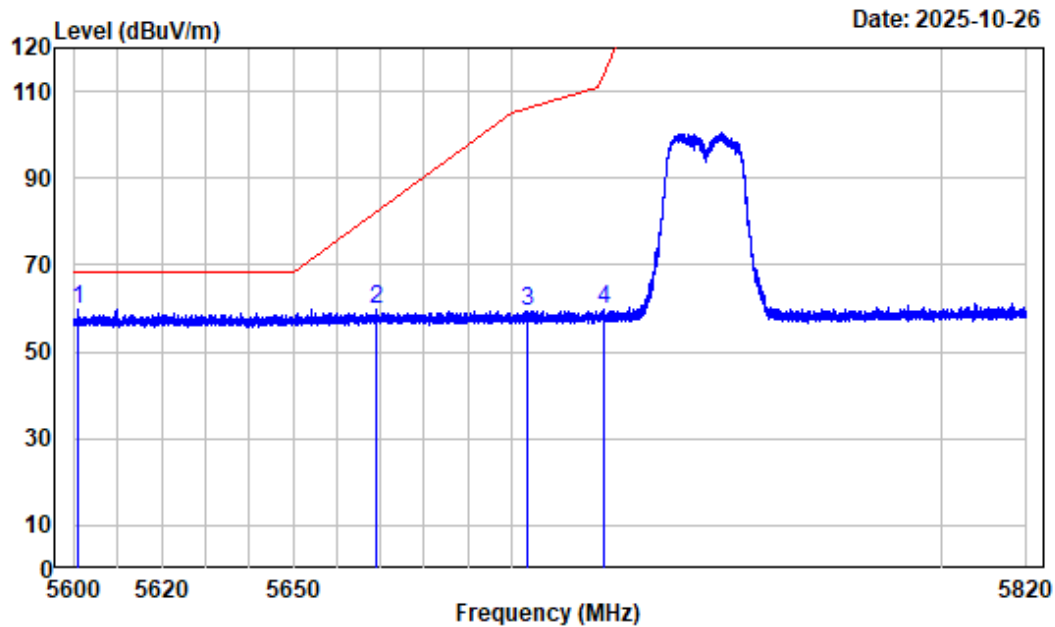

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5600.935	9.00	50.63	59.63	68.20	-8.57	Peak
2	5668.888	9.57	50.34	59.91	82.22	-22.31	Peak
3	5703.703	9.59	49.86	59.45	106.24	-46.79	Peak
4	5721.495	9.71	50.01	59.72	114.21	-54.49	Peak


Right Band edge_Horizontal_Peak_5GWiFi_B4_AC20_5825MHz

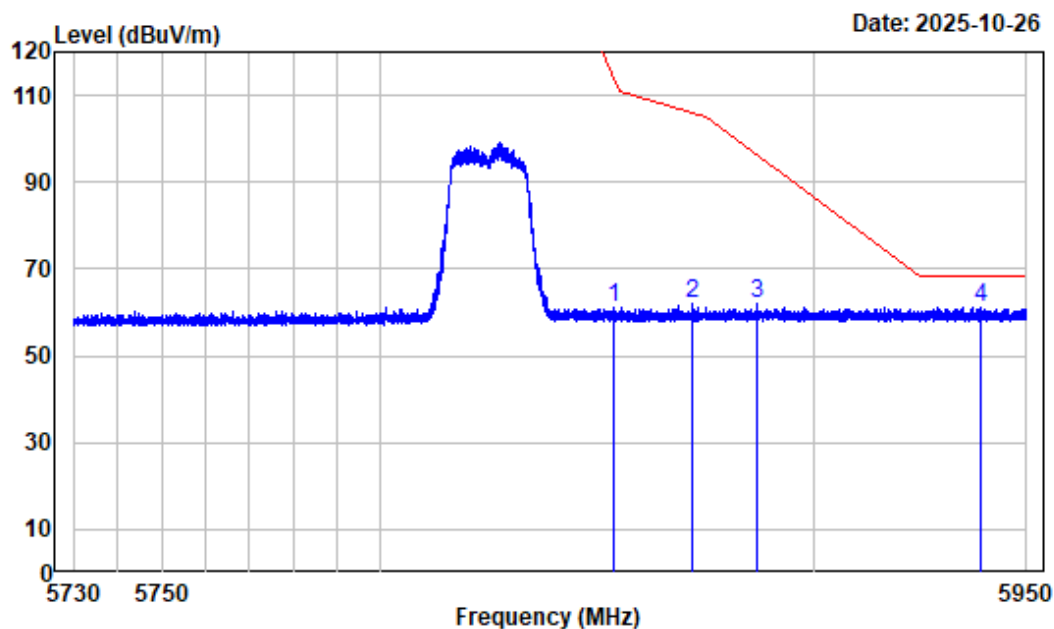

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5853.915	10.42	50.67	61.09	113.27	-52.18	Peak
2	5871.900	10.58	51.64	62.22	106.07	-43.85	Peak
3	5886.942	10.72	51.10	61.82	96.33	-34.51	Peak
4	5939.303	10.75	50.60	61.35	68.20	-6.85	Peak


Right Band edge_Vertical_Peak_5GWiFi_B4_AC20_5825MHz

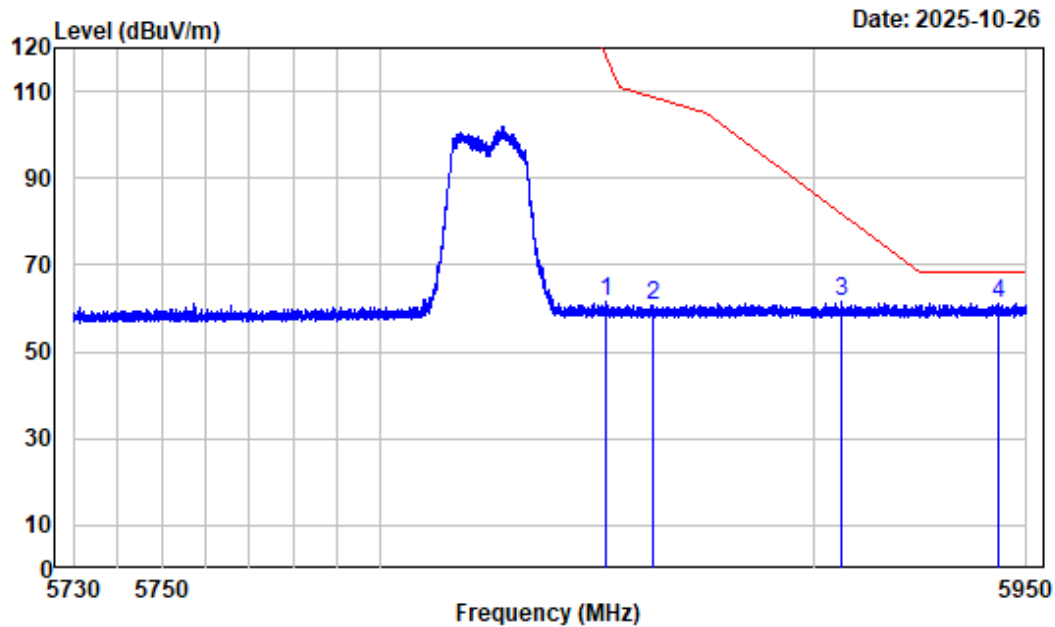

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.100	10.45	51.05	61.50	117.41	-55.91	Peak
2	5862.962	10.39	50.48	60.87	108.57	-47.70	Peak
3	5906.797	10.66	50.70	61.36	81.63	-20.27	Peak
4	5943.373	10.76	50.44	61.20	68.20	-7.00	Peak


Left Band edge_Horizontal_Peak_5GWiFi_B4_AC40_5755MHz

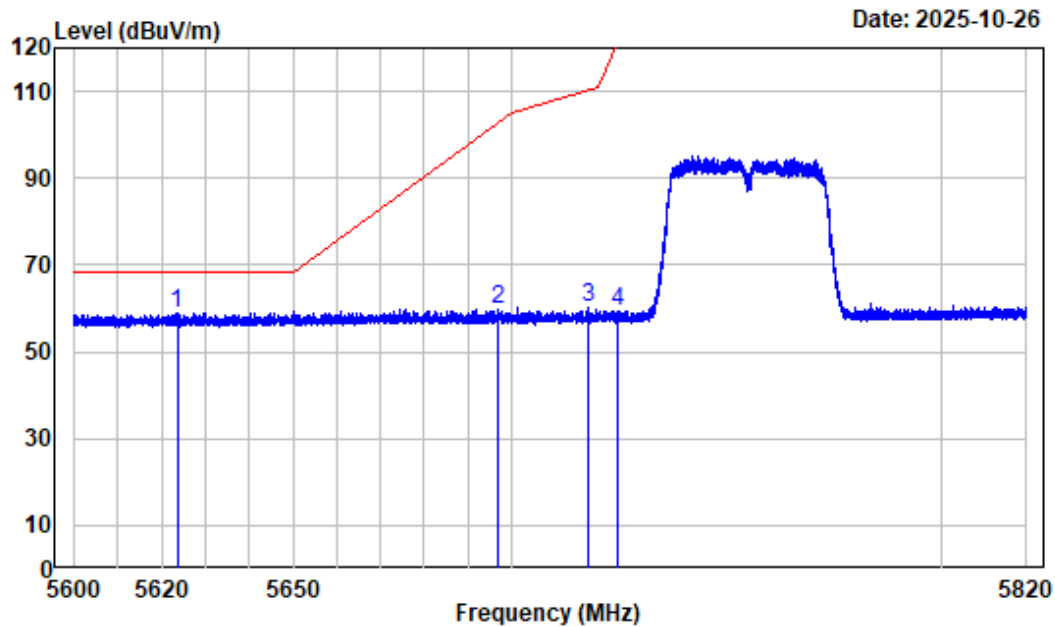

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5623.513	9.14	49.87	59.01	68.20	-9.19	Peak
2	5697.075	9.57	50.43	60.00	103.04	-43.04	Peak
3	5717.728	9.69	50.37	60.06	110.16	-50.10	Peak
4	5724.493	9.69	49.79	59.48	121.04	-61.56	Peak


Left Band edge_Vertical_Peak_5GWiFi_B4_AC40_5755MHz

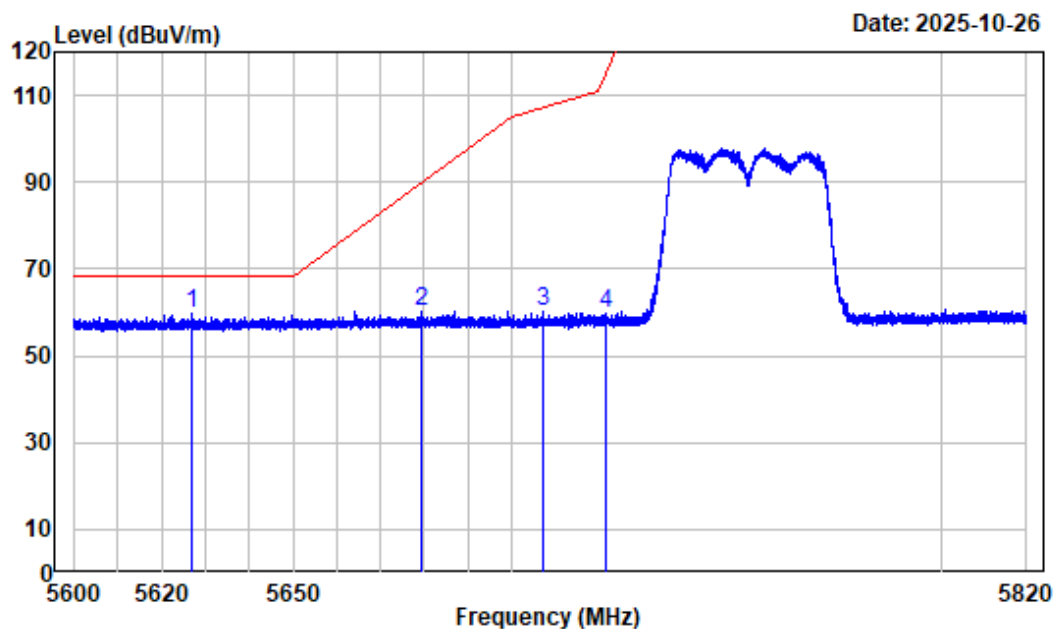

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5626.675	9.16	50.66	59.82	68.20	-8.38	Peak
2	5679.200	9.55	50.88	60.43	89.85	-29.42	Peak
3	5707.195	9.59	50.53	60.12	107.22	-47.10	Peak
4	5721.660	9.70	49.98	59.68	114.59	-54.91	Peak


Right Band edge_Horizontal_Peak_5GWiFi_B4_AC40_5795MHz

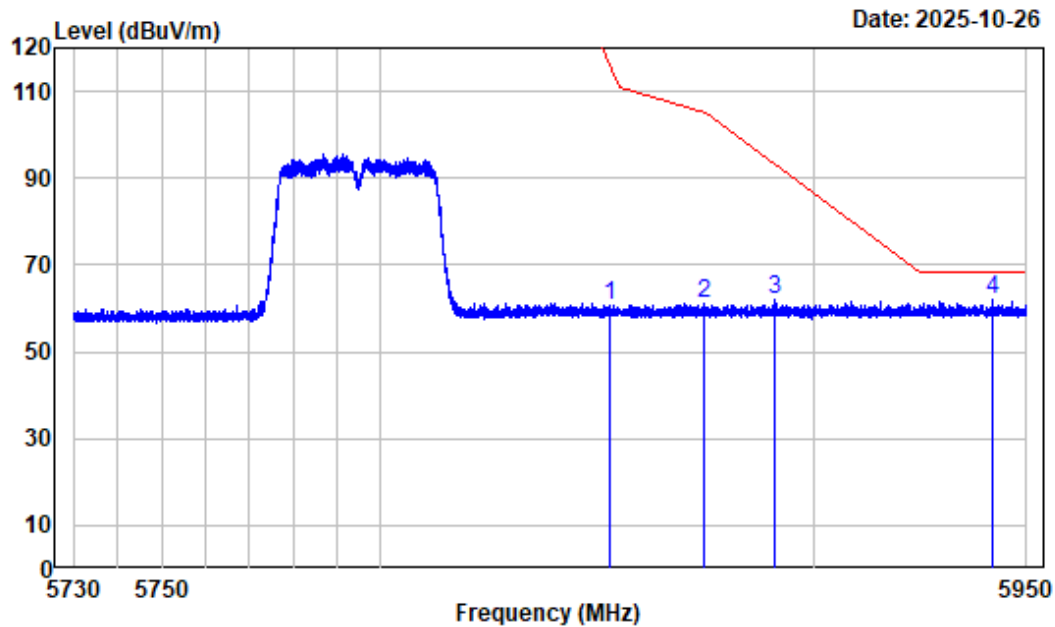

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.595	10.44	50.29	60.73	116.28	-55.55	Peak
2	5874.430	10.59	50.34	60.93	105.36	-44.43	Peak
3	5891.205	10.73	51.25	61.98	93.17	-31.19	Peak
4	5942.135	10.77	51.10	61.87	68.20	-6.33	Peak


Right Band edge_Vertical_Peak_5GWiFi_B4_AC40_5795MHz

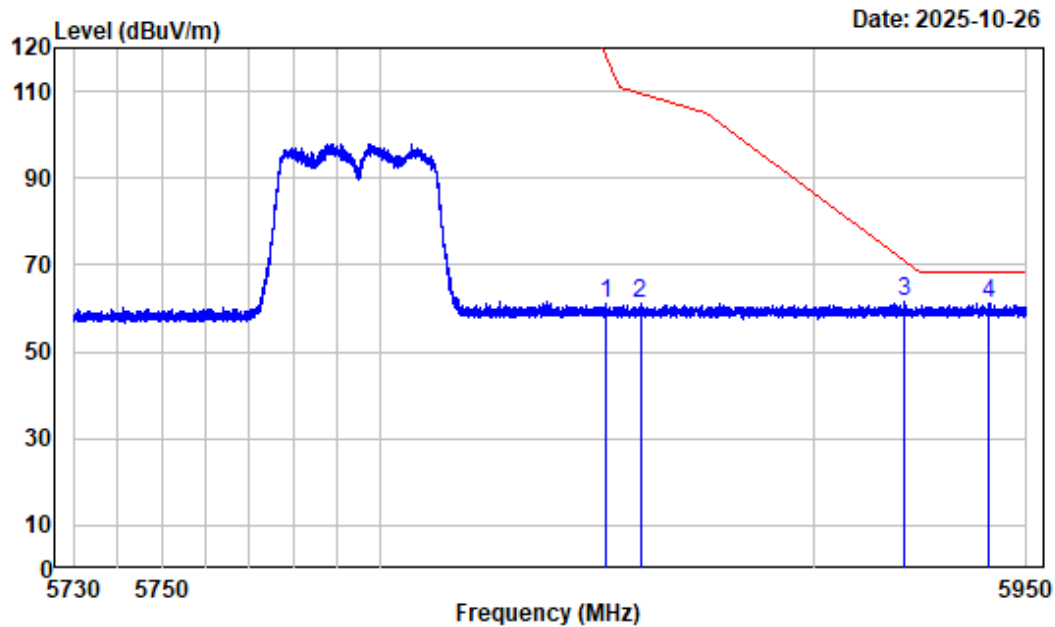

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC40-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.880	10.45	50.54	60.99	117.91	-56.92	Peak
2	5859.855	10.31	50.84	61.15	109.44	-48.29	Peak
3	5921.208	10.70	50.80	61.50	71.00	-9.50	Peak
4	5941.310	10.76	50.60	61.36	68.20	-6.84	Peak


Left Band edge_Horizontal_Peak_5GWiFi_B4_AC80_5775MHz

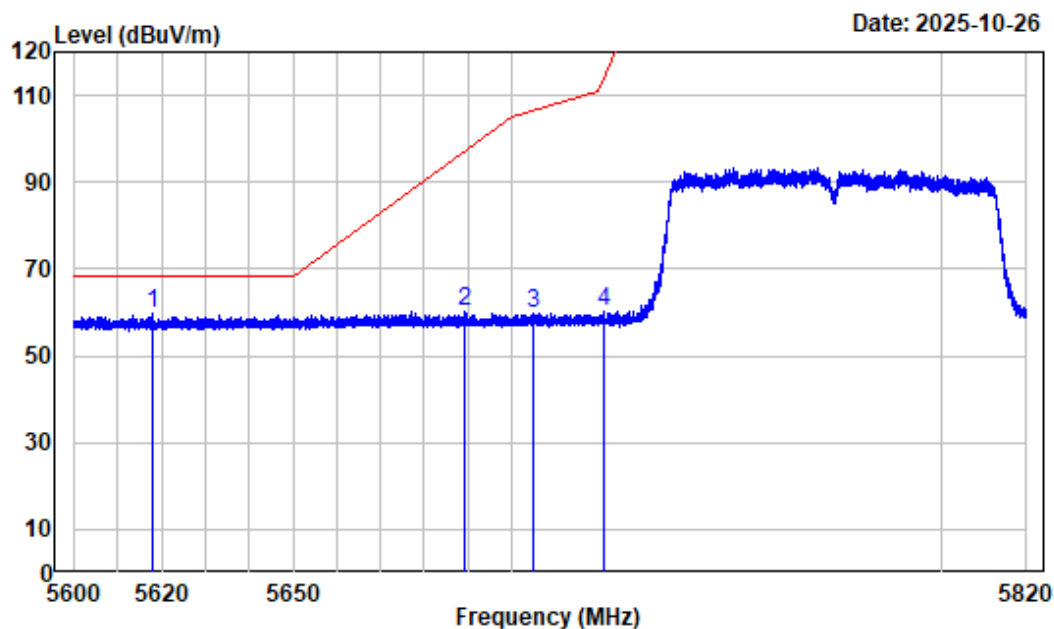

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5617.902	9.07	50.59	59.66	68.20	-8.54	Peak
2	5689.348	9.50	50.88	60.38	97.34	-36.96	Peak
3	5704.913	9.59	50.13	59.72	106.58	-46.86	Peak
4	5721.385	9.71	50.44	60.15	113.96	-53.81	Peak


Left Band edge_Vertical_Peak_5GWiFi_B4_AC80_5775MHz

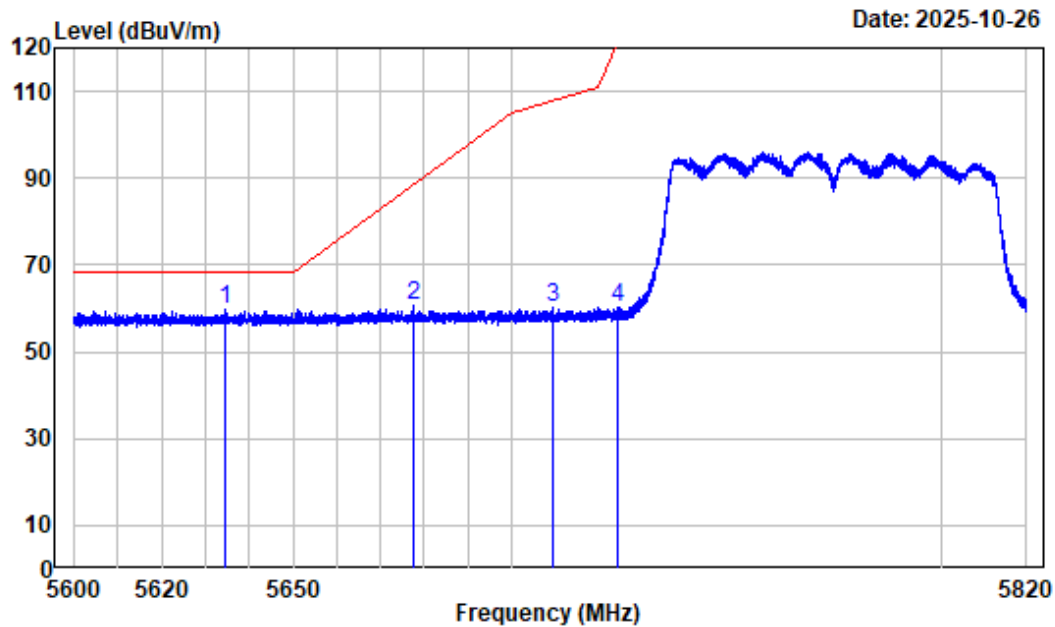

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5634.567	9.24	50.32	59.56	68.20	-8.64	Peak
2	5677.550	9.55	51.05	60.60	88.63	-28.03	Peak
3	5709.422	9.59	50.48	60.07	107.84	-47.77	Peak
4	5724.465	9.69	50.62	60.31	120.98	-60.67	Peak


Right Band edge_Horizontal_Peak_5GWiFi_B4_AC80_5775MHz

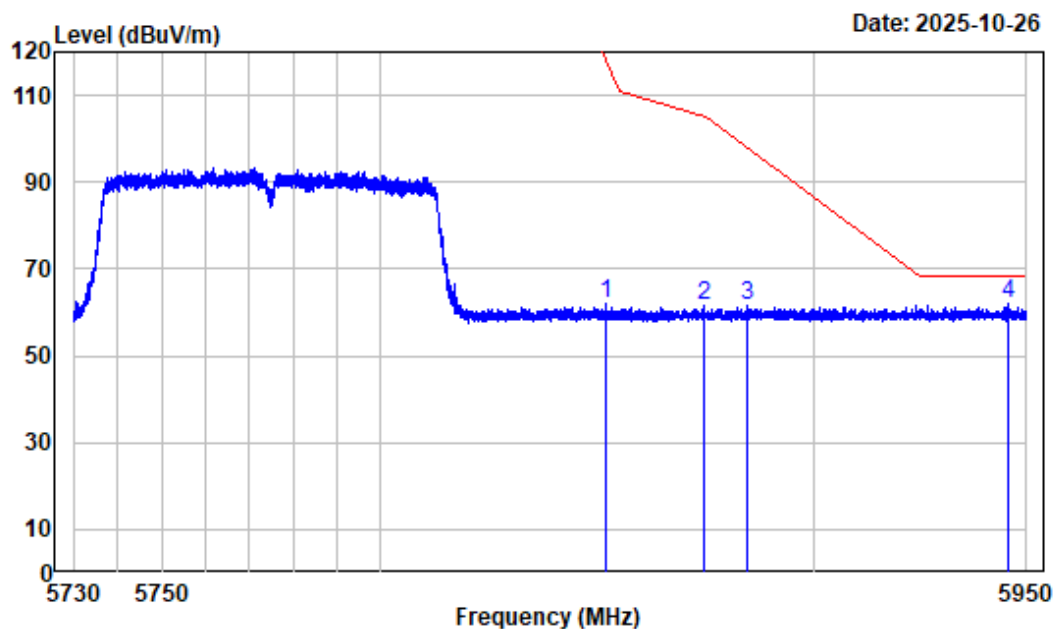

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.072	10.45	51.59	62.04	117.47	-55.43	Peak
2	5874.678	10.59	50.84	61.43	105.29	-43.86	Peak
3	5884.880	10.68	50.98	61.66	97.86	-36.20	Peak
4	5945.820	10.76	51.07	61.83	68.20	-6.37	Peak


Right Band edge_Vertical_Peak_5GWiFi_B4_AC80_5775MHz

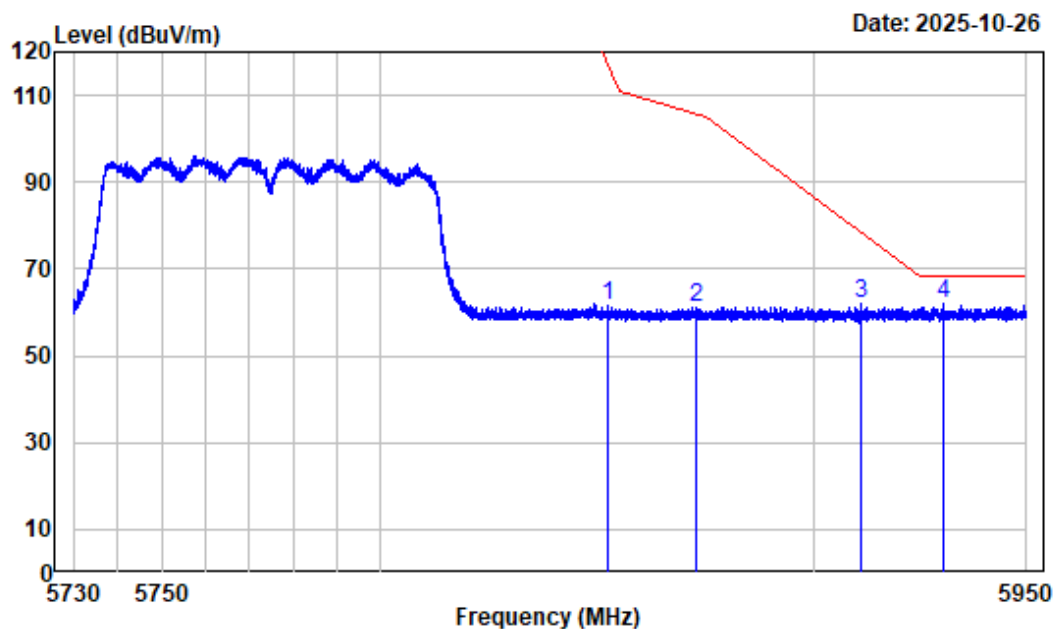

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AC80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.513	10.44	51.00	61.44	116.47	-55.03	Peak
2	5872.670	10.58	50.63	61.21	105.85	-44.64	Peak
3	5911.417	10.67	51.18	61.85	78.22	-16.37	Peak
4	5930.558	10.73	51.17	61.90	68.20	-6.30	Peak


Left Band edge_Horizontal_Peak_5GWiFi_B4_AX20_5745MHz

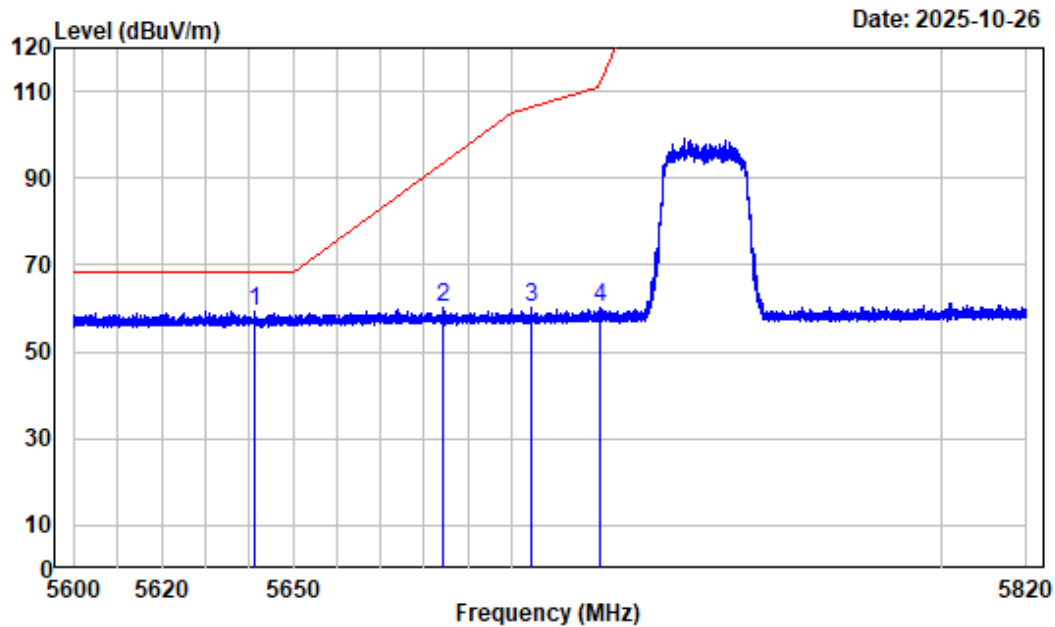

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5641.360	9.29	50.05	59.34	68.20	-8.86	Peak
2	5684.150	9.53	50.71	60.24	93.51	-33.27	Peak
3	5704.445	9.60	50.62	60.22	106.45	-46.23	Peak
4	5720.615	9.72	50.44	60.16	112.20	-52.04	Peak


Left Band edge_Vertical_Peak_5GWiFi_B4_AX20_5745MHz

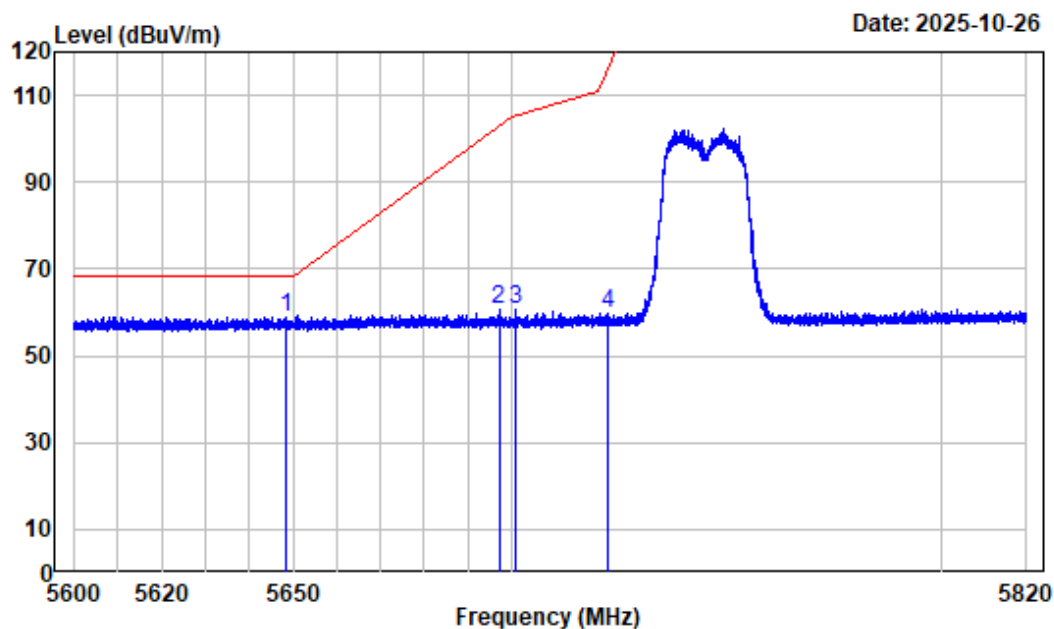

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5648.317	9.34	49.75	59.09	68.20	-9.11	Peak
2	5697.185	9.57	50.90	60.47	103.13	-42.66	Peak
3	5700.842	9.59	50.92	60.51	105.44	-44.93	Peak
4	5722.430	9.70	49.94	59.64	116.34	-56.70	Peak


Right Band edge_Horizontal_Peak_5GWiFi_B4_AX20_5825MHz

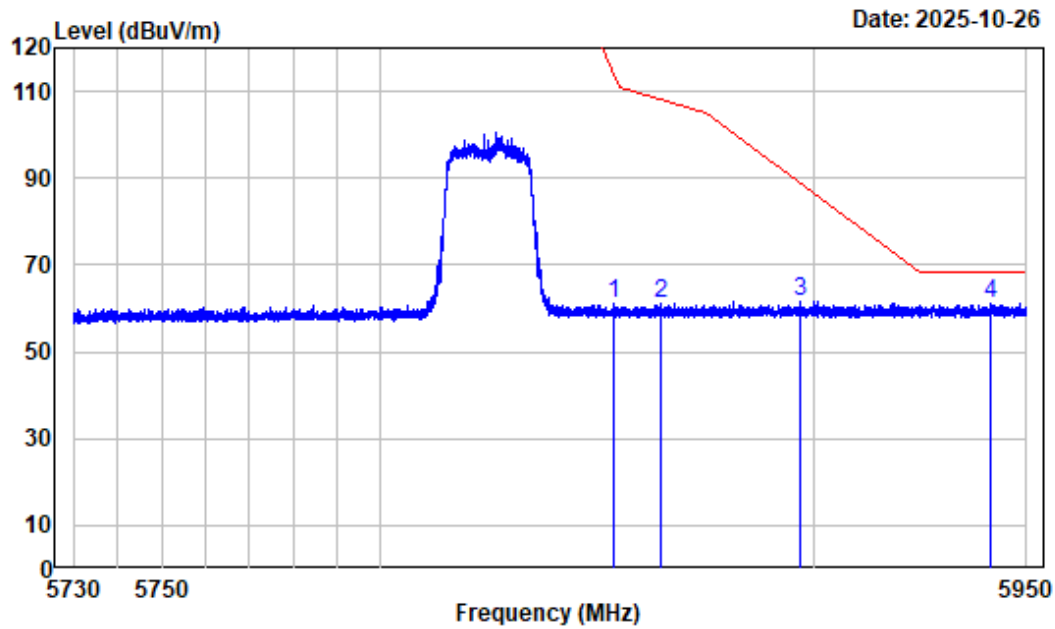

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5853.860	10.42	50.91	61.33	113.40	-52.07	Peak
2	5864.805	10.44	50.70	61.14	108.05	-46.91	Peak
3	5896.842	10.67	50.98	61.65	89.00	-27.35	Peak
4	5941.447	10.76	50.39	61.15	68.20	-7.05	Peak


Right Band edge_Vertical_Peak_5GWiFi_B4_AX20_5825MHz

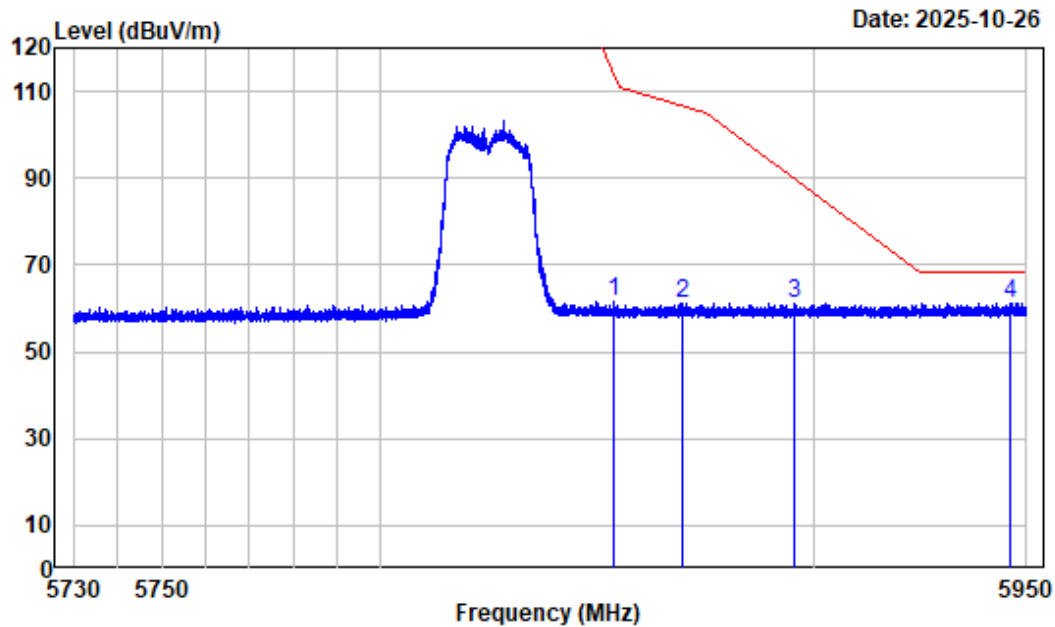

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5853.750	10.41	50.96	61.37	113.65	-52.28	Peak
2	5869.453	10.56	50.52	61.08	106.75	-45.67	Peak
3	5895.632	10.69	50.66	61.35	89.89	-28.54	Peak
4	5946.095	10.78	50.56	61.34	68.20	-6.86	Peak


Left Band edge_Horizontal_Peak_5GWiFi_B4_AX40_5755MHz

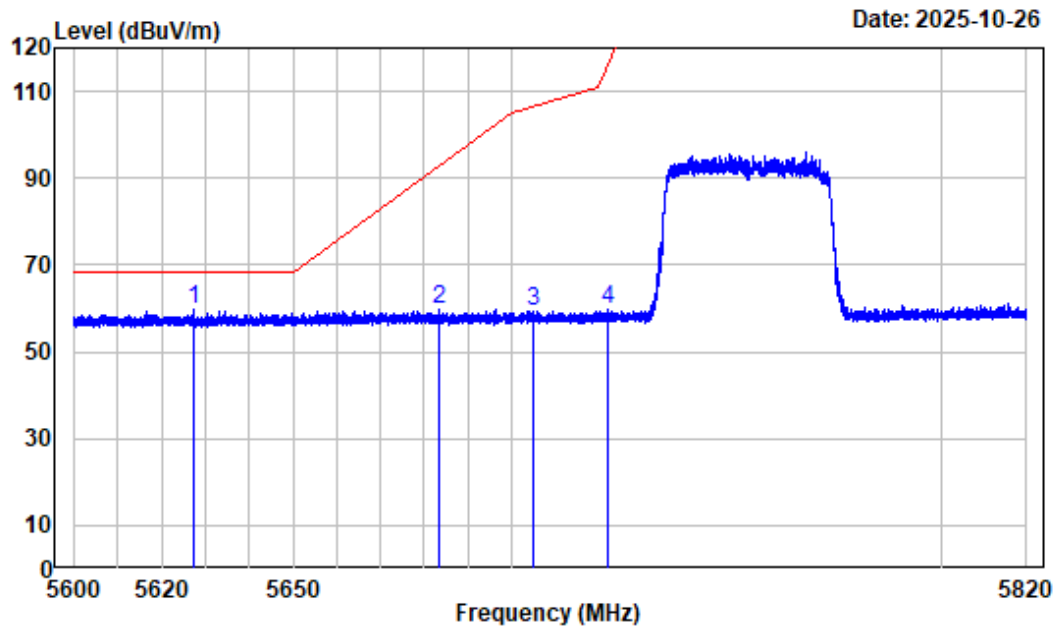

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5627.417	9.18	50.37	59.55	68.20	-8.65	Peak
2	5683.353	9.52	50.37	59.89	92.92	-33.03	Peak
3	5705.270	9.59	49.91	59.50	106.68	-47.18	Peak
4	5722.155	9.71	49.85	59.56	115.71	-56.15	Peak


Left Band edge_Vertical_Peak_5GWiFi_B4_AX40_5755MHz

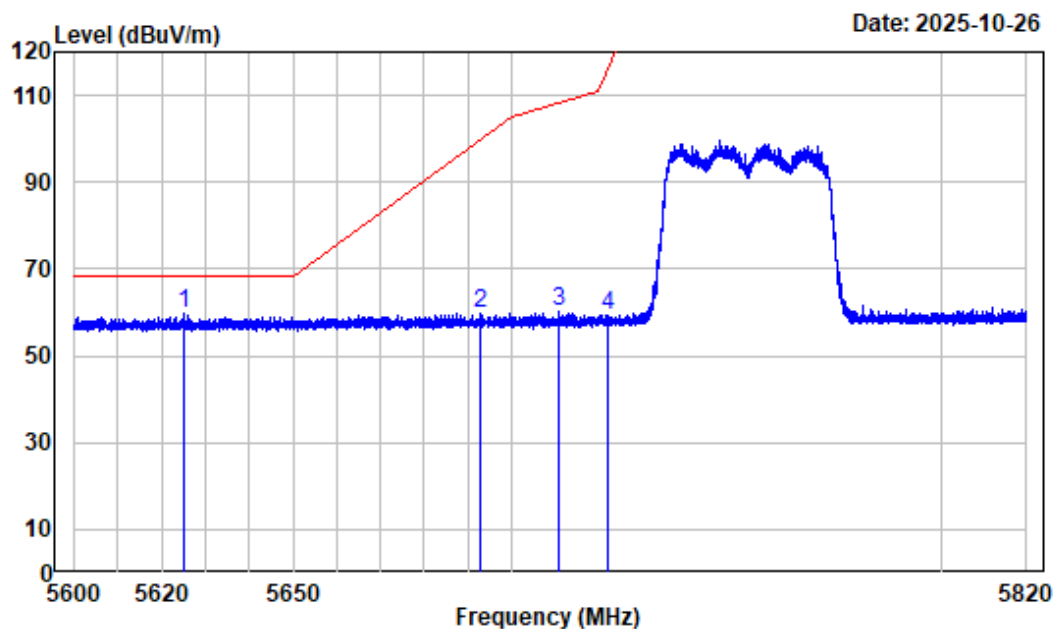

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5624.942	9.15	50.58	59.73	68.20	-8.47	Peak
2	5693.087	9.52	50.17	59.69	100.10	-40.41	Peak
3	5710.825	9.60	50.73	60.33	108.23	-47.90	Peak
4	5722.265	9.70	49.76	59.46	115.97	-56.51	Peak


Right Band edge_Horizontal_Peak_5GWiFi_B4_AX40_5795MHz

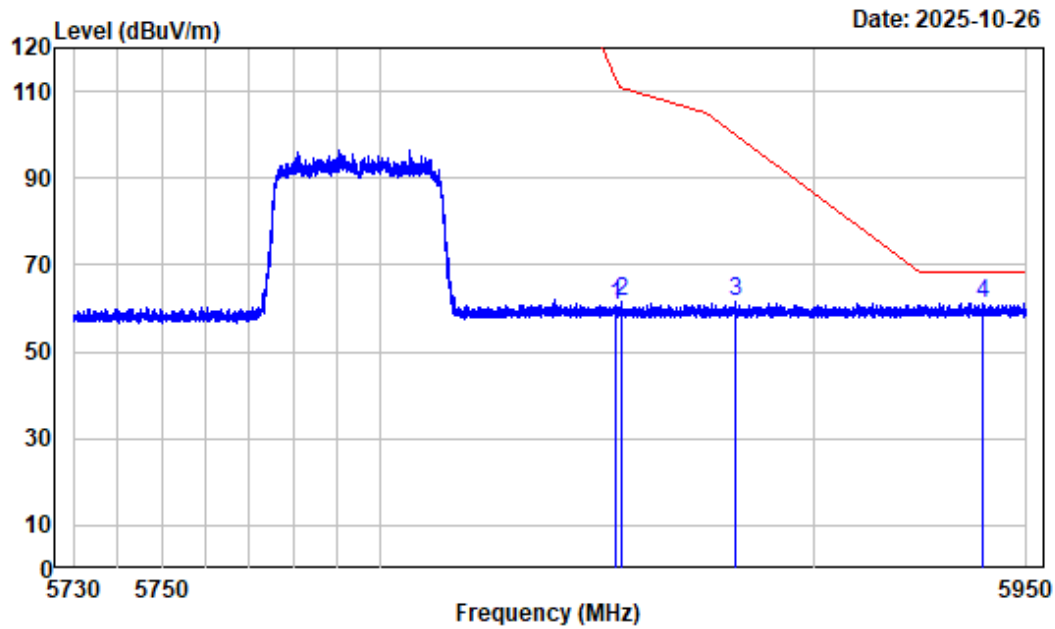

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5853.998	10.42	50.05	60.47	113.08	-52.61	Peak
2	5855.373	10.39	50.97	61.36	110.70	-49.34	Peak
3	5881.772	10.65	50.87	61.52	100.17	-38.65	Peak
4	5939.605	10.75	50.54	61.29	68.20	-6.91	Peak


Right Band edge_Vertical_Peak_5GWiFi_B4_AX40_5795MHz

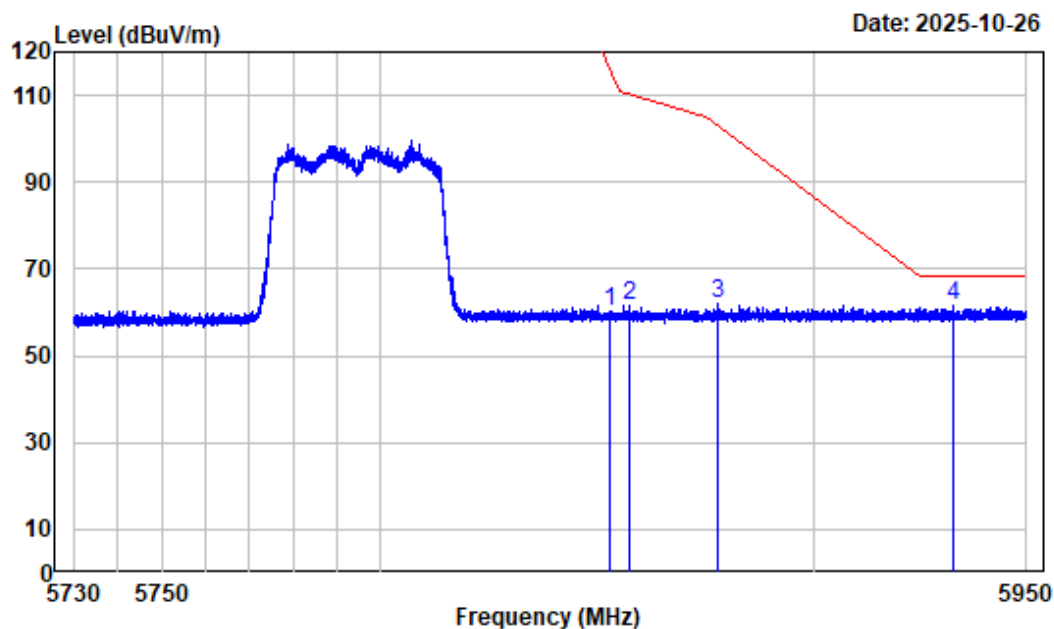

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX40-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5852.870	10.43	49.94	60.37	115.65	-55.28	Peak
2	5857.188	10.36	51.38	61.74	110.19	-48.45	Peak
3	5877.895	10.61	51.35	61.96	103.05	-41.09	Peak
4	5932.757	10.73	50.69	61.42	68.20	-6.78	Peak


Left Band edge_Horizontal_Peak_5GWiFi_B4_AX80_5775MHz

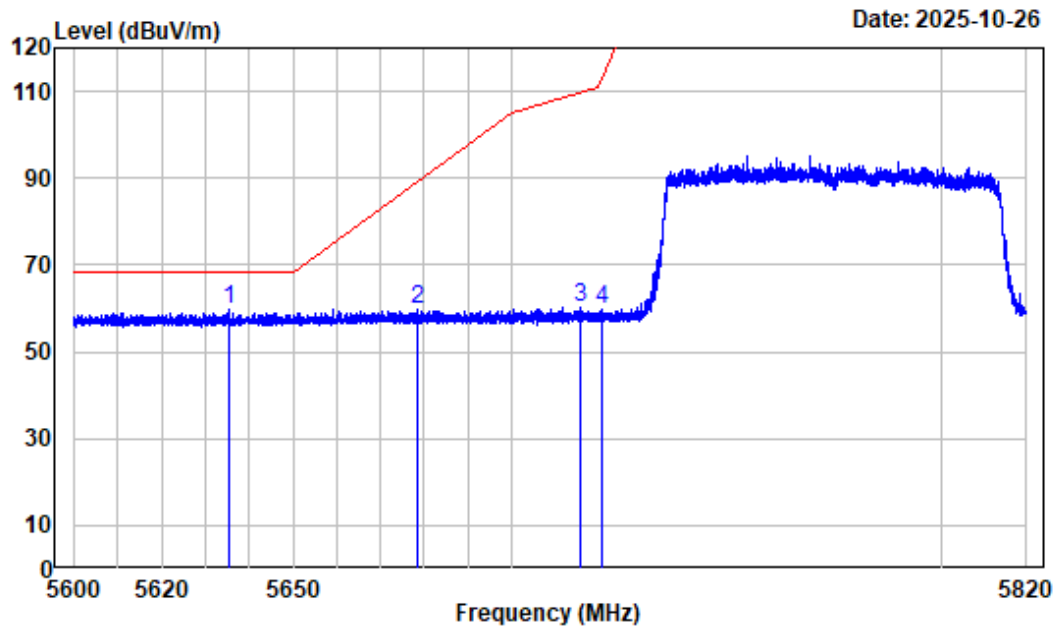

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5635.530	9.24	50.60	59.84	68.20	-8.36	Peak
2	5678.265	9.54	50.13	59.67	89.16	-29.49	Peak
3	5715.857	9.66	50.62	60.28	109.64	-49.36	Peak
4	5720.945	9.71	50.26	59.97	112.95	-52.98	Peak


Left Band edge_Vertical_Peak_5GWiFi_B4_AX80_5775MHz

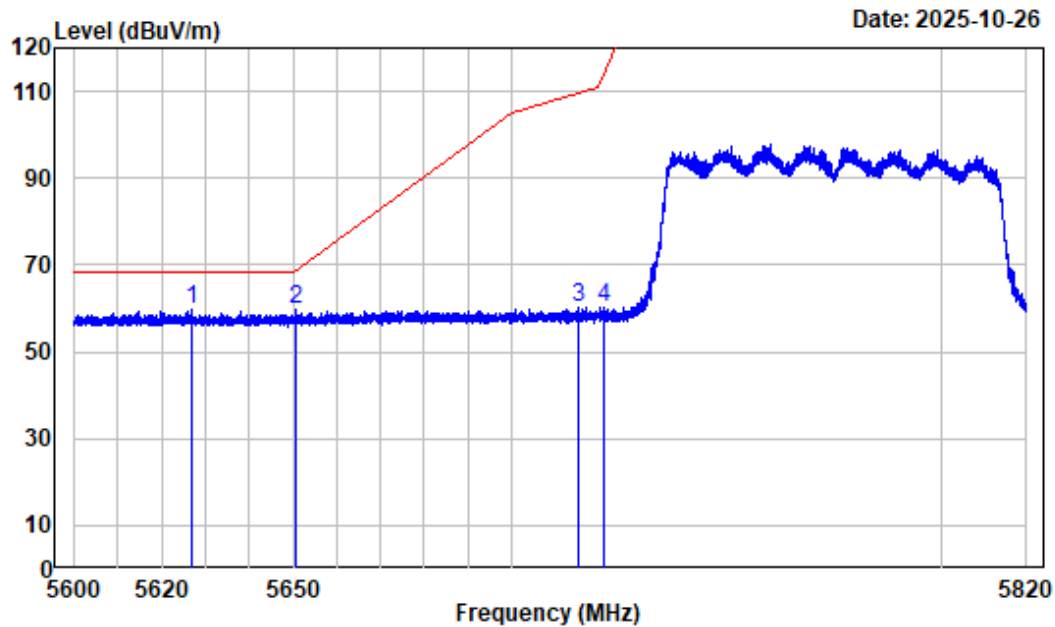

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5626.950	9.17	50.61	59.78	68.20	-8.42	Peak
2	5650.380	9.34	50.36	59.70	68.48	-8.78	Peak
3	5715.665	9.66	50.38	60.04	109.59	-49.55	Peak
4	5721.275	9.71	50.55	60.26	113.71	-53.45	Peak


Right Band edge_Horizontal_Peak_5GWiFi_B4_AX80_5775MHz

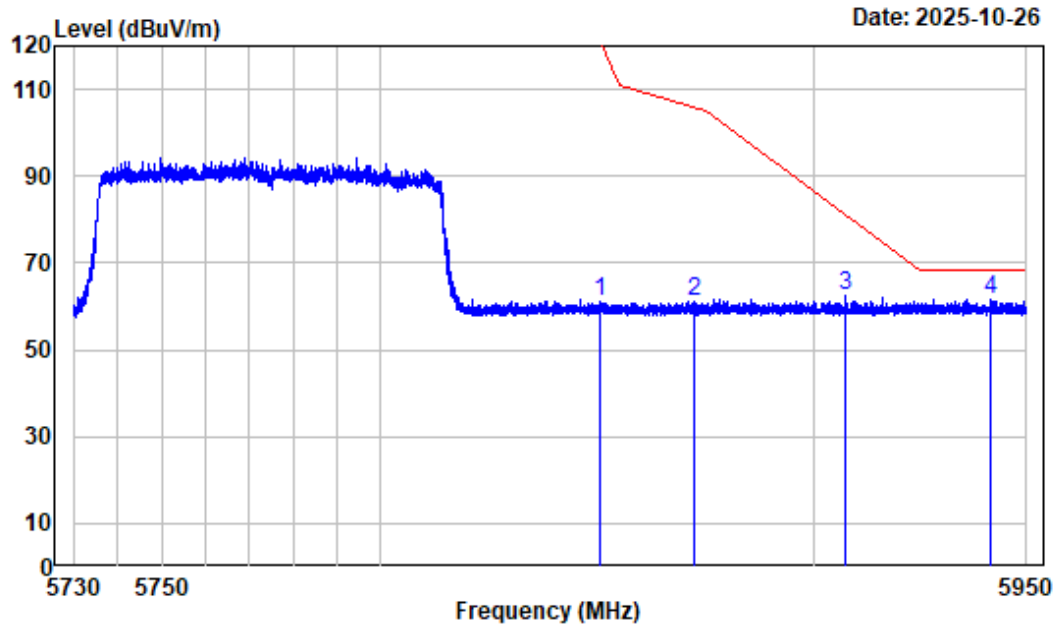

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.450	10.47	50.45	60.92	121.17	-60.25	Peak
2	5872.560	10.58	50.50	61.08	105.88	-44.80	Peak
3	5907.705	10.65	51.89	62.54	80.96	-18.42	Peak
4	5941.475	10.76	50.77	61.53	68.20	-6.67	Peak

Right Band edge_Vertical_Peak_5GWiFi_B4_AX80_5775MHz

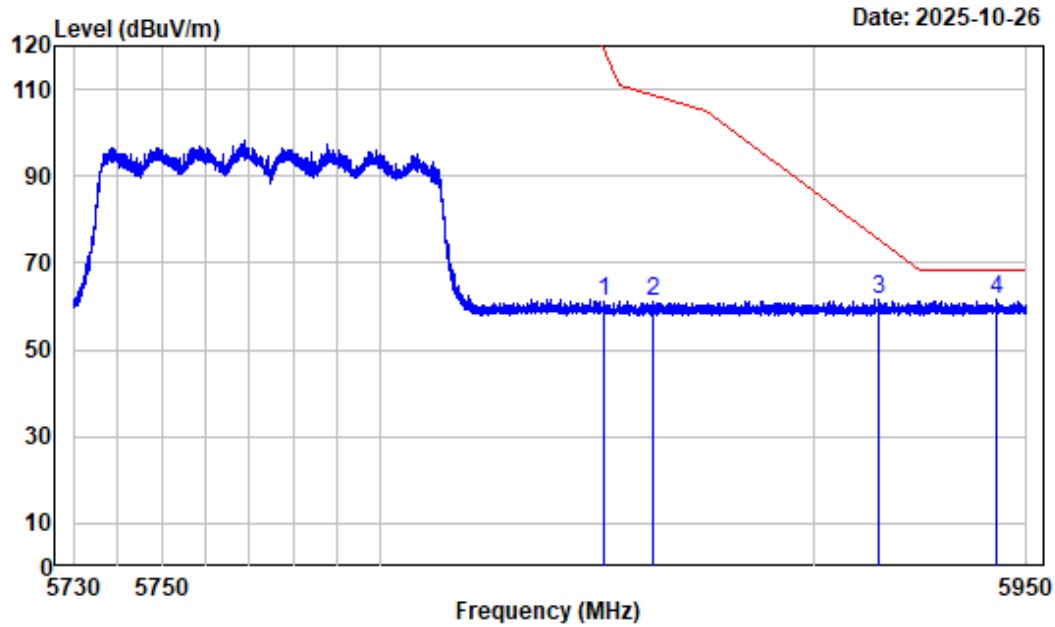


Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-AX80-5775

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5851.578	10.46	50.82	61.28	118.60	-57.32	Peak
2	5862.797	10.38	50.92	61.30	108.61	-47.31	Peak
3	5915.487	10.68	50.73	61.41	75.22	-13.81	Peak
4	5943.098	10.76	50.75	61.51	68.20	-6.69	Peak

1-18GHz (Listed with the worst case test plot)


1-7GHz Horizontal 5GWiFi B1 A ANT0 5200MHz

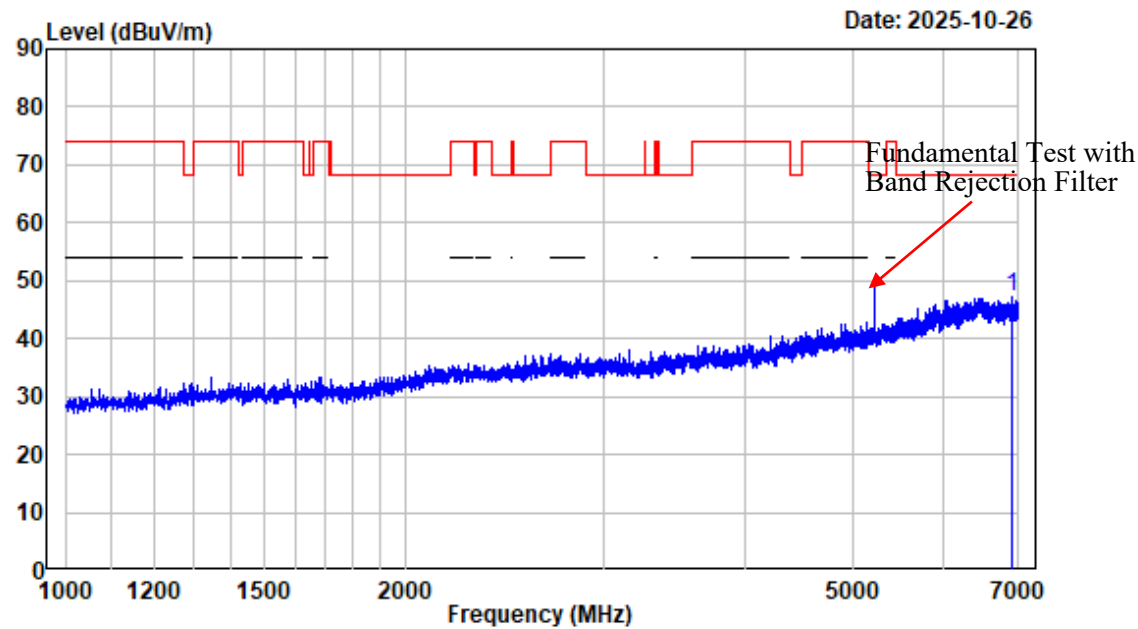

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5200

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6912.250	-1.22	48.52	47.30	68.20	-20.90	Peak


1-7GHz_Vertical_5GWiFi_B1_A_ANT0_5200MHz

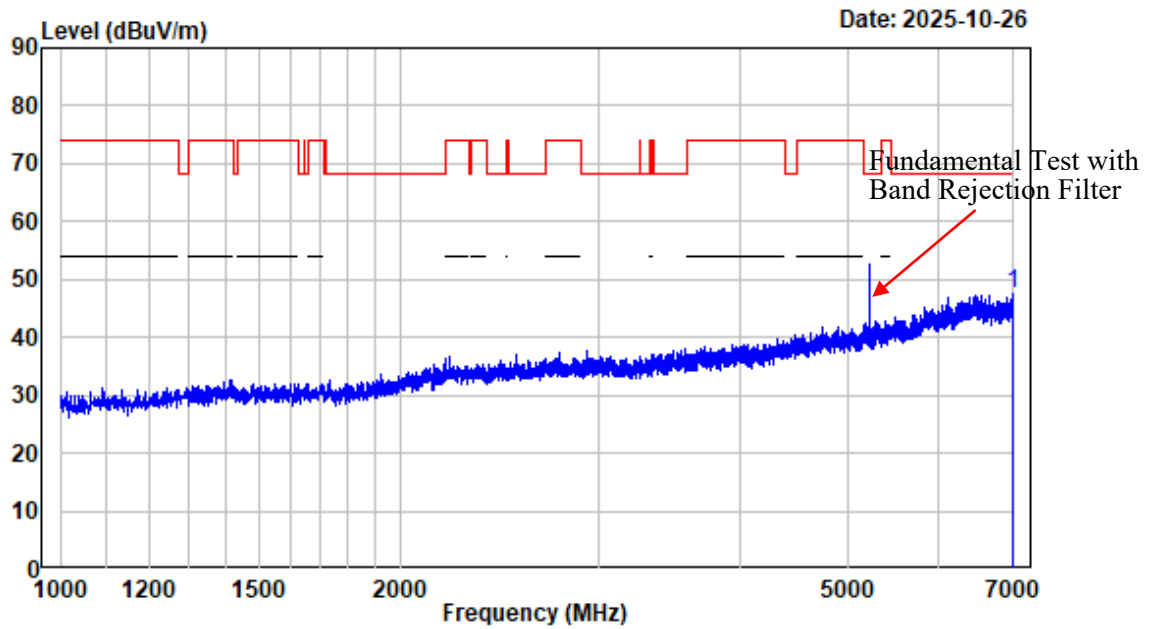

Condition : Vertical
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-A_ANT0-5200

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6997.750	-1.19	48.89	47.70	68.20	-20.50	Peak


7-18GHz_Horizontal_Peak_5GWiFi_B1_A_ANT0_5200MHz

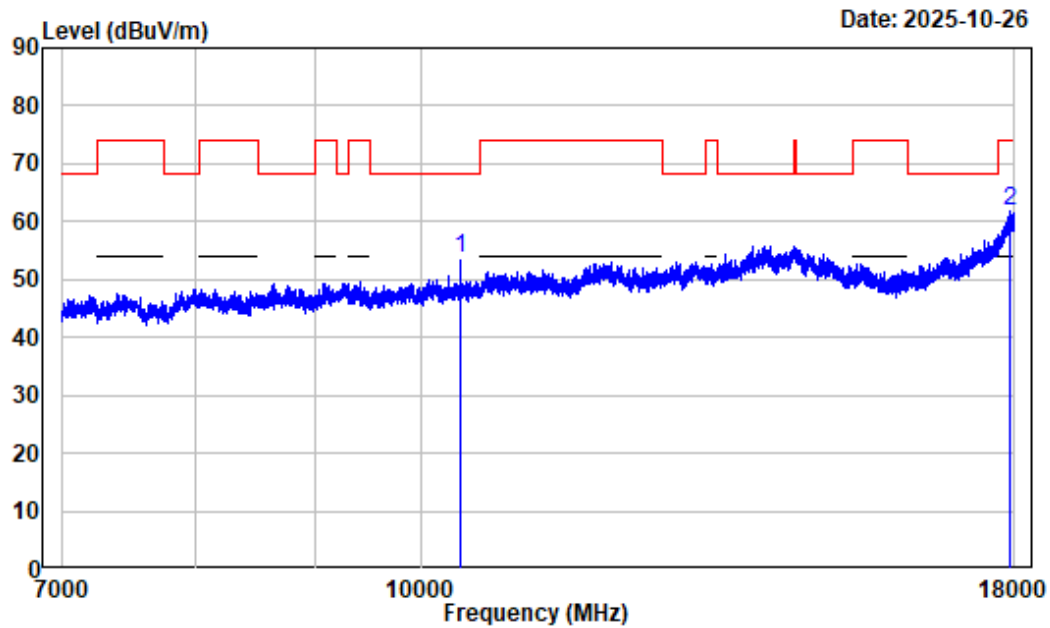

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5200

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	2.47	51.10	53.57	68.20	-14.63	Peak
2	17907.880	12.80	48.92	61.72	74.00	-12.28	Peak


7-18GHz_Horizontal_Average_5GWiFi_B1_A_ANT0_5200MHz

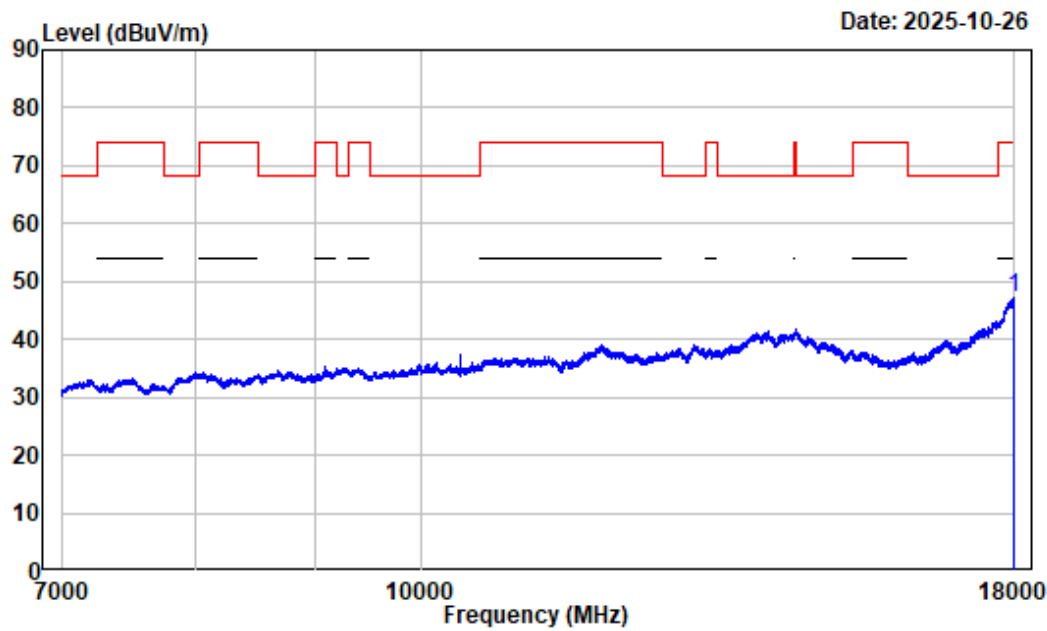

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5200

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17990.380	13.21	33.83	47.04	54.00	-6.96	Average


7-18GHz_Vertical_Peak_5GWiFi_B1_A_ANT0_5200MHz

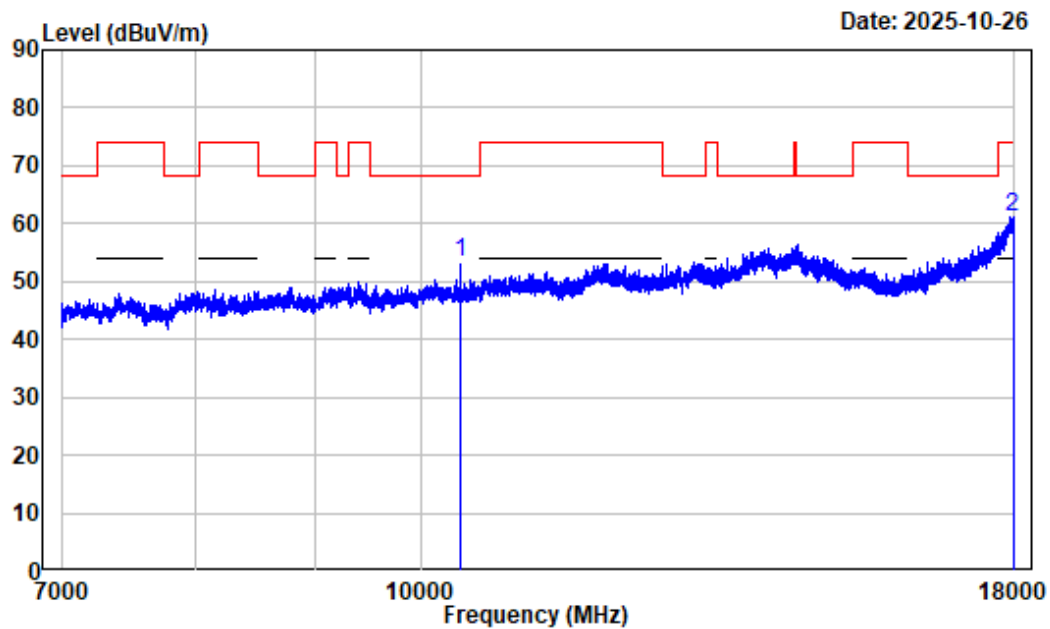

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT0-5200

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	2.47	50.96	53.43	68.20	-14.77	Peak
2	17973.880	13.13	47.89	61.02	74.00	-12.98	Peak


7-18GHz_Vertical_Average_5GWiFi_B1_A_ANT0_5200MHz

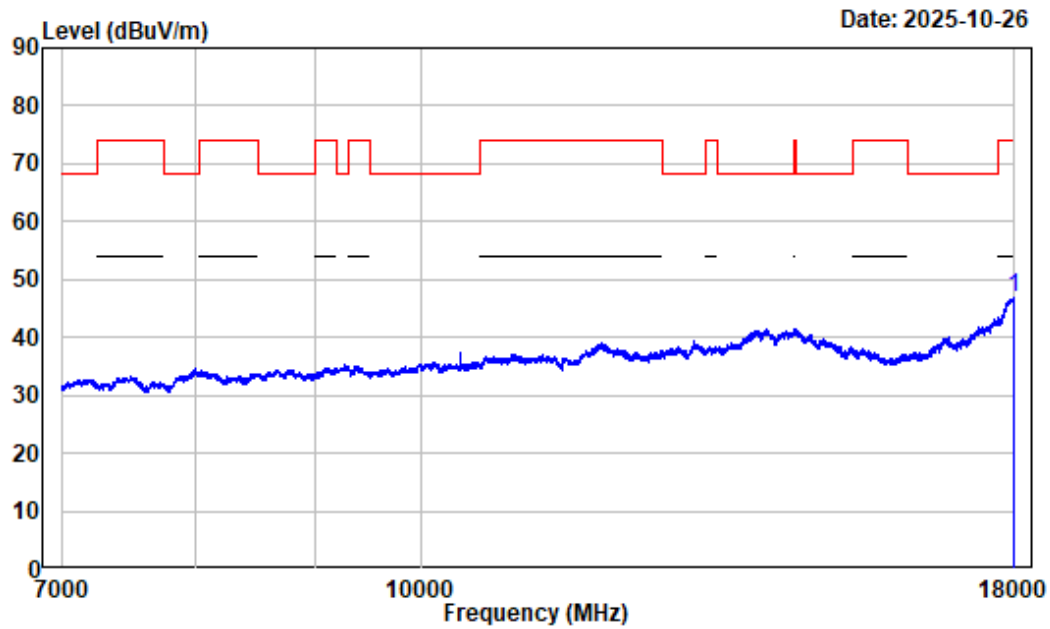

Condition : Vertical
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
 Note : 5GWiFi-Band1-A_ANT0-5200

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17998.630	13.25	33.65	46.90	54.00	-7.10	Average


1-7GHz_Horizontal_5GWiFi_B1_A_ANT1_5200MHz

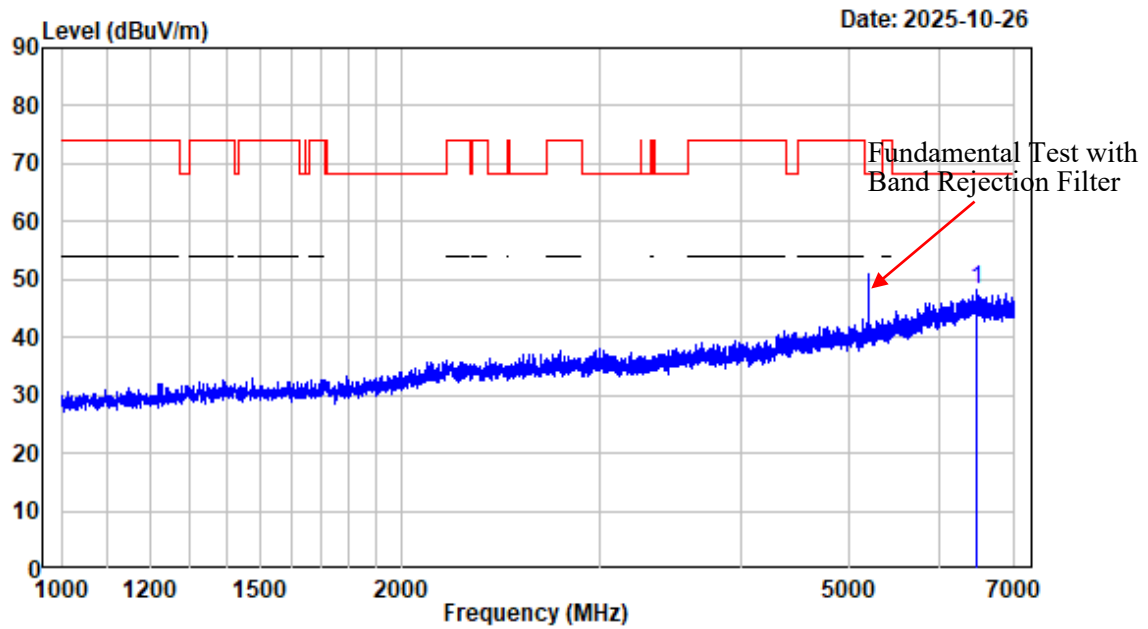

Condition : Horizontal
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-A_ANT1-5200

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6476.500	-1.18	49.43	48.25	68.20	-19.95	Peak


1-7GHz_Vertical_5GWiFi_B1_A_ANT1_5200MHz

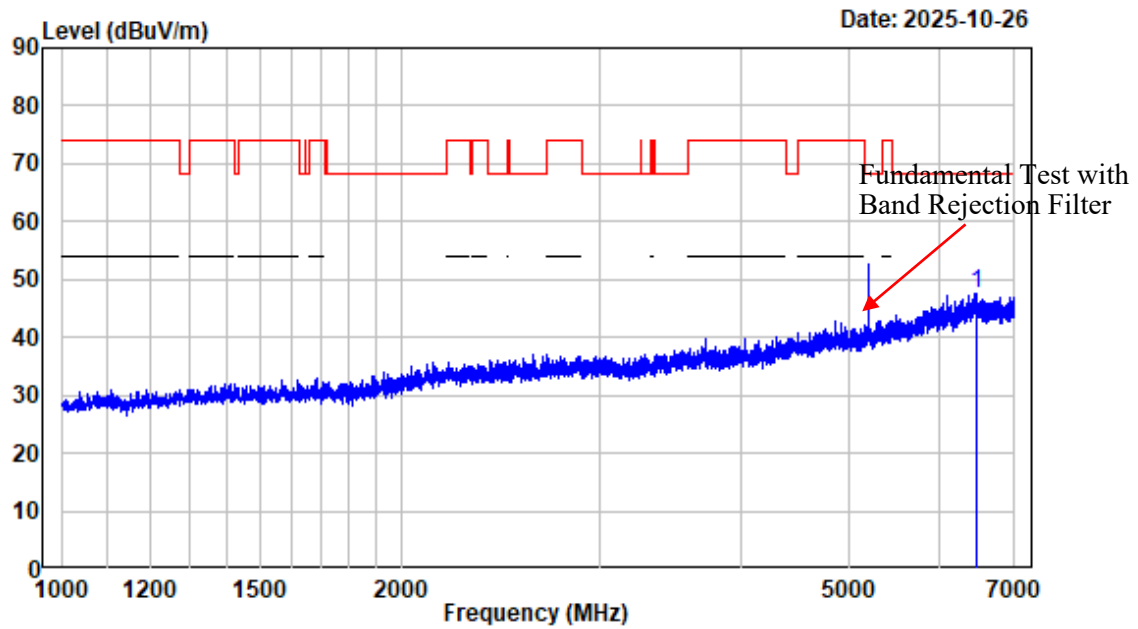

Condition : Vertical
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-A_ANT1-5200

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	
1	6487.000	-1.20	48.69	47.49	68.20 -20.71 Peak


7-18GHz_Horizontal_Peak_5GWiFi_B1_A_ANT1_5200MHz

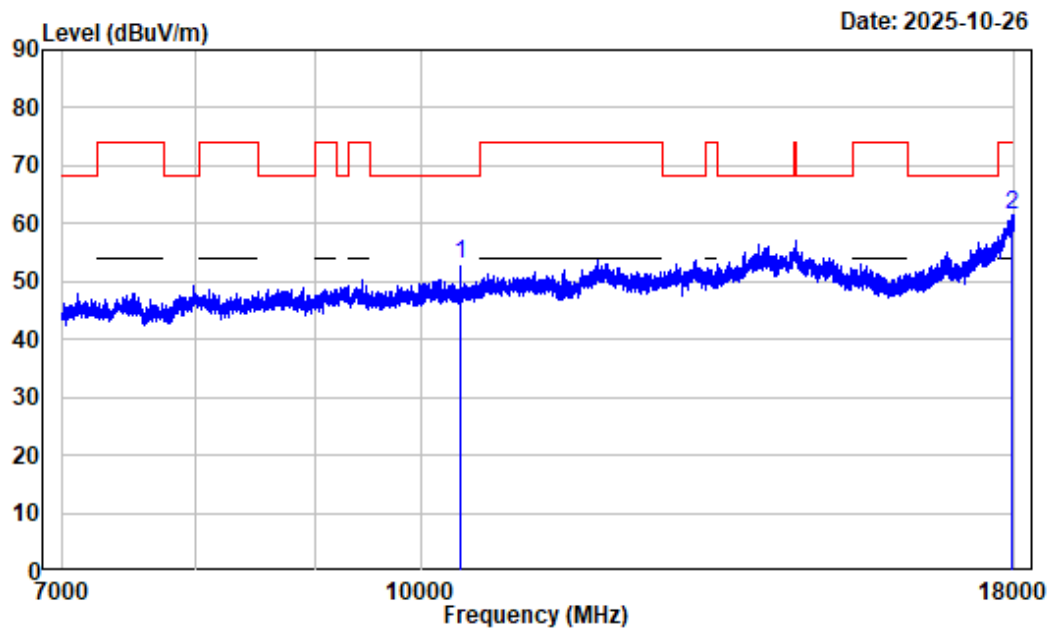

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5200

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	2.47	50.56	53.03	68.20	-15.17	Peak
2	17969.750	13.11	48.52	61.63	74.00	-12.37	Peak


7-18GHz_Horizontal_Average_5GWiFi_B1_A_ANT1_5200MHz

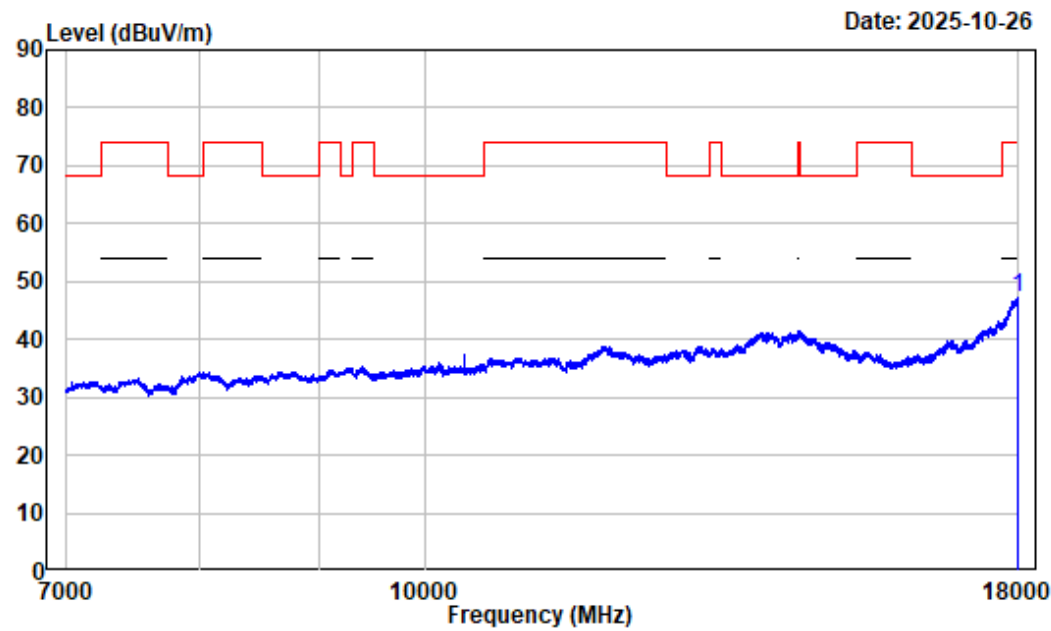

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5200

Freq		Factor	Read	Limit	Over	Remark
			Level	Level	Line	
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB
1 17991.750		13.22	34.09	47.31	54.00	-6.69 Average


7-18GHz_Vertical_Peak_5GWiFi_B1_A_ANT1_5200MHz

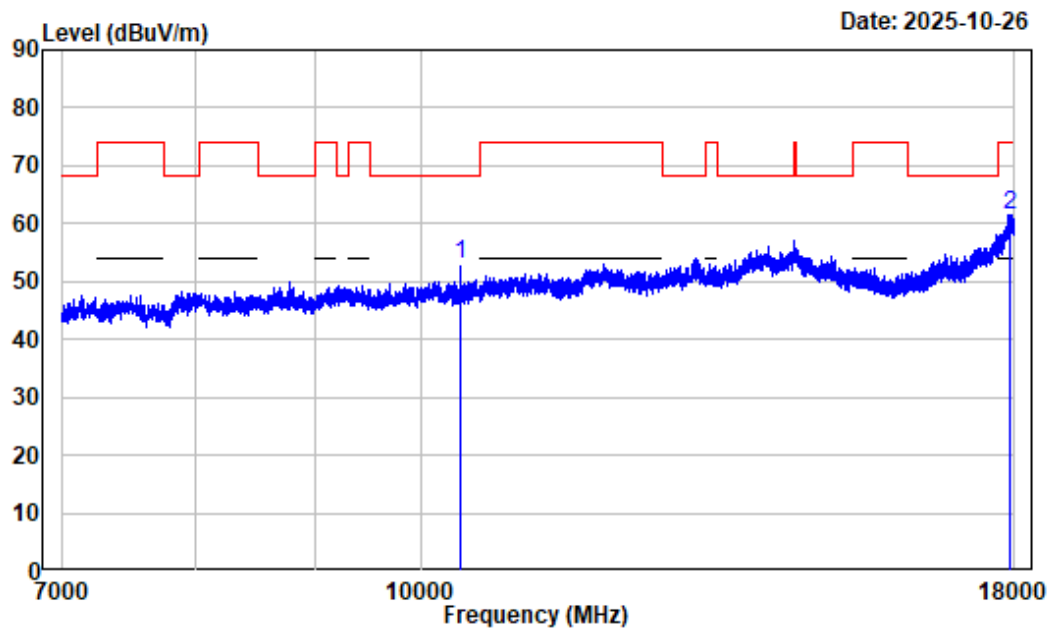

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5200

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	2.47	50.42	52.89	68.20	-15.31	Peak
2	17928.500	12.90	48.46	61.36	74.00	-12.64	Peak


7-18GHz_Vertical_Average_5GWiFi_B1_A_ANT1_5200MHz

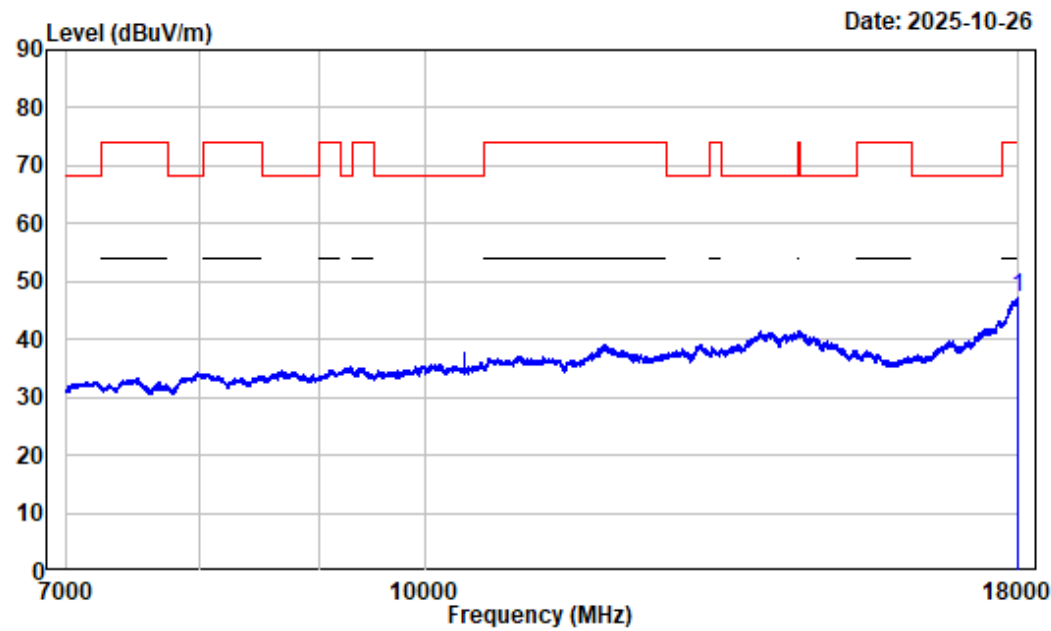

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A_ANT1-5200

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17991.750	13.22	33.87	47.09	54.00	-6.91	Average


1-7GHz_Horizontal_5GWiFi_B1_AC20_5200MHz

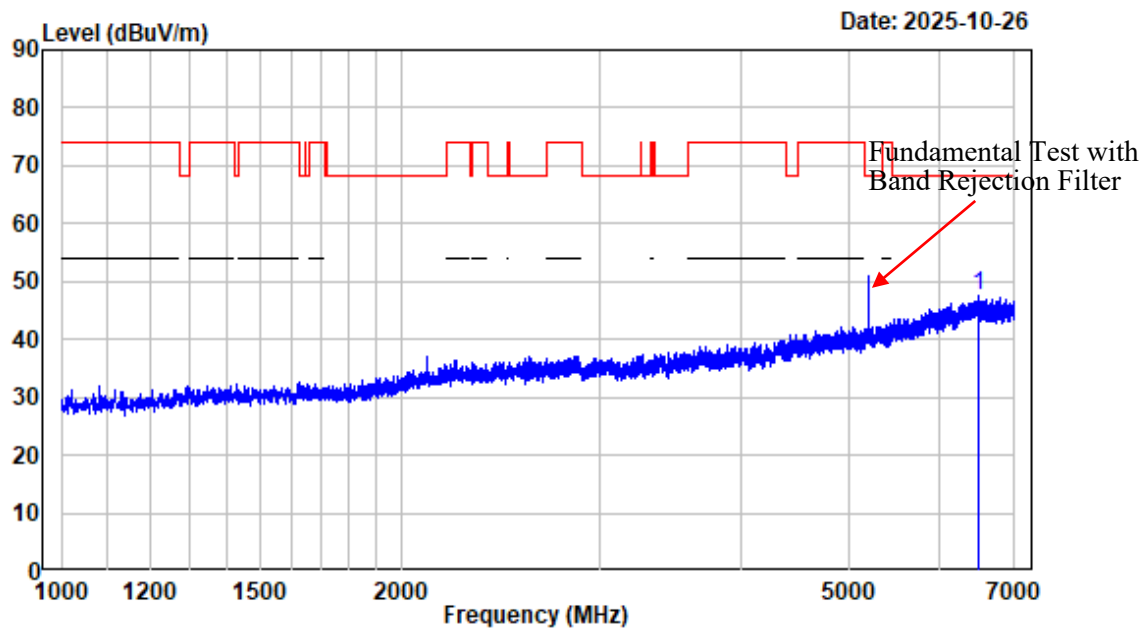

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5200

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6500.500	-1.20	48.73	47.53	68.20	-20.67	Peak


1-7GHz_Vertical_5GWiFi_B1_AC20_5200MHz

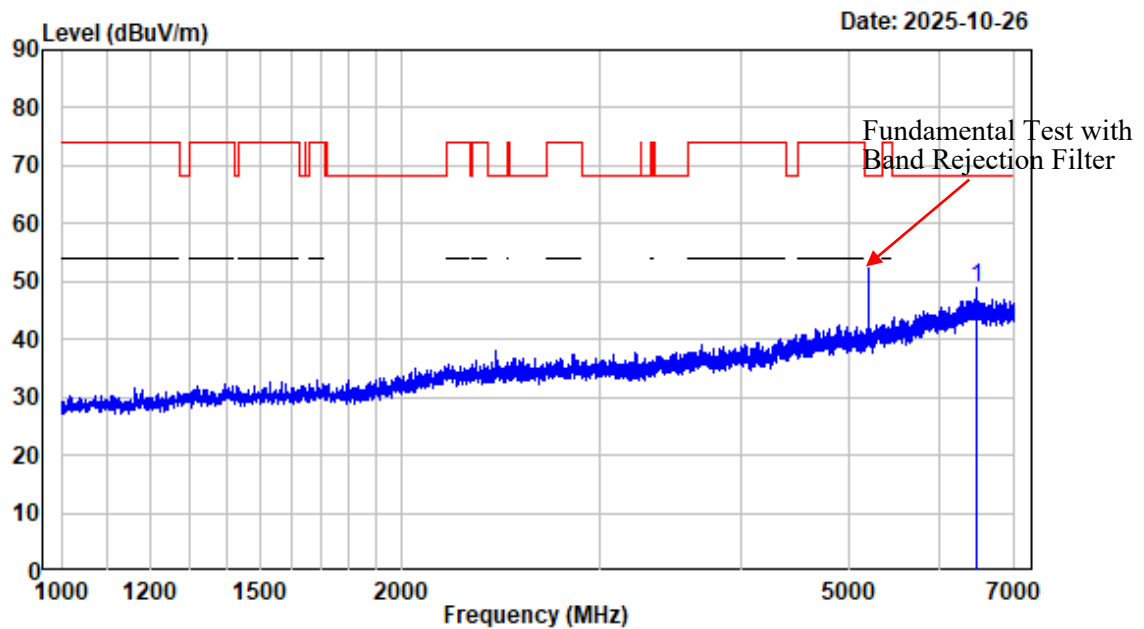

Condition : Vertical
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-AC20-5200

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	
1	6476.500	-1.18	50.01	48.83	68.20 -19.37 Peak


7-18GHz_Horizontal_Peak_5GWiFi_B1_AC20_5200MHz

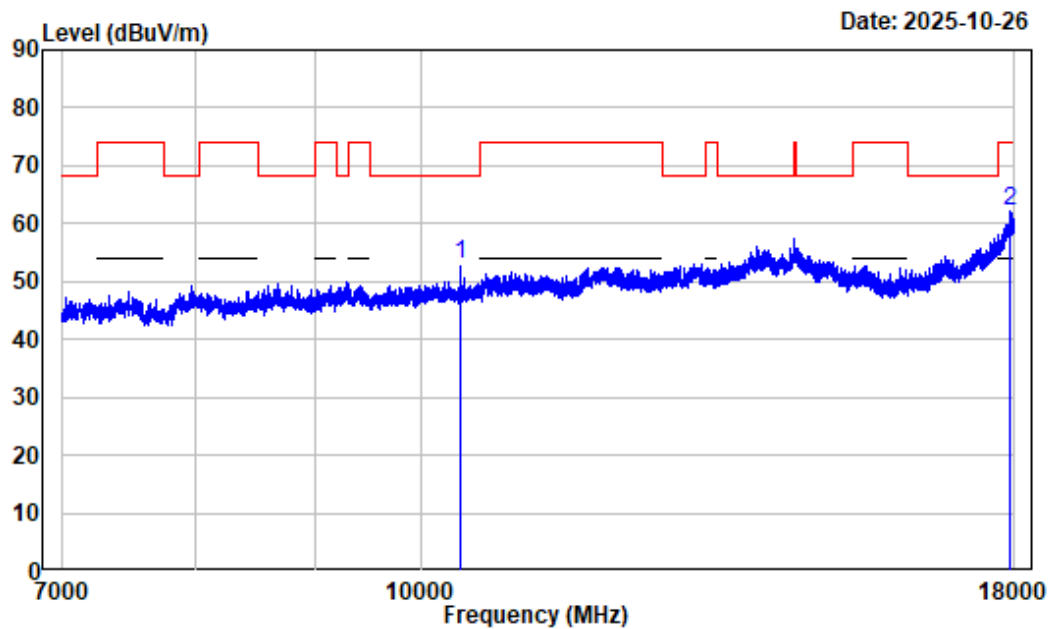

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5200

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	2.47	50.58	53.05	68.20	-15.15	Peak
2	17920.250	12.85	49.34	62.19	74.00	-11.81	Peak


7-18GHz_Horizontal_Average_5GWiFi_B1_AC20_5200MHz

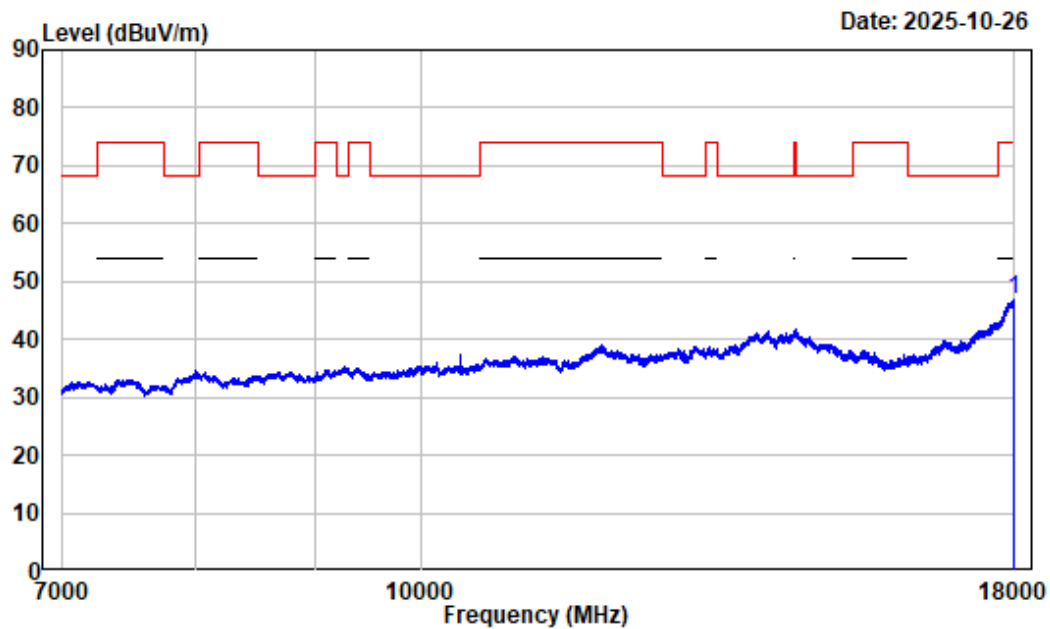

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5200

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17984.880	13.18	33.79	46.97	54.00	-7.03	Average


7-18GHz_Vertical_Peak_5GWiFi_B1_AC20_5200MHz

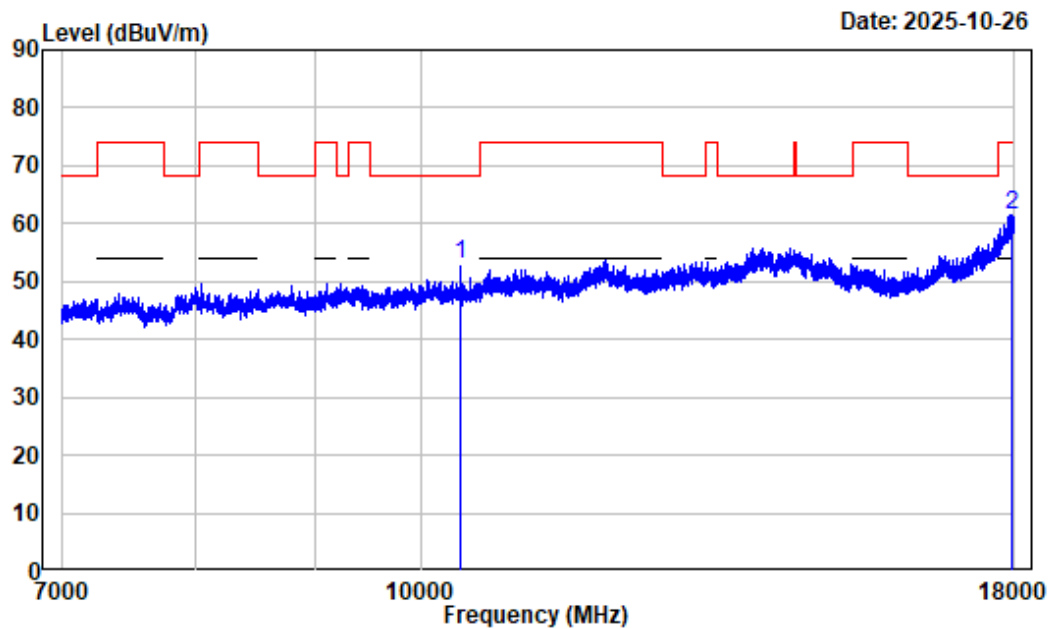

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5200

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	2.47	50.35	52.82	68.20	-15.38	Peak
2	17961.500	13.06	48.52	61.58	74.00	-12.42	Peak


7-18GHz_Vertical_Average_5GWiFi_B1_AC20_5200MHz

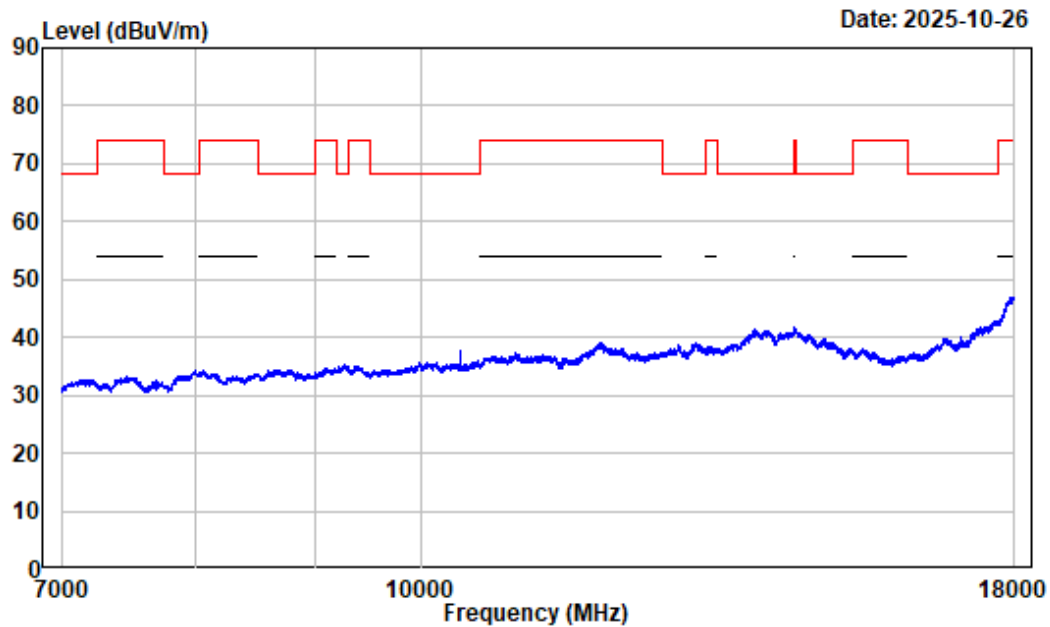

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5200

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 18000.000	13.26	33.67	46.93	54.00	-7.07	Average


1-7GHz_Horizontal_5GWiFi_B1_AC40_5230MHz

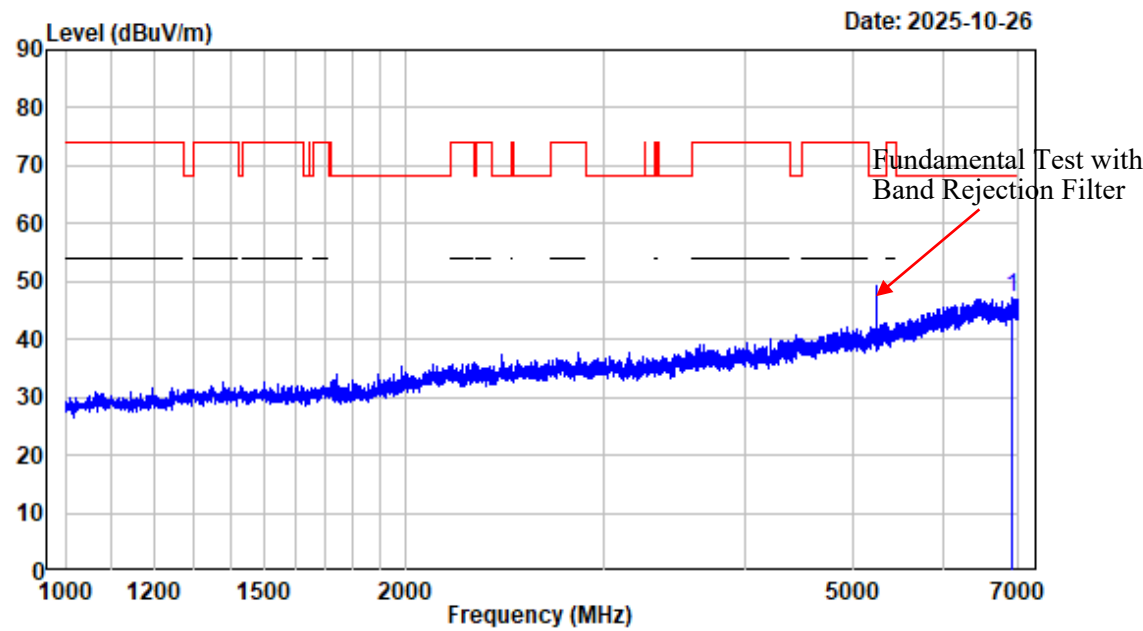

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq		Factor	Read	Limit	Over	Remark
			Level	Level	Line	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	6904.000	-1.27	48.34	47.07	68.20	-21.13 Peak


1-7GHz_Vertical_5GWiFi_B1_AC40_5230MHz

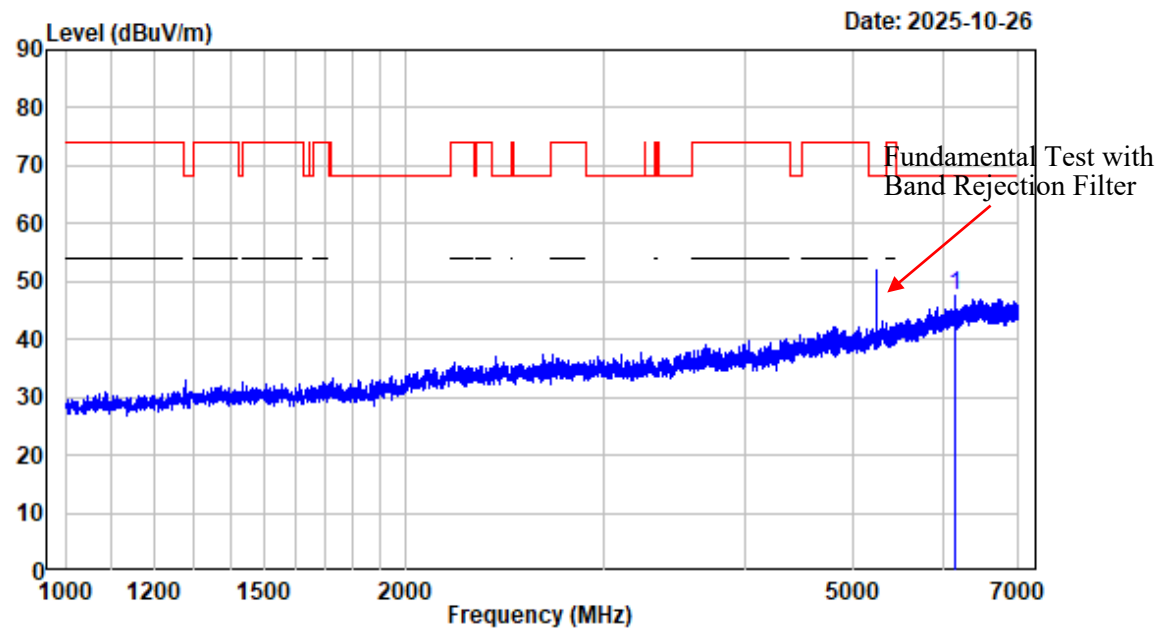

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	6146.500	-2.44	49.99	47.55	68.20	-20.65	Peak


7-18GHz_Horizontal_Peak_5GWiFi_B1_AC40_5230MHz

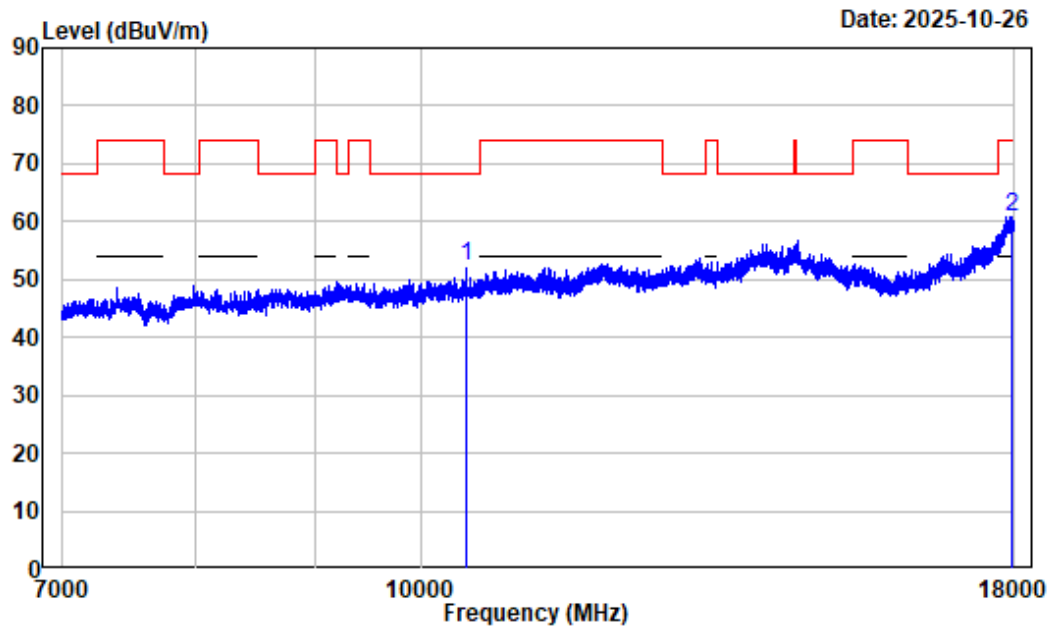

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	2.26	50.03	52.29	68.20	-15.91	Peak
2	17960.130	13.06	47.86	60.92	74.00	-13.08	Peak


7-18GHz_Horizontal_Average_5GWiFi_B1_AC40_5230MHz

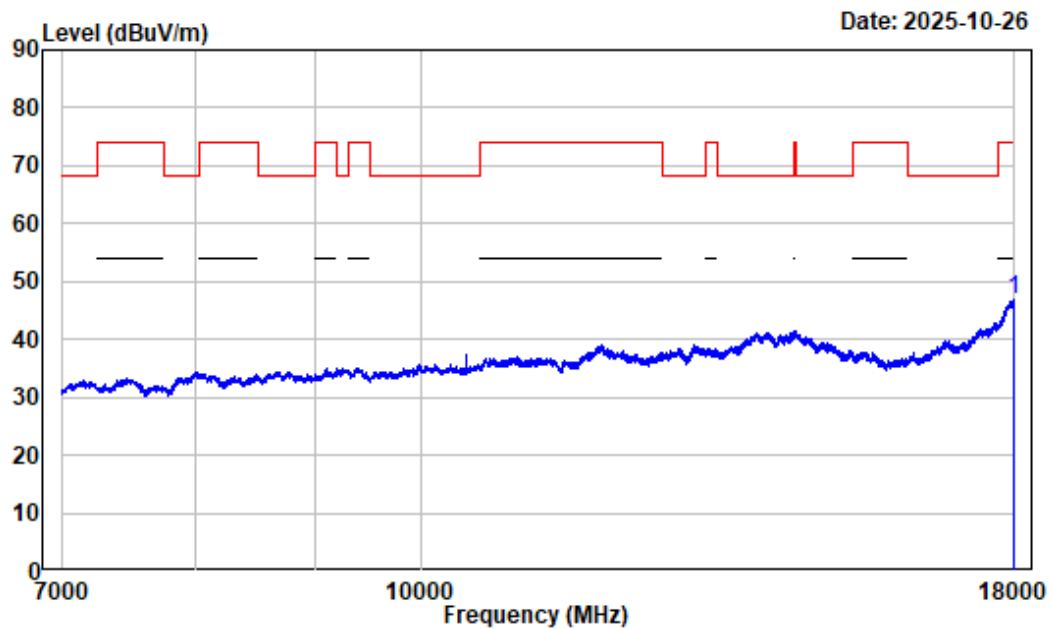

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17983.500	13.17	33.81	46.98	54.00	-7.02	Average


7-18GHz_Vertical_Peak_5GWiFi_B1_AC40_5230MHz

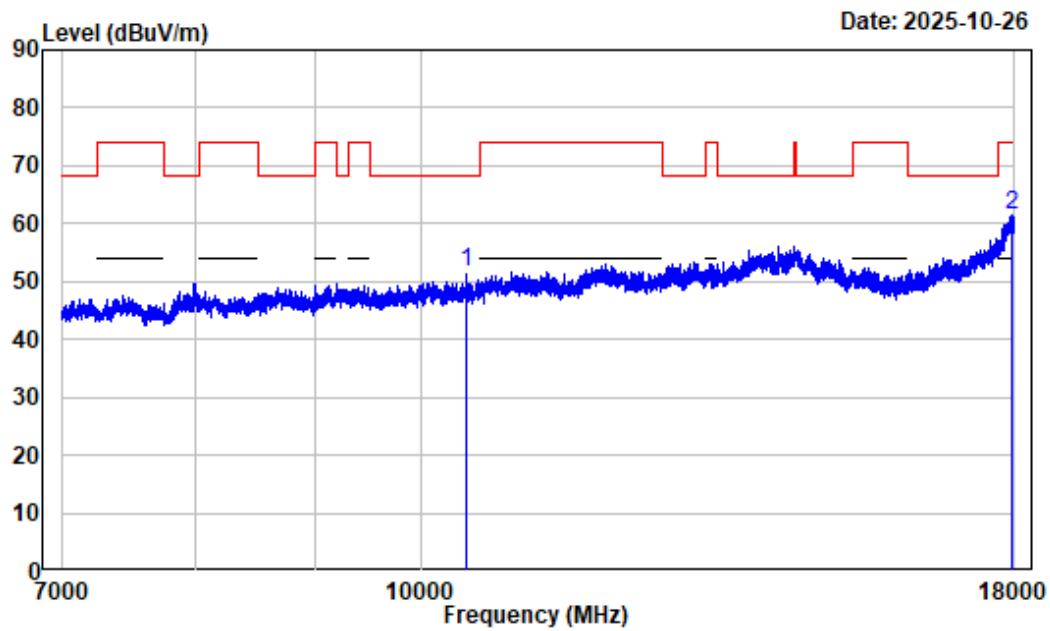

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	2.26	49.52	51.78	68.20	-16.42	Peak
2	17962.880	13.07	48.26	61.33	74.00	-12.67	Peak


7-18GHz_Vertical_Average_5GWiFi_B1_AC40_5230MHz

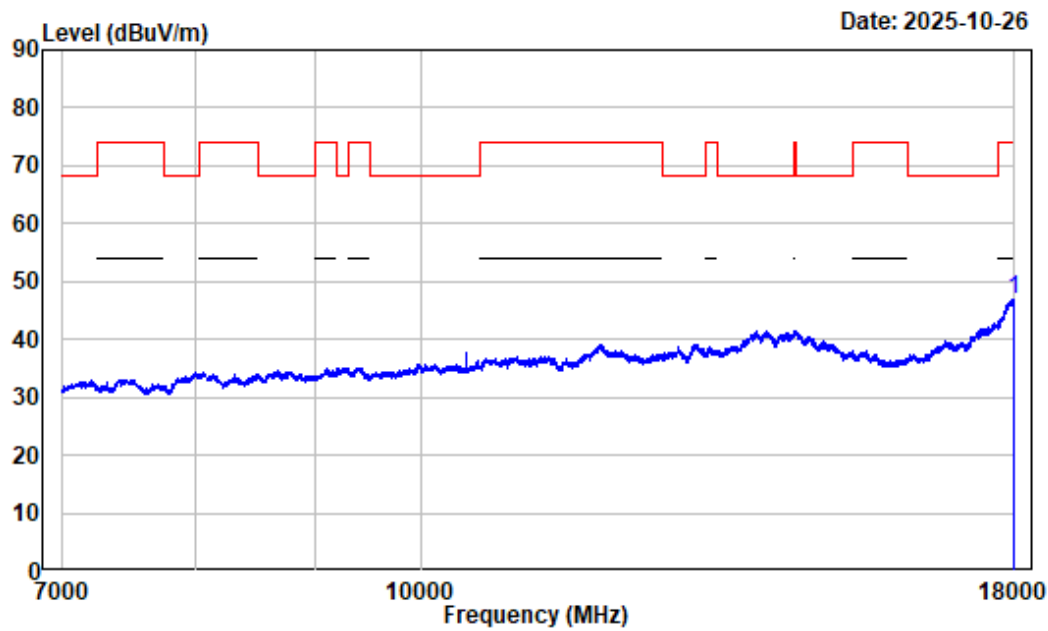

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17997.250	13.25	33.77	47.02	54.00	-6.98	Average


1-7GHz_Horizontal_5GWiFi_B1_AC80_5210MHz

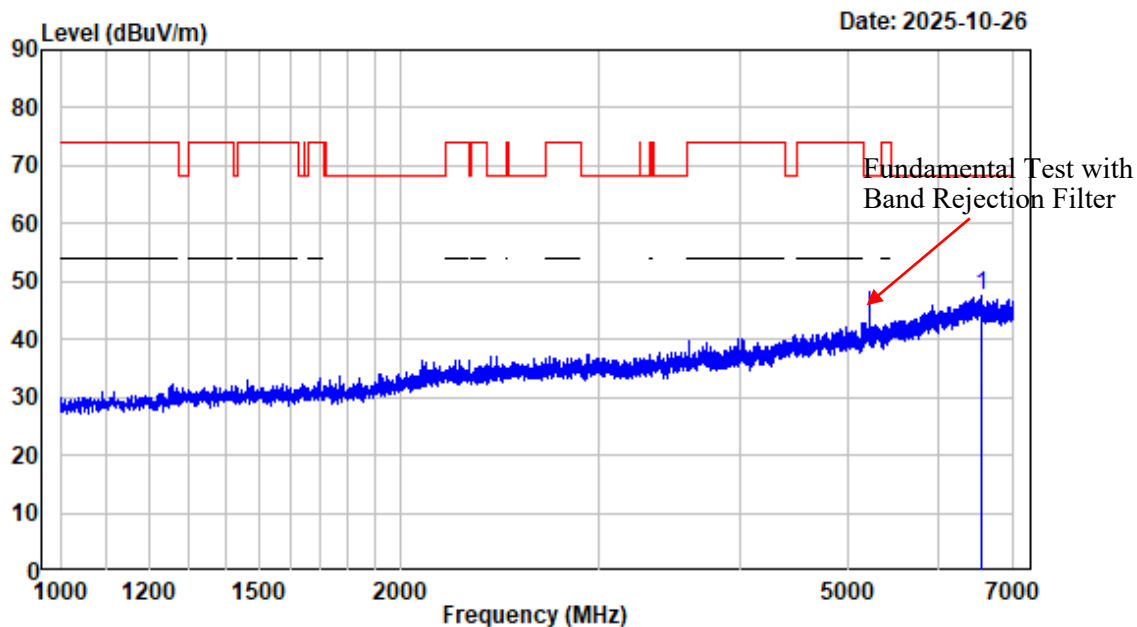

Condition : Horizontal
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6558.250	-1.26	48.78	47.52	68.20	-20.68	Peak


1-7GHz_Vertical_5GWiFi_B1_AC80_5210MHz

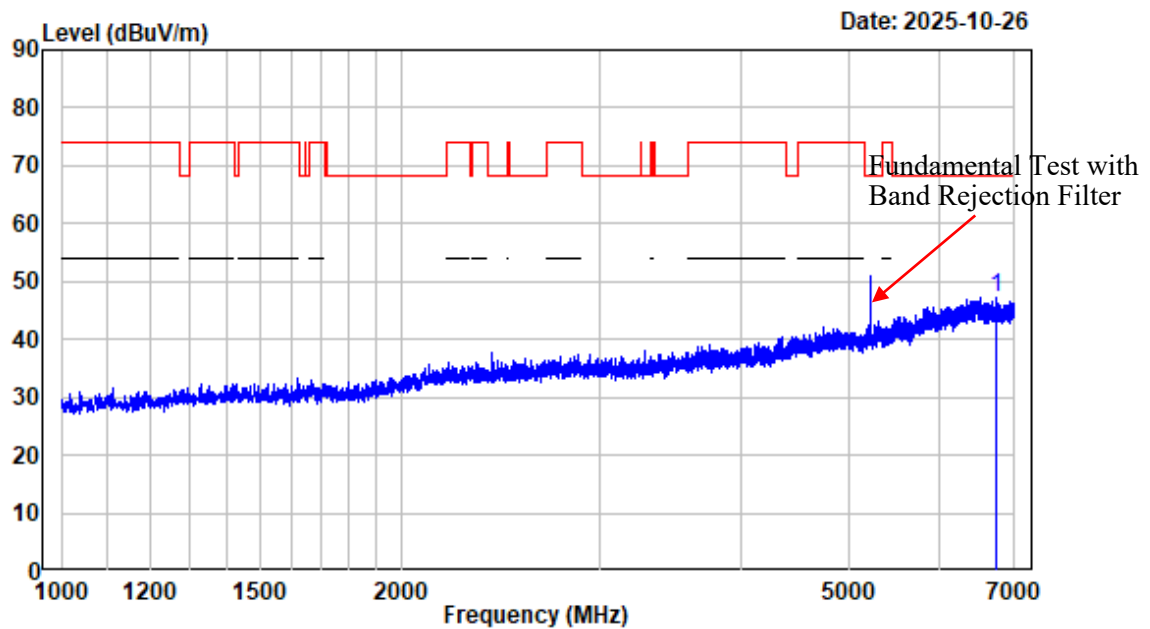

Condition : Vertical
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6739.750	-1.45	48.53	47.08	68.20	-21.12	Peak


7-18GHz Horizontal Peak 5GWiFi B1 AC80 5210MHz

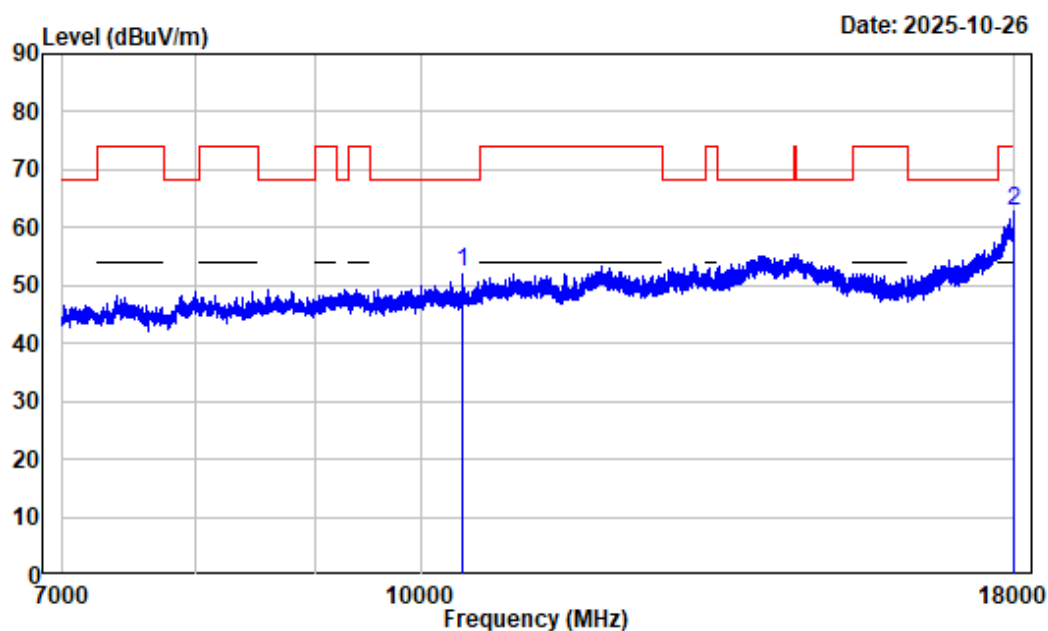

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10420.000	2.40	49.89	52.29	68.20	-15.91	Peak
2	17980.750	13.17	49.81	62.98	74.00	-11.02	Peak


7-18GHz_Horizontal_Average_5GWiFi_B1_AC80_5210MHz

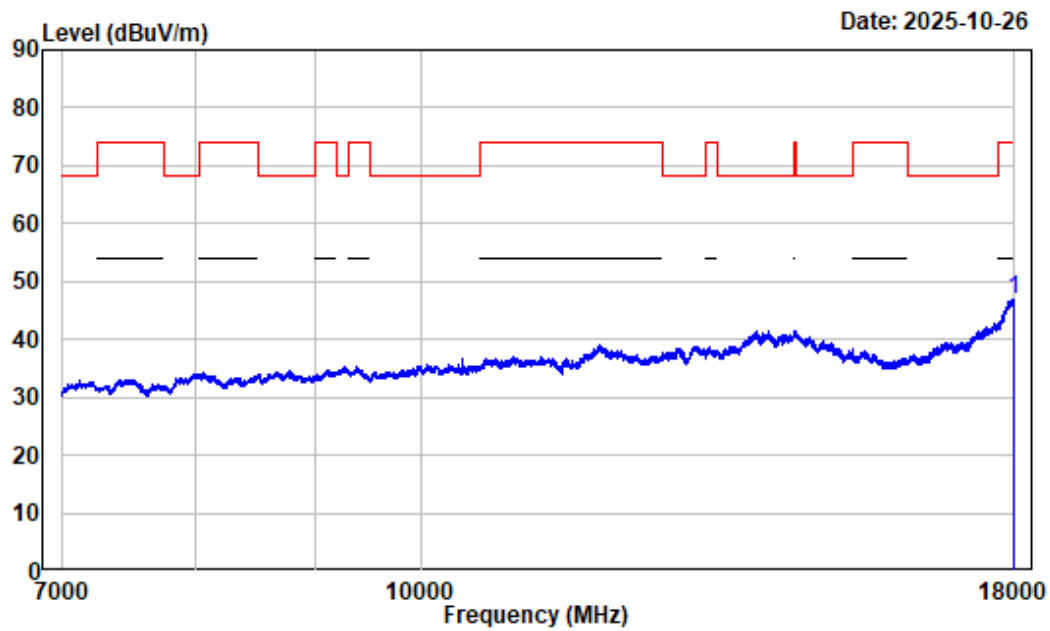

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17994.500	13.23	33.73	46.96	54.00	-7.04	Average


7-18GHz_Vertical_Peak_5GWiFi_B1_AC80_5210MHz

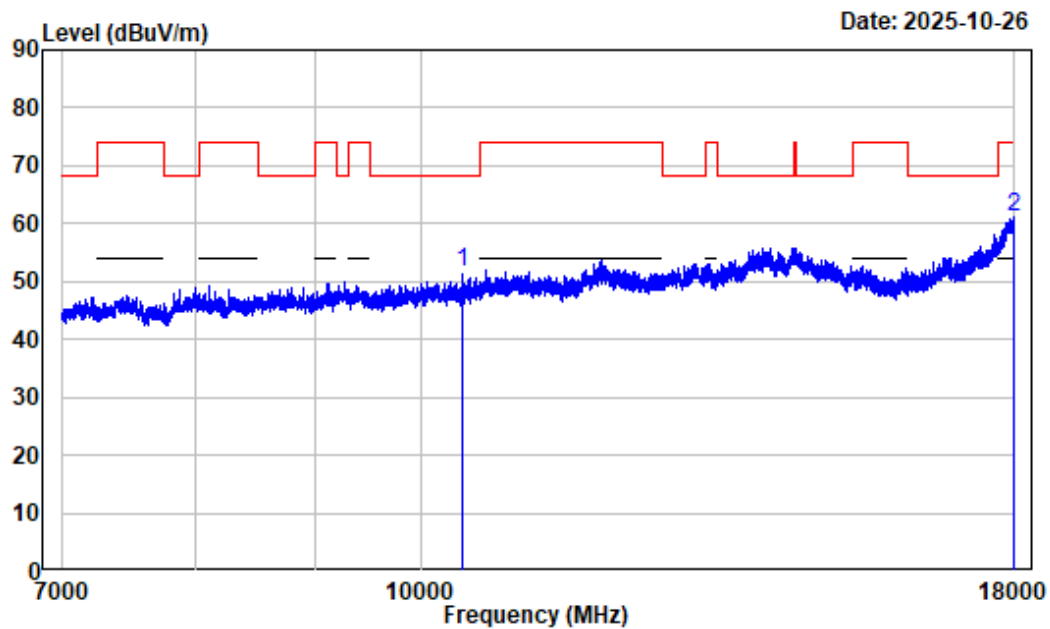

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10420.000	2.40	49.38	51.78	68.20	-16.42	Peak
2	17979.380	13.16	48.14	61.30	74.00	-12.70	Peak


7-18GHz_Vertical_Average_5GWiFi_B1_AC80_5210MHz

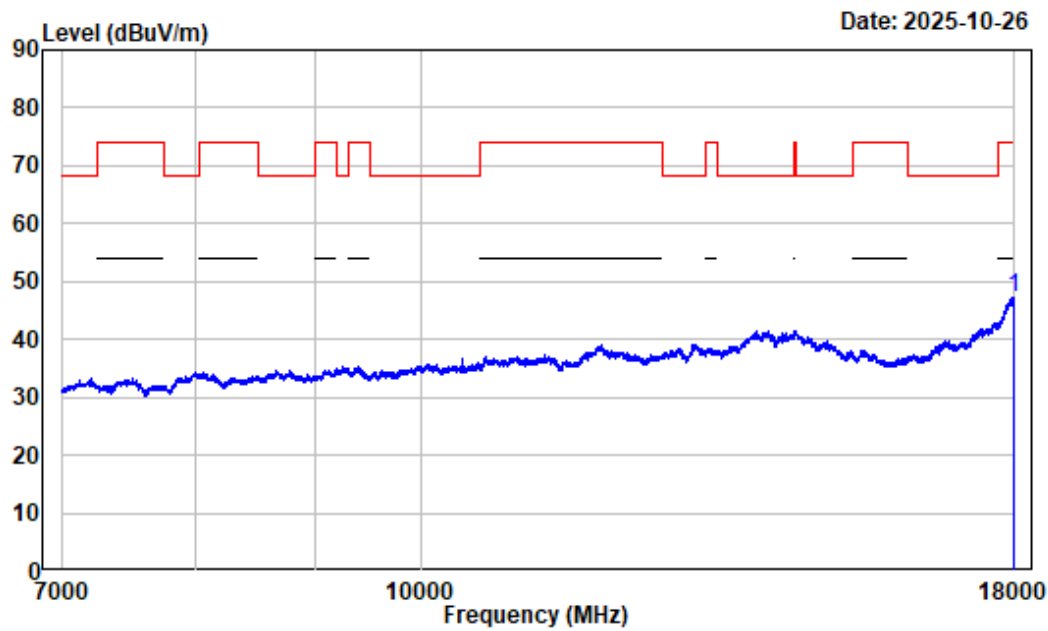

Condition : Vertical
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Average reading: RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq		Factor	Read	Limit	Over	Remark
			Level	Level	Line	
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB
1 17980.750		13.17	34.09	47.26	54.00	-6.74 Average


1-7GHz_Horizontal_5GWiFi_B1_AX20_5200MHz

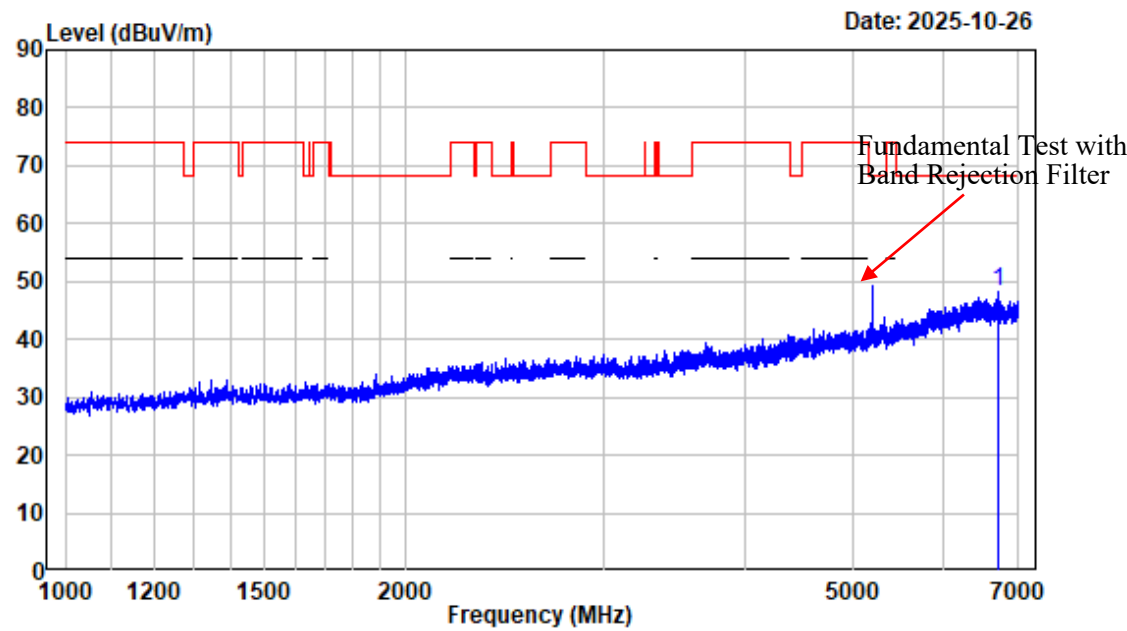

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5200

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6707.500	-1.51	49.84	48.33	68.20	-19.87	Peak


1-7GHz_Vertical_5GWiFi_B1_AX20_5200MHz

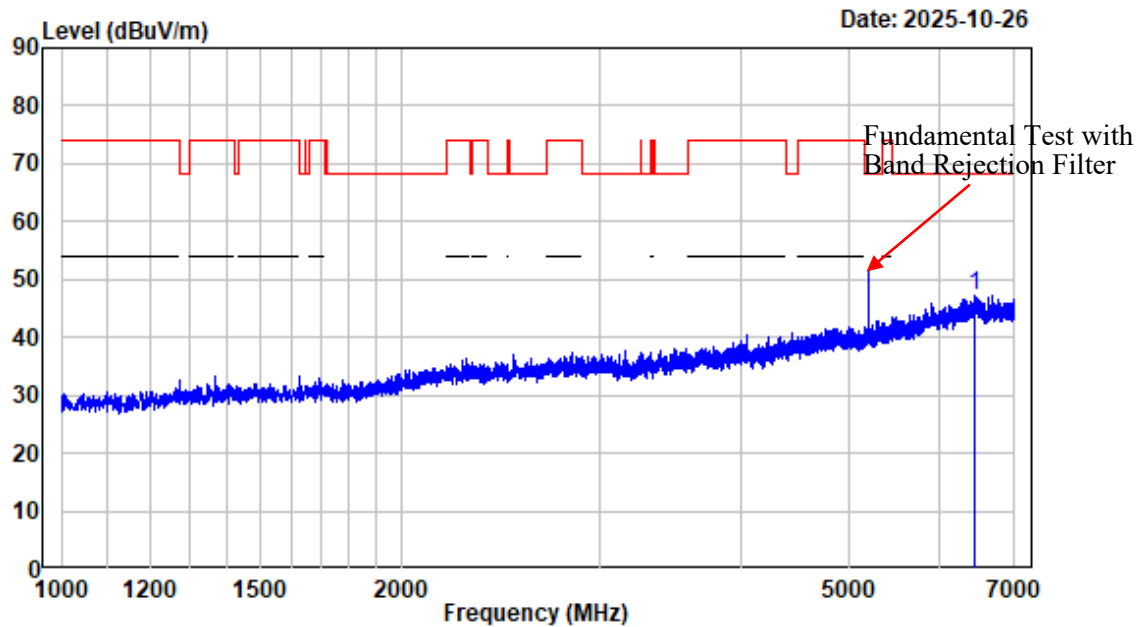

Condition : Vertical
 Project No. : 2501X77241E-RF
 Tester : Wing K Ji
 Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-AX20-5200

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	
1	6457.000	-1.18	48.27	47.09	68.20 -21.11 Peak

7-18GHz_Horizontal_Peak_5GWiFi_B1_AX20_5200MHz

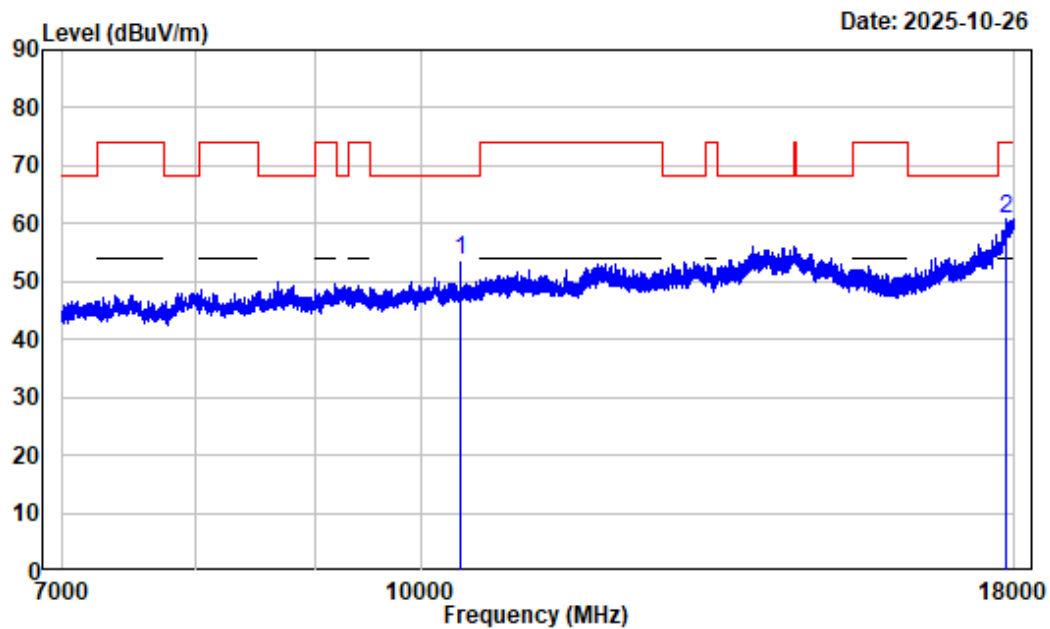

Condition : Horizontal
Project No. : 2501X77241E-RF
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AX20-5200

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	2.47	51.31	53.78	68.20	-14.42	Peak
2	17866.630	12.13	48.61	60.74	74.00	-13.26	Peak