

right ear Low CH (GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	35.32	31.78	8.60	32.09	43.61	74.00	-30.39	Vertical
7206.00	30.52	36.15	11.65	32.00	46.32	74.00	-27.68	Vertical
9608.00	30.30	37.95	14.14	31.62	50.77	74.00	-23.23	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	39.20	31.78	8.60	32.09	47.49	74.00	-26.51	Horizontal
7206.00	32.10	36.15	11.65	32.00	47.90	74.00	-26.10	Horizontal
9608.00	29.53	37.95	14.14	31.62	50.00	74.00	-24.00	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	24.51	31.78	8.60	32.09	32.80	54.00	-21.20	Vertical
7206.00	19.43	36.15	11.65	32.00	35.23	54.00	-18.77	Vertical
9608.00	18.63	37.95	14.14	31.62	39.10	54.00	-14.90	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	28.52	31.78	8.60	32.09	36.81	54.00	-17.19	Horizontal
7206.00	21.47	36.15	11.65	32.00	37.27	54.00	-16.73	Horizontal
9608.00	18.19	37.95	14.14	31.62	38.66	54.00	-15.34	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

right ear Middle CH (GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	35.19	31.85	8.67	32.12	43.59	74.00	-30.41	Vertical
7323.00	30.43	36.37	11.72	31.89	46.63	74.00	-27.37	Vertical
9764.00	30.22	38.35	14.25	31.62	51.20	74.00	-22.80	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	39.05	31.85	8.67	32.12	47.45	74.00	-26.55	Horizontal
7323.00	32.00	36.37	11.72	31.89	48.20	74.00	-25.80	Horizontal
9764.00	29.44	38.35	14.25	31.62	50.42	74.00	-23.58	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	24.41	31.85	8.67	32.12	32.81	54.00	-21.19	Vertical
7323.00	19.36	36.37	11.72	31.89	35.56	54.00	-18.44	Vertical
9764.00	18.56	38.35	14.25	31.62	39.54	54.00	-14.46	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	28.40	31.85	8.67	32.12	36.80	54.00	-17.20	Horizontal
7323.00	21.39	36.37	11.72	31.89	37.59	54.00	-16.41	Horizontal
9764.00	18.12	38.35	14.25	31.62	39.10	54.00	-14.90	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

right ear High CH(GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	34.74	31.93	8.73	32.16	43.24	74.00	-30.76	Vertical
7440.00	30.13	36.59	11.79	31.78	46.73	74.00	-27.27	Vertical
9920.00	29.96	38.81	14.38	31.88	51.27	74.00	-22.73	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	38.51	31.93	8.73	32.16	47.01	74.00	-26.99	Horizontal
7440.00	31.66	36.59	11.79	31.78	48.26	74.00	-25.74	Horizontal
9920.00	29.14	38.81	14.38	31.88	50.45	74.00	-23.55	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	24.05	31.93	8.73	32.16	32.55	54.00	-21.45	Vertical
7440.00	19.11	36.59	11.79	31.78	35.71	54.00	-18.29	Vertical
9920.00	18.35	38.81	14.38	31.88	39.66	54.00	-14.34	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	27.99	31.93	8.73	32.16	36.49	54.00	-17.51	Horizontal
7440.00	21.12	36.59	11.79	31.78	37.72	54.00	-16.28	Horizontal
9920.00	17.87	38.81	14.38	31.88	39.18	54.00	-14.82	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

8.7 RADIATED BAND EDGE DATA

Remark: All restriction band have been tested, and only the worst case is shown in report

left ear Low CH (GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	39.25	27.59	5.38	30.18	42.04	74.00	-31.96	Horizontal
2400.00	52.93	27.58	5.39	30.18	55.72	74.00	-18.28	Horizontal
2390.00	38.89	27.59	5.38	30.18	41.68	74.00	-32.32	Vertical
2400.00	52.07	27.58	5.39	30.18	54.86	74.00	-19.14	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	31.79	27.59	5.38	30.18	34.58	54.00	-19.42	Horizontal
2400.00	39.60	27.58	5.39	30.18	42.39	54.00	-11.61	Horizontal
2390.00	31.57	27.59	5.38	30.18	34.36	54.00	-19.64	Vertical
2400.00	41.24	27.58	5.39	30.18	44.03	54.00	-9.97	Vertical

left ear High CH(GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	42.49	27.53	5.47	29.93	45.56	74.00	-28.44	Horizontal
2500.00	43.75	27.55	5.49	29.93	46.86	74.00	-27.14	Horizontal
2483.50	42.07	27.53	5.47	29.93	45.14	74.00	-28.86	Vertical
2500.00	40.90	27.55	5.49	29.93	44.01	74.00	-29.99	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.27	27.53	5.47	29.93	36.34	54.00	-17.66	Horizontal
2500.00	32.65	27.55	5.49	29.93	35.76	54.00	-18.24	Horizontal
2483.50	33.81	27.53	5.47	29.93	36.88	54.00	-17.12	Vertical
2500.00	34.43	27.55	5.49	29.93	37.54	54.00	-16.46	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

right ear Low CH (GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	37.16	27.61	5.36	30.18	39.95	74.00	-34.05	Horizontal
2390.00	37.32	27.59	5.38	30.18	40.11	74.00	-33.89	Horizontal
2400.00	53.32	27.58	5.39	30.18	56.11	74.00	-17.89	Horizontal
2310.00	37.65	27.61	5.36	30.18	40.44	74.00	-33.56	Vertical
2390.00	37.34	27.59	5.38	30.18	40.13	74.00	-33.87	Vertical
2400.00	54.76	27.58	5.39	30.18	57.55	74.00	-16.45	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	29.65	27.61	5.36	30.18	32.44	54.00	-21.56	Horizontal
2390.00	29.13	27.59	5.38	30.18	31.92	54.00	-22.08	Horizontal
2400.00	40.03	27.58	5.39	30.18	42.82	54.00	-11.18	Horizontal
2310.00	28.34	27.61	5.36	30.18	31.13	54.00	-22.87	Vertical
2390.00	28.68	27.59	5.38	30.18	31.47	54.00	-22.53	Vertical
2400.00	41.15	27.58	5.39	30.18	43.94	54.00	-10.06	Vertical

right ear High CH(GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	38.76	27.53	5.47	29.93	41.83	74.00	-32.17	Horizontal
2500.00	38.99	27.55	5.49	29.93	42.10	74.00	-31.90	Horizontal
2483.50	38.68	27.53	5.47	29.93	41.75	74.00	-32.25	Vertical
2500.00	39.46	27.55	5.49	29.93	42.57	74.00	-31.43	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	31.89	27.53	5.47	29.93	34.96	54.00	-19.04	Horizontal
2500.00	30.68	27.55	5.49	29.93	33.79	54.00	-20.21	Horizontal
2483.50	32.64	27.53	5.47	29.93	35.71	54.00	-18.29	Vertical
2500.00	30.14	27.55	5.49	29.93	33.25	54.00	-20.75	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

9. AVERAGE TIME OF OCCUPANCY

9.1 LIMIT

FCC Part 5 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247(a)(1)	Average Time of Occupancy	0.4 sec	2400-2483.5

9.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer.
- Set RBW =1MHz/VBW =1MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is $3.37 \times 31.6 = 106.6$.
- DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is $5.06 \times 31.6 = 160$.
- DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is $10.12 \times 31.6 = 320$.


9.3 TEST SETUP



9.4 TEST RESULTS

AVERAGE TIME OF OCCUPANCY							
CONDITION	MODE	FREQUENCY (MHZ)	PULSE TIME (MS)	AVERAGE TIME OF OCCUPANCY (MS)	LIMIT (MS)	BURST NUMBER	RESULTS
NVNT	1DH1	2402	0.415	130.662	400	318	PASS
NVNT	1DH3	2480	1.676	259.842	400	160	PASS
NVNT	1DH5	2480	2.908	305.340	400	171	PASS
NVNT	2DH1	2402	0.396	126.165	400	319	PASS
NVNT	2DH3	2441	1.658	258.586	400	156	PASS
NVNT	2DH5	2480	2.9	307.400	400	106	PASS


9.5 ORIGINAL TEST DATA

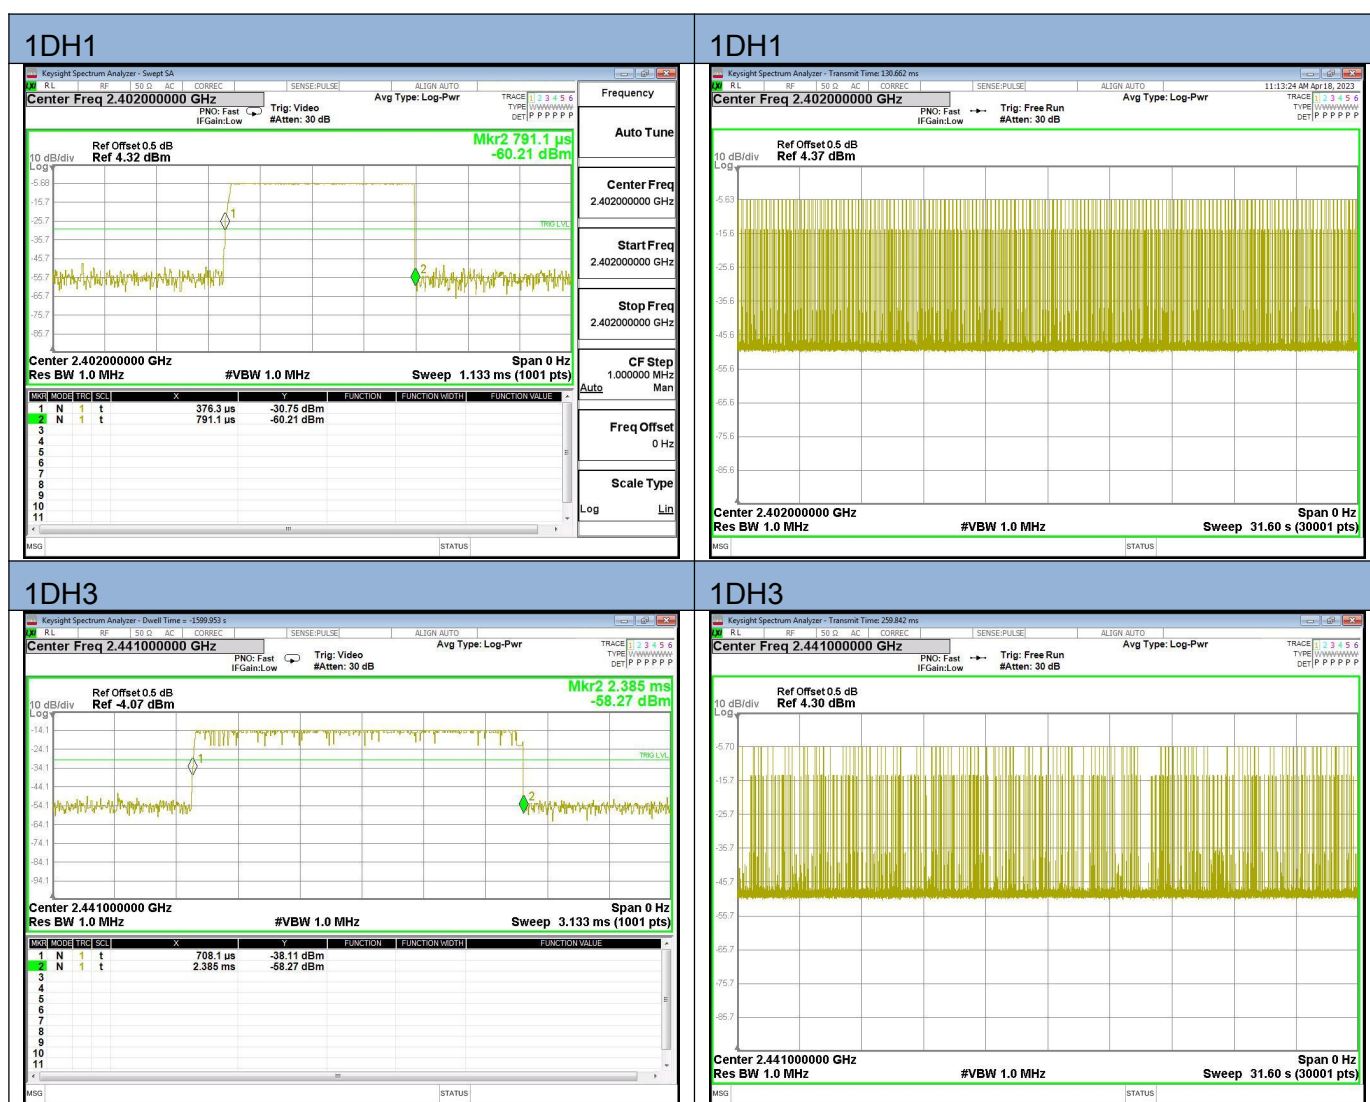


1DH5




1DH5

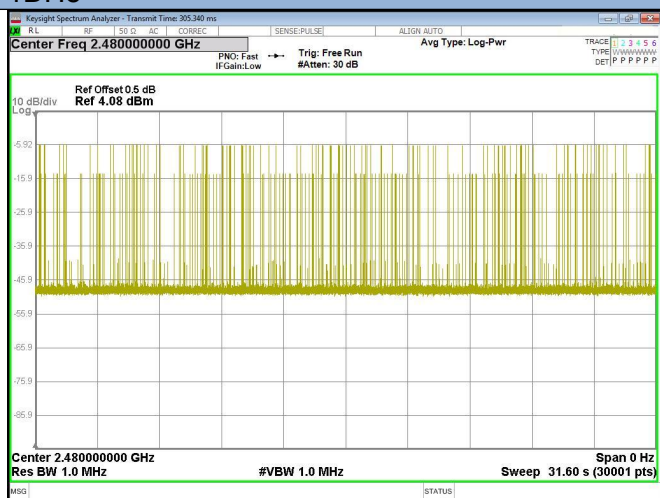


2DH1

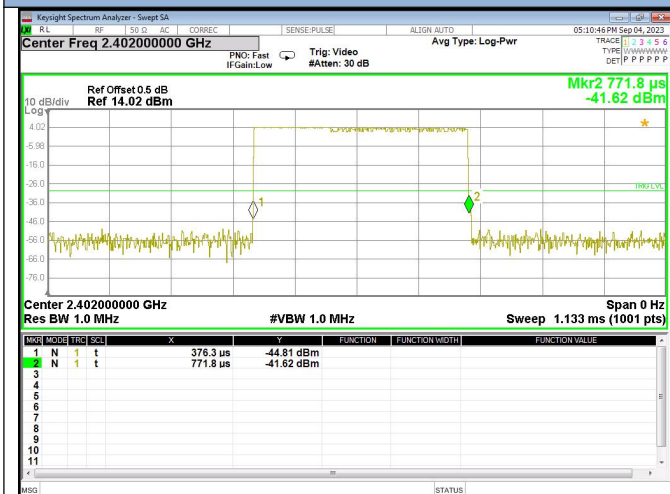


2DH1

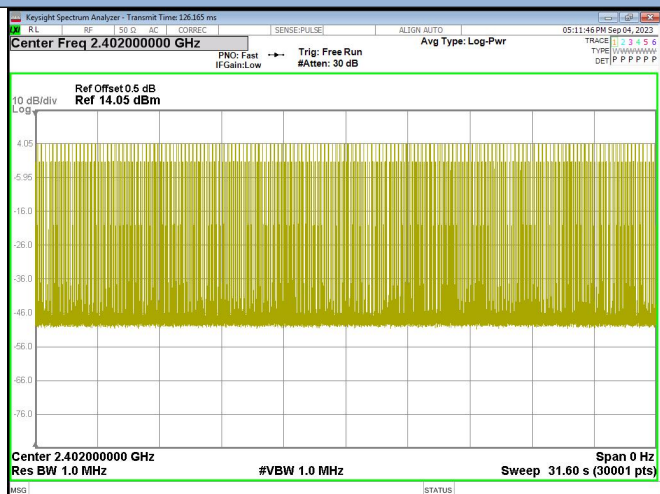


2DH3

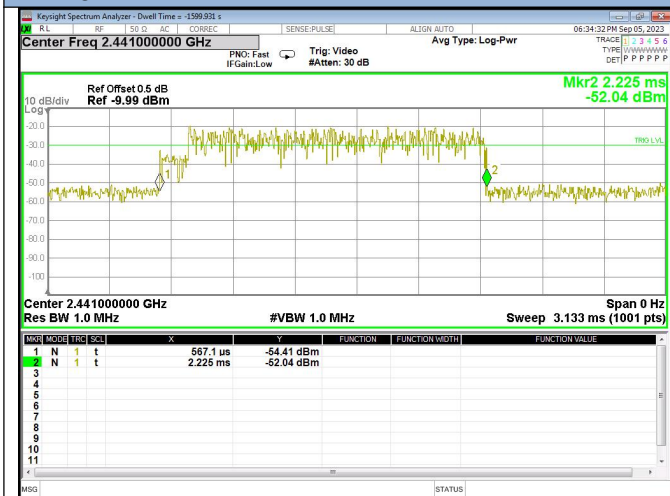

2DH3

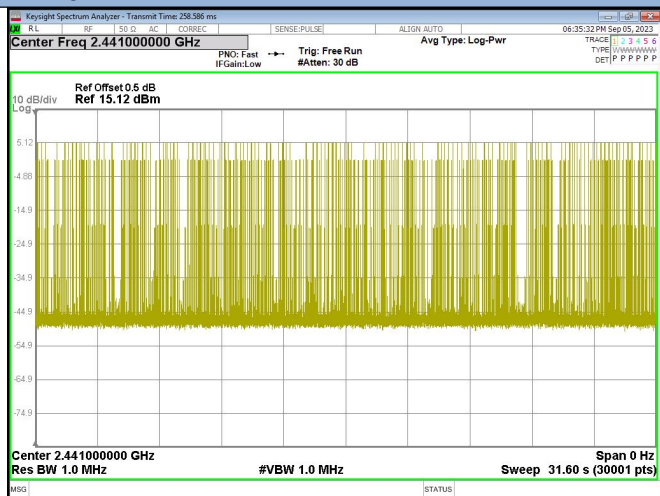

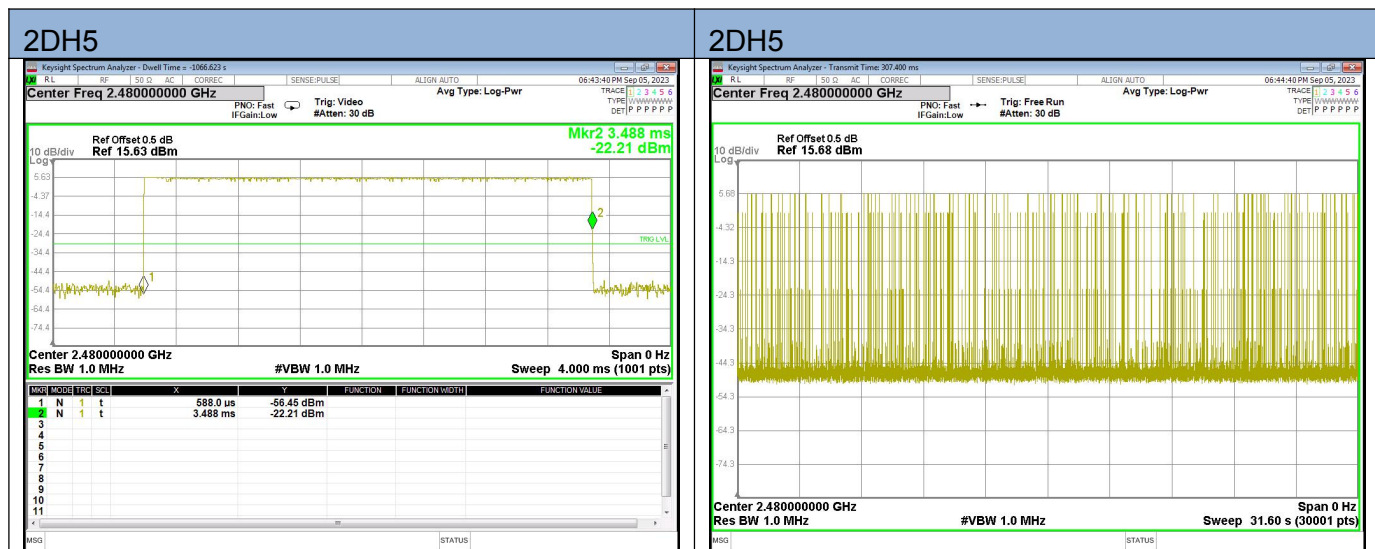

10. HOPPING CHANNEL SEPARATION MEASUREMENT

10.1 LIMIT


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 20 dB Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

10.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement

10.3 TEST SETUP

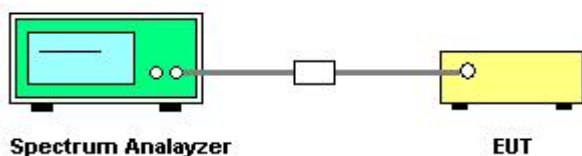


10.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.


10.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	GFSK Mode	Test Voltage:	DC 3.7V


Modulation	Frequency (MHz)	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
GFSK	1DH1	2402	1.000	0.54	Pass
	1DH3	2441	1.002	0.55	Pass
	1DH5	2480	1.006	0.52	Pass
	2DH1	2402	1.004	0.85	Pass
	2DH3	2441	0.998	0.86	Pass
	2DH5	2480	0.998	0.84	Pass

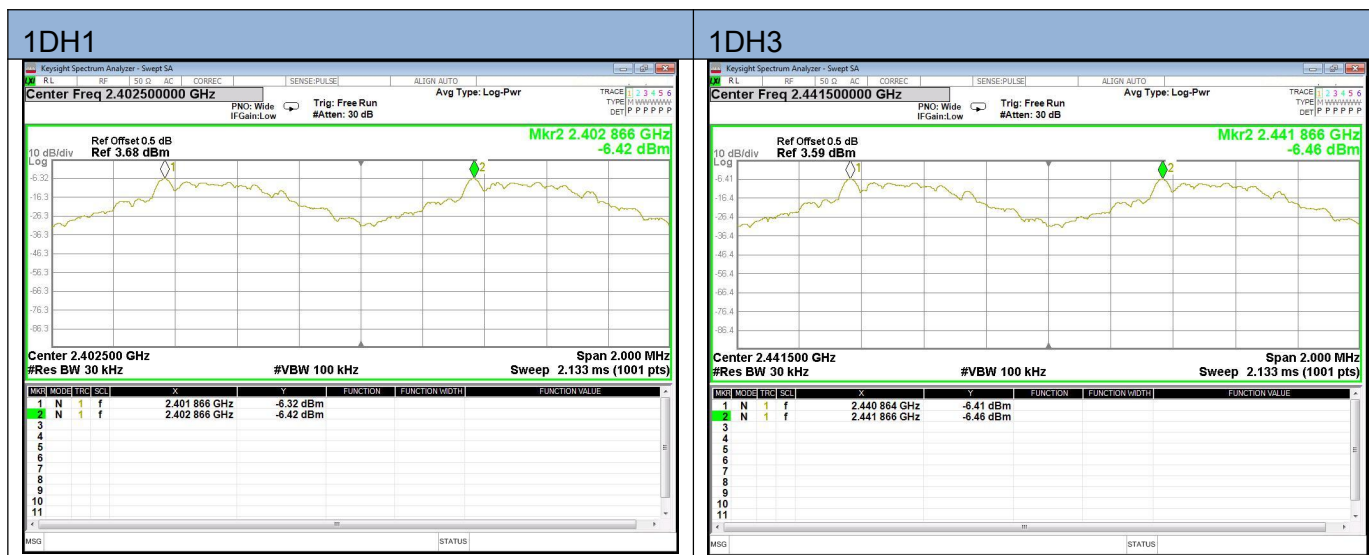


1DH5

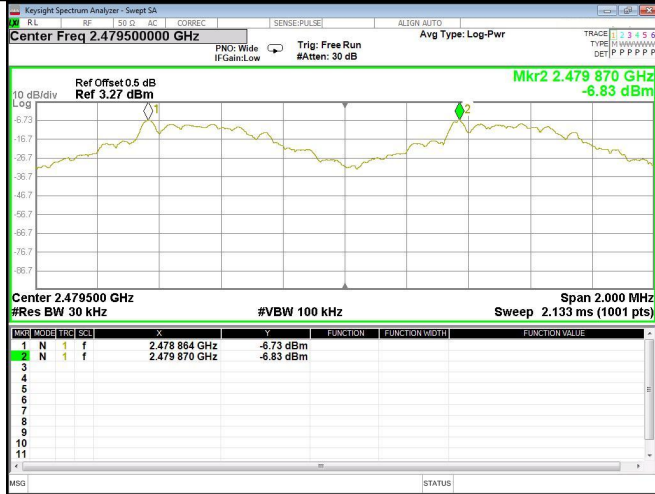


2DH1

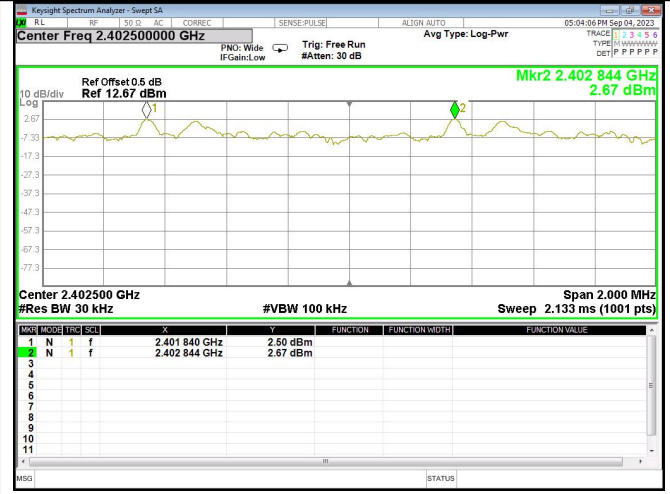

2DH3

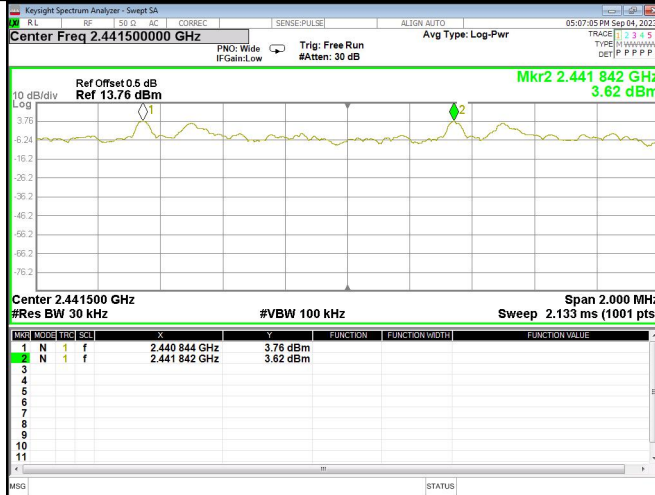

2DH5

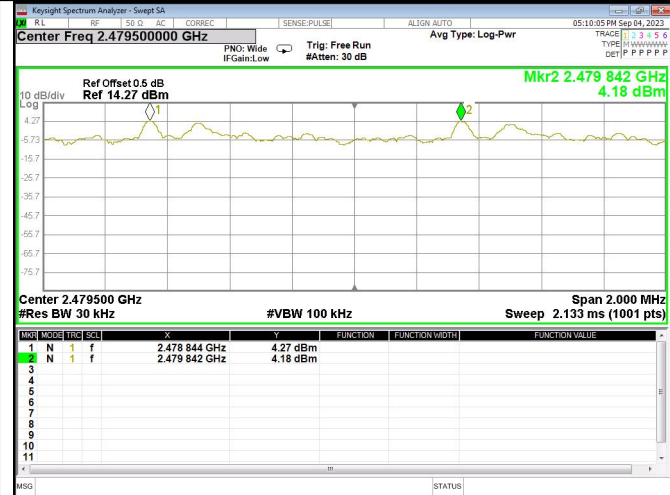

11. ANTENNA REQUIREMENT

11.1 STANDARD REQUIREMENT

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2 RESULT

The antennas used for this product are Chip antenna and no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is -0.4dBi.

*****END OF THE REPORT*****