



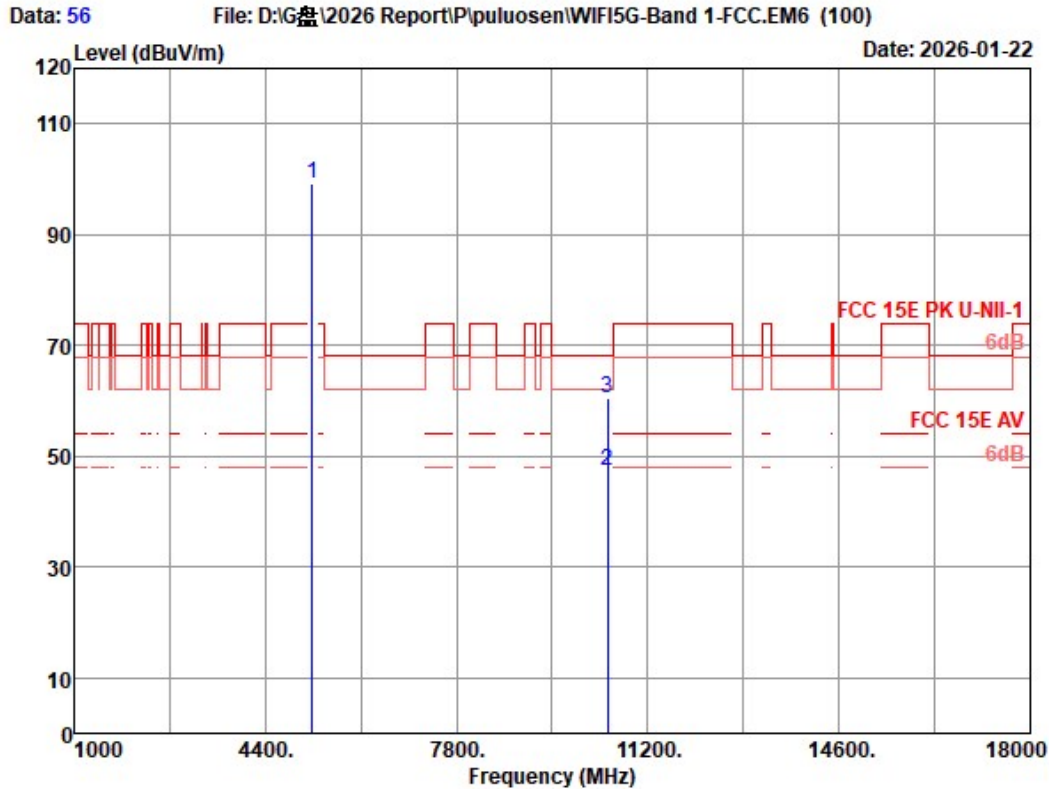


Site no. : 3m Chamber Data no. : 56  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11a 5240MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5240.000       | 33.60                    | 1.00                  | 31.35                 | 95.95             | 99.20                         | -----              | -----                    | Peak    |
| 2   | 10480.000      | 37.98                    | 1.15                  | 32.02                 | 40.25             | 47.36                         | -----              | -----                    | Average |
| 3   | 10480.000      | 37.98                    | 1.15                  | 32.02                 | 53.25             | 60.36                         | 68.20              | 7.84                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

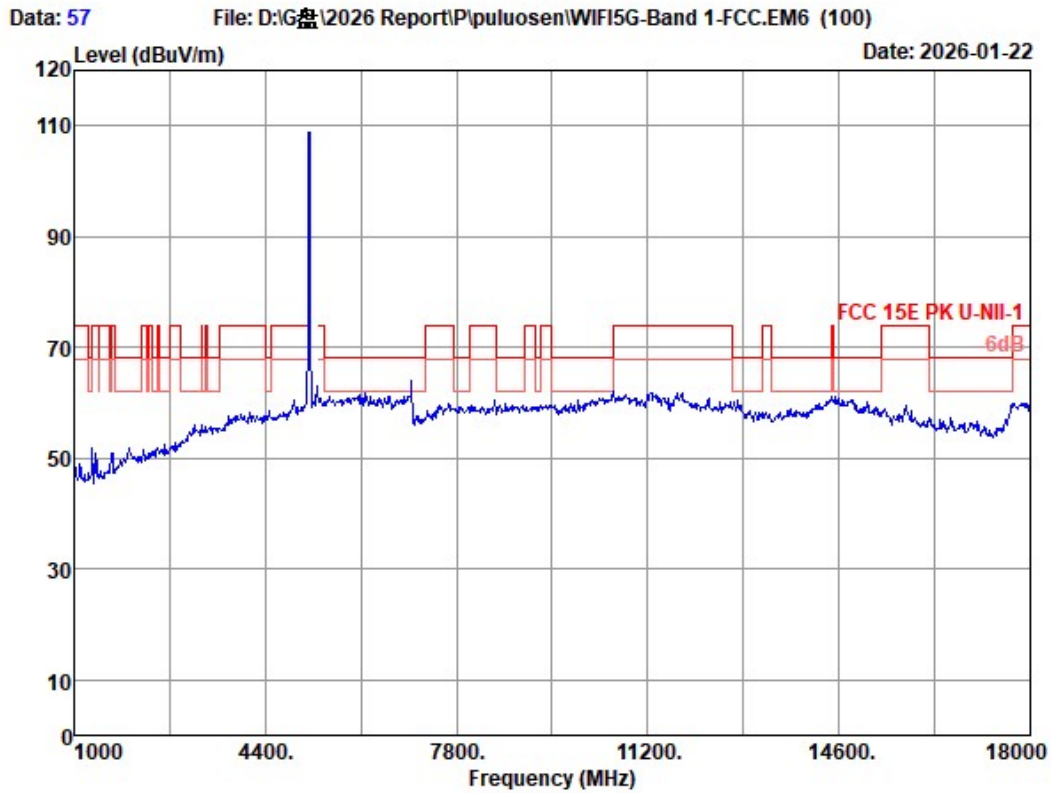


|             |                                |           |              |
|-------------|--------------------------------|-----------|--------------|
| Site no.    | : 3m Chamber                   | Data no.  | : 57         |
| Dis. / Ant. | : 3m 2025-3115-4580            | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC 15E PK U-NII-1           | Engineer  | : Epoch      |
| Env. / Ins. | : 23.2°C/52.6%                 |           |              |
| Test Mode   | : WIFI5G 11n20 5180MHz TX Mode |           |              |

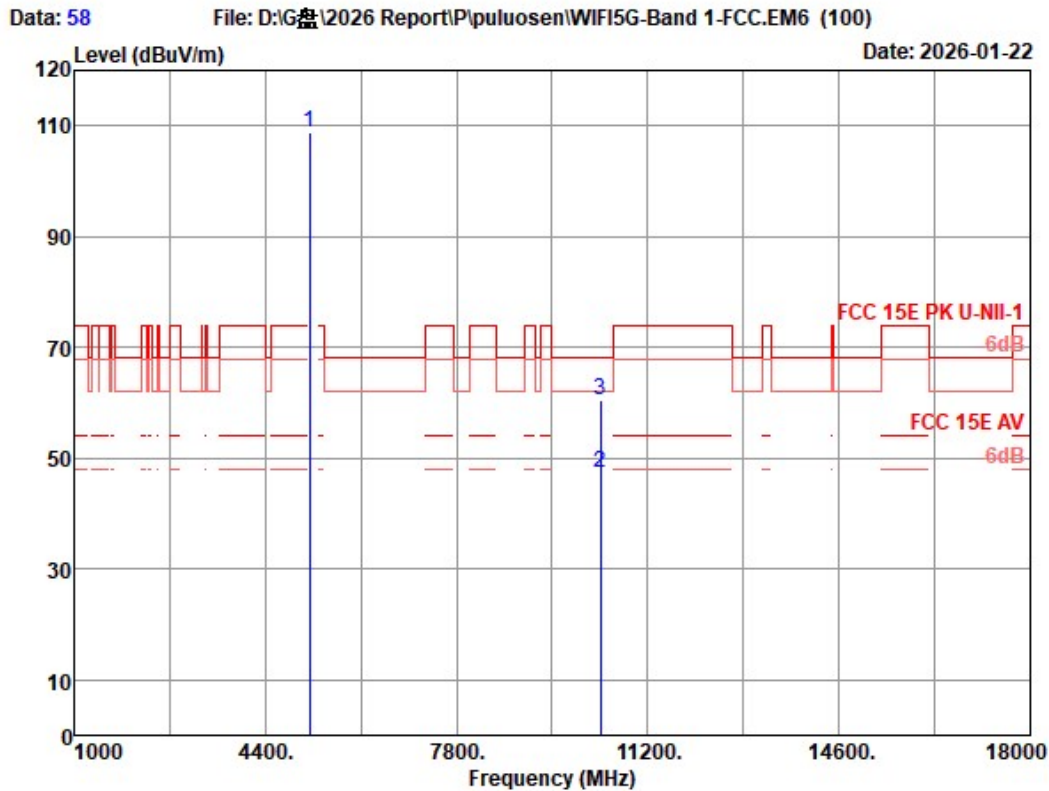


Site no. : 3m Chamber Data no. : 58  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11n20 5180MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5180.000       | 33.28                    | 1.00                  | 31.36                 | 105.83            | 108.75                        | -----              | -----                    | Peak    |
| 2   | 10360.000      | 37.90                    | 1.16                  | 32.17                 | 40.58             | 47.47                         | -----              | -----                    | Average |
| 3   | 10360.000      | 37.90                    | 1.16                  | 32.17                 | 53.58             | 60.47                         | 68.20              | 7.73                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

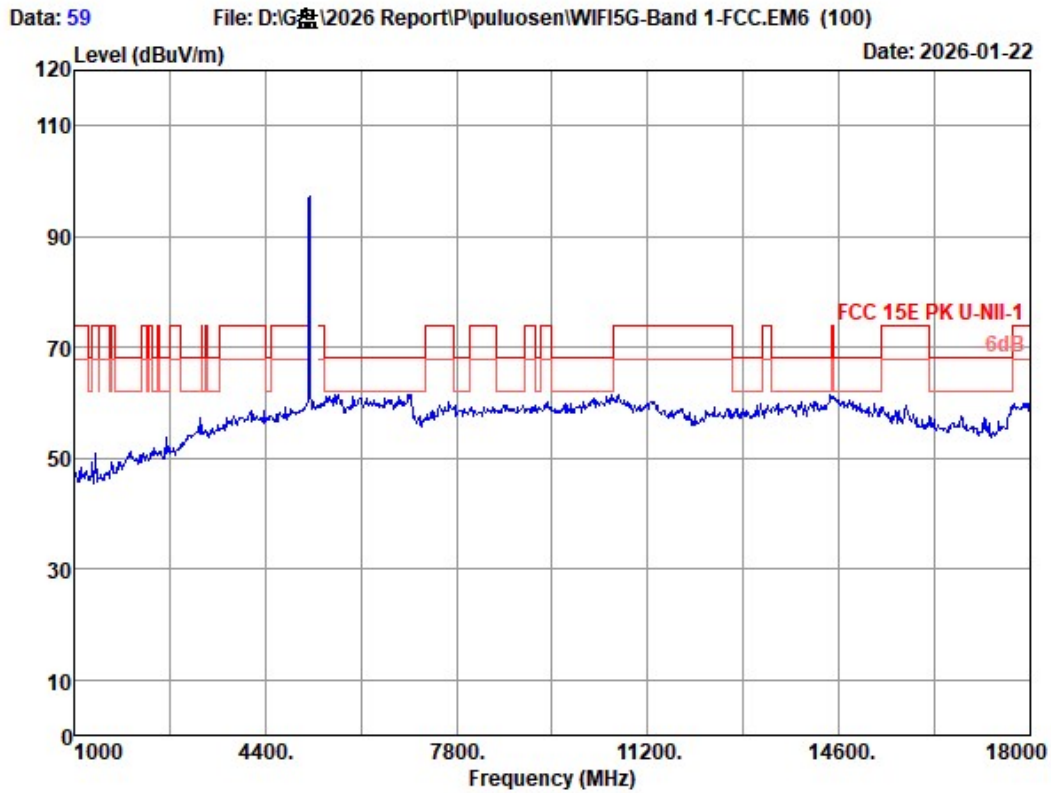


|             |                                |           |            |
|-------------|--------------------------------|-----------|------------|
| Site no.    | : 3m Chamber                   | Data no.  | : 59       |
| Dis. / Ant. | : 3m 2025-3115-4580            | Ant. pol. | : VERTICAL |
| Limit       | : FCC 15E PK U-NII-1           | Engineer  | : Epoch    |
| Env. / Ins. | : 23.2°C/52.6%                 |           |            |
| Test Mode   | : WIFI5G 11n20 5180MHz TX Mode |           |            |

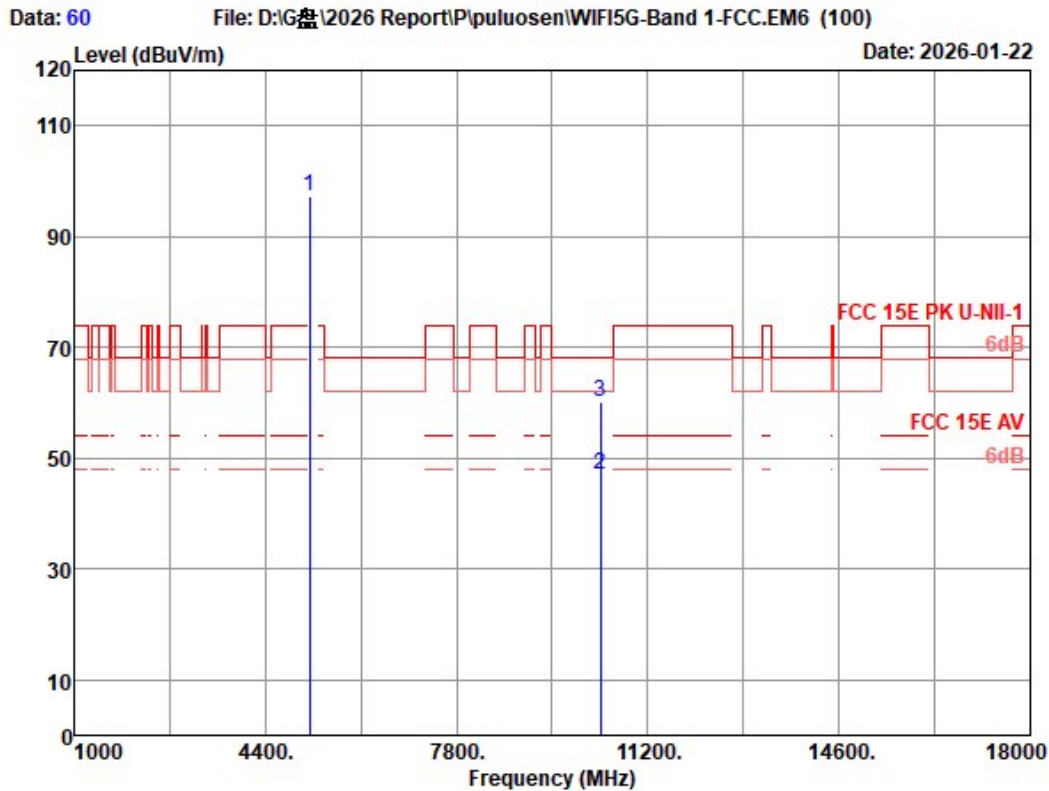


Site no. : 3m Chamber Data no. : 60  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11n20 5180MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5180.000       | 33.28                    | 1.00                  | 31.36                 | 94.28             | 97.20                         | -----              | -----                    | Peak    |
| 2   | 10360.000      | 37.90                    | 1.16                  | 32.17                 | 40.14             | 47.03                         | -----              | -----                    | Average |
| 3   | 10360.000      | 37.90                    | 1.16                  | 32.17                 | 53.14             | 60.03                         | 68.20              | 8.17                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

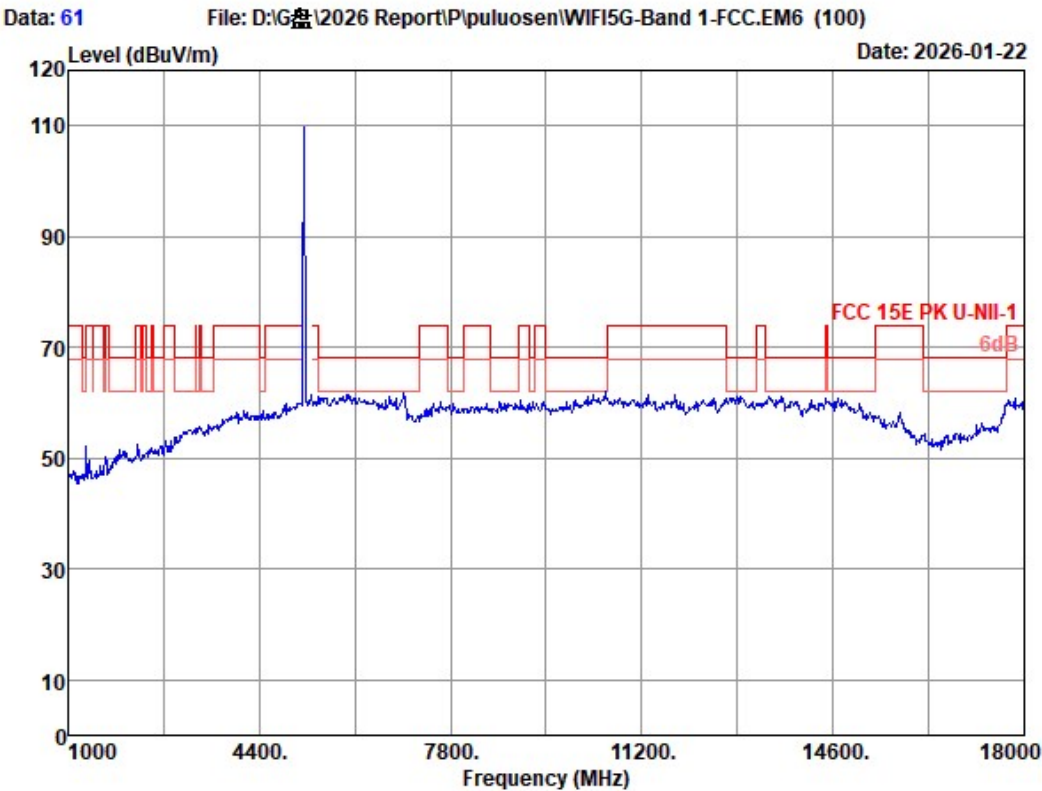


|             |                                |           |              |
|-------------|--------------------------------|-----------|--------------|
| Site no.    | : 3m Chamber                   | Data no.  | : 61         |
| Dis. / Ant. | : 3m 2025-3115-4580            | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC 15E PK U-NII-1           | Engineer  | : Epoch      |
| Env. / Ins. | : 23.2°C/52.6%                 |           |              |
| Test Mode   | : WIFI5G 11n20 5200MHz TX Mode |           |              |

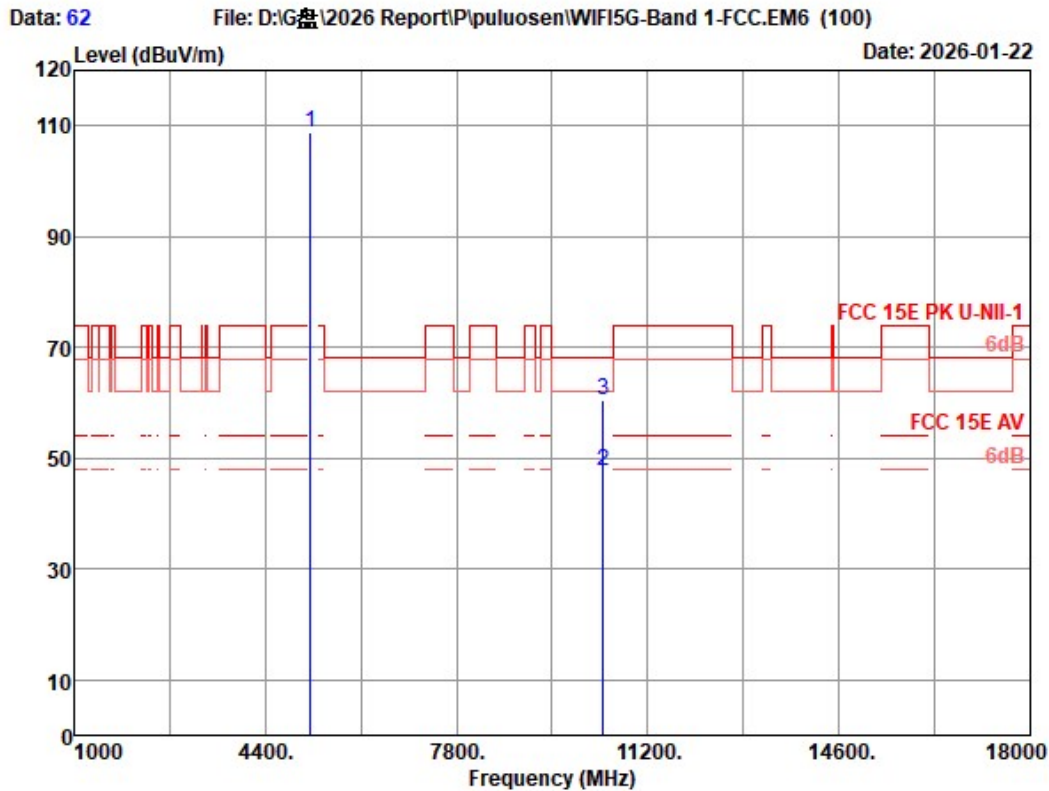


Site no. : 3m Chamber Data no. : 62  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11n20 5200MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5200.000       | 33.20                    | 1.00                  | 31.36                 | 105.90            | 108.74                        | -----              | -----                    | Peak    |
| 2   | 10400.000      | 37.90                    | 1.16                  | 32.12                 | 40.69             | 47.63                         | -----              | -----                    | Average |
| 3   | 10400.000      | 37.90                    | 1.16                  | 32.12                 | 53.69             | 60.63                         | 68.20              | 7.57                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

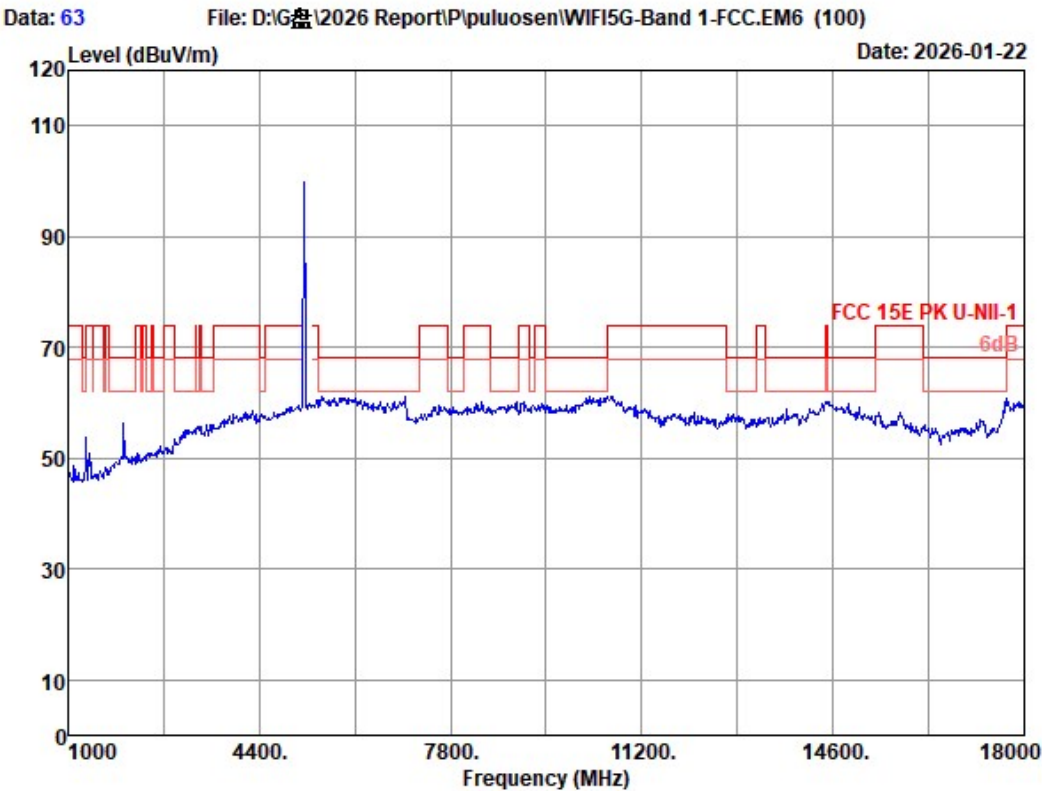


|             |                                |           |            |
|-------------|--------------------------------|-----------|------------|
| Site no.    | : 3m Chamber                   | Data no.  | : 63       |
| Dis. / Ant. | : 3m 2025-3115-4580            | Ant. pol. | : VERTICAL |
| Limit       | : FCC 15E PK U-NII-1           | Engineer  | : Epoch    |
| Env. / Ins. | : 23.2°C/52.6%                 |           |            |
| Test Mode   | : WIFI5G 11n20 5200MHz TX Mode |           |            |

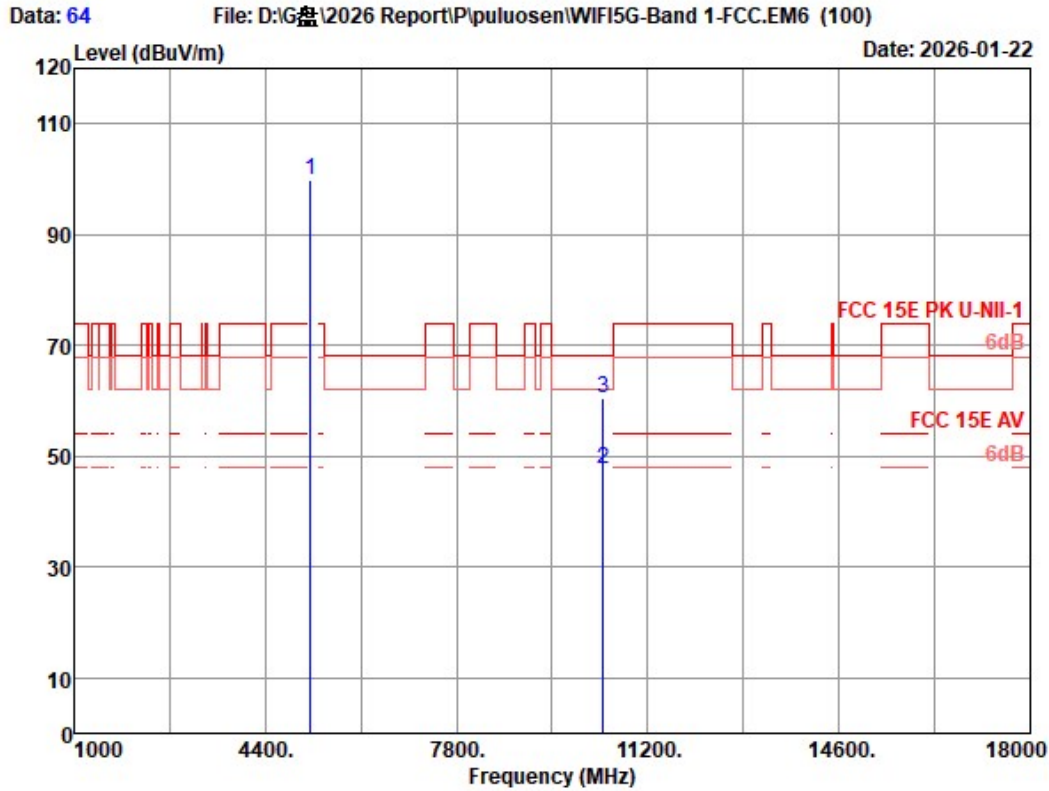


Site no. : 3m Chamber Data no. : 64  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11n20 5200MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5200.000       | 33.20                    | 1.00                  | 31.36                 | 96.96             | 99.80                         | -----              | -----                    | Peak    |
| 2   | 10400.000      | 37.90                    | 1.16                  | 32.12                 | 40.66             | 47.60                         | -----              | -----                    | Average |
| 3   | 10400.000      | 37.90                    | 1.16                  | 32.12                 | 53.66             | 60.60                         | 68.20              | 7.60                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

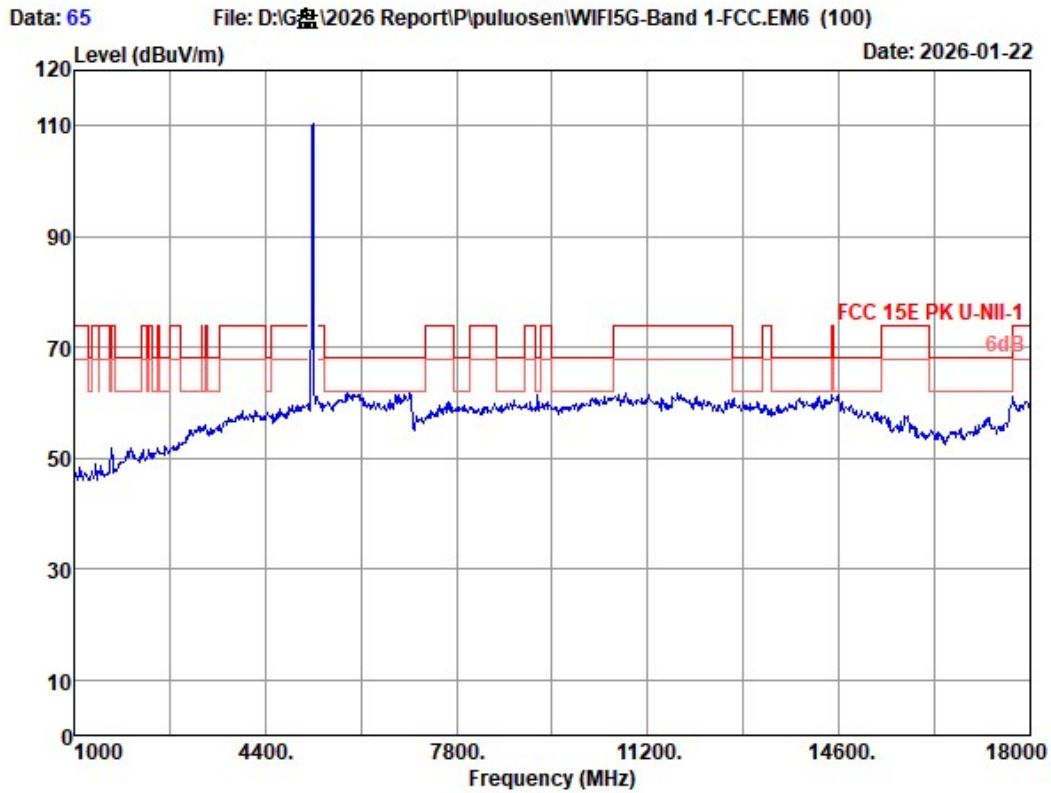


|             |                                |           |              |
|-------------|--------------------------------|-----------|--------------|
| Site no.    | : 3m Chamber                   | Data no.  | : 65         |
| Dis. / Ant. | : 3m 2025-3115-4580            | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC 15E PK U-NII-1           | Engineer  | : Epoch      |
| Env. / Ins. | : 23.2°C/52.6%                 |           |              |
| Test Mode   | : WIFI5G 11n20 5240MHz TX Mode |           |              |

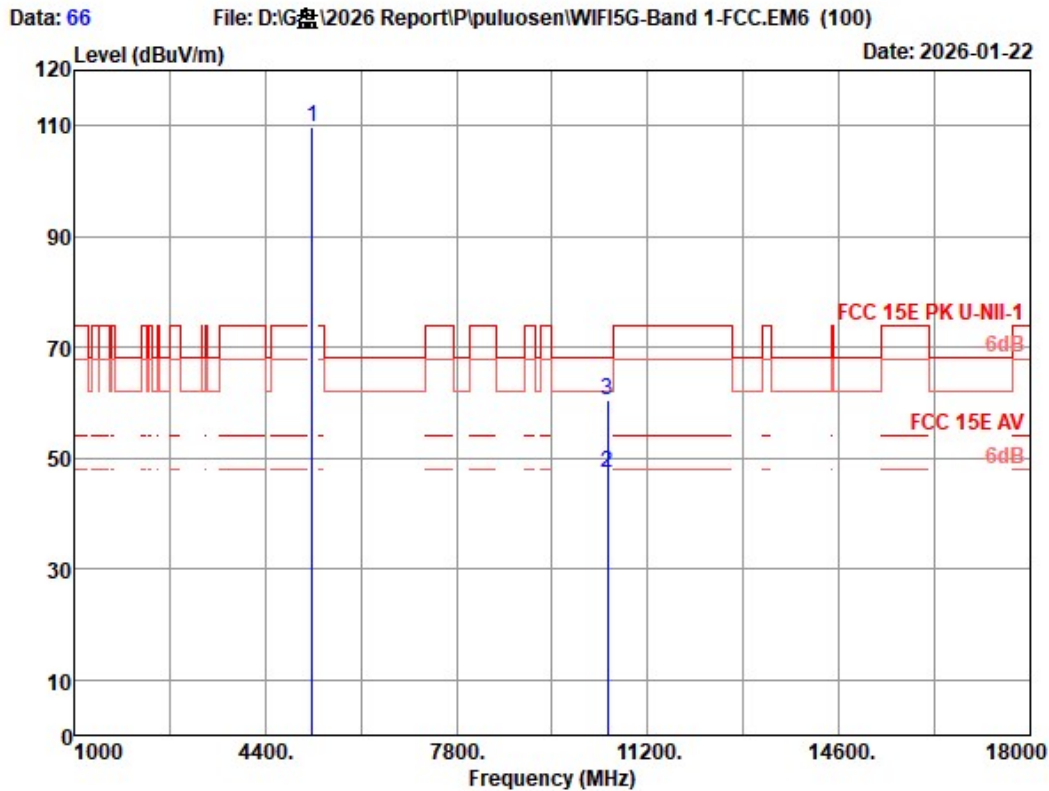


Site no. : 3m Chamber Data no. : 66  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11n20 5240MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5240.000       | 33.60                    | 1.00                  | 31.35                 | 106.40            | 109.65                        | -----              | -----                    | Peak    |
| 2   | 10480.000      | 37.98                    | 1.15                  | 32.02                 | 40.27             | 47.38                         | -----              | -----                    | Average |
| 3   | 10480.000      | 37.98                    | 1.15                  | 32.02                 | 53.27             | 60.38                         | 68.20              | 7.82                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

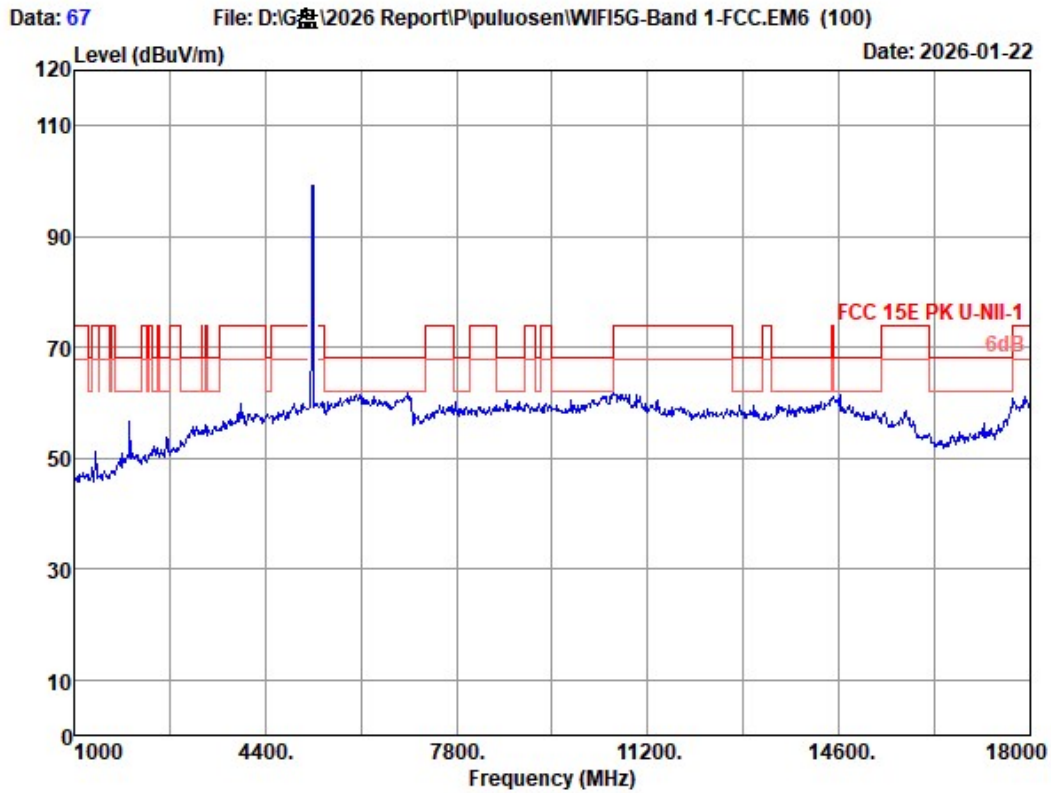


|             |                                |           |            |
|-------------|--------------------------------|-----------|------------|
| Site no.    | : 3m Chamber                   | Data no.  | : 67       |
| Dis. / Ant. | : 3m 2025-3115-4580            | Ant. pol. | : VERTICAL |
| Limit       | : FCC 15E PK U-NII-1           | Engineer  | : Epoch    |
| Env. / Ins. | : 23.2°C/52.6%                 |           |            |
| Test Mode   | : WIFI5G 11n20 5240MHz TX Mode |           |            |

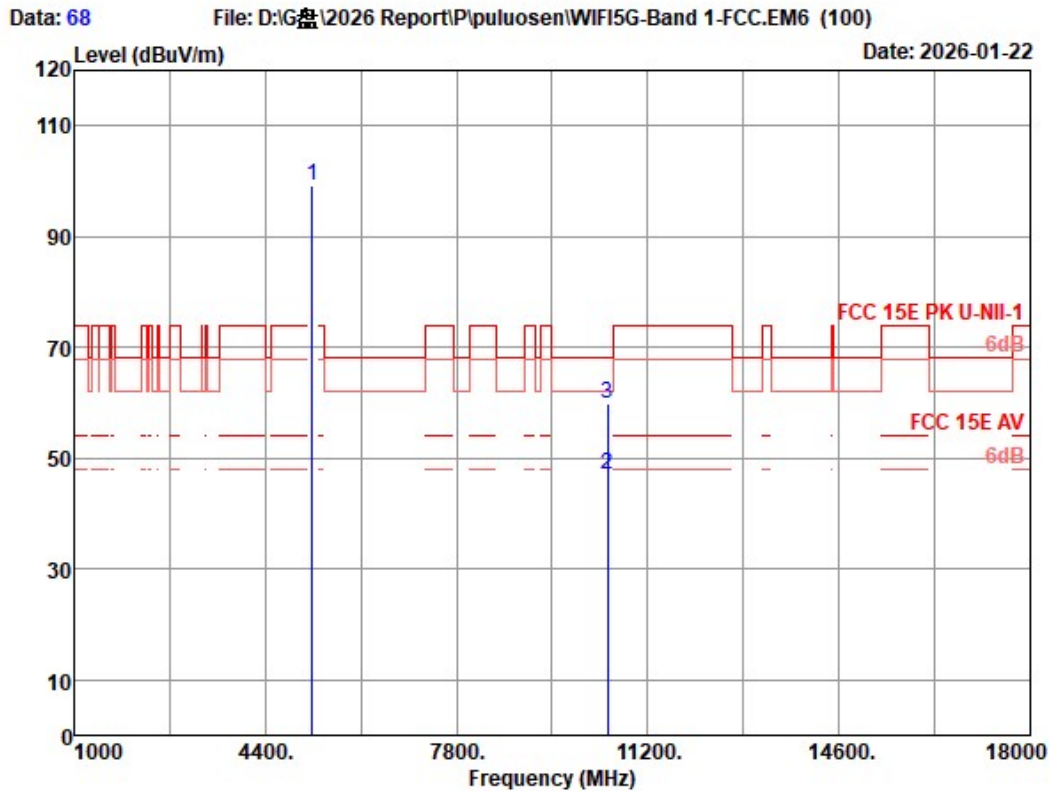


Site no. : 3m Chamber Data no. : 68  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11n20 5240MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5240.000       | 33.60                    | 1.00                  | 31.35                 | 96.05             | 99.30                         | -----              | -----                    | Peak    |
| 2   | 10480.000      | 37.98                    | 1.15                  | 32.02                 | 39.78             | 46.89                         | -----              | -----                    | Average |
| 3   | 10480.000      | 37.98                    | 1.15                  | 32.02                 | 52.78             | 59.89                         | 68.20              | 8.31                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

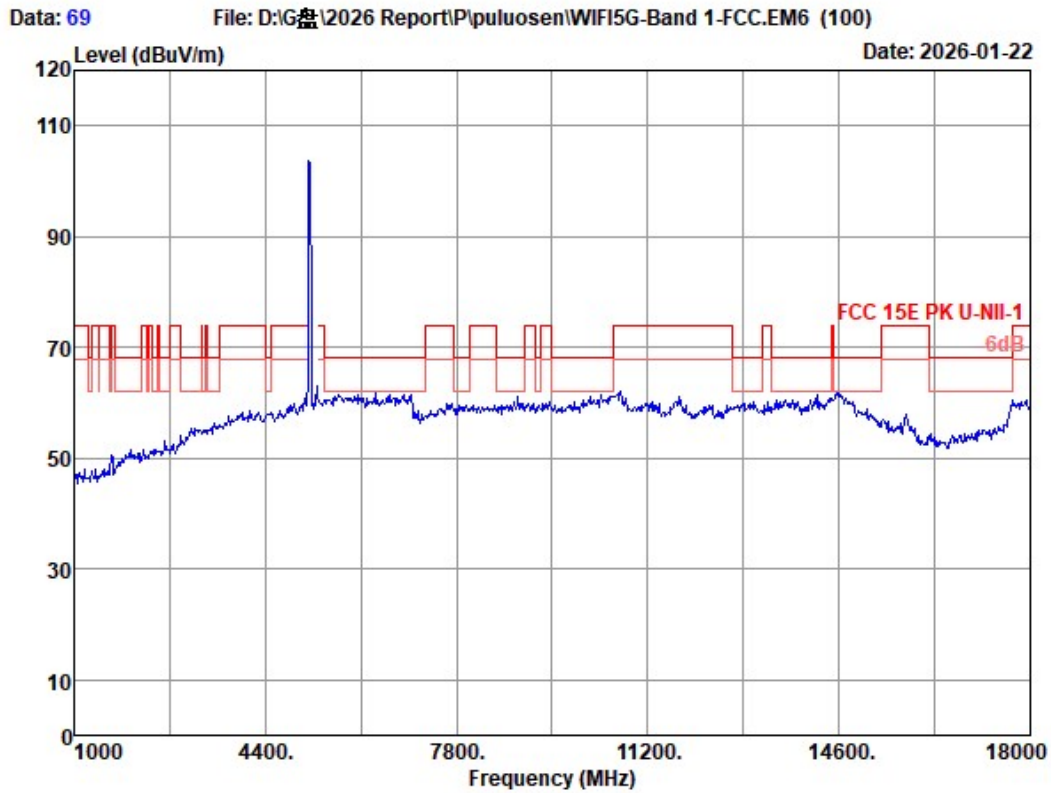


|             |                                |           |              |
|-------------|--------------------------------|-----------|--------------|
| Site no.    | : 3m Chamber                   | Data no.  | : 69         |
| Dis. / Ant. | : 3m 2025-3115-4580            | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC 15E PK U-NII-1           | Engineer  | : Epoch      |
| Env. / Ins. | : 23.2°C/52.6%                 |           |              |
| Test Mode   | : WIFI5G 11n40 5190MHz TX Mode |           |              |

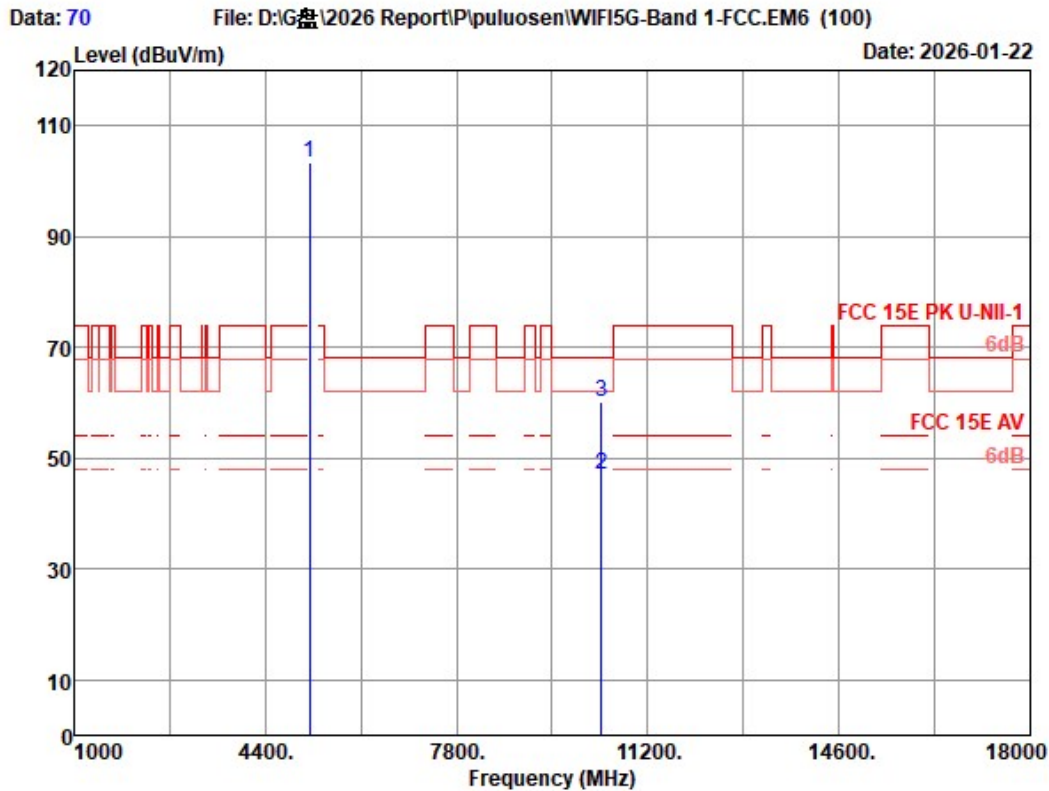


Site no. : 3m Chamber Data no. : 70  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11n40 5190MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5190.000       | 33.24                    | 1.00                  | 31.36                 | 100.55            | 103.43                        | -----              | -----                    | Peak    |
| 2   | 10380.000      | 37.90                    | 1.16                  | 32.14                 | 40.18             | 47.10                         | -----              | -----                    | Average |
| 3   | 10380.000      | 37.90                    | 1.16                  | 32.14                 | 53.18             | 60.10                         | 68.20              | 8.10                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

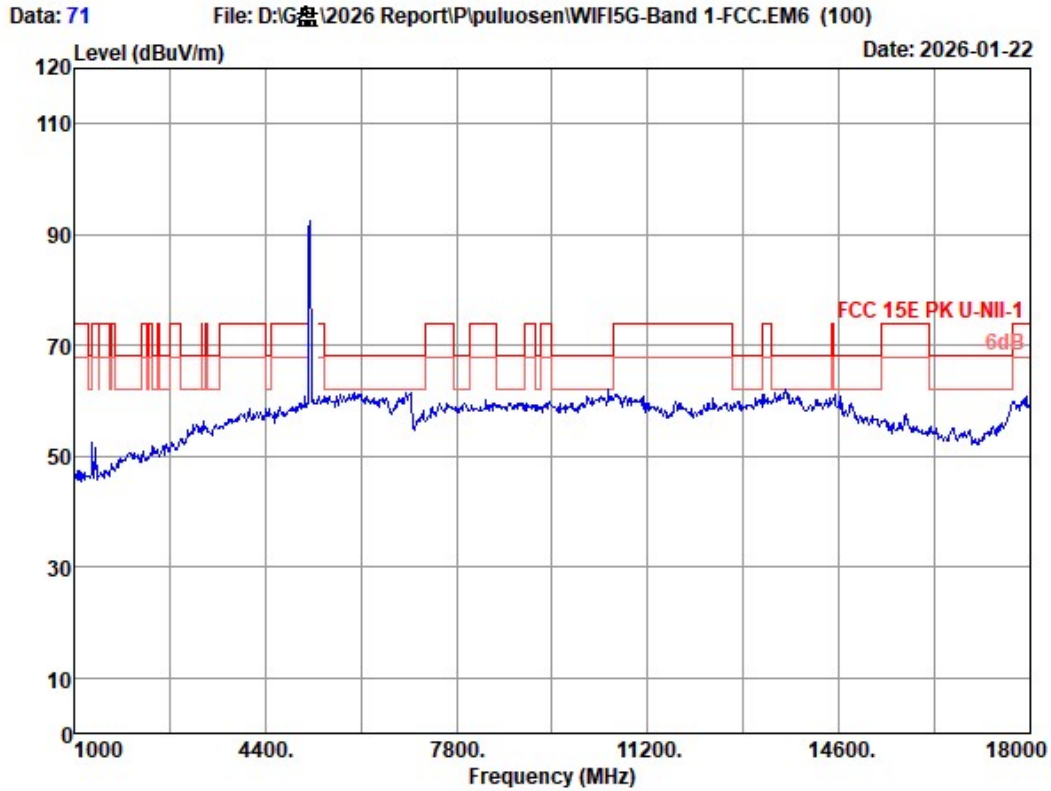


|             |                                |           |            |
|-------------|--------------------------------|-----------|------------|
| Site no.    | : 3m Chamber                   | Data no.  | : 71       |
| Dis. / Ant. | : 3m 2025-3115-4580            | Ant. pol. | : VERTICAL |
| Limit       | : FCC 15E PK U-NII-1           | Engineer  | : Epoch    |
| Env. / Ins. | : 23.2°C/52.6%                 |           |            |
| Test Mode   | : WIFI5G 11n40 5190MHz TX Mode |           |            |

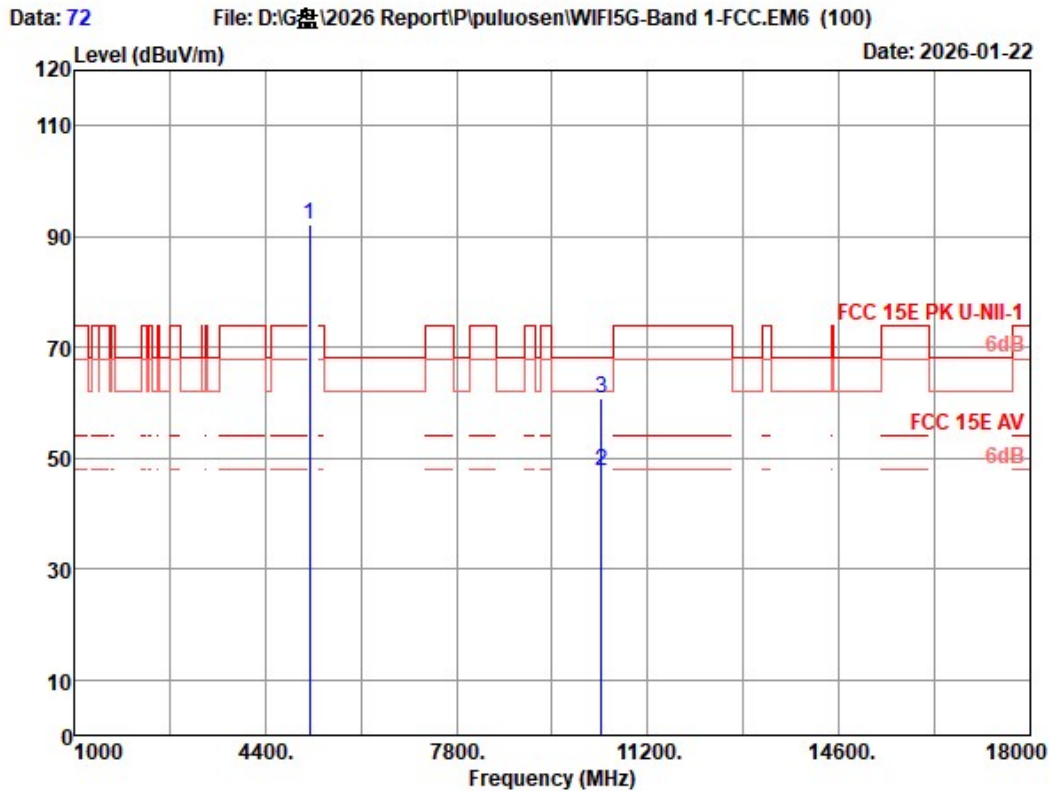


Site no. : 3m Chamber Data no. : 72  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11n40 5190MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5190.000       | 33.24                    | 1.00                  | 31.36                 | 89.33             | 92.21                         | -----              | -----                    | Peak    |
| 2   | 10380.000      | 37.90                    | 1.16                  | 32.14                 | 40.74             | 47.66                         | -----              | -----                    | Average |
| 3   | 10380.000      | 37.90                    | 1.16                  | 32.14                 | 53.74             | 60.66                         | 68.20              | 7.54                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

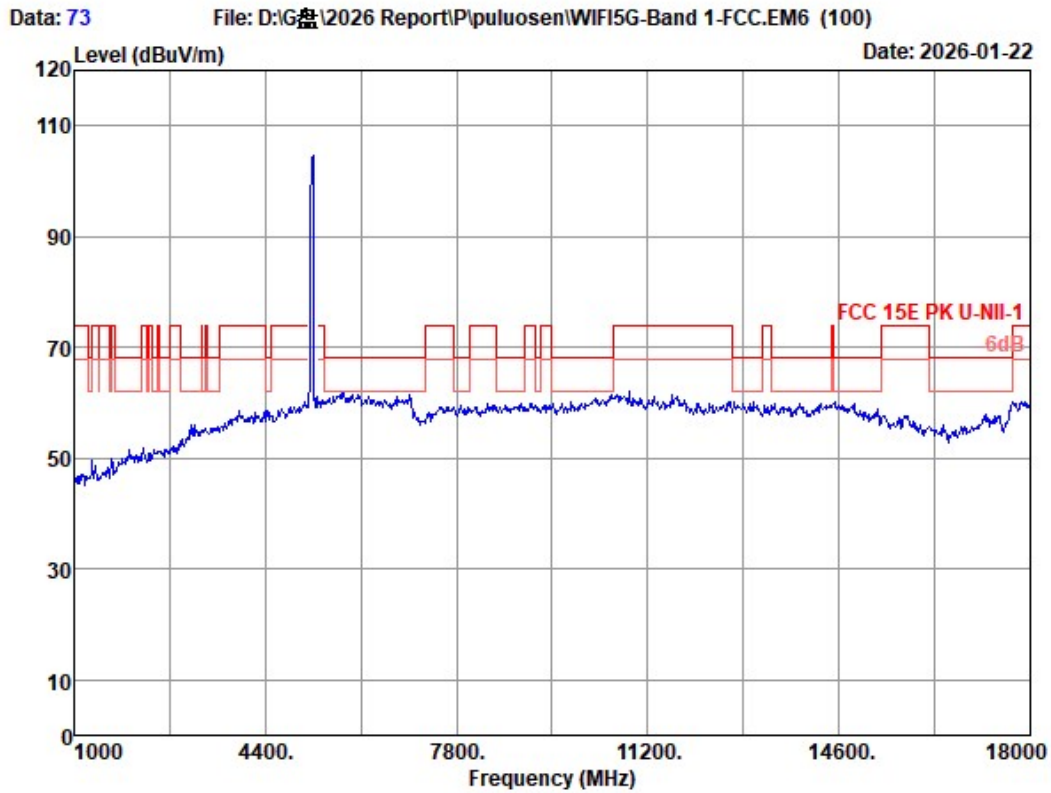


|             |                                |           |              |
|-------------|--------------------------------|-----------|--------------|
| Site no.    | : 3m Chamber                   | Data no.  | : 73         |
| Dis. / Ant. | : 3m 2025-3115-4580            | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC 15E PK U-NII-1           | Engineer  | : Epoch      |
| Env. / Ins. | : 23.2°C/52.6%                 |           |              |
| Test Mode   | : WIFI5G 11n40 5230MHz TX Mode |           |              |

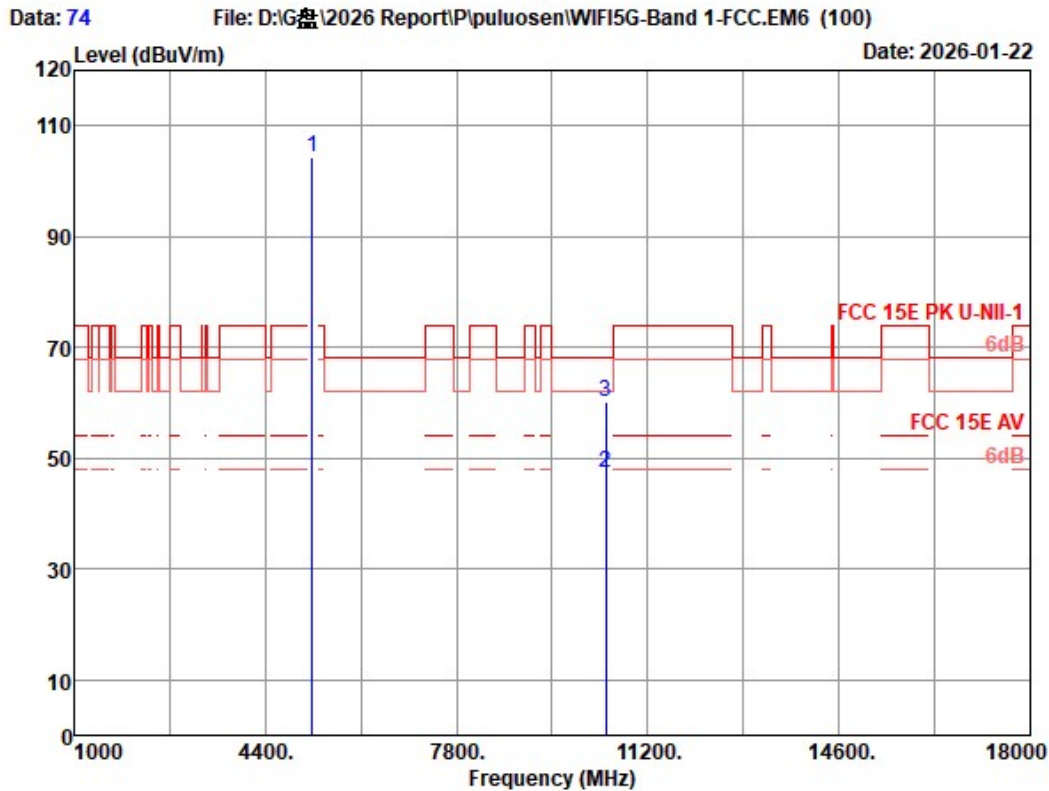


Site no. : 3m Chamber Data no. : 74  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11n40 5230MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5230.000       | 33.50                    | 1.00                  | 31.35                 | 101.05            | 104.20                        | -----              | -----                    | Peak    |
| 2   | 10460.000      | 37.96                    | 1.15                  | 32.05                 | 40.25             | 47.31                         | -----              | -----                    | Average |
| 3   | 10460.000      | 37.96                    | 1.15                  | 32.05                 | 53.25             | 60.31                         | 68.20              | 7.89                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

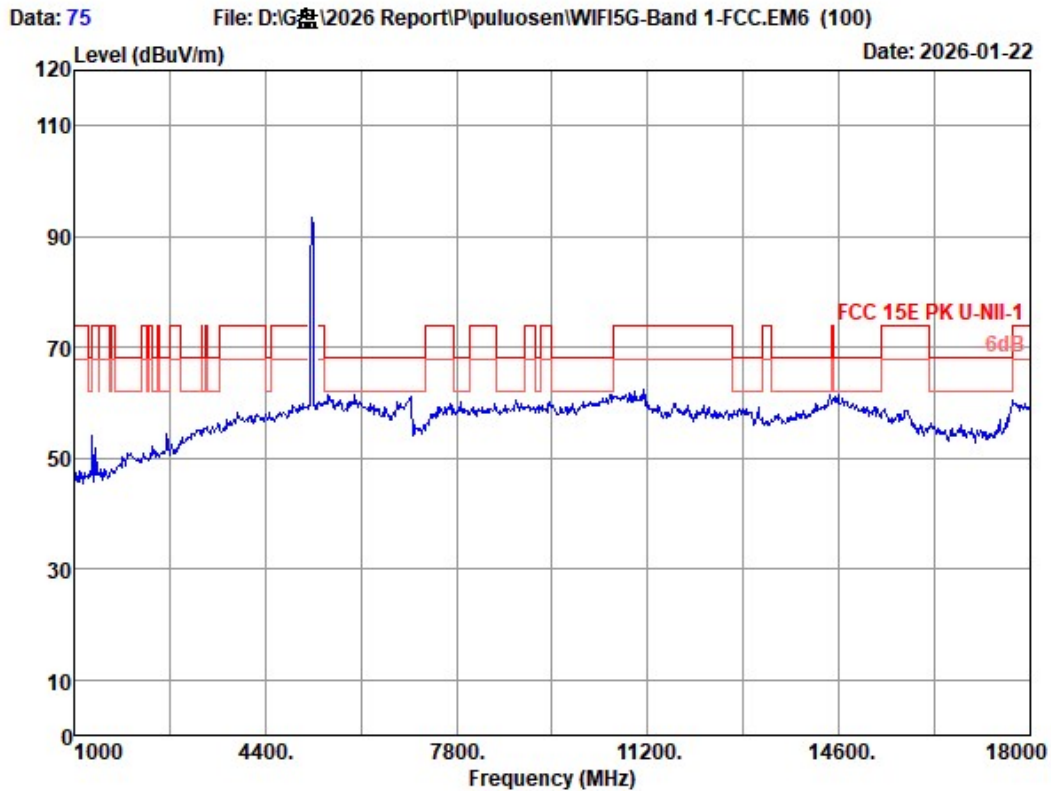


|             |                                |           |            |
|-------------|--------------------------------|-----------|------------|
| Site no.    | : 3m Chamber                   | Data no.  | : 75       |
| Dis. / Ant. | : 3m 2025-3115-4580            | Ant. pol. | : VERTICAL |
| Limit       | : FCC 15E PK U-NII-1           | Engineer  | : Epoch    |
| Env. / Ins. | : 23.2°C/52.6%                 |           |            |
| Test Mode   | : WIFI5G 11n40 5230MHz TX Mode |           |            |

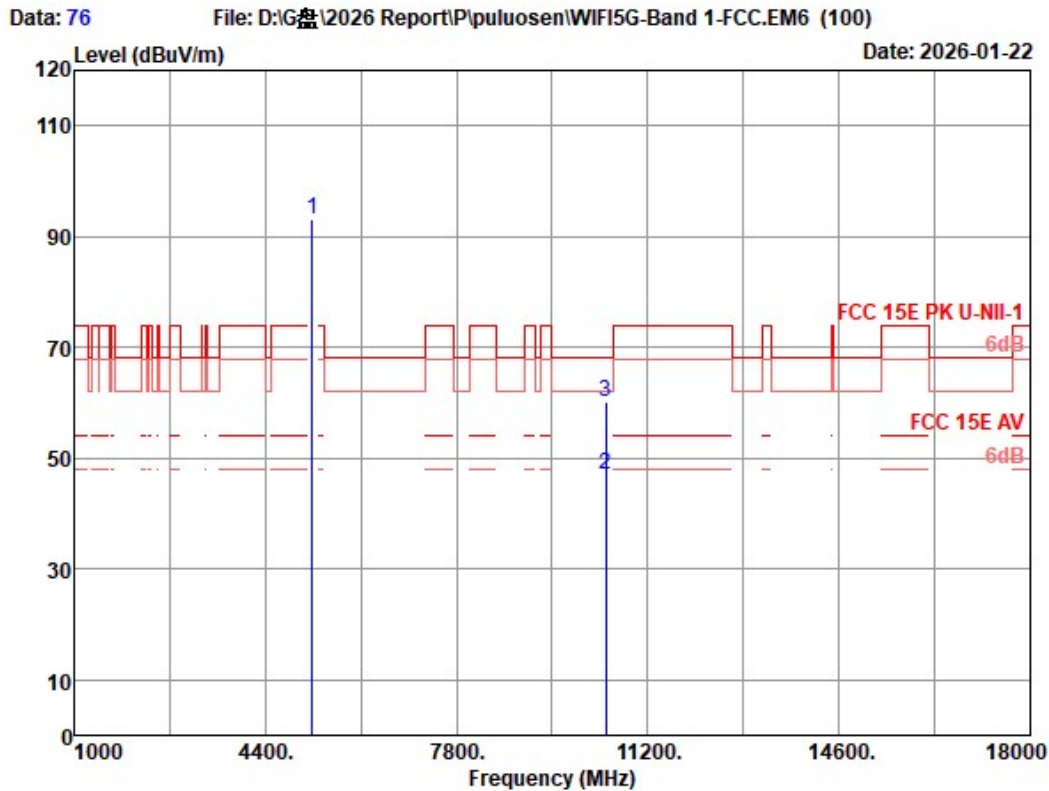


Site no. : 3m Chamber Data no. : 76  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11n40 5230MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5230.000       | 33.50                    | 1.00                  | 31.35                 | 89.93             | 93.08                         | -----              | -----                    | Peak    |
| 2   | 10460.000      | 37.96                    | 1.15                  | 32.05                 | 40.05             | 47.11                         | -----              | -----                    | Average |
| 3   | 10460.000      | 37.96                    | 1.15                  | 32.05                 | 53.05             | 60.11                         | 68.20              | 8.09                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

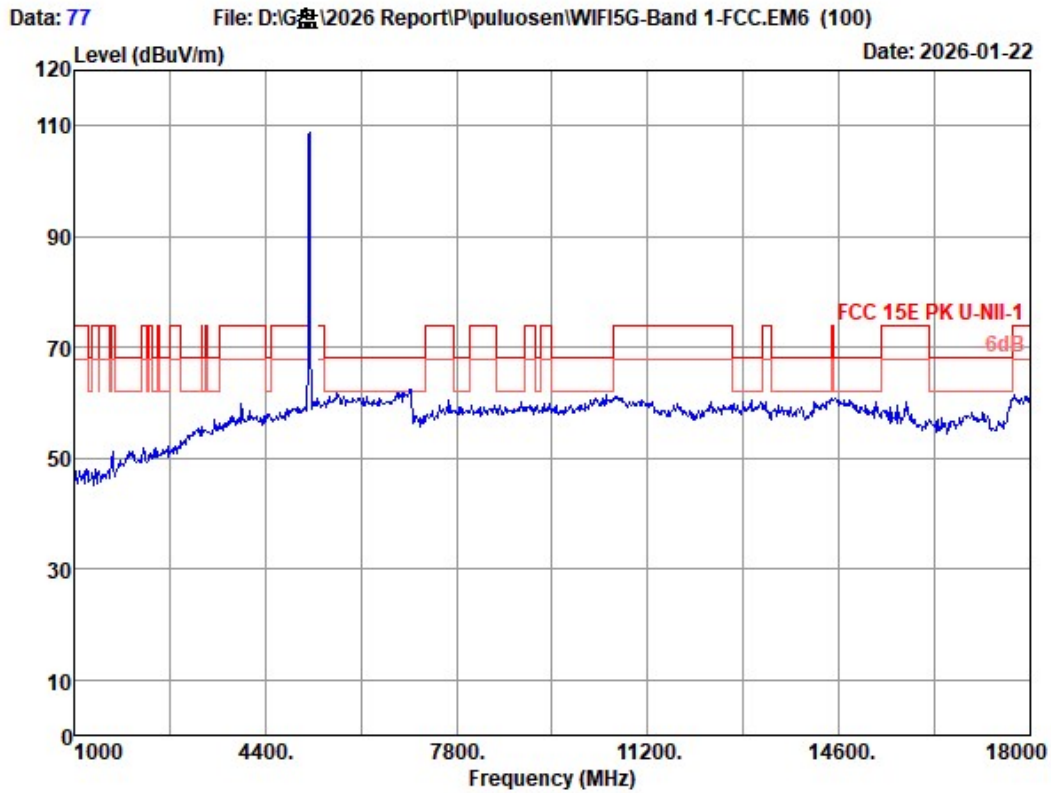


|             |                                 |           |              |
|-------------|---------------------------------|-----------|--------------|
| Site no.    | : 3m Chamber                    | Data no.  | : 77         |
| Dis. / Ant. | : 3m 2025-3115-4580             | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC 15E PK U-NII-1            | Engineer  | : Epoch      |
| Env. / Ins. | : 23.2°C/52.6%                  |           |              |
| Test Mode   | : WIFI5G 11ac20 5180MHz TX Mode |           |              |

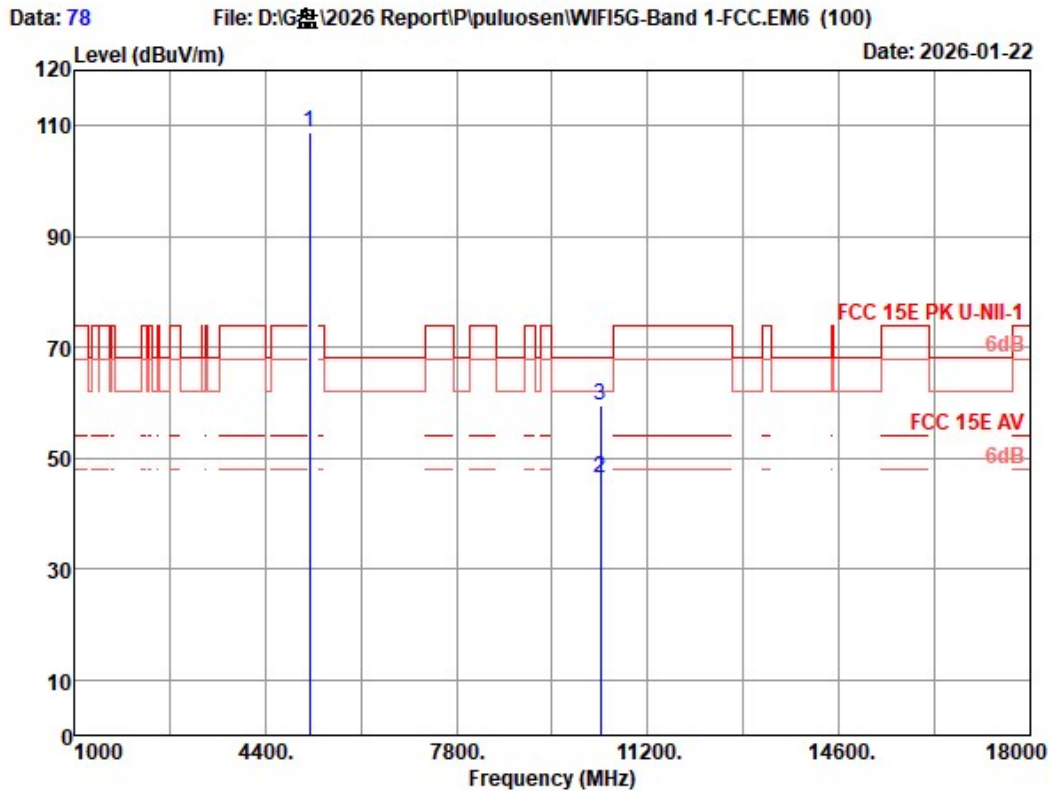


Site no. : 3m Chamber Data no. : 78  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11ac20 5180MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5180.000       | 33.28                    | 1.00                  | 31.36                 | 106.02            | 108.94                        | -----              | -----                    | Peak    |
| 2   | 10360.000      | 37.90                    | 1.16                  | 32.17                 | 39.53             | 46.42                         | -----              | -----                    | Average |
| 3   | 10360.000      | 37.90                    | 1.16                  | 32.17                 | 52.53             | 59.42                         | 68.20              | 8.78                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

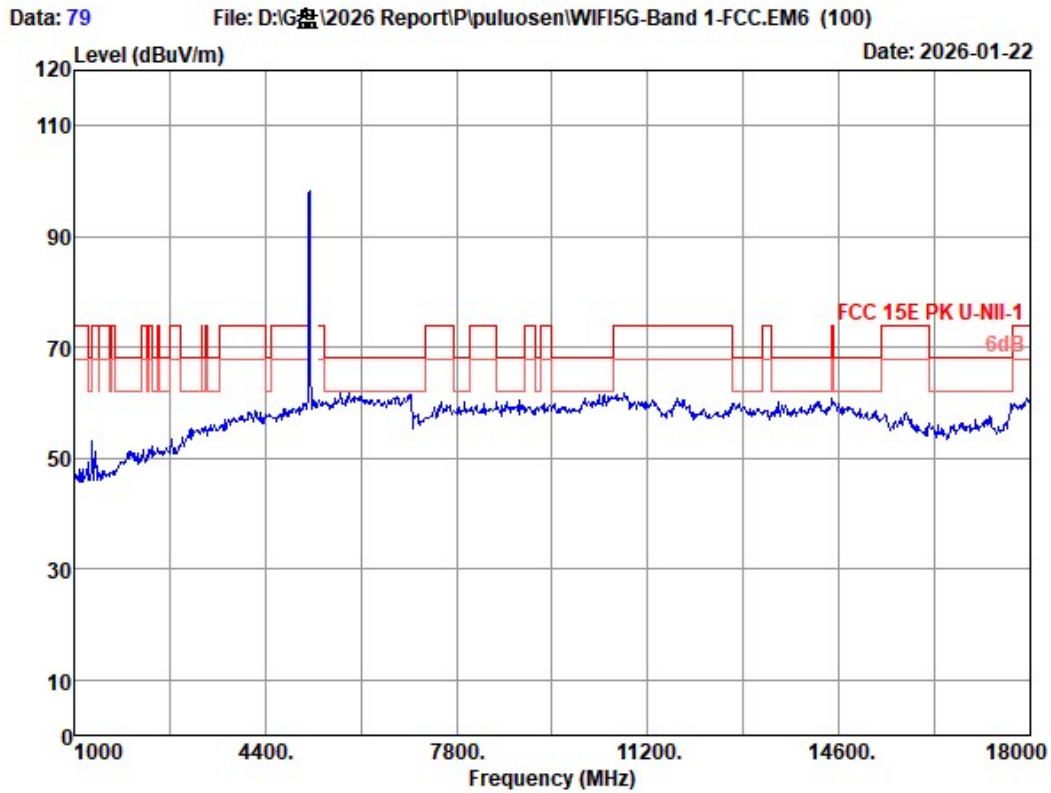


|             |                                 |           |            |
|-------------|---------------------------------|-----------|------------|
| Site no.    | : 3m Chamber                    | Data no.  | : 79       |
| Dis. / Ant. | : 3m 2025-3115-4580             | Ant. pol. | : VERTICAL |
| Limit       | : FCC 15E PK U-NII-1            | Engineer  | : Epoch    |
| Env. / Ins. | : 23.2°C/52.6%                  |           |            |
| Test Mode   | : WIFI5G 11ac20 5180MHz TX Mode |           |            |

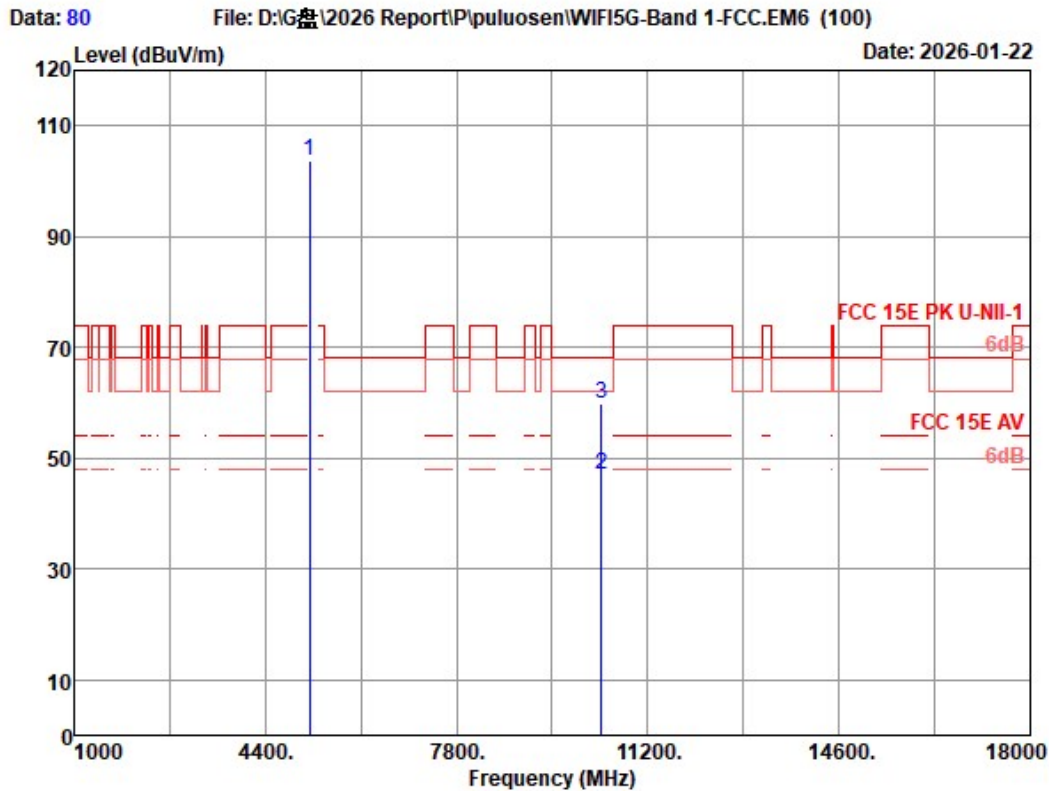


Site no. : 3m Chamber Data no. : 80  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11ac20 5180MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5190.000       | 33.24                    | 1.00                  | 31.36                 | 100.65            | 103.53                        | -----              | -----                    | Peak    |
| 2   | 10380.000      | 37.90                    | 1.16                  | 32.14                 | 40.02             | 46.94                         | -----              | -----                    | Average |
| 3   | 10380.000      | 37.90                    | 1.16                  | 32.14                 | 53.02             | 59.94                         | 68.20              | 8.26                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

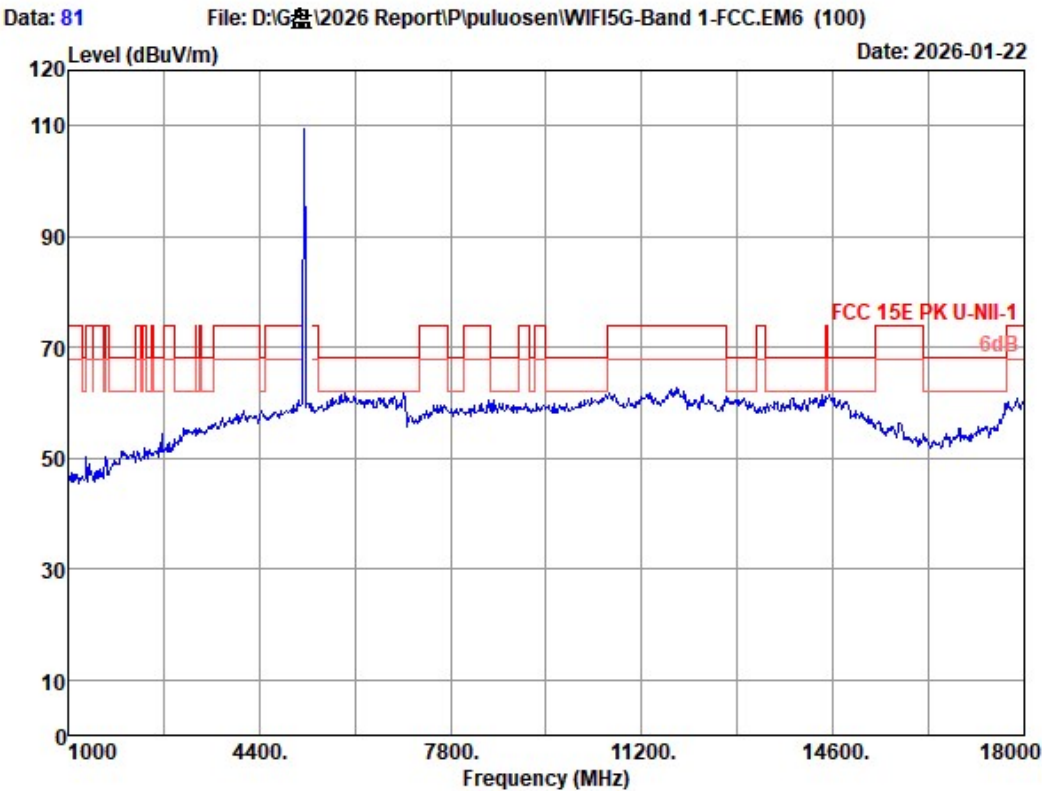


|             |                                 |           |              |
|-------------|---------------------------------|-----------|--------------|
| Site no.    | : 3m Chamber                    | Data no.  | : 81         |
| Dis. / Ant. | : 3m 2025-3115-4580             | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC 15E PK U-NII-1            | Engineer  | : Epoch      |
| Env. / Ins. | : 23.2°C/52.6%                  |           |              |
| Test Mode   | : WIFI5G 11ac20 5200MHz TX Mode |           |              |

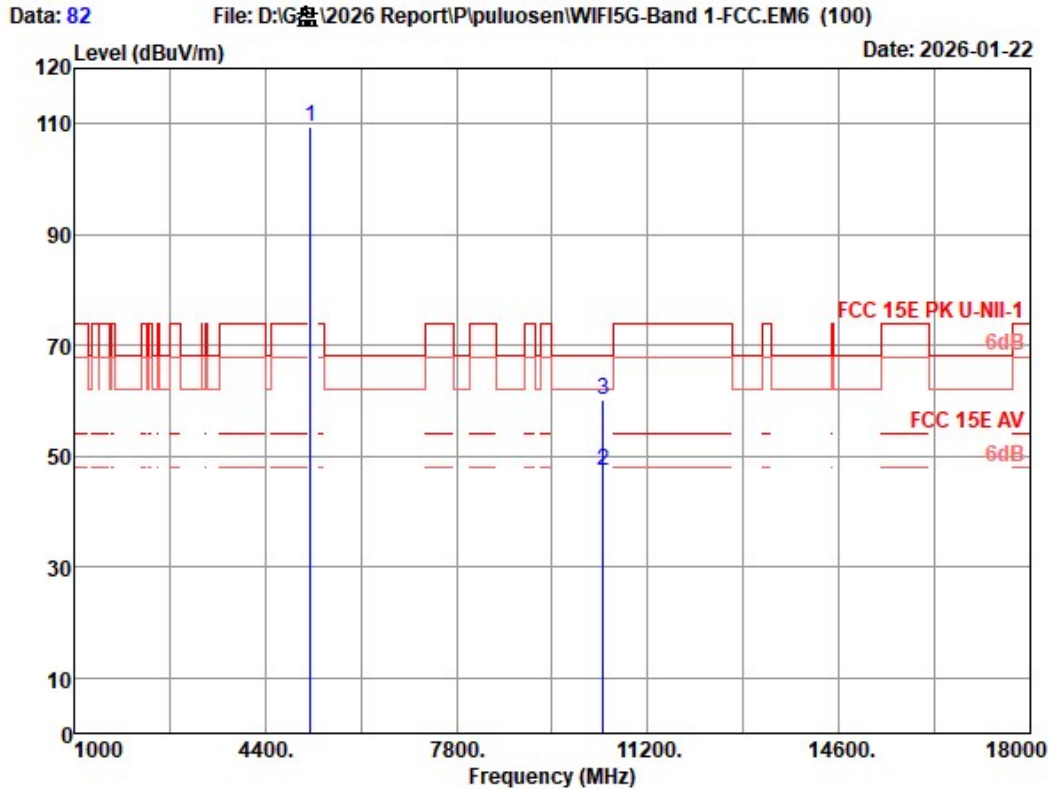


Site no. : 3m Chamber Data no. : 82  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11ac20 5200MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5200.000       | 33.20                    | 1.00                  | 31.36                 | 106.58            | 109.42                        | -----              | -----                    | Peak    |
| 2   | 10400.000      | 37.90                    | 1.16                  | 32.12                 | 40.27             | 47.21                         | -----              | -----                    | Average |
| 3   | 10400.000      | 37.90                    | 1.16                  | 32.12                 | 53.27             | 60.21                         | 68.20              | 7.99                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

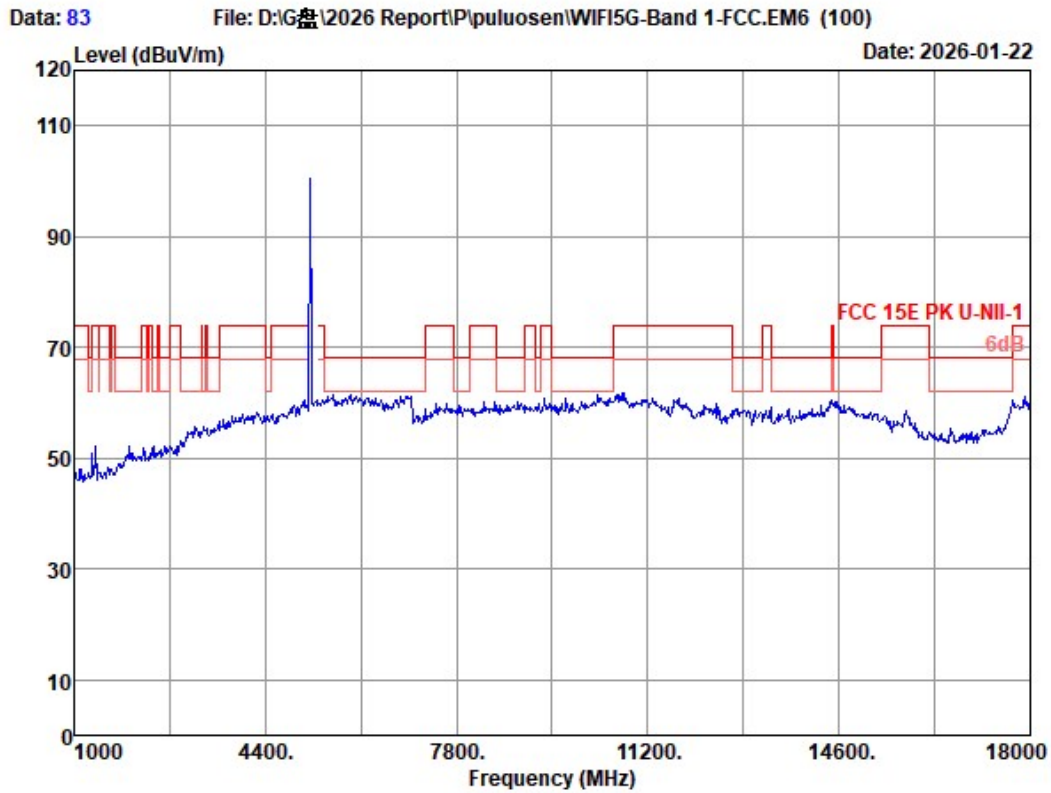


|             |                                 |           |            |
|-------------|---------------------------------|-----------|------------|
| Site no.    | : 3m Chamber                    | Data no.  | : 83       |
| Dis. / Ant. | : 3m 2025-3115-4580             | Ant. pol. | : VERTICAL |
| Limit       | : FCC 15E PK U-NII-1            | Engineer  | : Epoch    |
| Env. / Ins. | : 23.2°C/52.6%                  |           |            |
| Test Mode   | : WIFI5G 11ac20 5200MHz TX Mode |           |            |

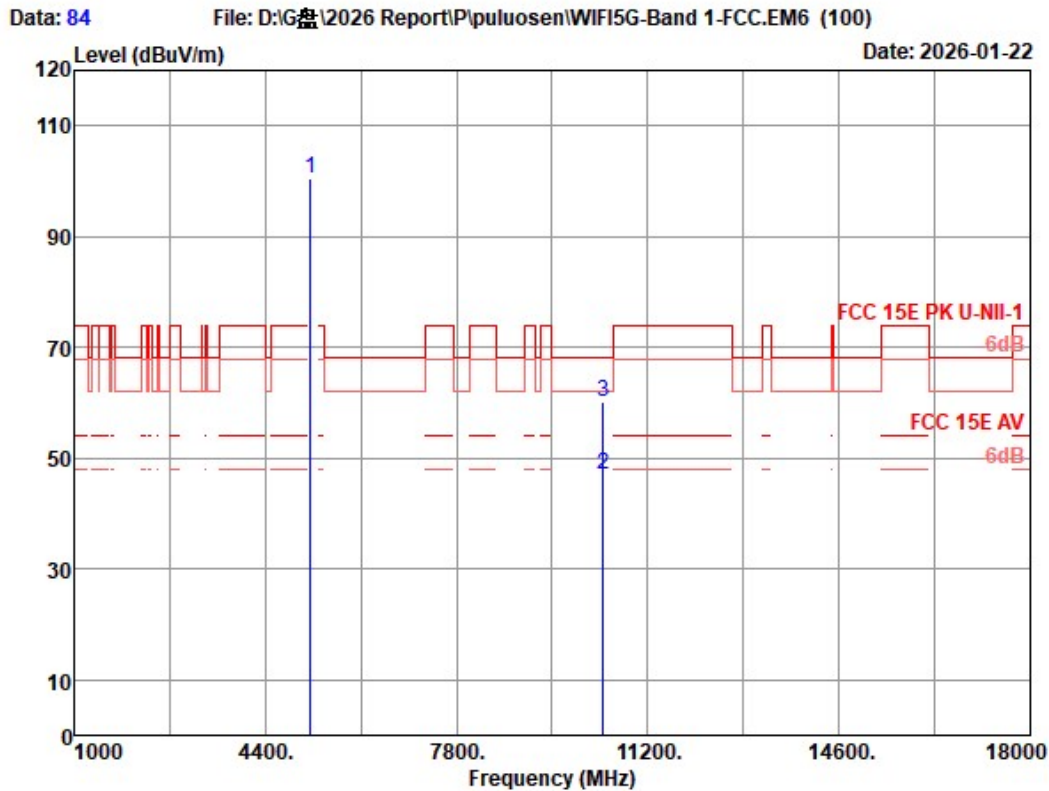


Site no. : 3m Chamber Data no. : 84  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11ac20 5200MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5200.000       | 33.20                    | 1.00                  | 31.36                 | 97.58             | 100.42                        | -----              | -----                    | Peak    |
| 2   | 10400.000      | 37.90                    | 1.16                  | 32.12                 | 40.13             | 47.07                         | -----              | -----                    | Average |
| 3   | 10400.000      | 37.90                    | 1.16                  | 32.12                 | 53.13             | 60.07                         | 68.20              | 8.13                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

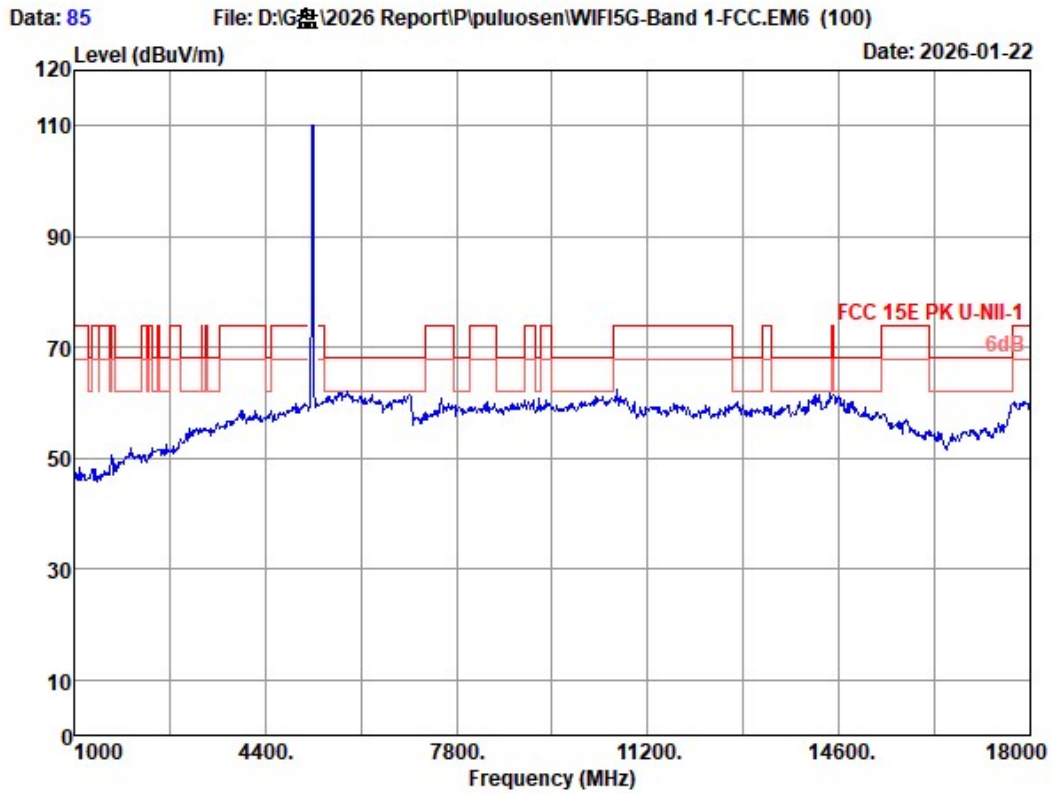


|             |                                 |           |              |
|-------------|---------------------------------|-----------|--------------|
| Site no.    | : 3m Chamber                    | Data no.  | : 85         |
| Dis. / Ant. | : 3m 2025-3115-4580             | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC 15E PK U-NII-1            | Engineer  | : Epoch      |
| Env. / Ins. | : 23.2°C/52.6%                  |           |              |
| Test Mode   | : WIFI5G 11ac20 5240MHz TX Mode |           |              |

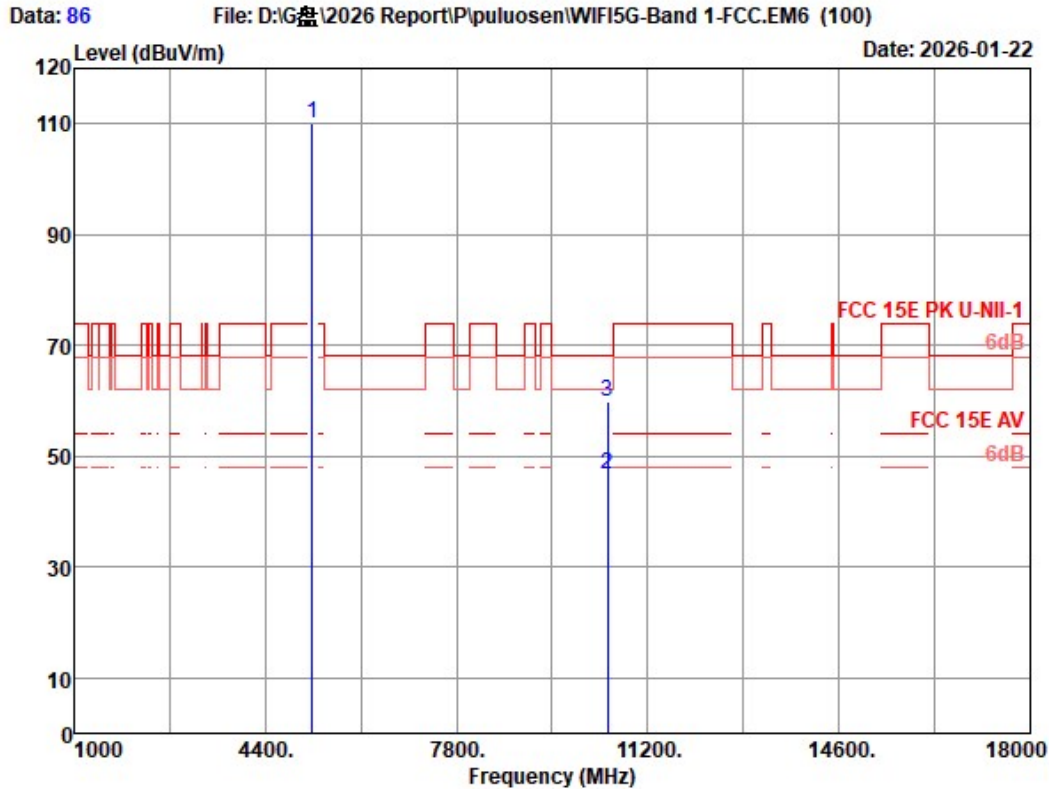


Site no. : 3m Chamber Data no. : 86  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11ac20 5240MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5240.000       | 33.60                    | 1.00                  | 31.35                 | 106.95            | 110.20                        | -----              | -----                    | Peak    |
| 2   | 10480.000      | 37.98                    | 1.15                  | 32.02                 | 39.67             | 46.78                         | -----              | -----                    | Average |
| 3   | 10480.000      | 37.98                    | 1.15                  | 32.02                 | 52.67             | 59.78                         | 68.20              | 8.42                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

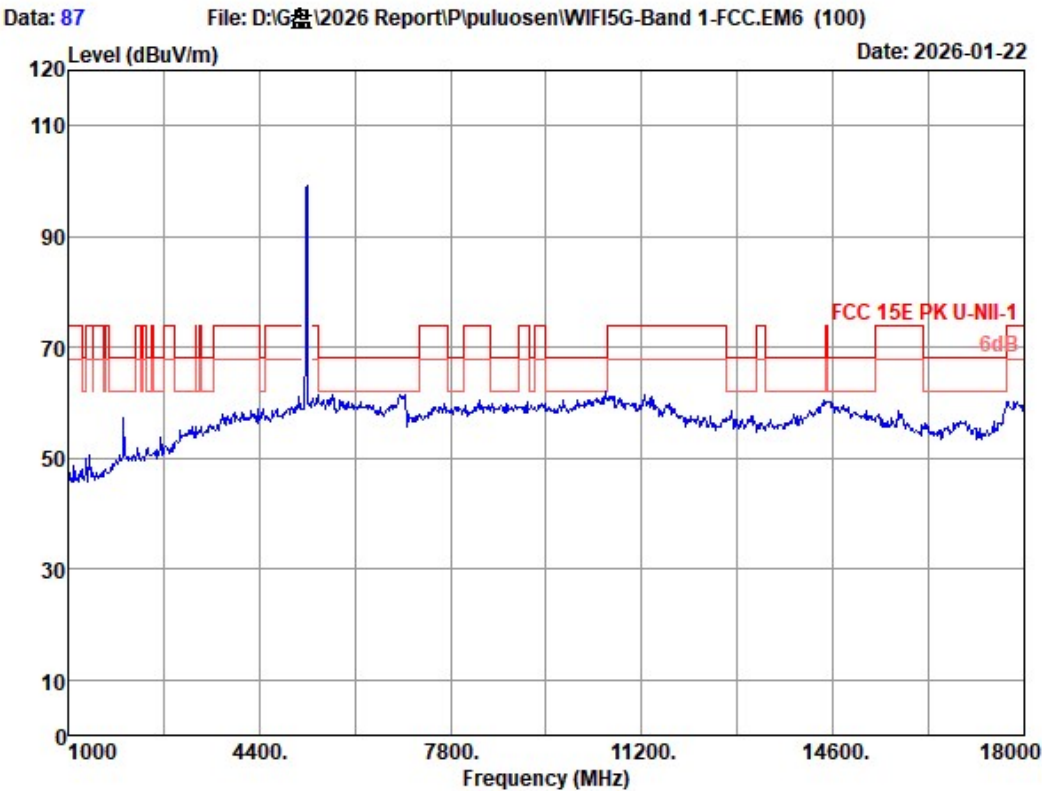


|             |                                 |           |            |
|-------------|---------------------------------|-----------|------------|
| Site no.    | : 3m Chamber                    | Data no.  | : 87       |
| Dis. / Ant. | : 3m 2025-3115-4580             | Ant. pol. | : VERTICAL |
| Limit       | : FCC 15E PK U-NII-1            | Engineer  | : Epoch    |
| Env. / Ins. | : 23.2°C/52.6%                  |           |            |
| Test Mode   | : WIFI5G 11ac20 5240MHz TX Mode |           |            |

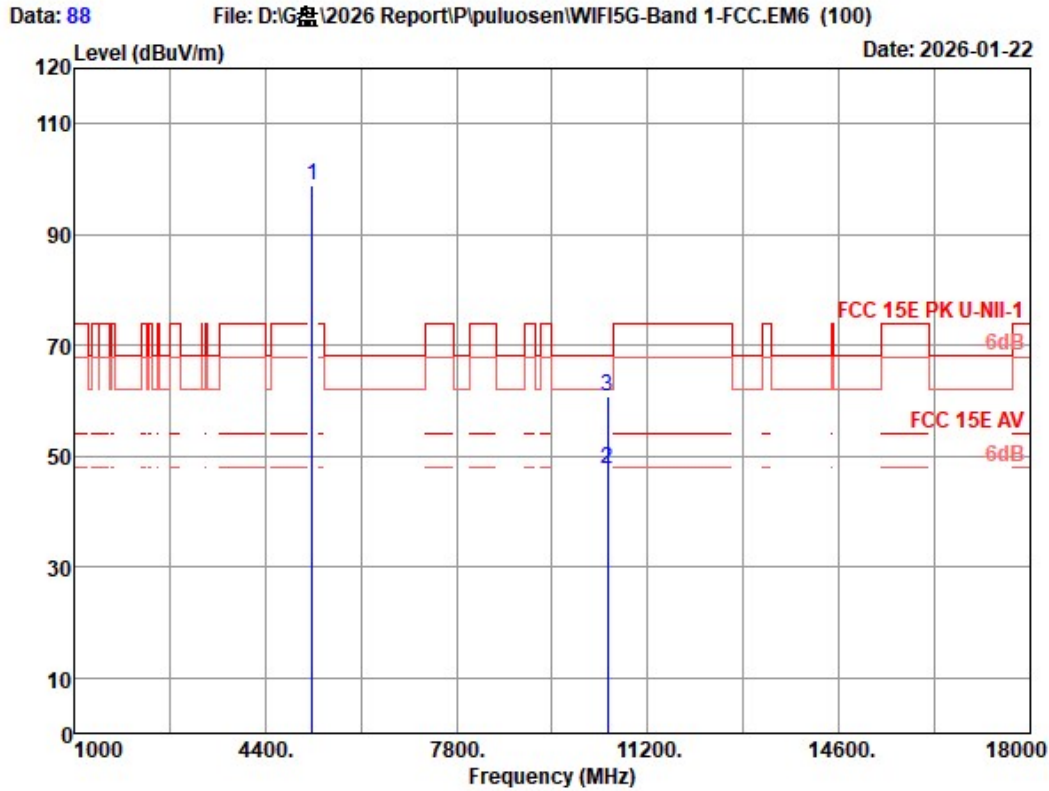


Site no. : 3m Chamber Data no. : 88  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11ac20 5240MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5240.000       | 33.60                    | 1.00                  | 31.35                 | 95.52             | 98.77                         | -----              | -----                    | Peak    |
| 2   | 10480.000      | 37.98                    | 1.15                  | 32.02                 | 40.65             | 47.76                         | -----              | -----                    | Average |
| 3   | 10480.000      | 37.98                    | 1.15                  | 32.02                 | 53.65             | 60.76                         | 68.20              | 7.44                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

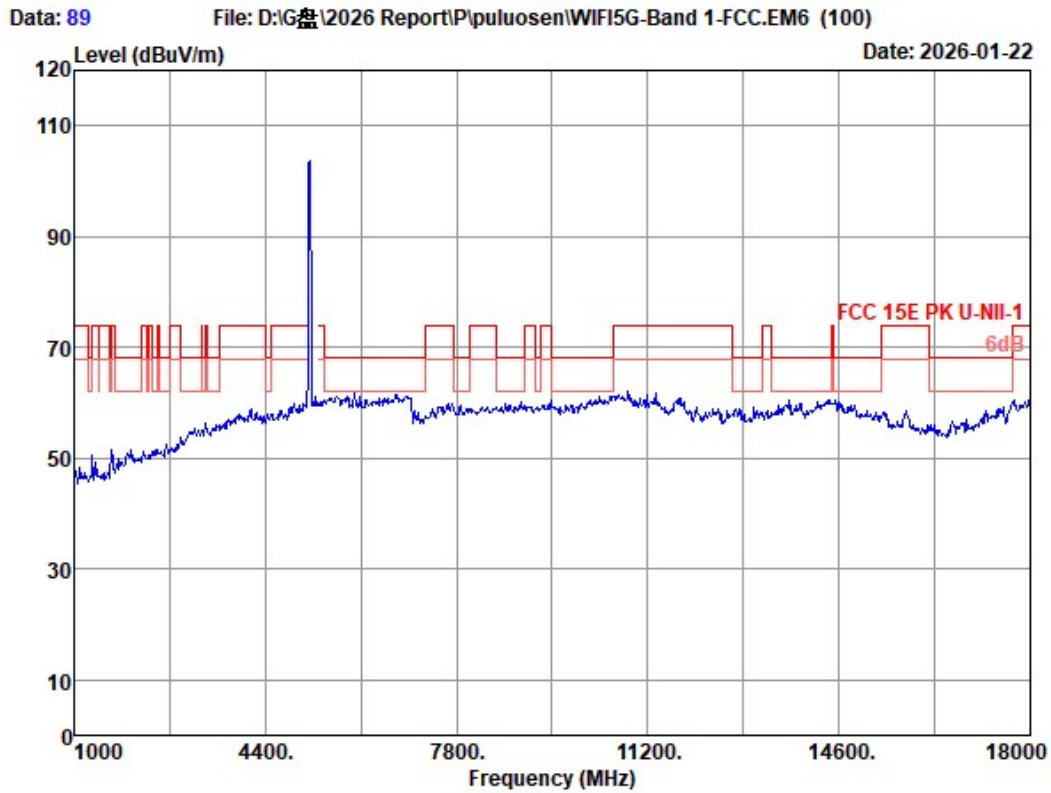


|             |                                 |           |              |
|-------------|---------------------------------|-----------|--------------|
| Site no.    | : 3m Chamber                    | Data no.  | : 89         |
| Dis. / Ant. | : 3m 2025-3115-4580             | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC 15E PK U-NII-1            | Engineer  | : Epoch      |
| Env. / Ins. | : 23.2°C/52.6%                  |           |              |
| Test Mode   | : WIFI5G 11ac40 5190MHz TX Mode |           |              |

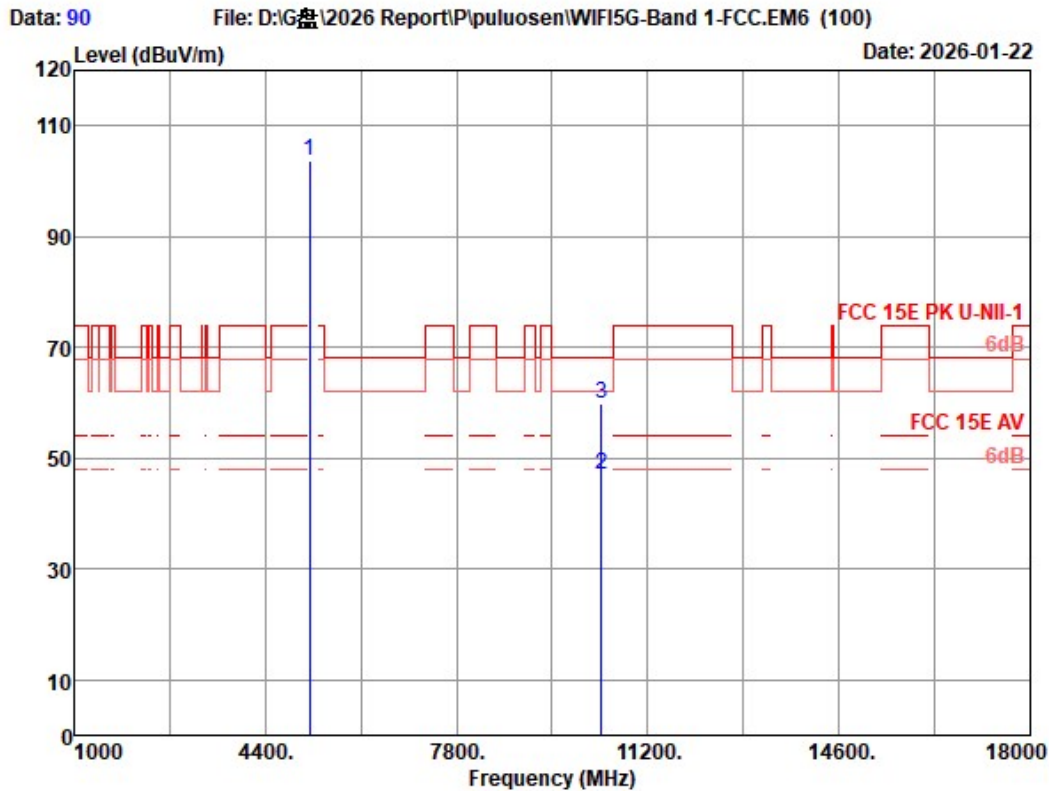


Site no. : 3m Chamber Data no. : 90  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11ac40 5190MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5190.000       | 33.24                    | 1.00                  | 31.36                 | 100.65            | 103.53                        | -----              | -----                    | Peak    |
| 2   | 10380.000      | 37.90                    | 1.16                  | 32.14                 | 40.02             | 46.94                         | -----              | -----                    | Average |
| 3   | 10380.000      | 37.90                    | 1.16                  | 32.14                 | 53.02             | 59.94                         | 68.20              | 8.26                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

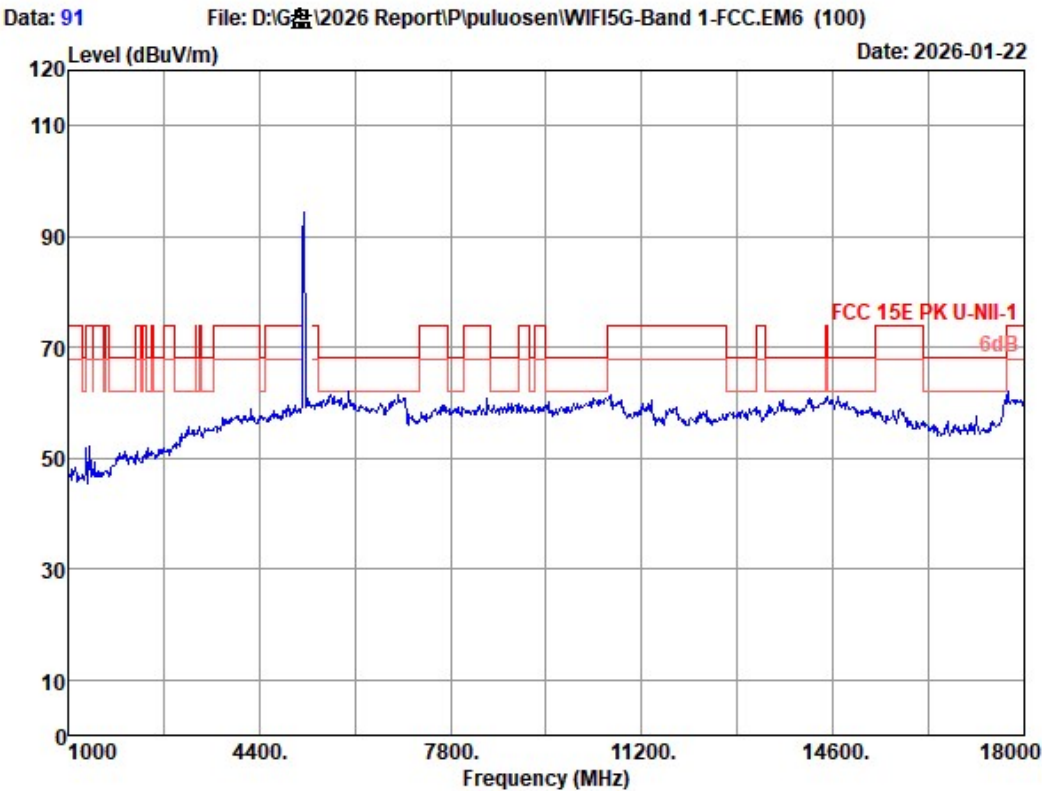


|             |                                 |           |            |
|-------------|---------------------------------|-----------|------------|
| Site no.    | : 3m Chamber                    | Data no.  | : 91       |
| Dis. / Ant. | : 3m 2025-3115-4580             | Ant. pol. | : VERTICAL |
| Limit       | : FCC 15E PK U-NII-1            | Engineer  | : Epoch    |
| Env. / Ins. | : 23.2°C/52.6%                  |           |            |
| Test Mode   | : WIFI5G 11ac40 5190MHz TX Mode |           |            |

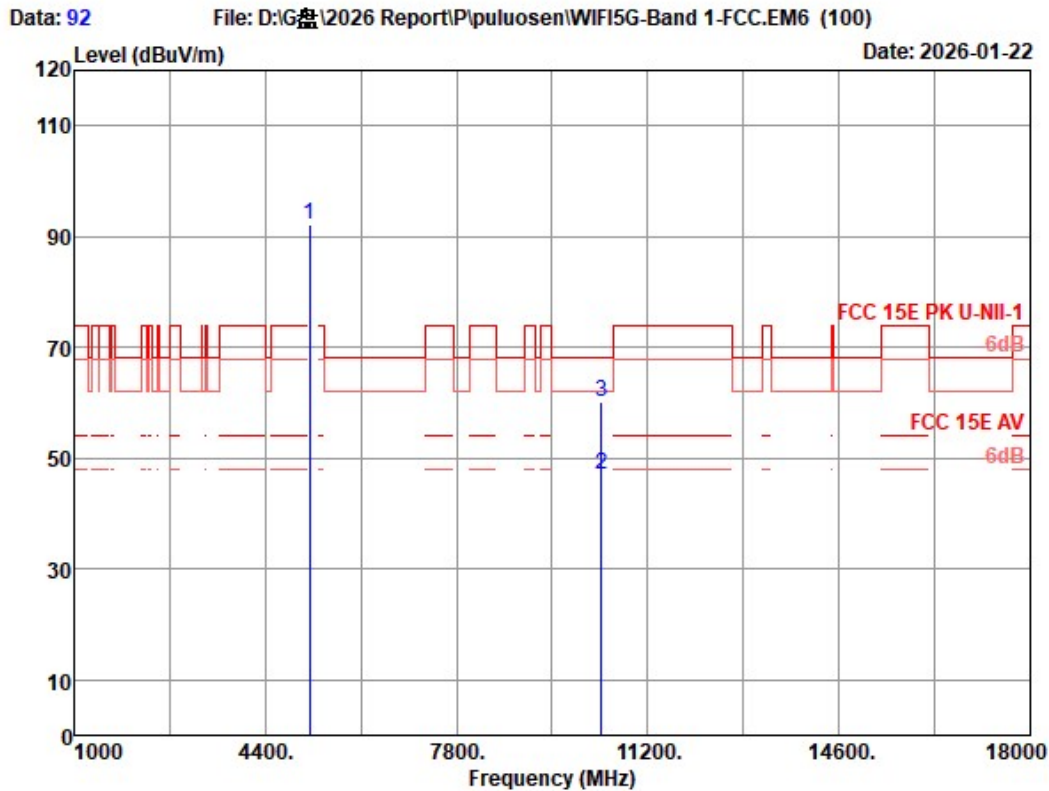


Site no. : 3m Chamber Data no. : 92  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11ac40 5190MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5190.000       | 33.24                    | 1.00                  | 31.36                 | 89.32             | 92.20                         | -----              | -----                    | Peak    |
| 2   | 10380.000      | 37.90                    | 1.16                  | 32.14                 | 40.18             | 47.10                         | -----              | -----                    | Average |
| 3   | 10380.000      | 37.90                    | 1.16                  | 32.14                 | 53.18             | 60.10                         | 68.20              | 8.10                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

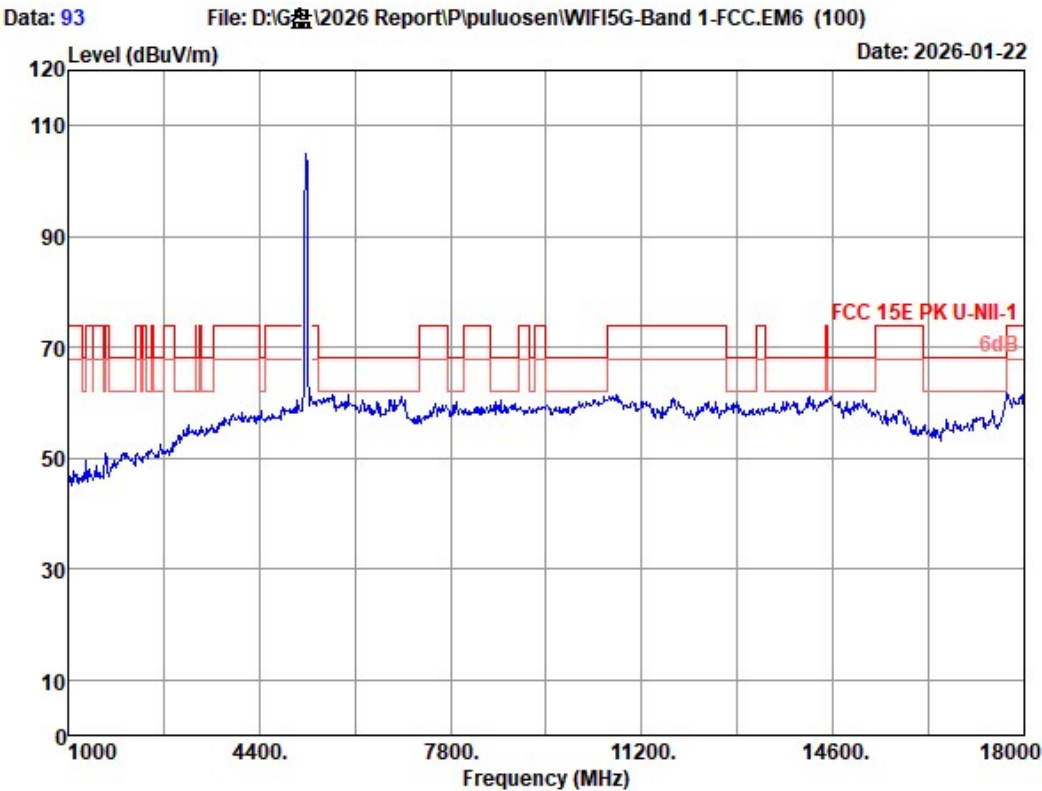


|             |                                 |           |              |
|-------------|---------------------------------|-----------|--------------|
| Site no.    | : 3m Chamber                    | Data no.  | : 93         |
| Dis. / Ant. | : 3m    2025-3115-4580          | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC 15E PK U-NII-1            | Engineer  | : Epoch      |
| Env. / Ins. | : 23.2°C/52.6%                  |           |              |
| Test Mode   | : WIFI5G 11ac40 5230MHz TX Mode |           |              |

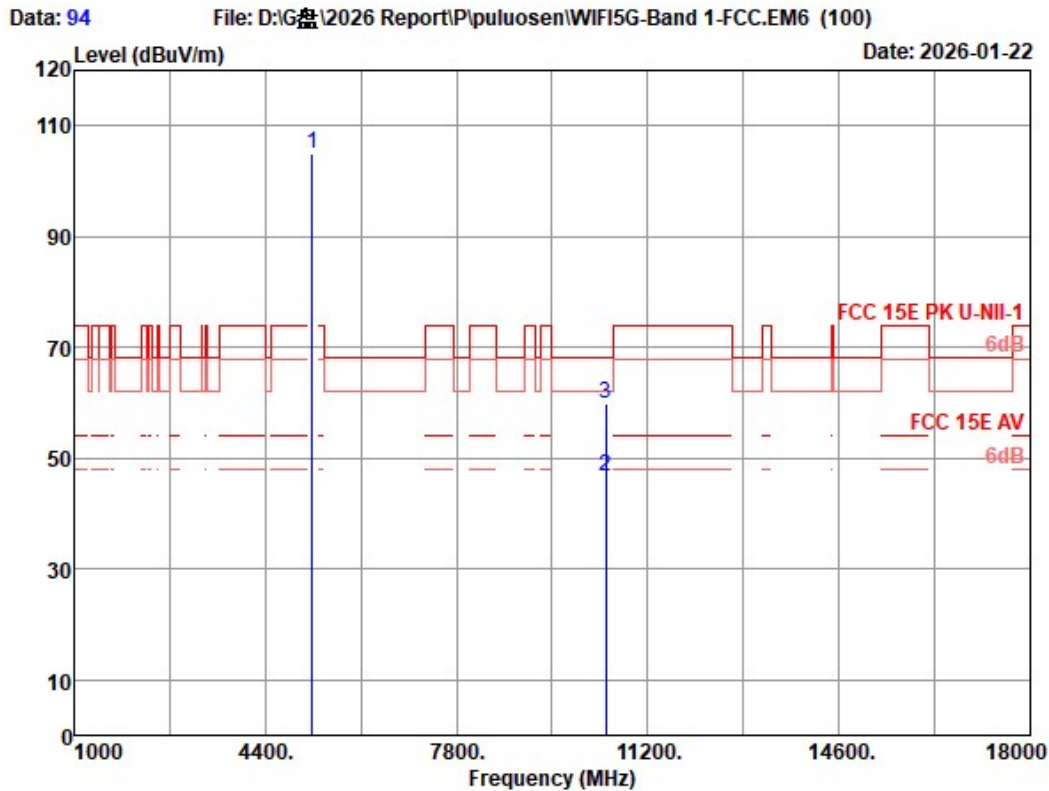


Site no. : 3m Chamber Data no. : 94  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11ac40 5230MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5230.000       | 33.50                    | 1.00                  | 31.35                 | 101.74            | 104.89                        | -----              | -----                    | Peak    |
| 2   | 10460.000      | 37.96                    | 1.15                  | 32.05                 | 39.73             | 46.79                         | -----              | -----                    | Average |
| 3   | 10460.000      | 37.96                    | 1.15                  | 32.05                 | 52.73             | 59.79                         | 68.20              | 8.41                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

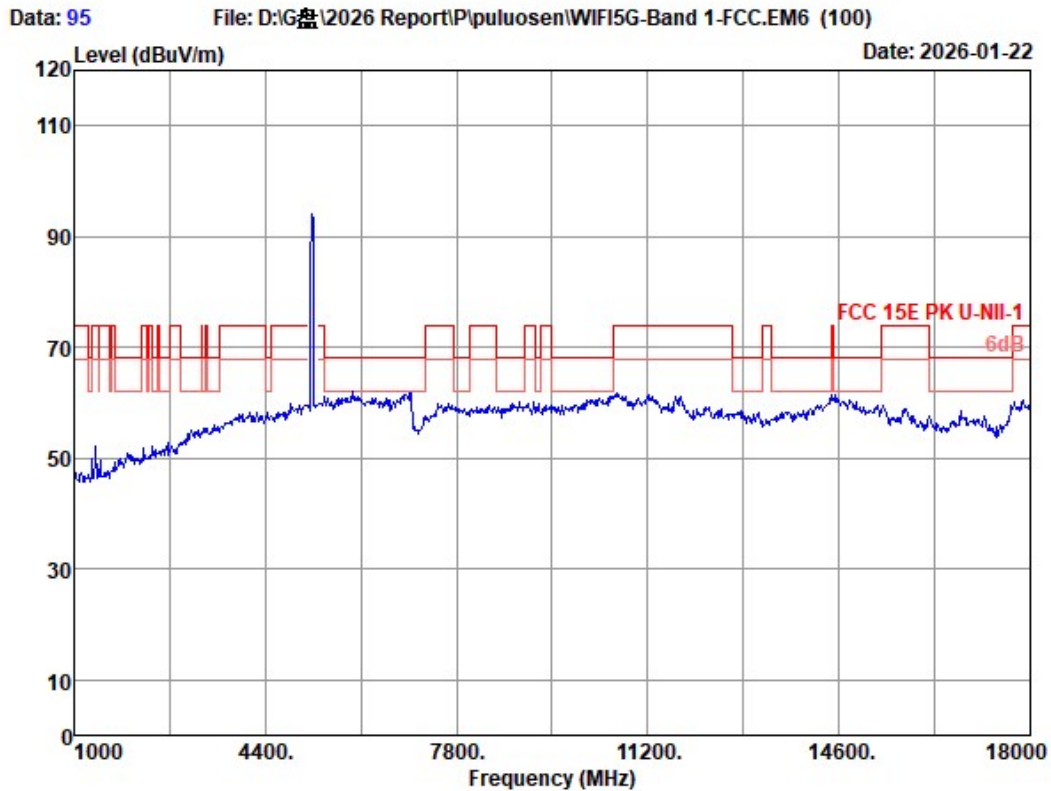


|             |                                 |           |            |
|-------------|---------------------------------|-----------|------------|
| Site no.    | : 3m Chamber                    | Data no.  | : 95       |
| Dis. / Ant. | : 3m 2025-3115-4580             | Ant. pol. | : VERTICAL |
| Limit       | : FCC 15E PK U-NII-1            | Engineer  | : Epoch    |
| Env. / Ins. | : 23.2°C/52.6%                  |           |            |
| Test Mode   | : WIFI5G 11ac40 5230MHz TX Mode |           |            |

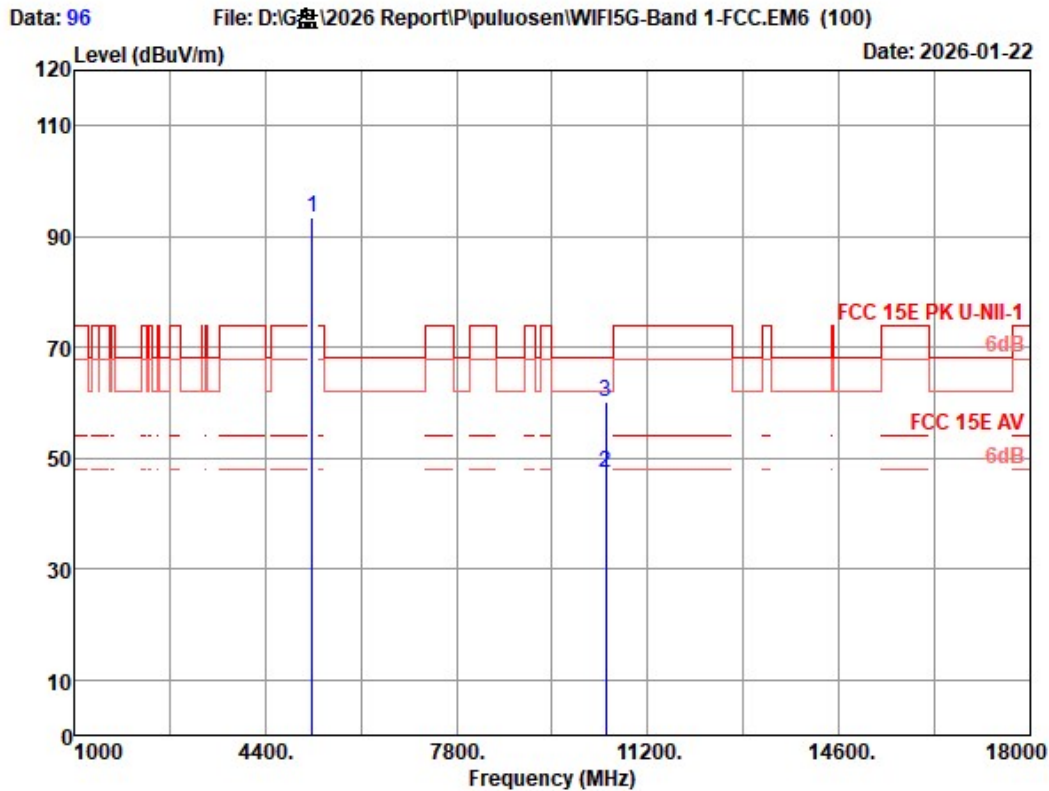

Site no. : 3m Chamber Data no. : 96  
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch  
 Env. / Ins. : 23.2°C/52.6%  
 Test Mode : WIFI5G 11ac40 5230MHz TX Mode

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>Factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>Limits<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|--------------------------|---------|
| 1   | 5230.000       | 33.50                    | 1.00                  | 31.35                 | 90.31             | 93.46                         | -----              | -----                    | Peak    |
| 2   | 10460.000      | 37.96                    | 1.15                  | 32.05                 | 40.18             | 47.24                         | -----              | -----                    | Average |
| 3   | 10460.000      | 37.96                    | 1.15                  | 32.05                 | 53.18             | 60.24                         | 68.20              | 7.96                     | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 -Amp factor(peak)  
 2. The emission levels that are 20dB below the official  
 limit are not reported

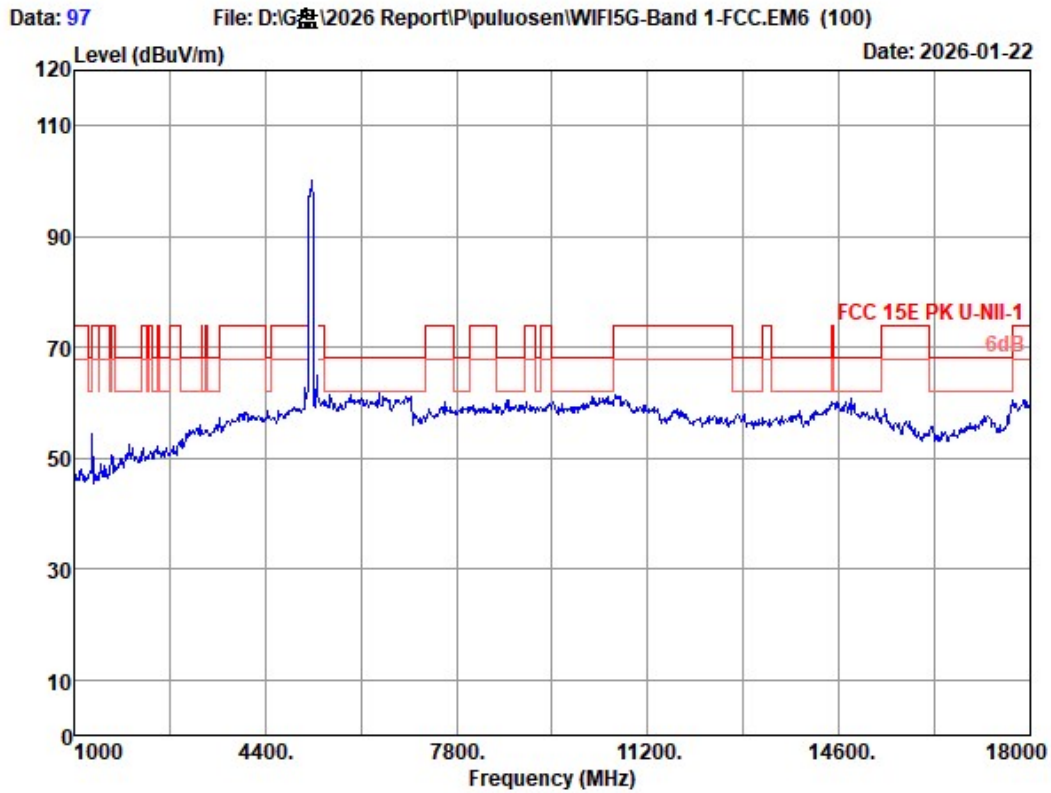

|             |                                 |           |              |
|-------------|---------------------------------|-----------|--------------|
| Site no.    | : 3m Chamber                    | Data no.  | : 97         |
| Dis. / Ant. | : 3m 2025-3115-4580             | Ant. pol. | : HORIZONTAL |
| Limit       | : FCC 15E PK U-NII-1            | Engineer  | : Epoch      |
| Env. / Ins. | : 23.2°C/52.6%                  |           |              |
| Test Mode   | : WIFI5G 11ac80 5210MHz TX Mode |           |              |