



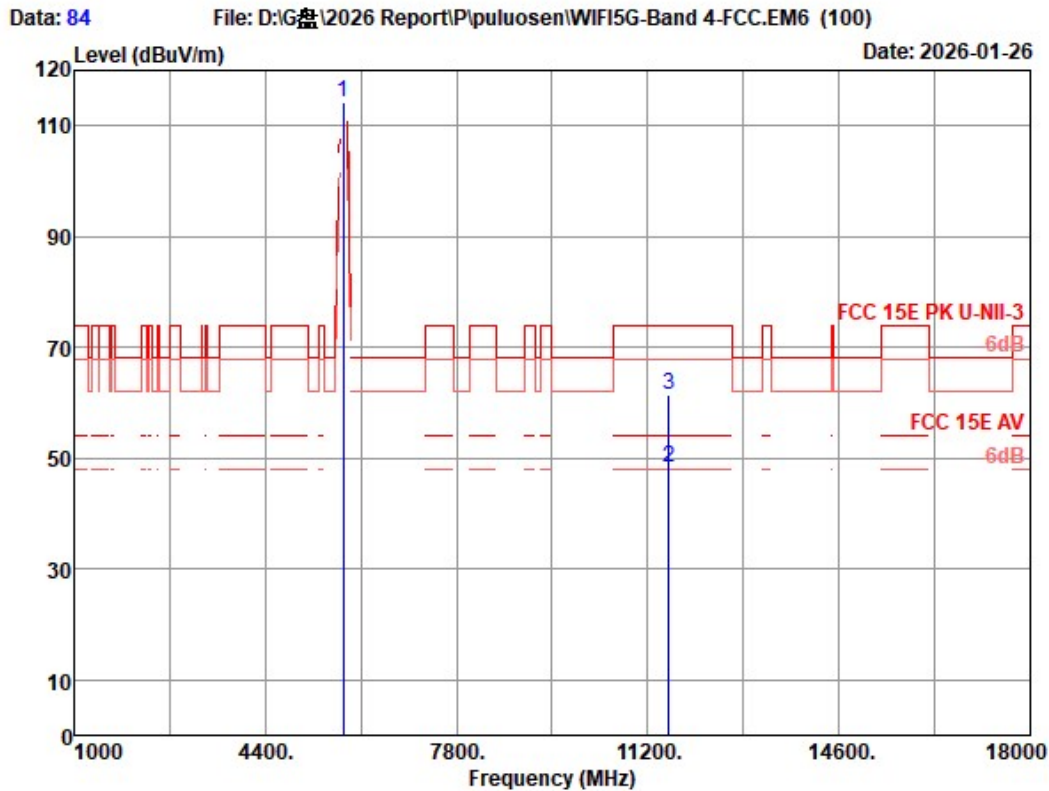


Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5785MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5785.000	33.74	1.00	31.24	110.71	114.21	-----	-----	Peak
2	11570.000	38.91	1.27	31.51	39.71	48.38	54.00	5.62	Average
3	11570.000	38.91	1.27	31.51	52.71	61.38	74.00	12.62	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

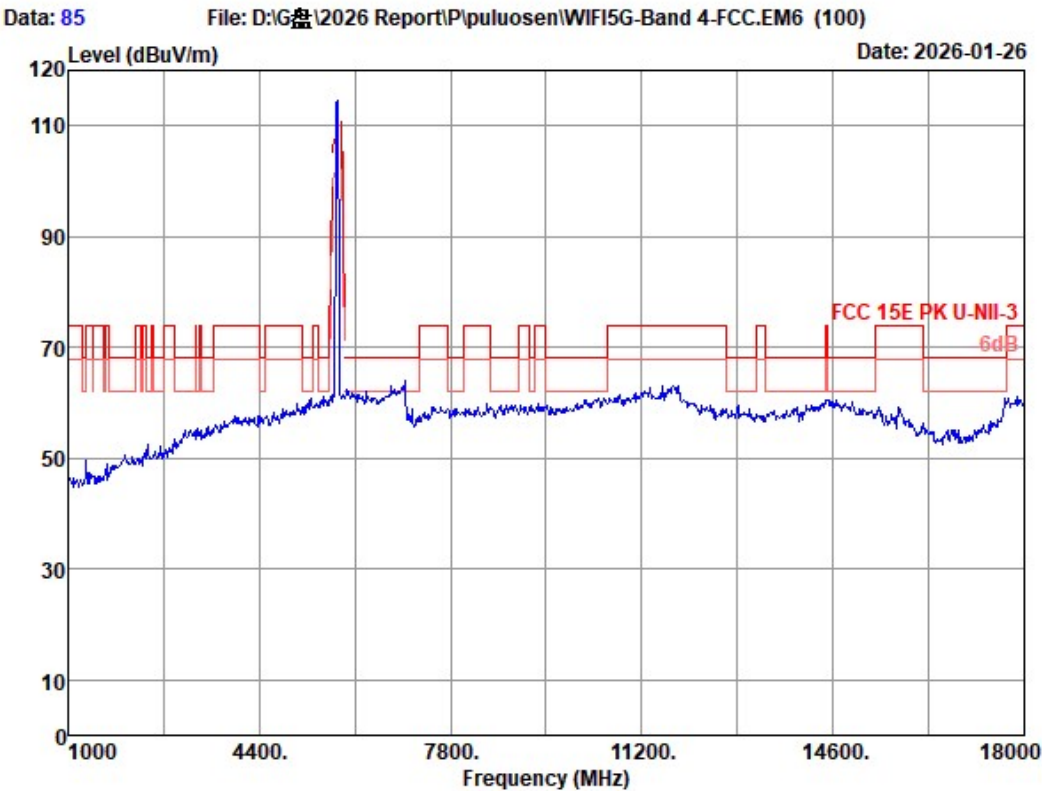


Site no.	: 3m Chamber	Data no.	: 85
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5785MHz TX Mode		

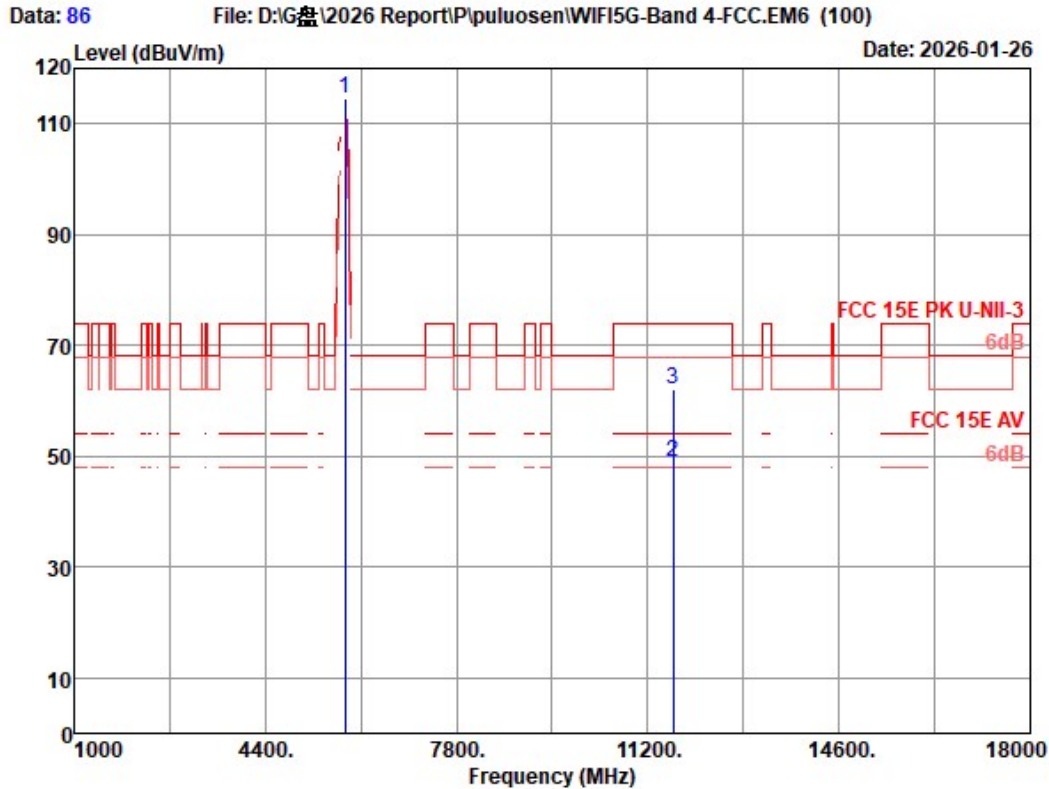


Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5825.000	33.90	1.00	31.24	110.99	114.65	-----	-----	Peak
2	11650.000	39.00	1.29	31.53	40.18	48.94	54.00	5.06	Average
3	11650.000	39.00	1.29	31.53	53.18	61.94	74.00	12.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

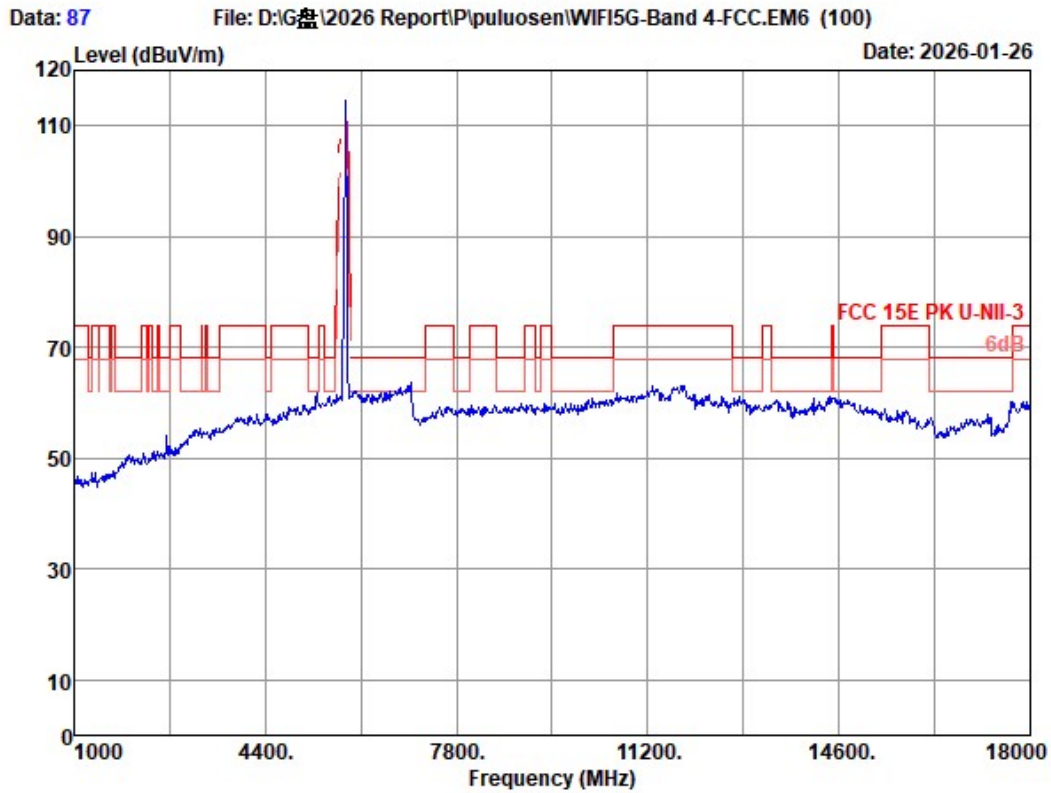


Site no.	: 3m Chamber	Data no.	: 87
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5825MHz TX Mode		

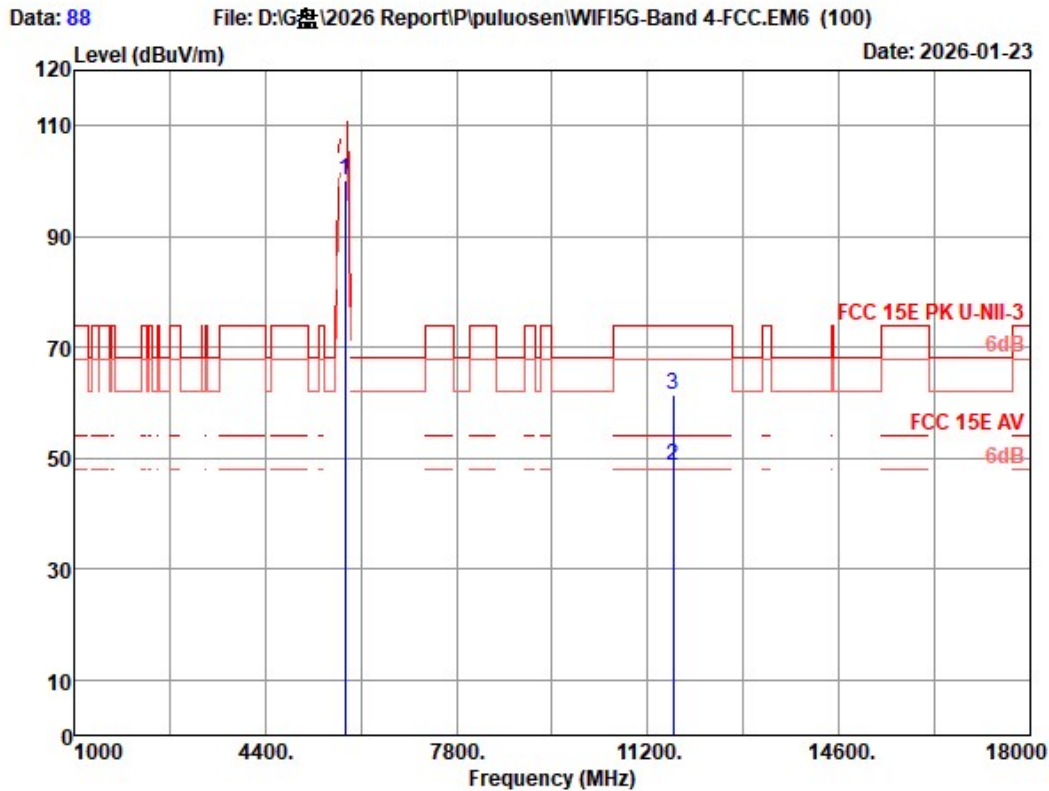


Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5825.000	33.90	1.00	31.24	96.49	100.15	-----	-----	Peak
2	11650.000	39.00	1.29	31.53	39.74	48.50	54.00	5.50	Average
3	11650.000	39.00	1.29	31.53	52.74	61.50	74.00	12.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

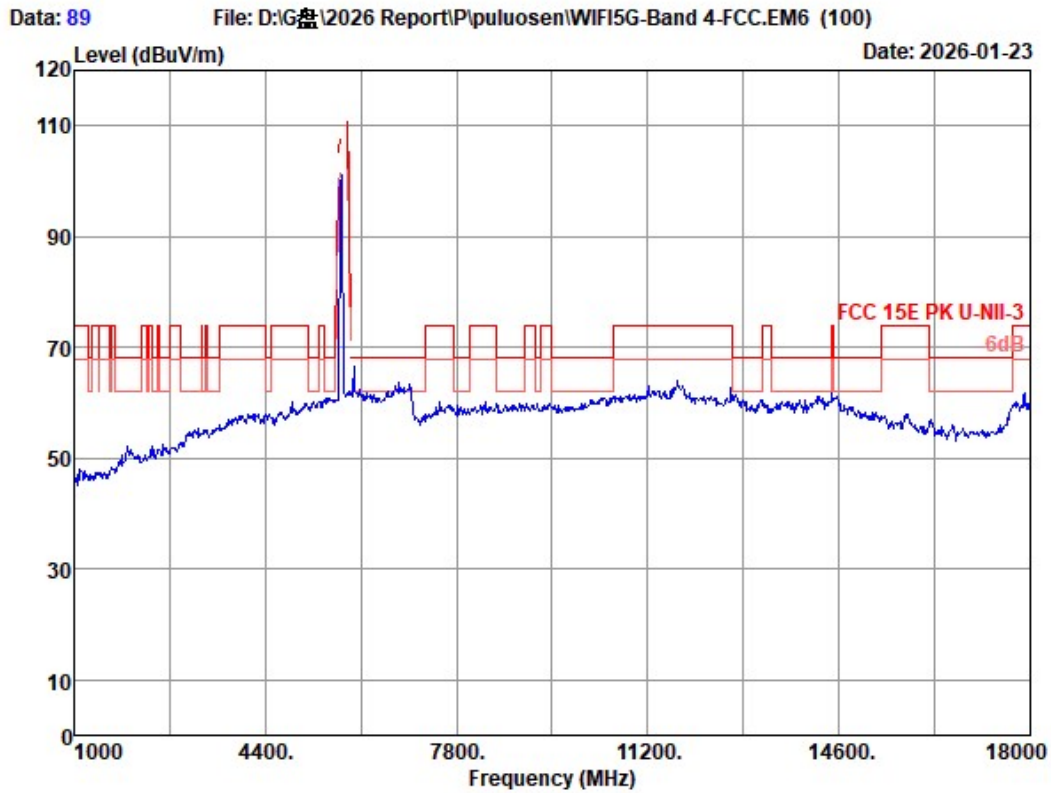


Site no.	: 3m Chamber	Data no.	: 89
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac40 5755MHz TX Mode		

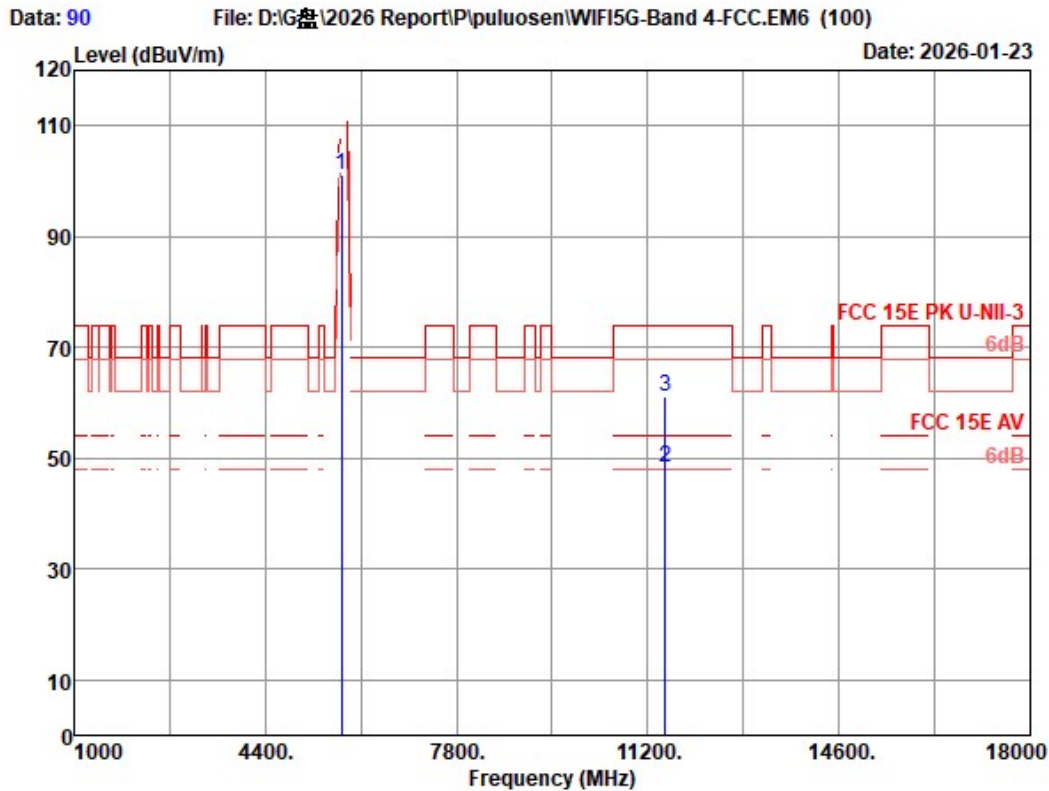


Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5755.000	33.62	1.00	31.25	97.61	100.98	-----	-----	Peak
2	11510.000	38.73	1.25	31.50	39.79	48.27	54.00	5.73	Average
3	11510.000	38.73	1.25	31.50	52.79	61.27	74.00	12.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

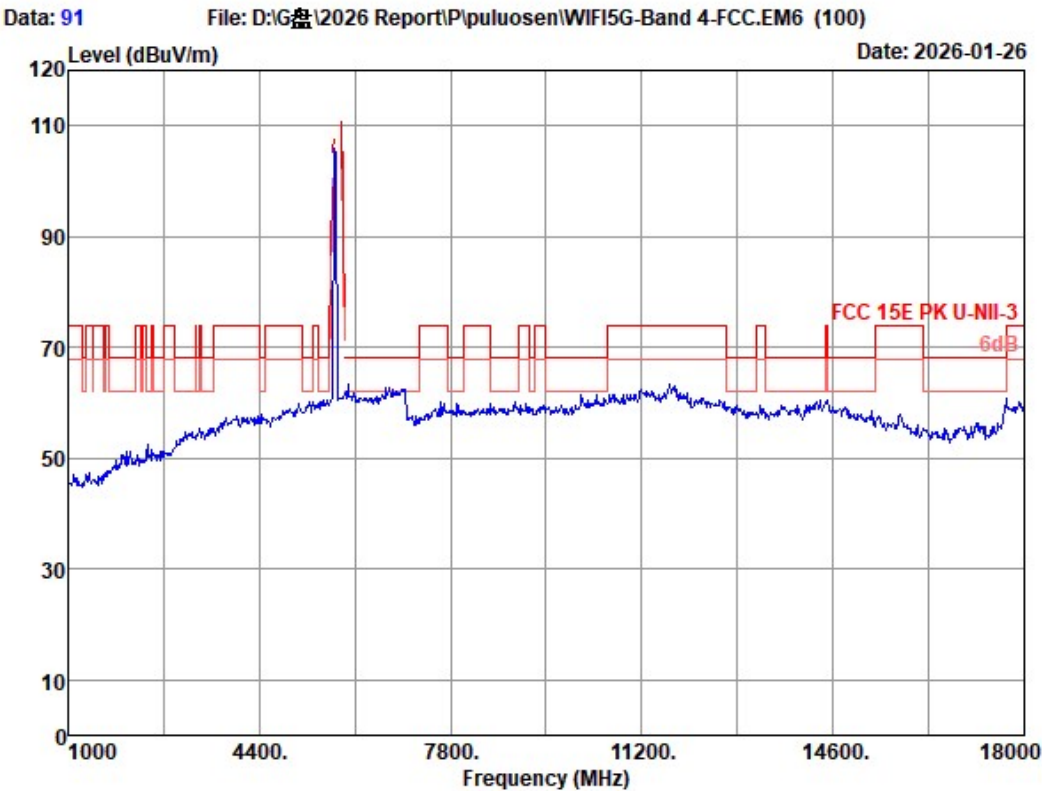


Site no.	: 3m Chamber	Data no.	: 91
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac40 5755MHz TX Mode		

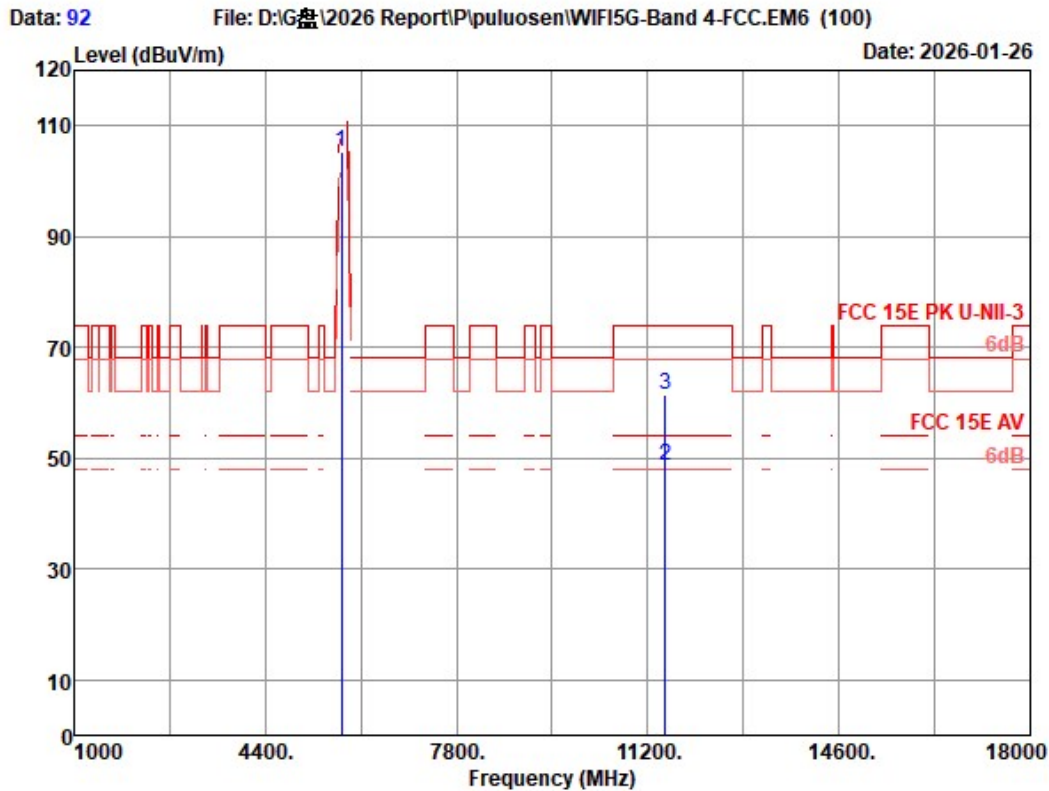


Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5755.000	33.62	1.00	31.25	101.92	105.29	-----	-----	Peak
2	11510.000	38.73	1.25	31.50	40.01	48.49	54.00	5.51	Average
3	11510.000	38.73	1.25	31.50	53.01	61.49	74.00	12.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

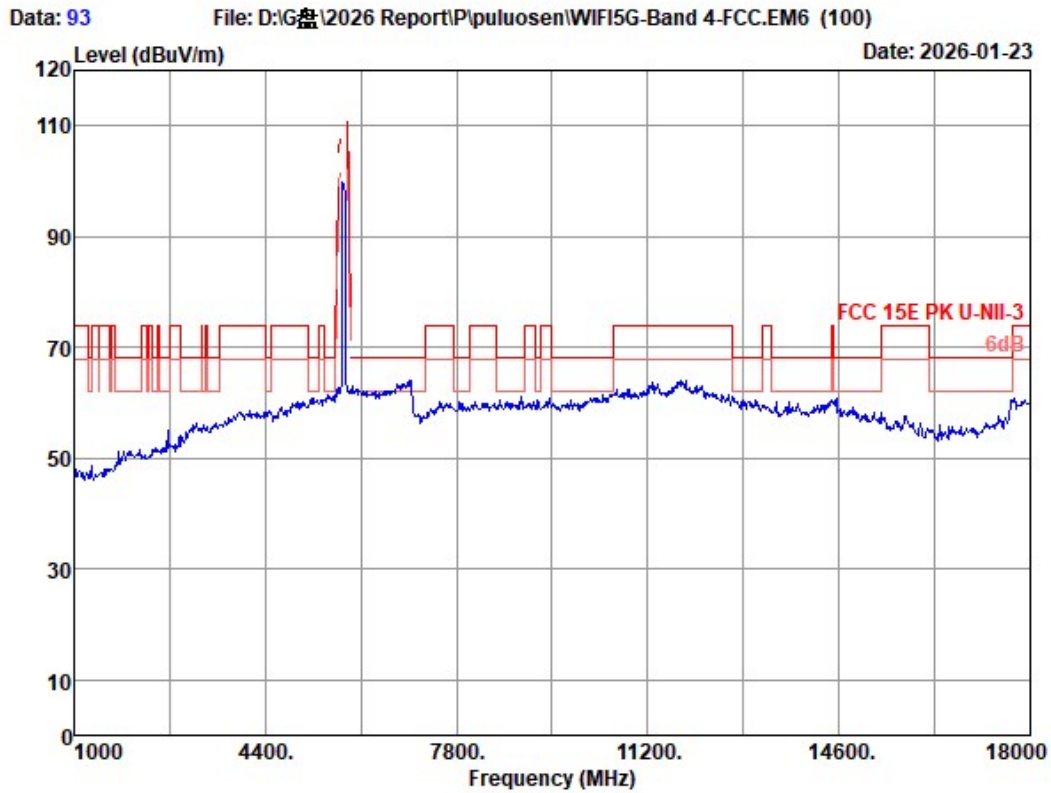


Site no.	: 3m Chamber	Data no.	: 93
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac40 5795MHz TX Mode		

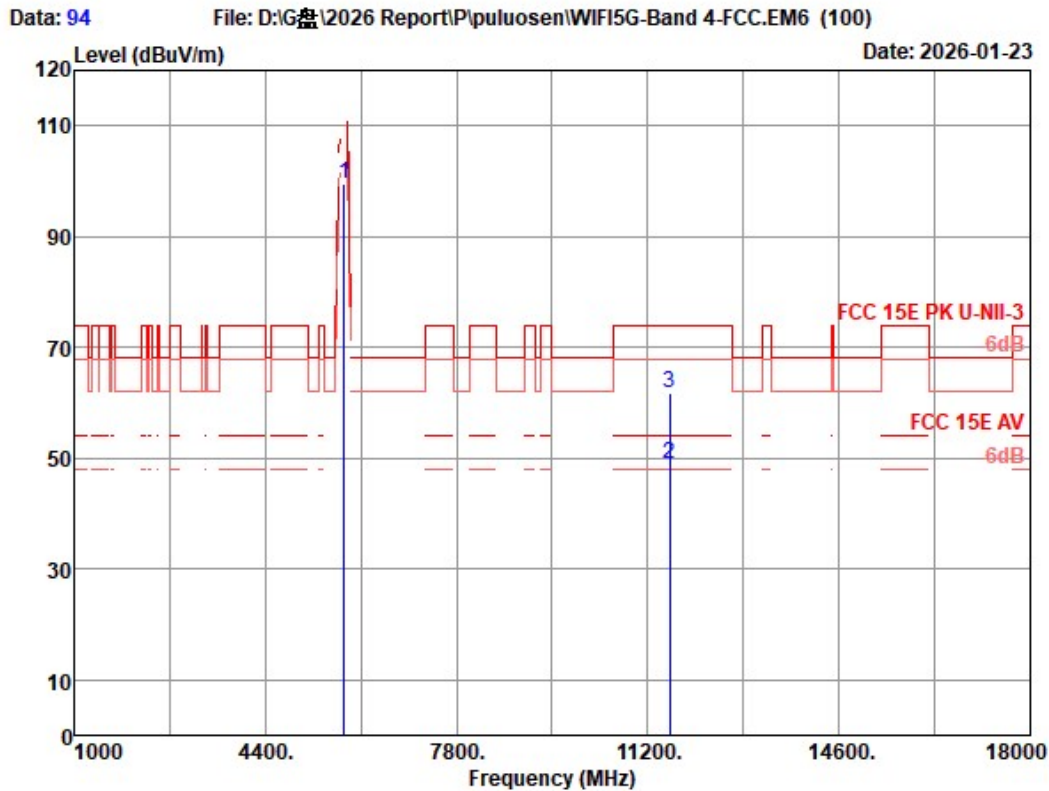


Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5795.000	33.78	1.00	31.24	95.91	99.45	-----	-----	Peak
2	11590.000	38.97	1.28	31.52	40.07	48.80	54.00	5.20	Average
3	11590.000	38.97	1.28	31.52	53.07	61.80	74.00	12.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

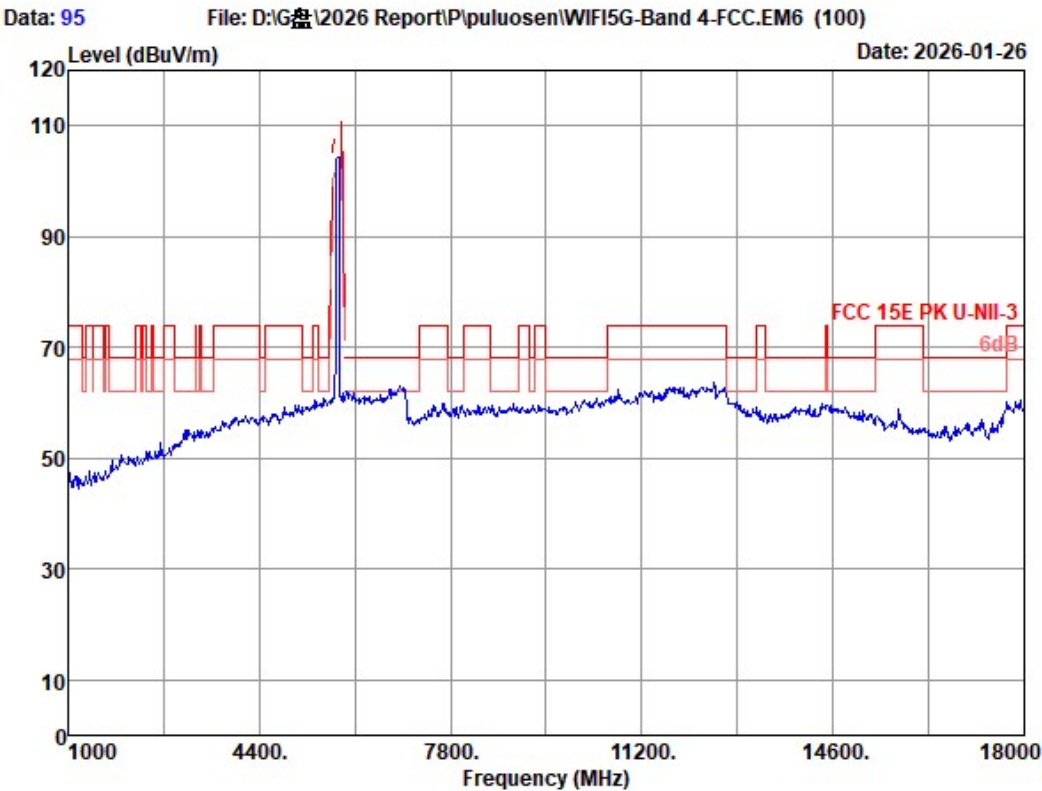


Site no.	: 3m Chamber	Data no.	: 95
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac40 5795MHz TX Mode		

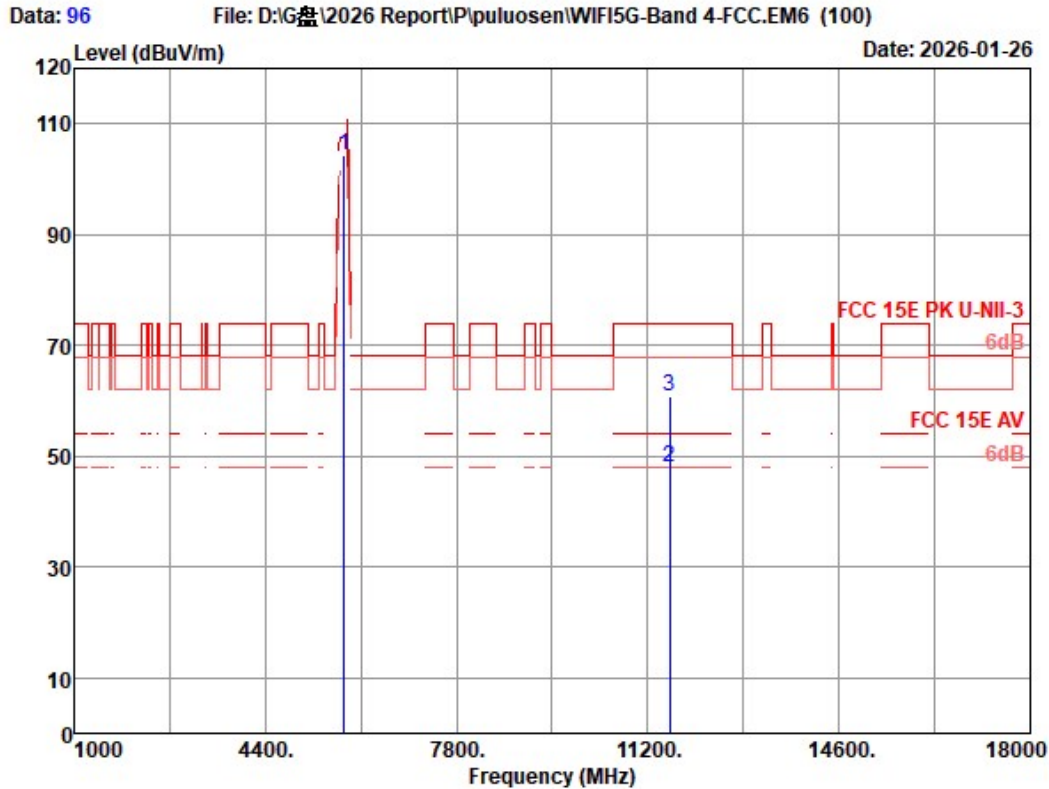


Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5795.000	33.78	1.00	31.24	100.76	104.30	-----	-----	Peak
2	11590.000	38.97	1.28	31.52	39.15	47.88	54.00	6.12	Average
3	11590.000	38.97	1.28	31.52	52.15	60.88	74.00	13.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

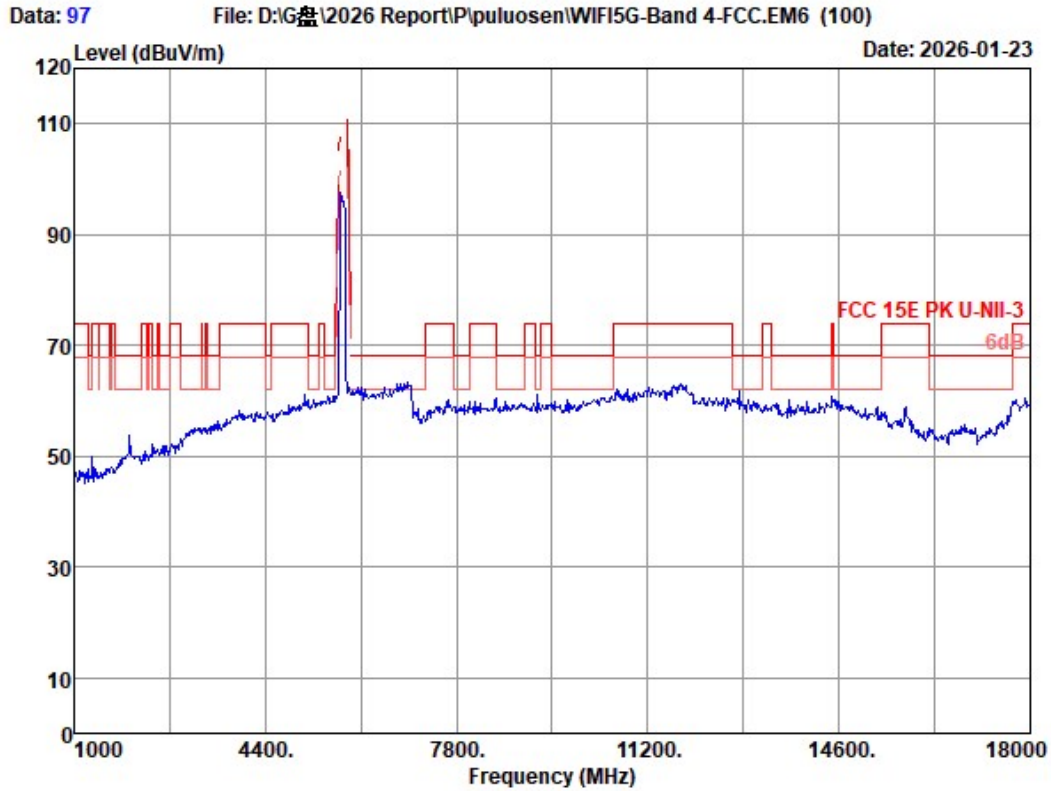


Site no.	: 3m Chamber	Data no.	: 97
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac80 5775MHz TX Mode		

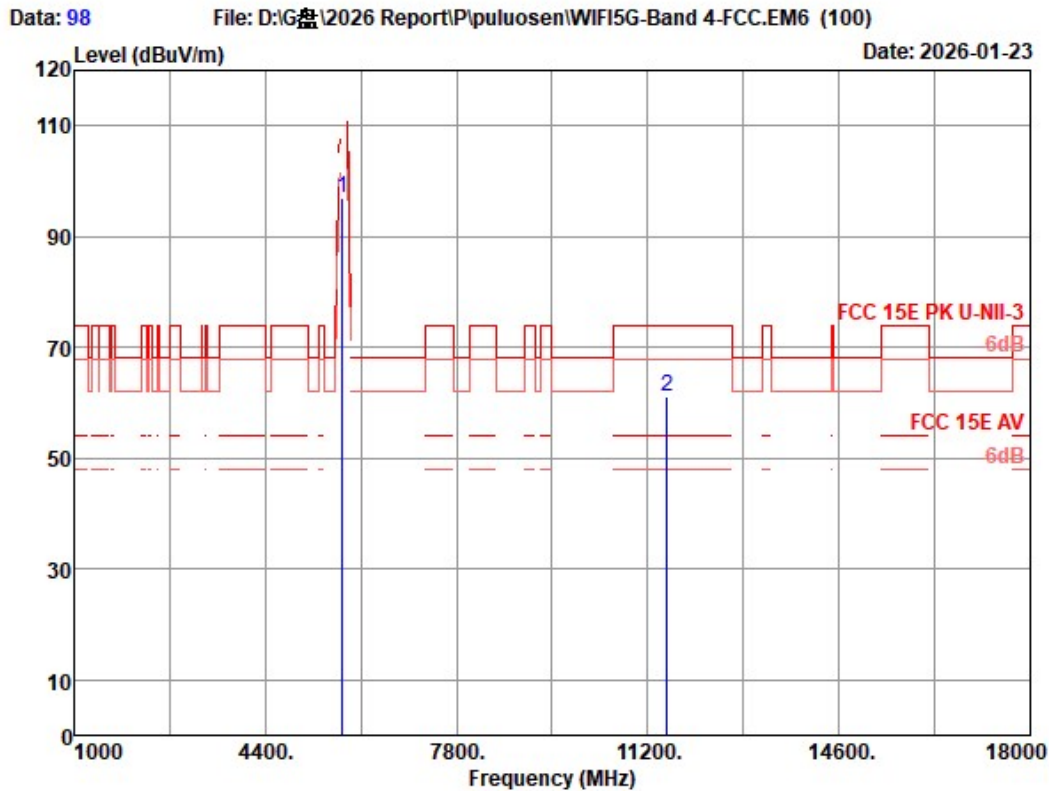


Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac80 5775MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5775.000	33.70	1.00	31.25	93.64	97.09	-----	-----	Peak
2	11550.000	38.85	1.26	31.51	52.56	61.16	74.00	12.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

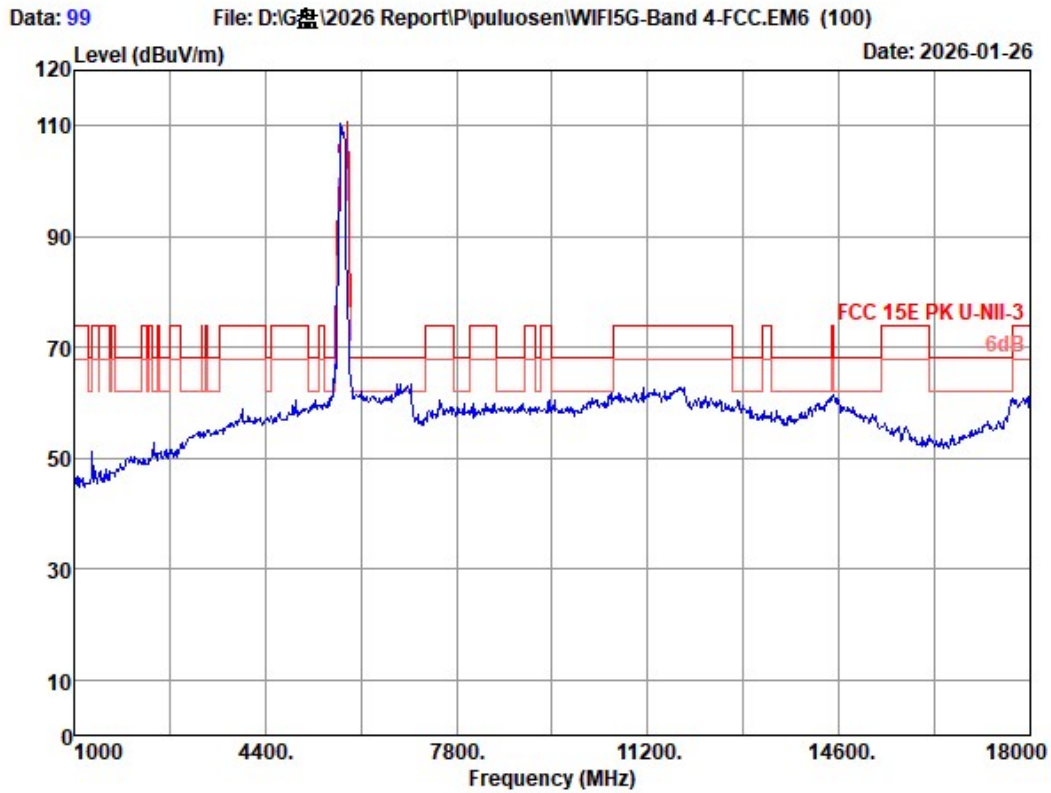

Site no.	: 3m Chamber	Data no.	: 99
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-3	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac80 5775MHz TX Mode		

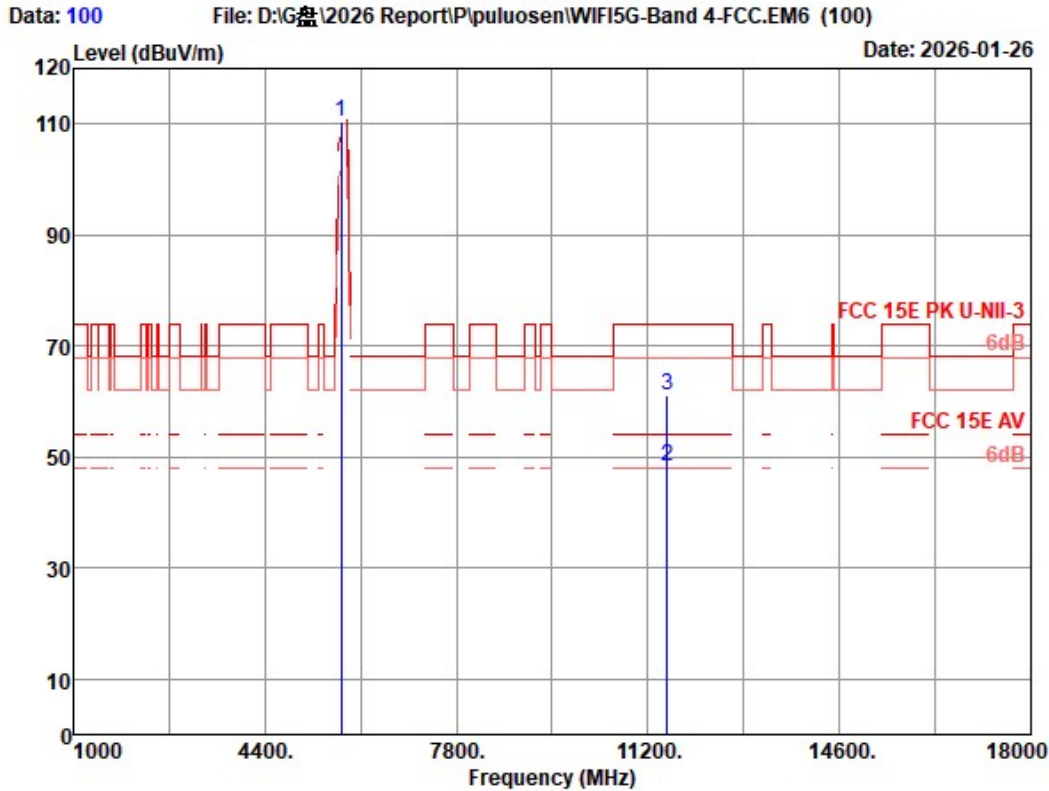

Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac80 5775MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5755.000	33.62	1.00	31.25	106.97	110.34	-----	-----	Peak
2	11550.000	38.85	1.26	31.51	39.56	48.16	54.00	5.84	Average
3	11550.000	38.85	1.26	31.51	52.56	61.16	74.00	12.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

5. BAND EDGE COMPLIANCE TEST

5.1.Limit

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz,

All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For transmitters operating in the band 5470-5725MHz, Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For transmitters operating in the 5.725-5.85 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

5.2.Test Procedure

Use the test method described in ANSI C63.10 clause 6.10:

1. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO
5. Per KDB789033 clause H 2)d).if the test distance is 3m,the EIRP(dBm)=E(dBuv/m)-95.2
Get the final compare with limit.

5.3.Test Results


Pass (The testing data was attached in the next pages.)

U-NII-1 Band:

Data: 1

File: D:\G:\2026 Report\IP\puluosen\WIFI5G-Band 1-FCC.EM6 (100)


Date: 2026-01-22

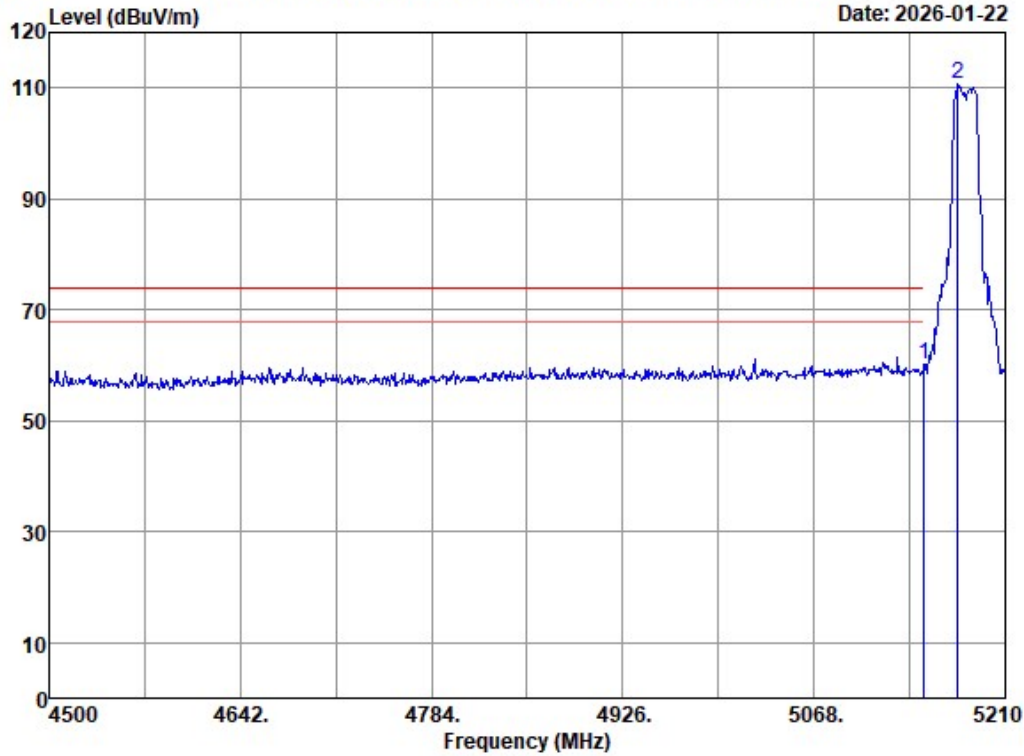

Site no.	: 3m Chamber	Data no.	: 1
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5180MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	57.27	60.30	74.00	13.70	Peak
2	5174.500	33.30	1.00	31.37	107.74	110.67	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
-Amp factor(peak)
2. The emission levels that are 20dB below the official limit are not reported

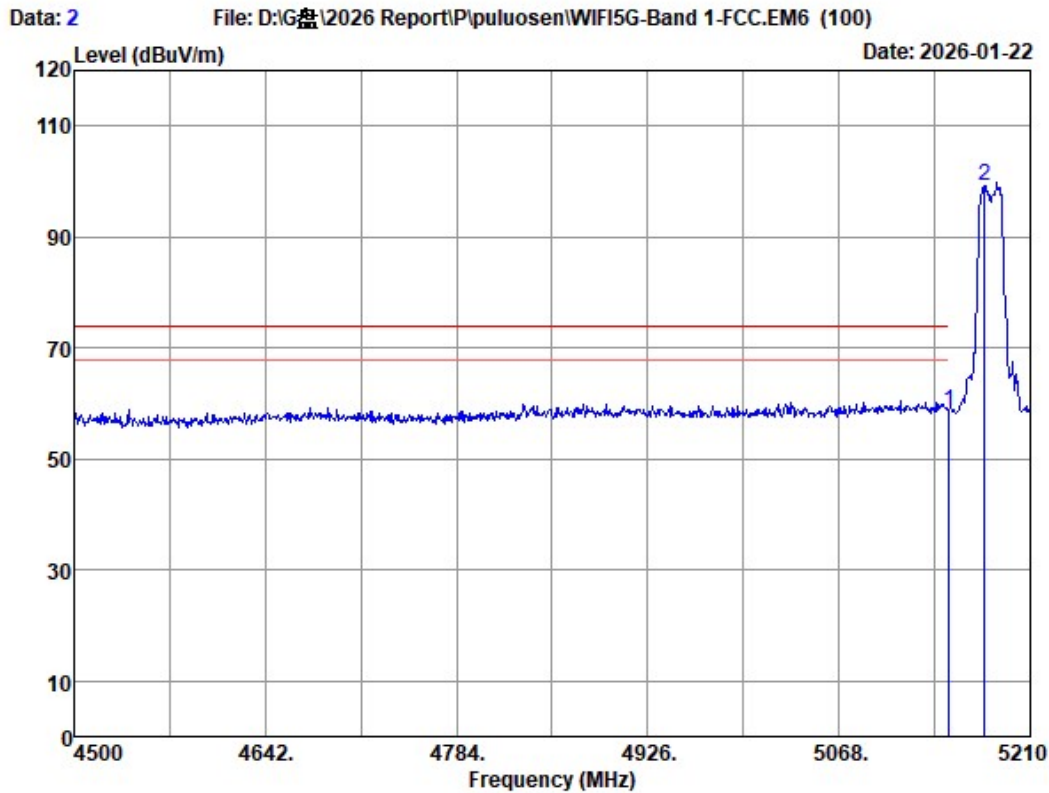

Site no.	: 3m Chamber	Data no.	: 2
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11a 5180MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	55.67	58.70	74.00	15.30	Peak
2	5175.920	33.30	1.00	31.36	96.32	99.26	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

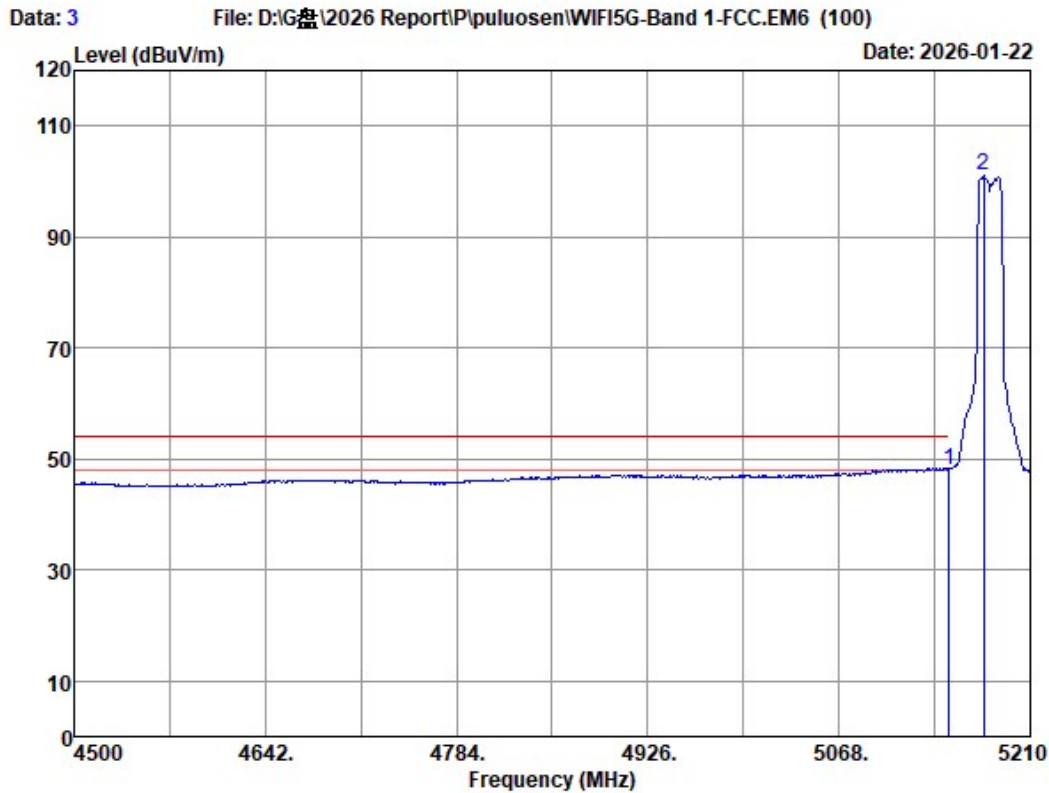

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	44.97	48.00	54.00	6.00	Average
2	5175.210	33.30	1.00	31.36	98.07	101.01	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

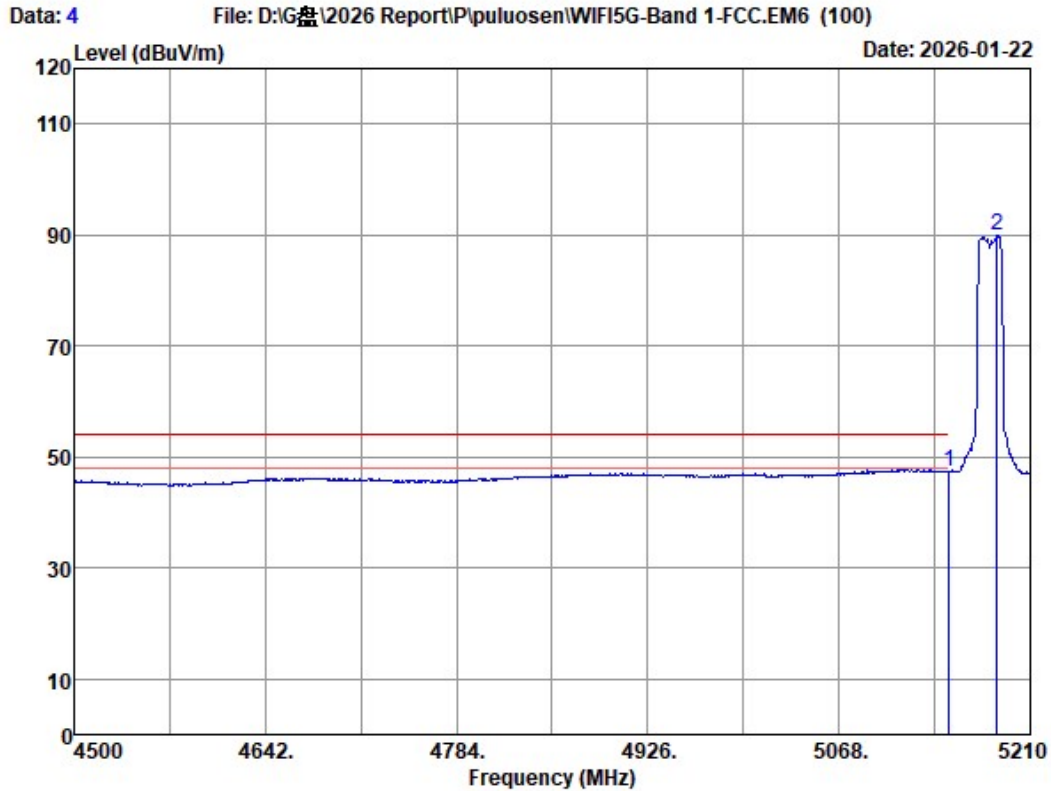

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	44.45	47.48	54.00	6.52	Average
2	5185.150	33.26	1.00	31.36	86.97	89.87	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

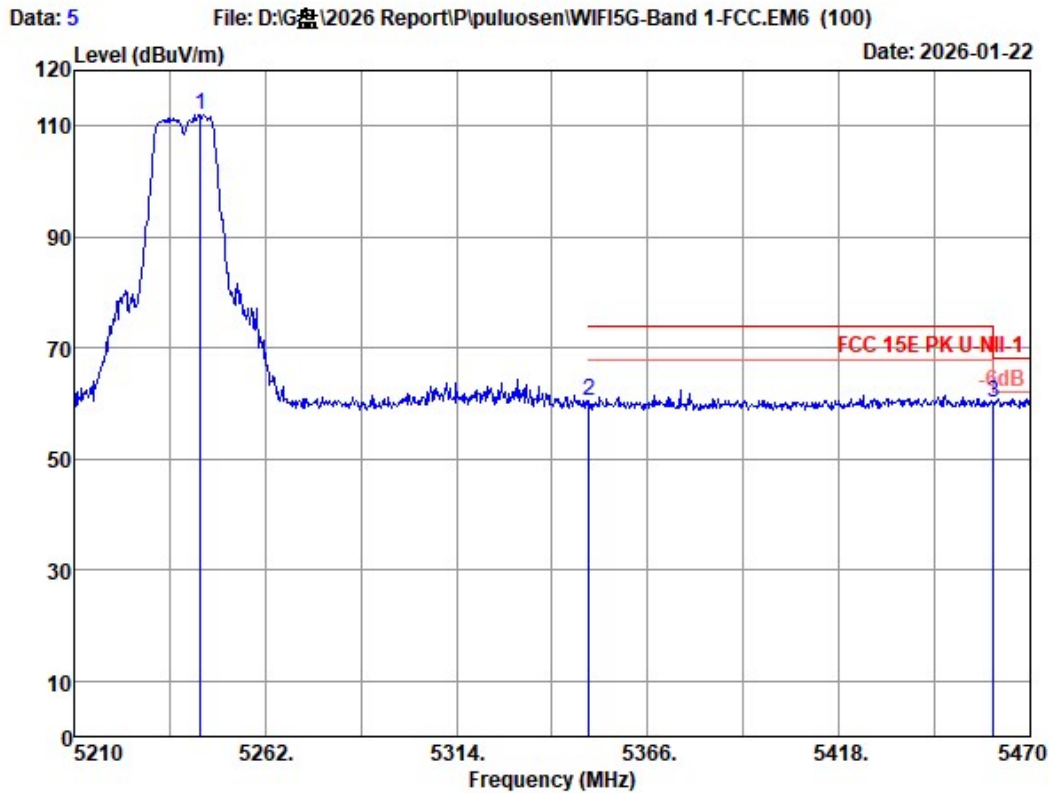

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5244.320	33.64	1.00	31.35	108.80	112.09	-----	-----	Peak
2	5350.000	33.60	1.00	31.33	57.09	60.36	74.00	13.64	Peak
3	5460.000	33.76	1.00	31.31	56.66	60.11	68.20	8.09	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

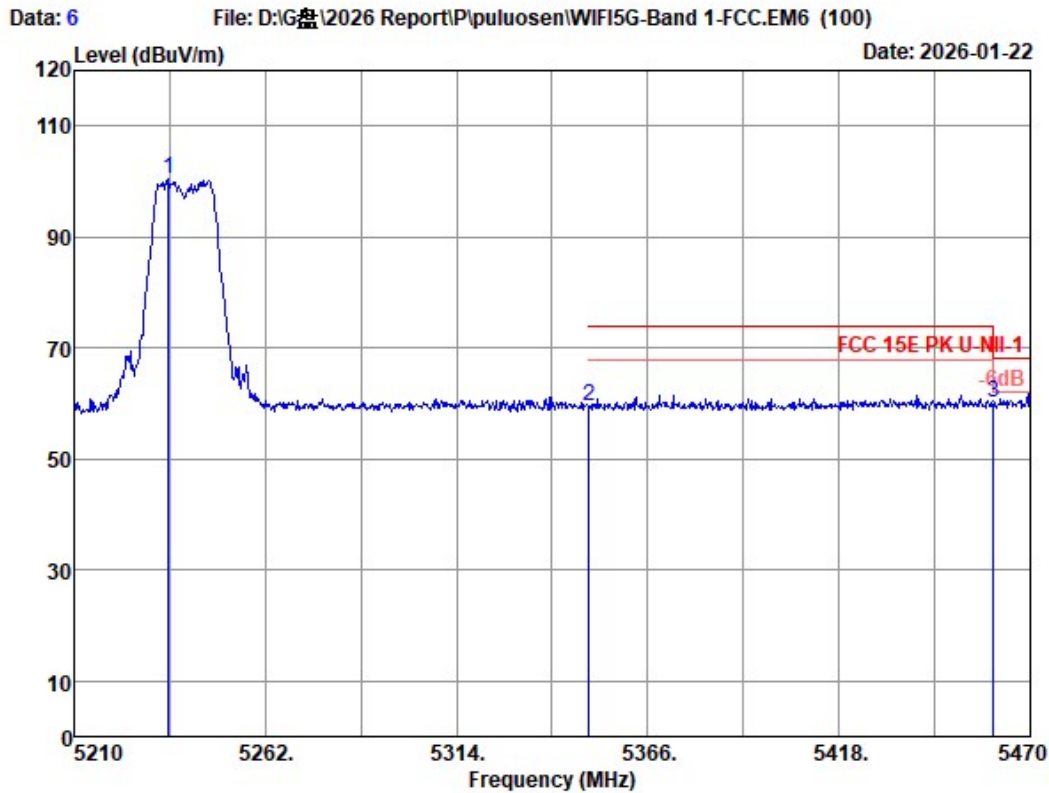

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5235.740	33.56	1.00	31.35	97.11	100.32	-----	-----	Peak
2	5350.000	33.60	1.00	31.33	56.19	59.46	74.00	14.54	Peak
3	5460.000	33.76	1.00	31.31	56.64	60.09	68.20	8.11	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

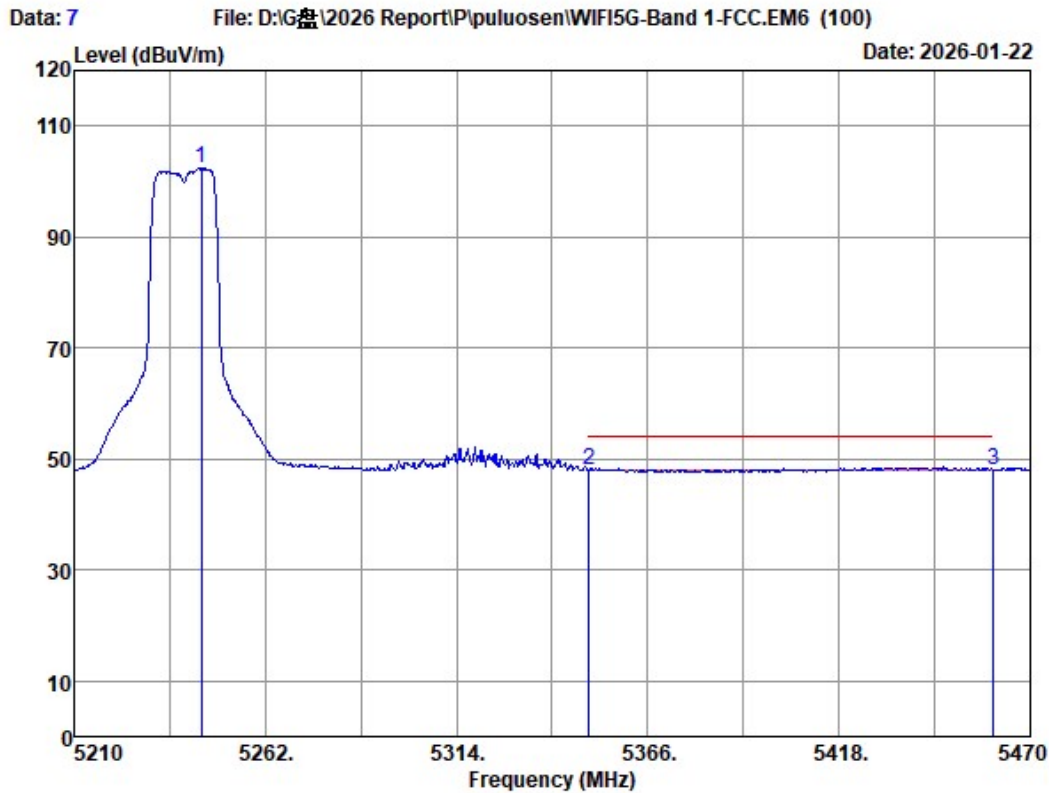

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5244.580	33.65	1.00	31.35	99.17	102.47	-----	-----	Average
2	5350.000	33.60	1.00	31.33	44.66	47.93	54.00	6.07	Average
3	5460.000	33.76	1.00	31.31	44.68	48.13	54.00	5.87	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

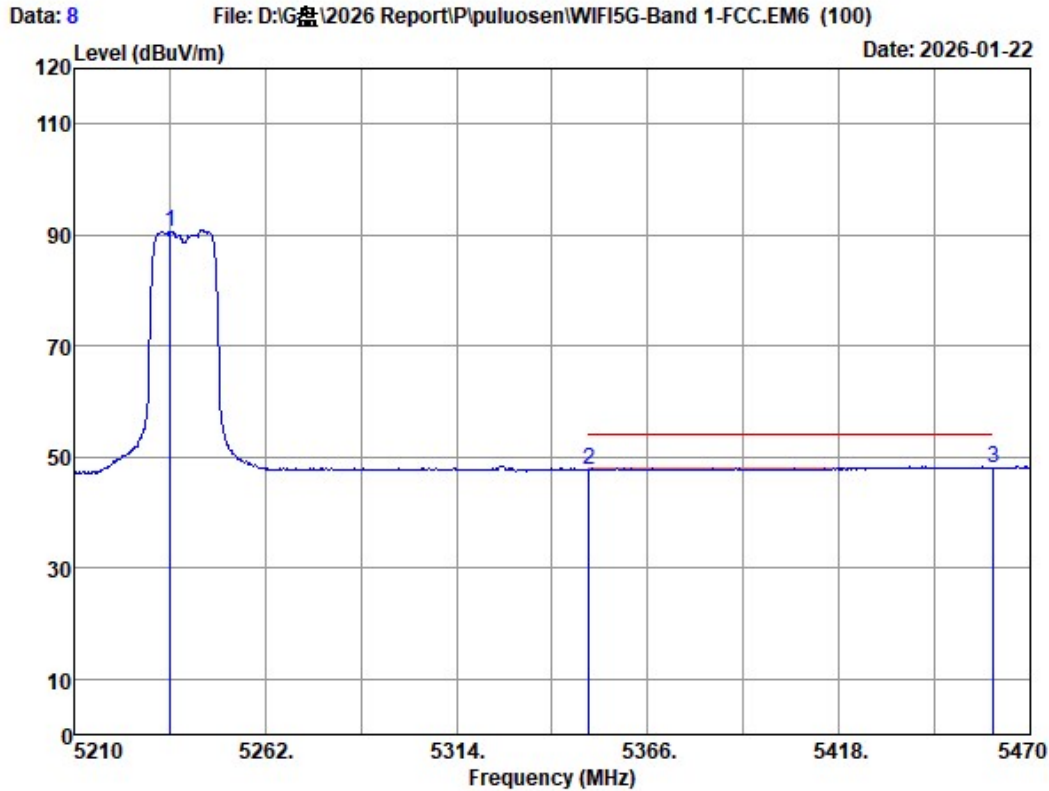

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5236.260	33.56	1.00	31.35	87.39	90.60	-----	-----	Average
2	5350.000	33.60	1.00	31.33	44.51	47.78	54.00	6.22	Average
3	5460.000	33.76	1.00	31.31	44.63	48.08	54.00	5.92	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

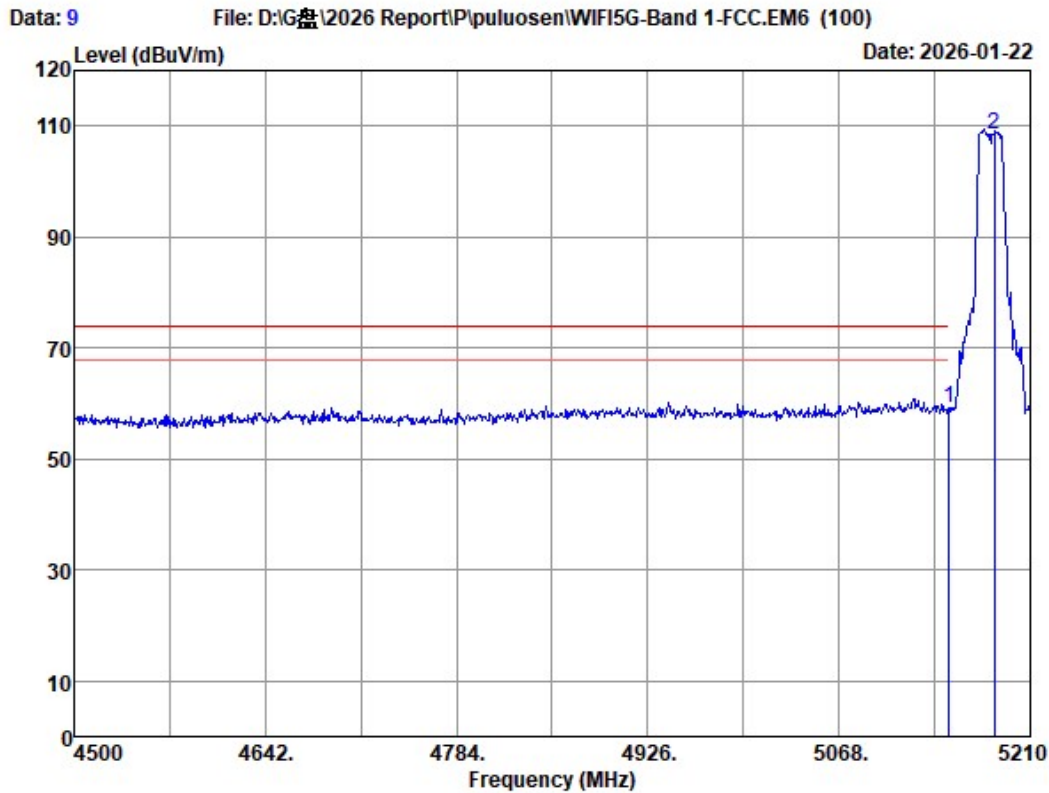

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	56.10	59.13	74.00	14.87	Peak
2	5183.020	33.27	1.00	31.36	105.65	108.56	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

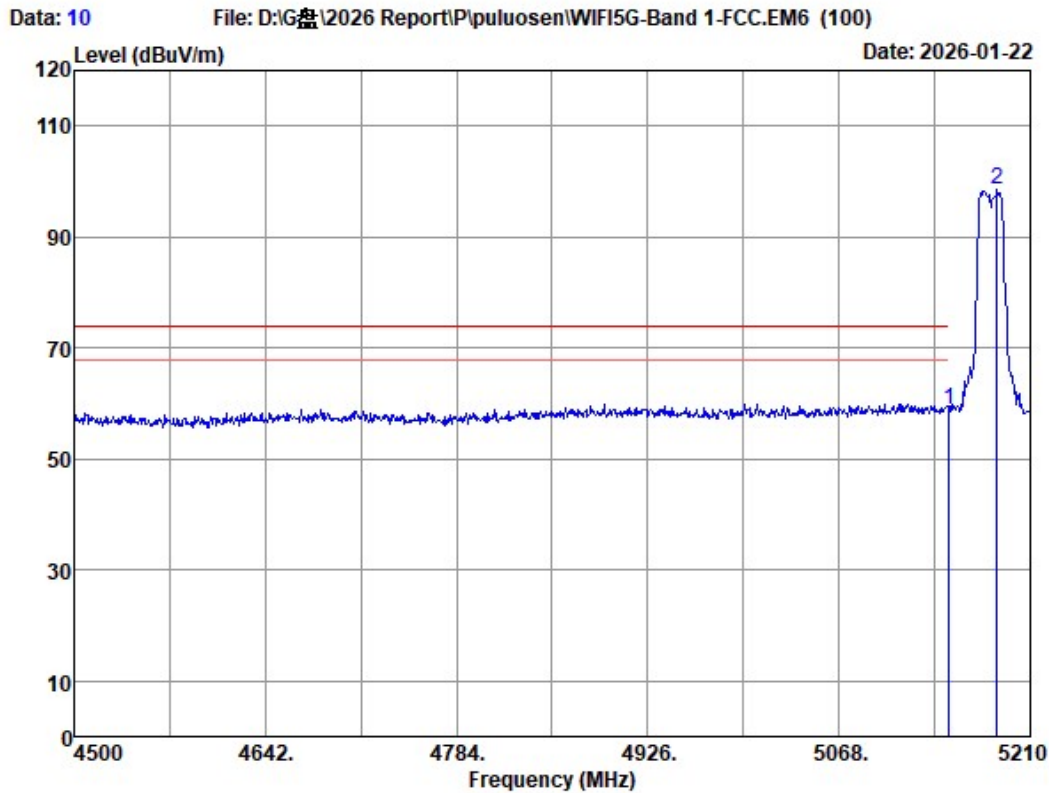

Site no.	: 3m Chamber	Data no.	: 10
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5180MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	55.95	58.98	74.00	15.02	Peak
2	5185.150	33.26	1.00	31.36	95.68	98.58	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
-Amp factor(peak)
2. The emission levels that are 20dB below the official limit are not reported

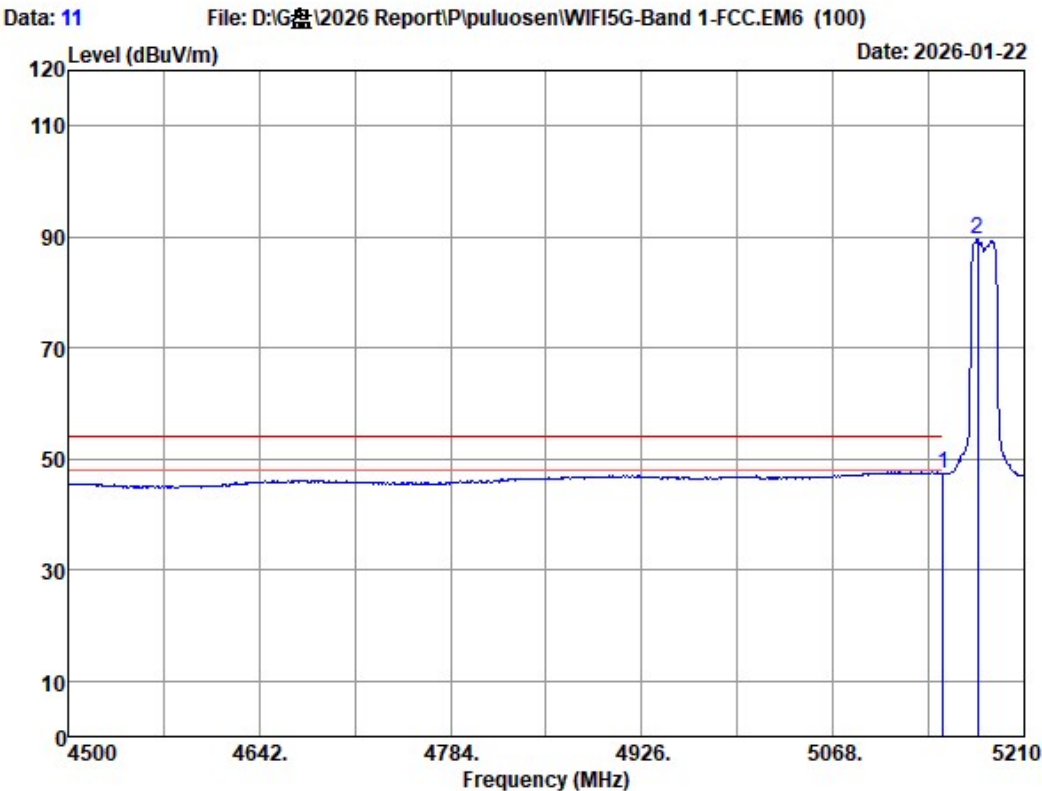

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	44.27	47.30	54.00	6.70	Average
2	5175.210	33.30	1.00	31.36	86.59	89.53	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

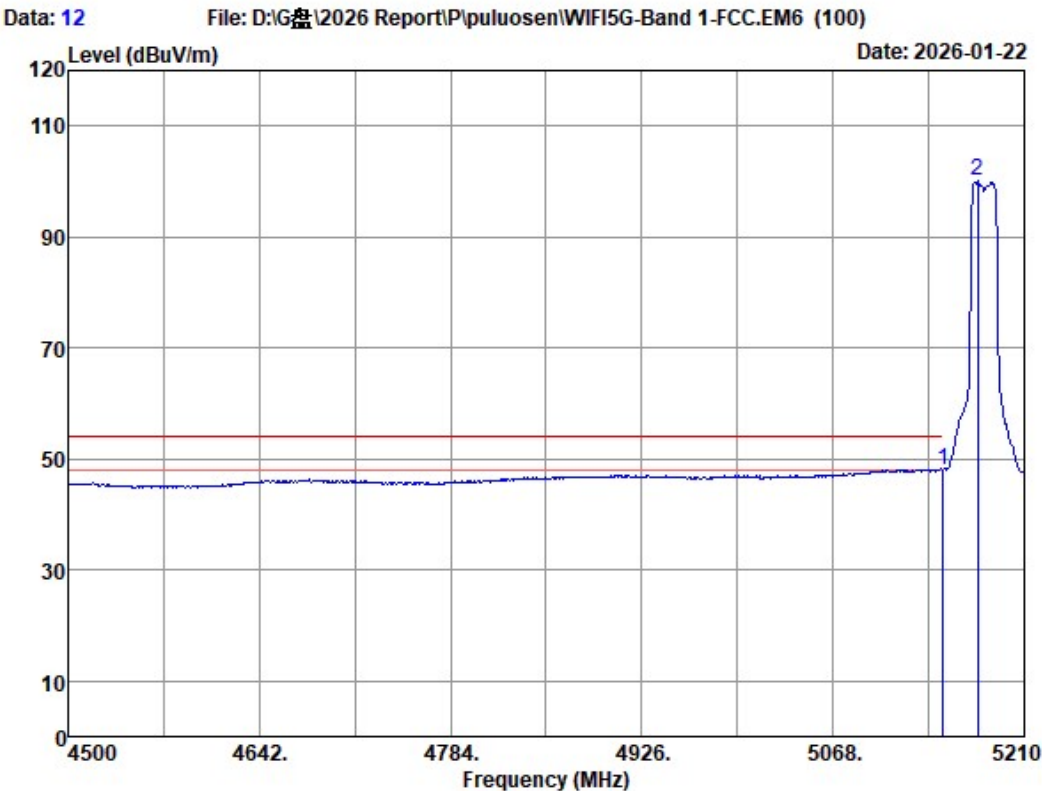

Site no.	: 3m Chamber	Data no.	: 12
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E AV	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n20 5180MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	45.03	48.06	54.00	5.94	Average
2	5175.210	33.30	1.00	31.36	97.18	100.12	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

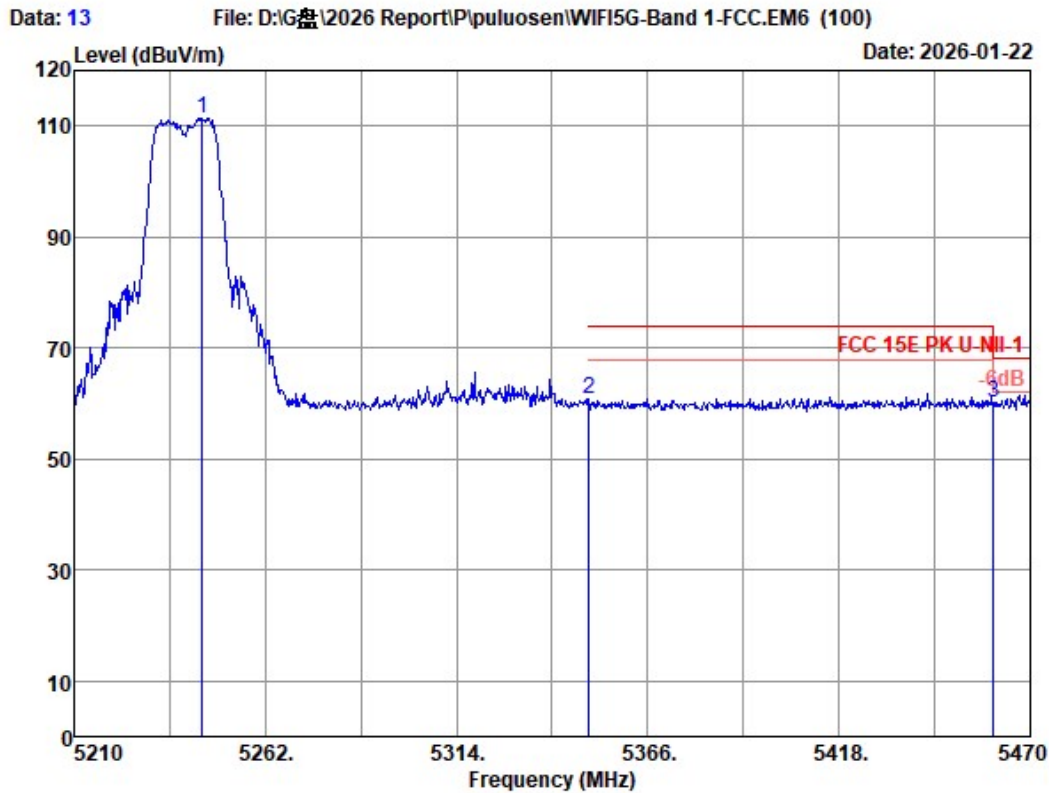

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5244.840	33.65	1.00	31.35	108.21	111.51	-----	-----	Peak
2	5350.000	33.60	1.00	31.33	57.40	60.67	74.00	13.33	Peak
3	5460.000	33.76	1.00	31.31	56.75	60.20	68.20	8.00	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

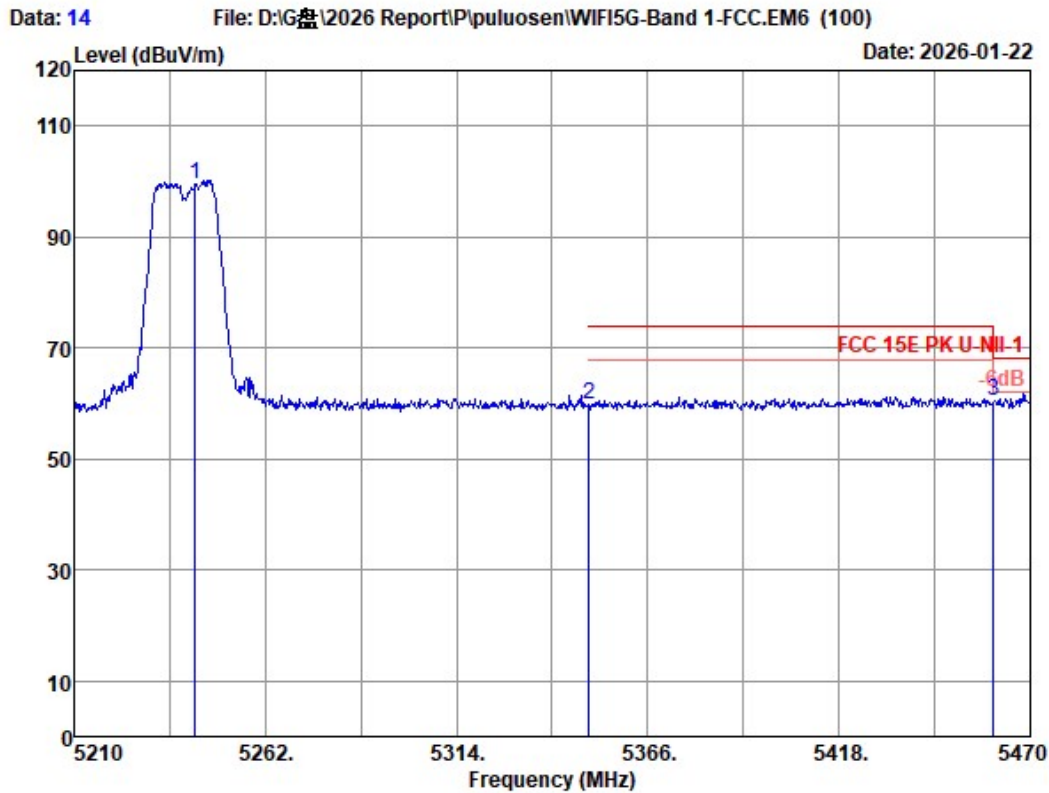

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5243.020	33.63	1.00	31.35	96.28	99.56	-----	-----	Peak
2	5350.000	33.60	1.00	31.33	56.49	59.76	74.00	14.24	Peak
3	5460.000	33.76	1.00	31.31	56.99	60.44	68.20	7.76	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

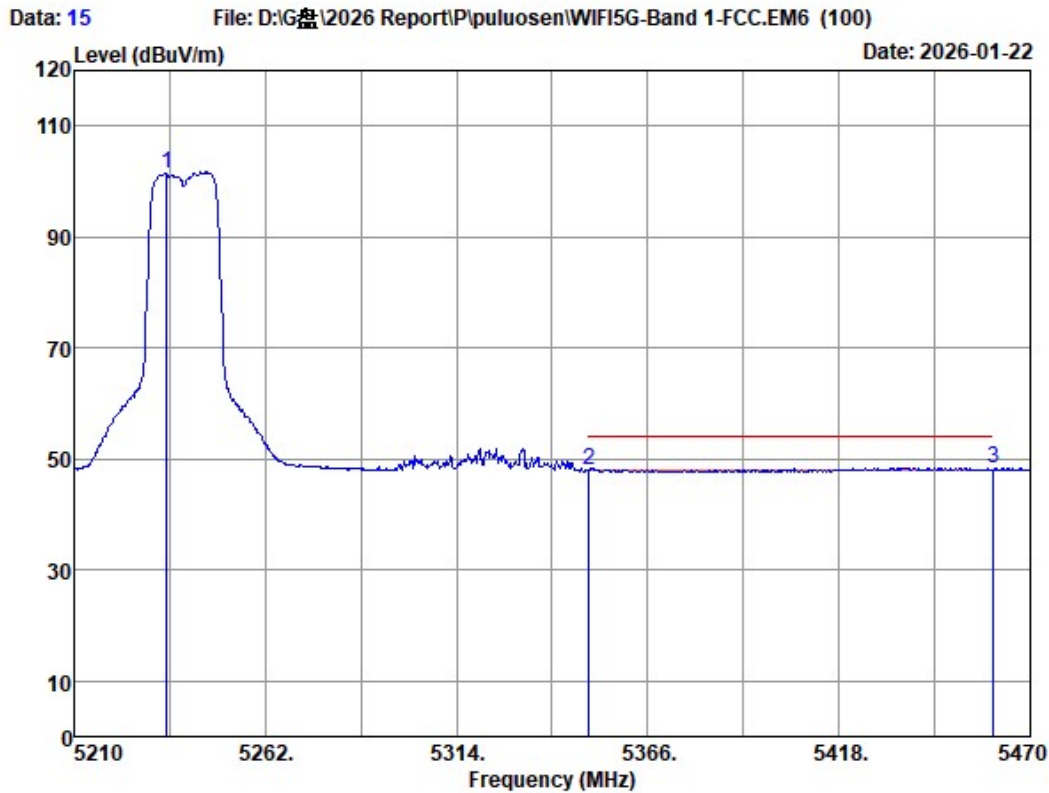

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5235.220	33.55	1.00	31.35	98.22	101.42	-----	-----	Average
2	5350.000	33.60	1.00	31.33	44.66	47.93	54.00	6.07	Average
3	5460.000	33.76	1.00	31.31	44.73	48.18	54.00	5.82	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

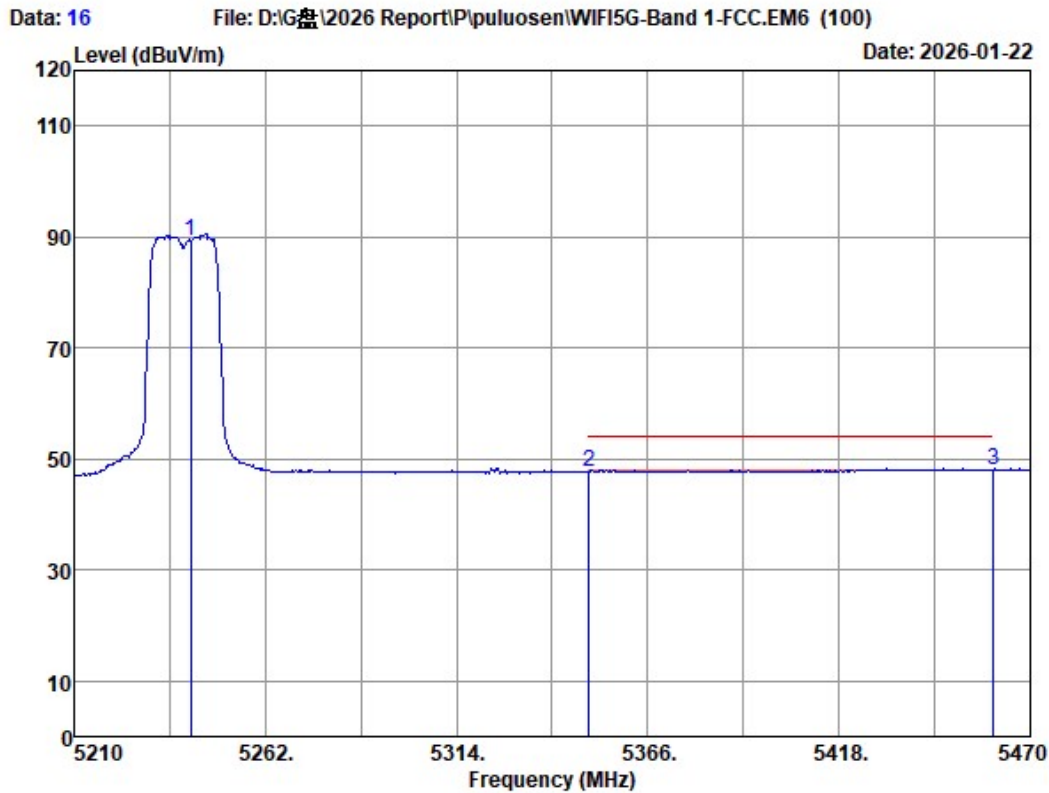

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5241.720	33.62	1.00	31.35	86.04	89.31	-----	-----	Average
2	5350.000	33.60	1.00	31.33	44.40	47.67	54.00	6.33	Average
3	5460.000	33.76	1.00	31.31	44.47	47.92	54.00	6.08	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

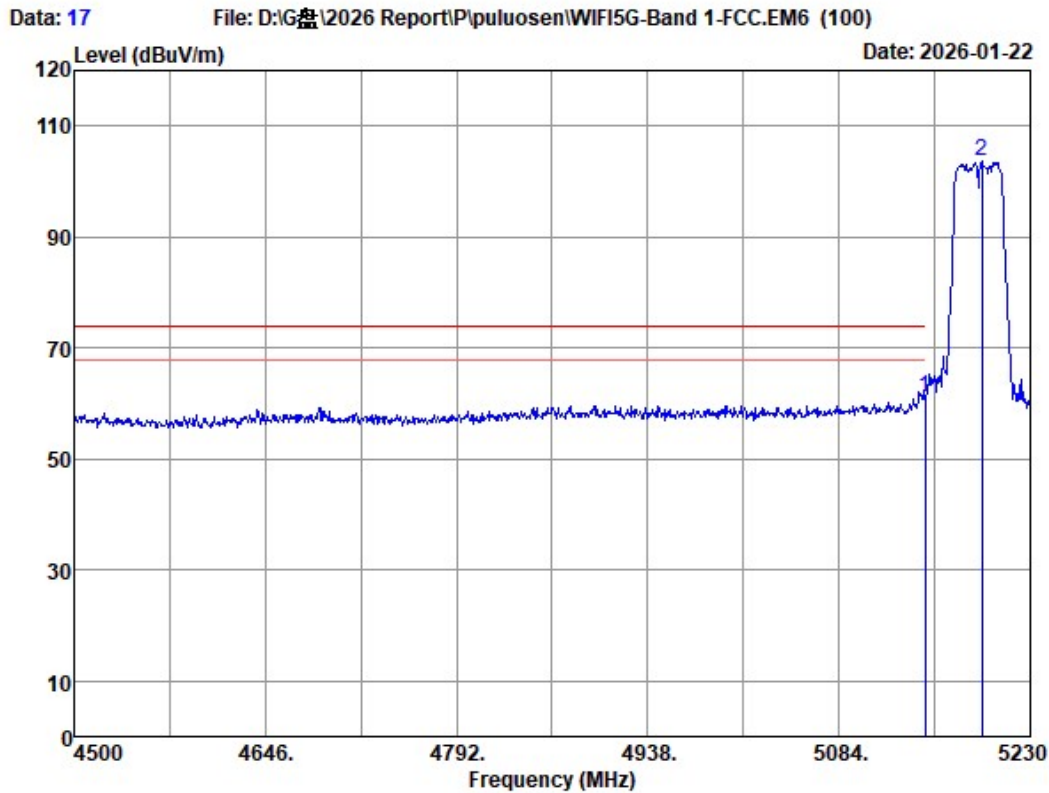

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	58.10	61.13	74.00	12.87	Peak
2	5192.770	33.23	1.00	31.36	100.77	103.64	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

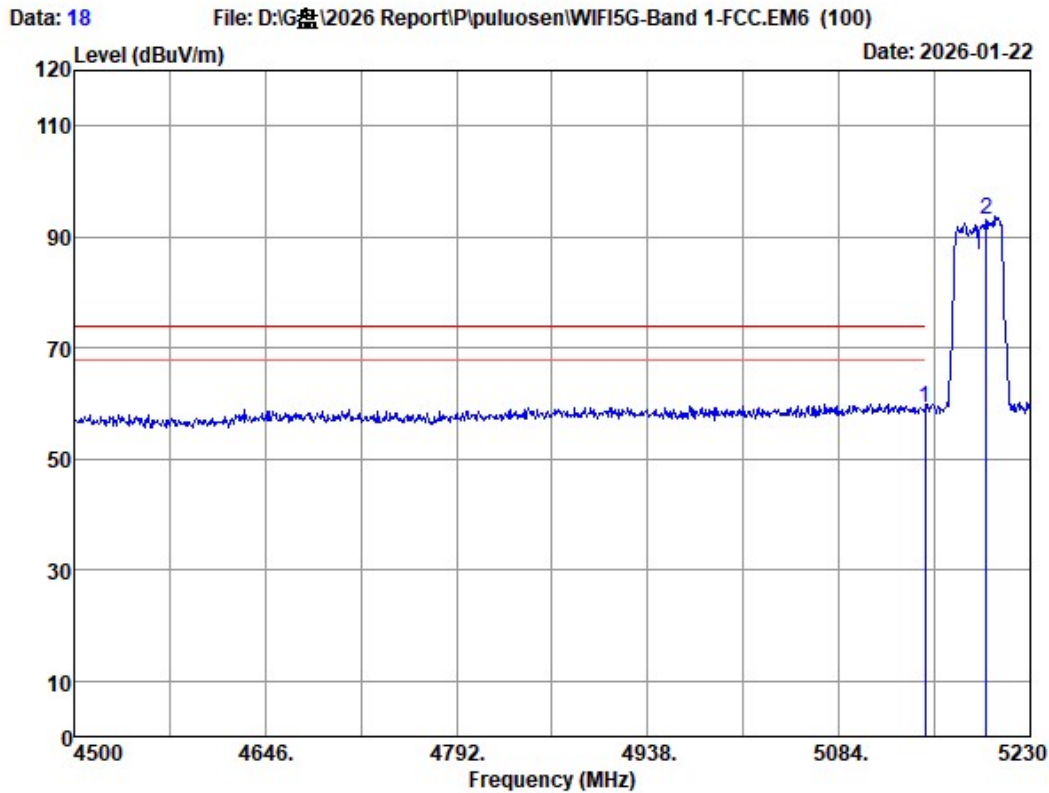

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	56.21	59.24	74.00	14.76	Peak
2	5196.420	33.21	1.00	31.36	90.22	93.07	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported