



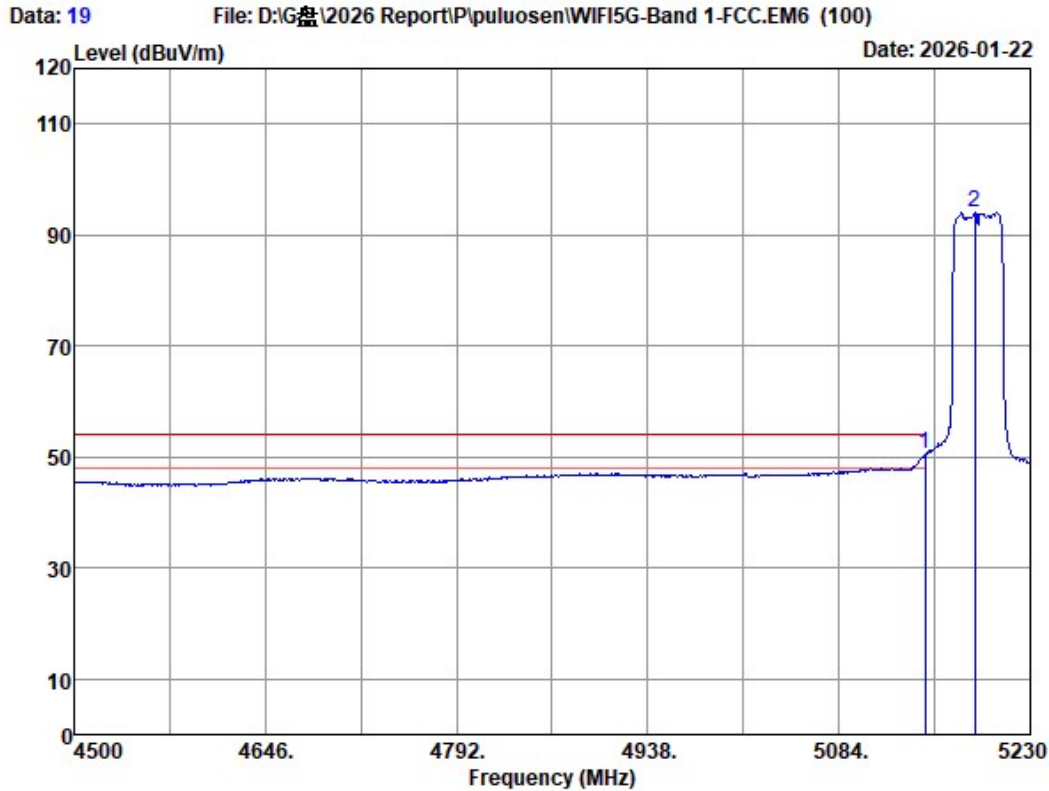

Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	47.41	50.44	54.00	3.56	Average
2	5187.660	33.25	1.00	31.36	91.16	94.05	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

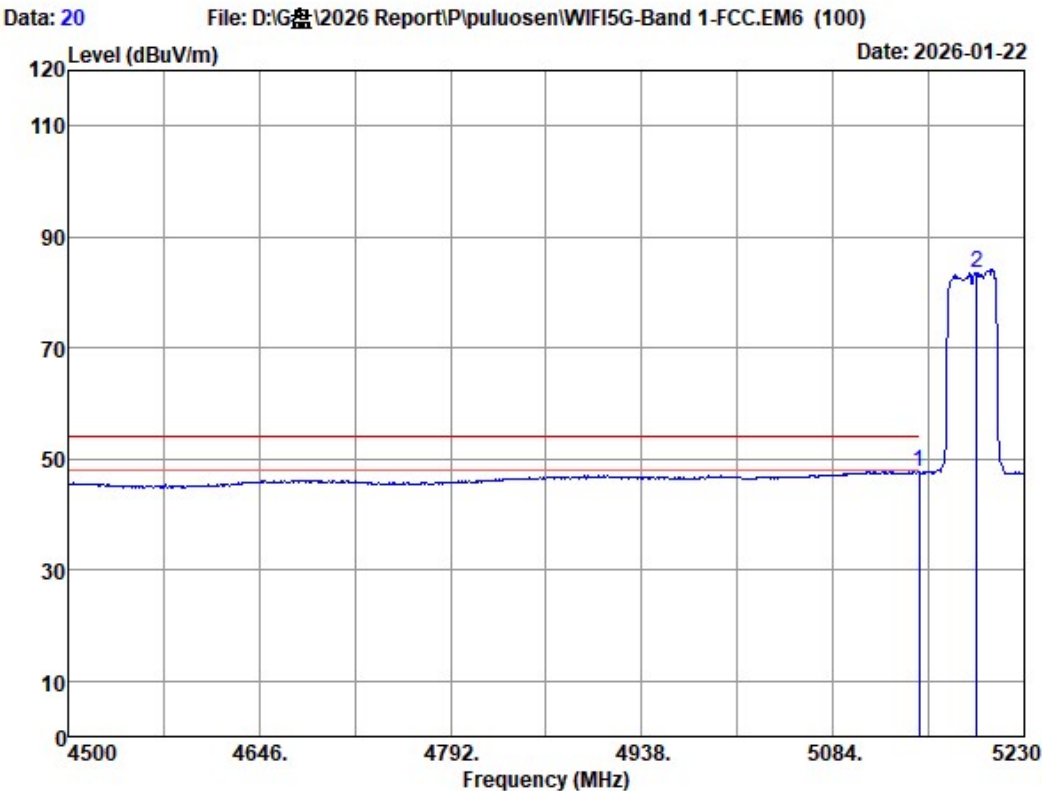

Site no.	: 3m Chamber	Data no.	: 20
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E AV	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n40 5190MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	44.54	47.57	54.00	6.43	Average
2	5193.500	33.23	1.00	31.36	80.81	83.68	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

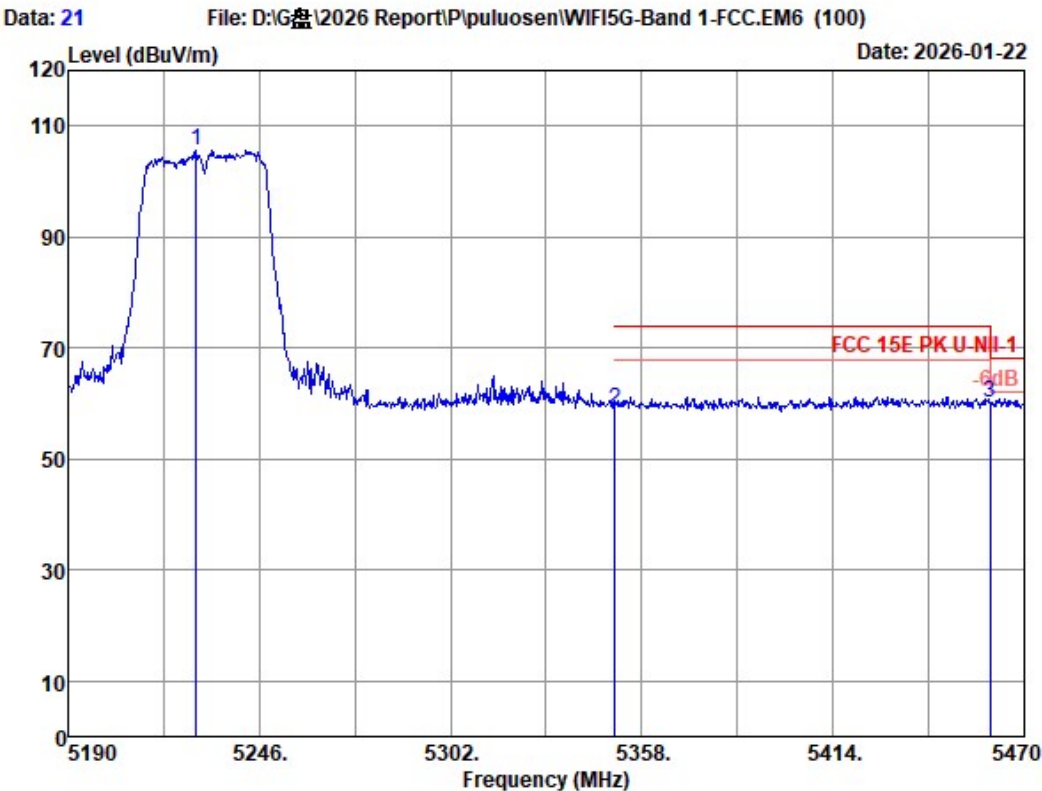

Site no.	: 3m Chamber	Data no.	: 21
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11n40 5230MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5227.520	33.48	1.00	31.35	102.45	105.58	-----	-----	Peak
2	5350.000	33.60	1.00	31.33	55.60	58.87	74.00	15.13	Peak
3	5460.000	33.76	1.00	31.31	56.83	60.28	68.20	7.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

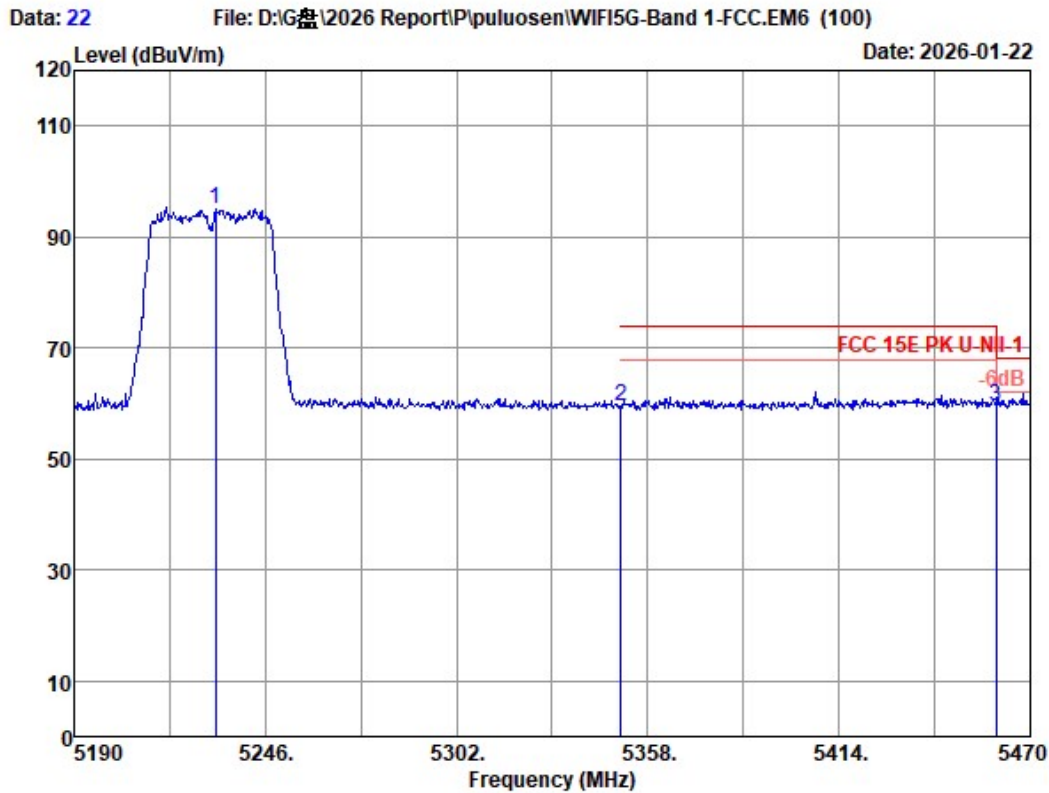

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5231.440	33.51	1.00	31.35	91.74	94.90	-----	-----	Peak
2	5350.000	33.60	1.00	31.33	56.18	59.45	74.00	14.55	Peak
3	5460.000	33.76	1.00	31.31	55.92	59.37	68.20	8.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

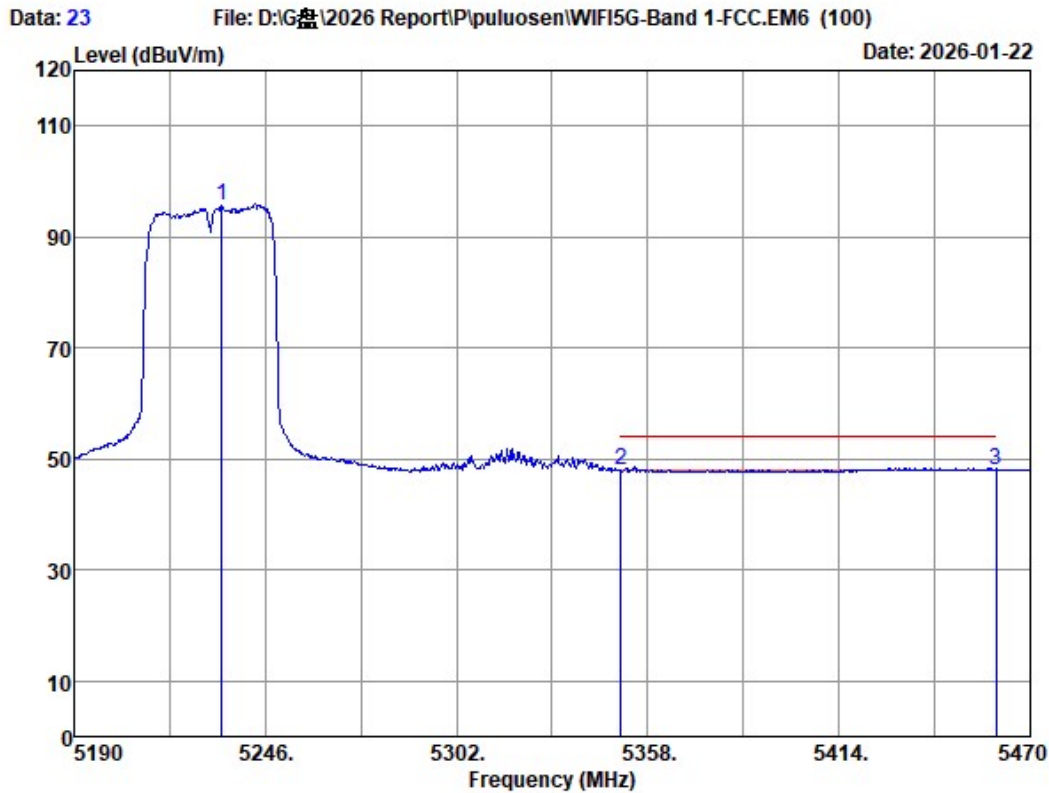

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5233.120	33.53	1.00	31.35	92.36	95.54	-----	-----	Average
2	5350.000	33.60	1.00	31.33	44.67	47.94	54.00	6.06	Average
3	5460.000	33.76	1.00	31.31	44.60	48.05	54.00	5.95	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

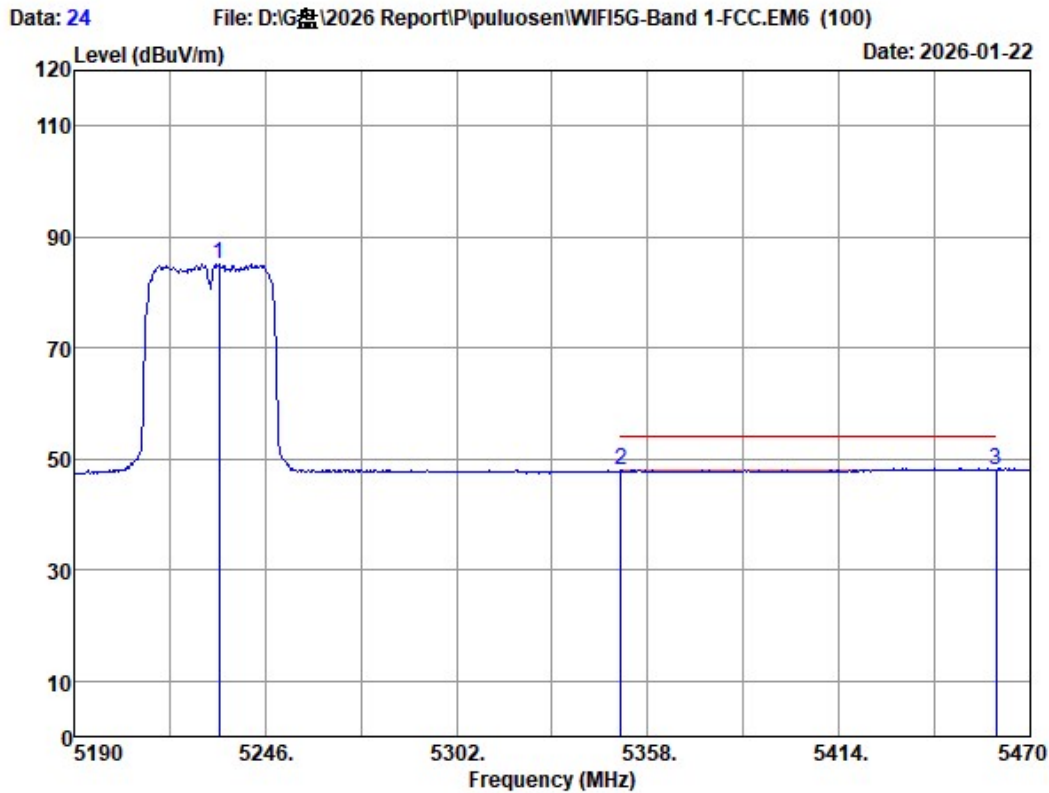

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5232.560	33.53	1.00	31.35	82.04	85.22	-----	-----	Average
2	5350.000	33.60	1.00	31.33	44.59	47.86	54.00	6.14	Average
3	5460.000	33.76	1.00	31.31	44.58	48.03	54.00	5.97	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

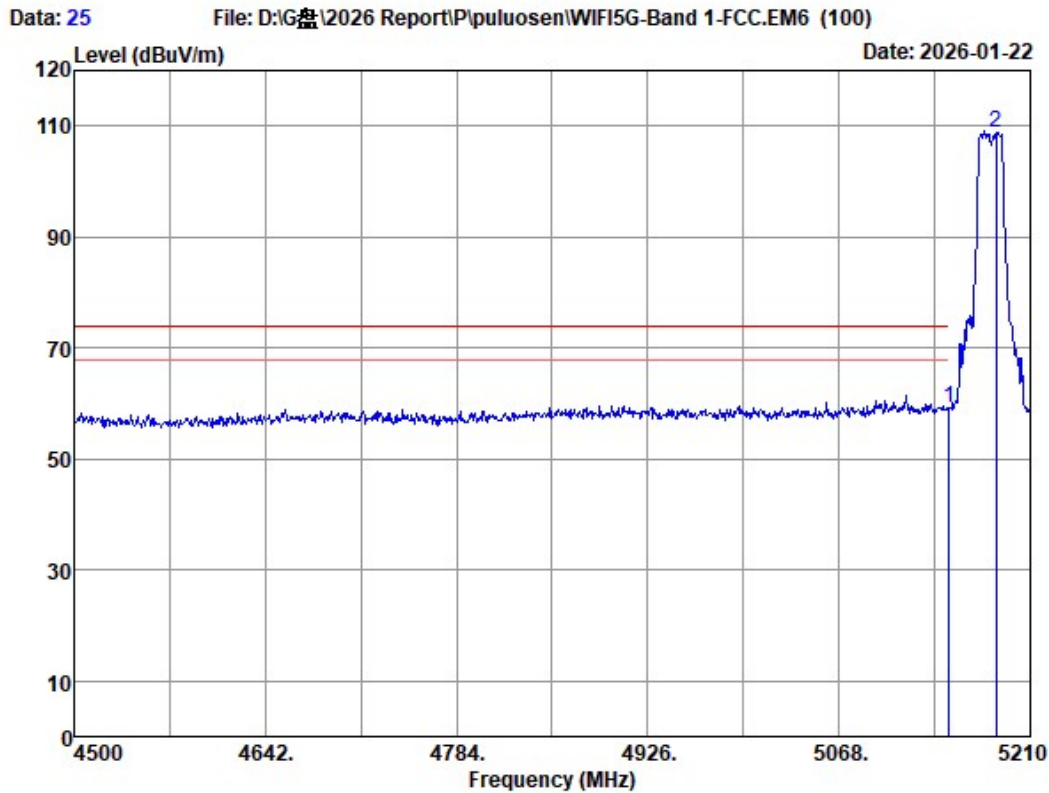

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	56.16	59.19	74.00	14.81	Peak
2	5184.440	33.26	1.00	31.36	105.76	108.66	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

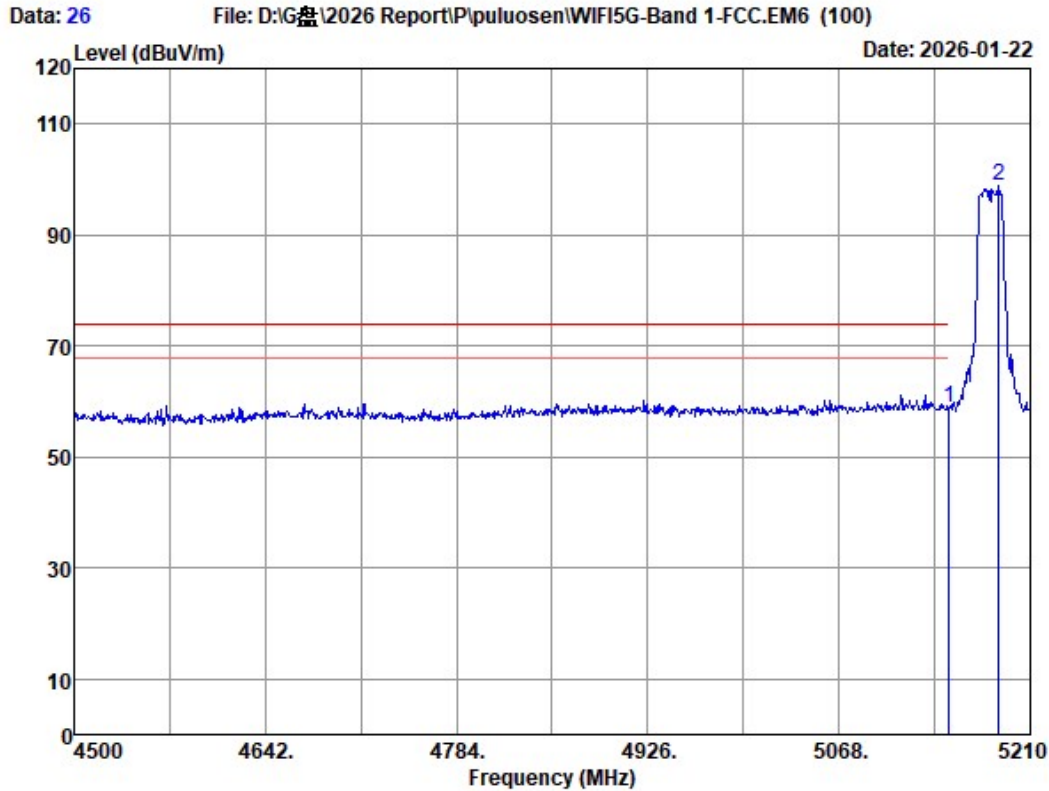

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	55.92	58.95	74.00	15.05	Peak
2	5186.570	33.25	1.00	31.36	95.93	98.82	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

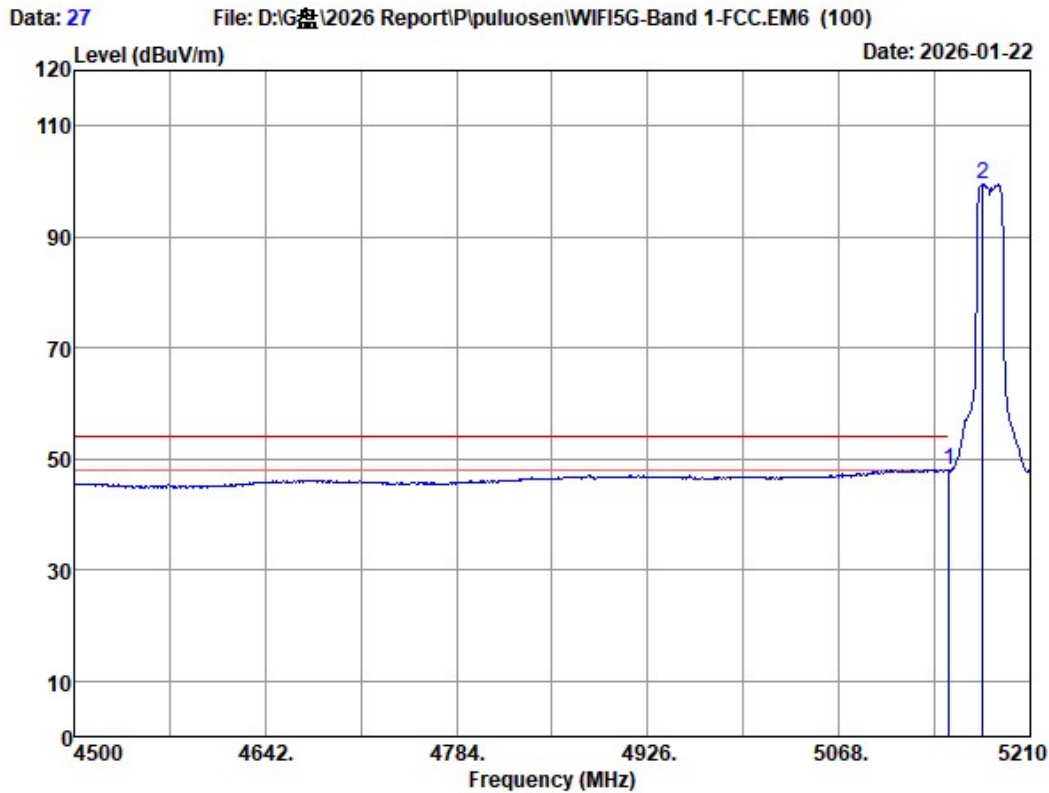

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	45.07	48.10	54.00	5.90	Average
2	5174.500	33.30	1.00	31.37	96.74	99.67	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

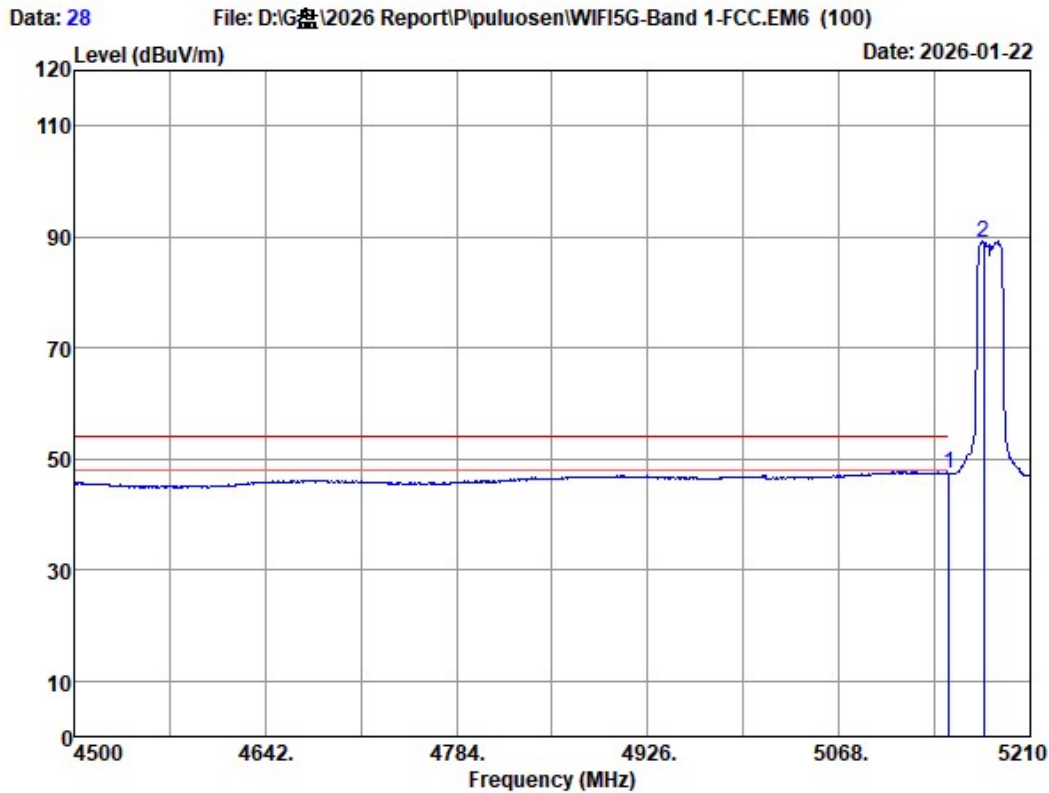

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5180MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	44.32	47.35	54.00	6.65	Average
2	5175.210	33.30	1.00	31.36	85.90	88.84	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

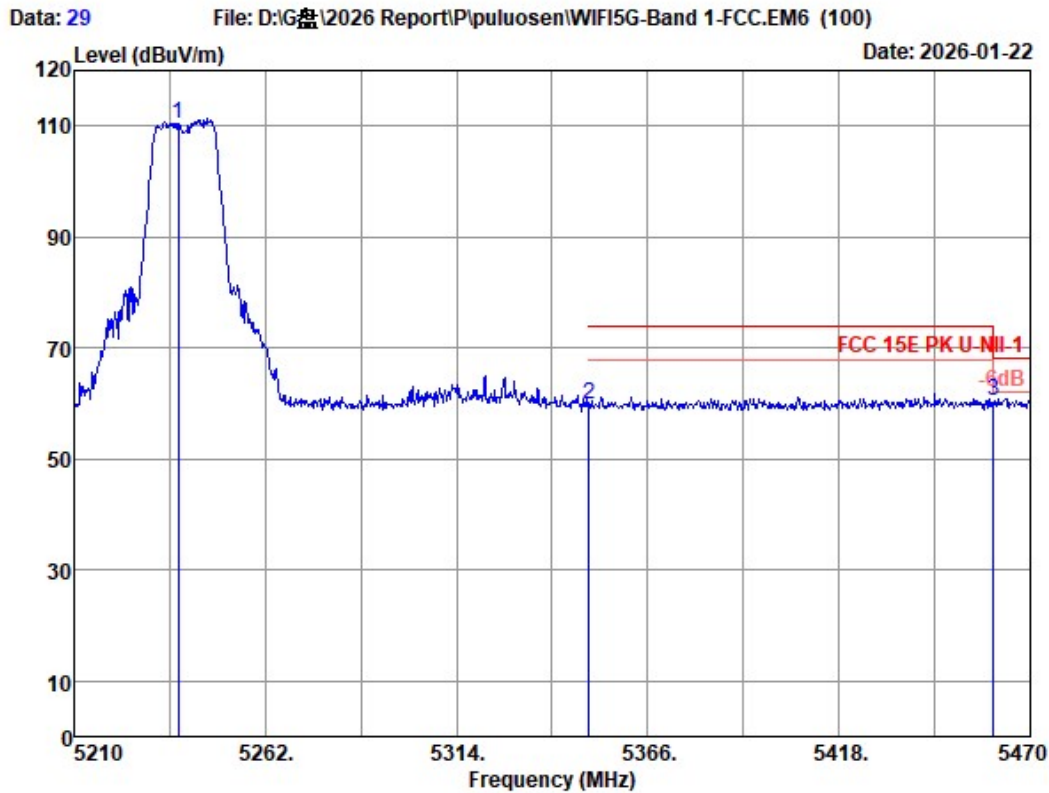

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5238.340	33.58	1.00	31.35	107.24	110.47	-----	-----	Peak
2	5350.000	33.60	1.00	31.33	56.56	59.83	74.00	14.17	Peak
3	5460.000	33.76	1.00	31.31	57.13	60.58	68.20	7.62	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

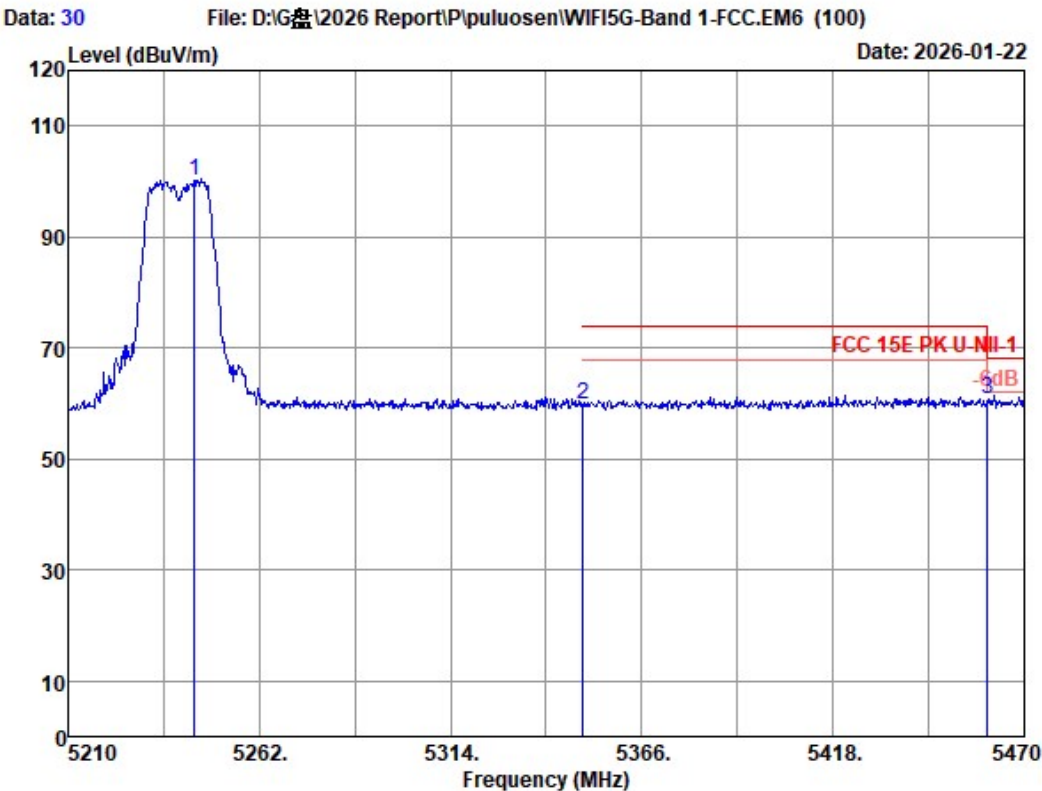

Site no.	: 3m Chamber	Data no.	: 30
Dis. / Ant.	: 3m 2025-3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC 15E PK U-NII-1	Engineer	: Epoch
Env. / Ins.	: 23.2°C/52.6%		
Test Mode	: WIFI5G 11ac20 5240MHz TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5244.320	33.64	1.00	31.35	96.88	100.17	-----	-----	Peak
2	5350.000	33.60	1.00	31.33	56.43	59.70	74.00	14.30	Peak
3	5460.000	33.76	1.00	31.31	57.21	60.66	68.20	7.54	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

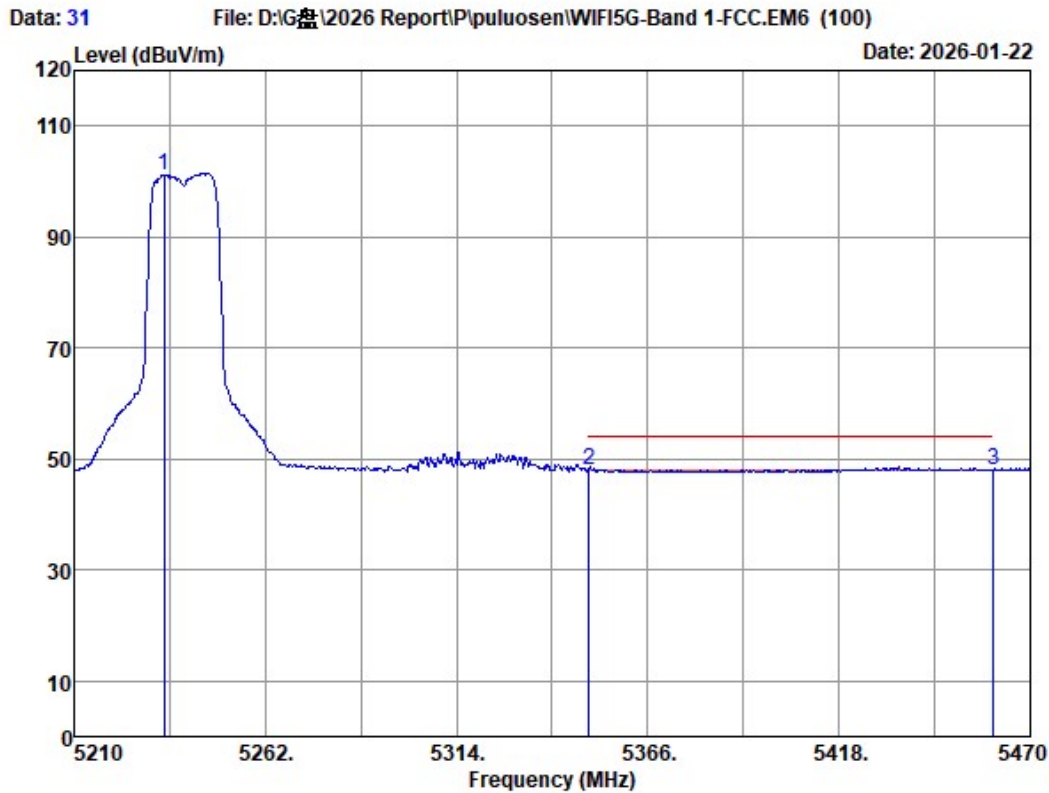

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5234.440	33.54	1.00	31.35	97.87	101.06	-----	-----	Average
2	5350.000	33.60	1.00	31.33	44.81	48.08	54.00	5.92	Average
3	5460.000	33.76	1.00	31.31	44.56	48.01	54.00	5.99	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

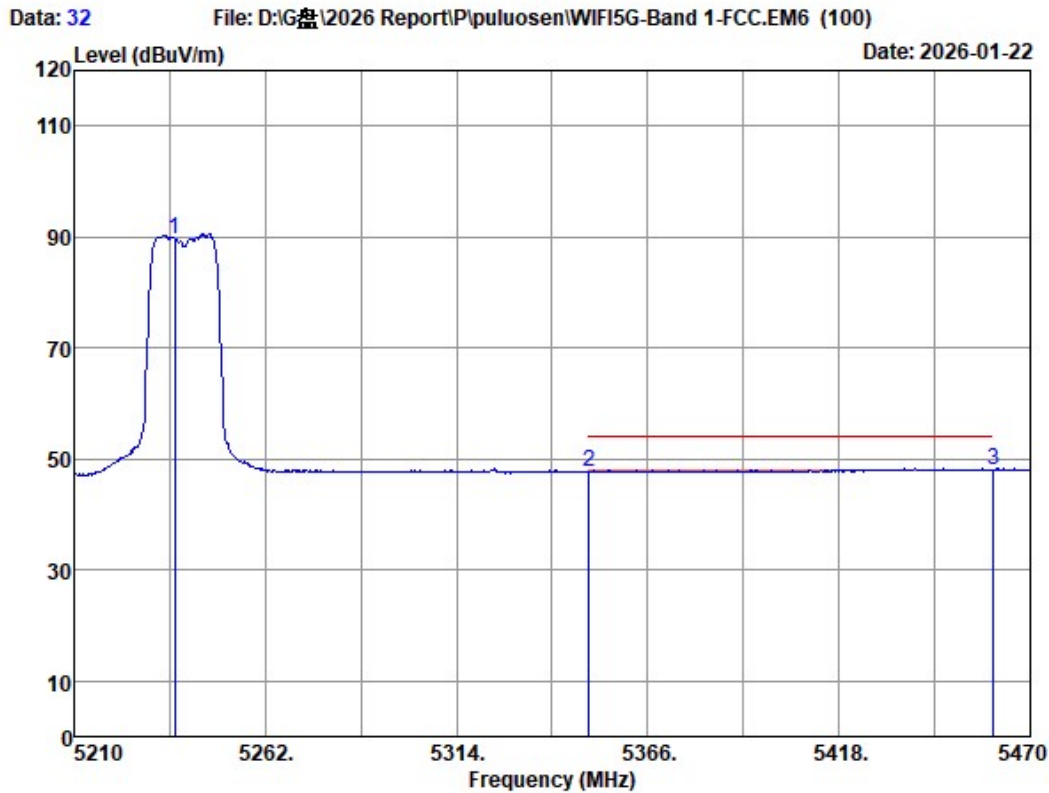

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5240MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5237.300	33.57	1.00	31.35	86.47	89.69	-----	-----	Average
2	5350.000	33.60	1.00	31.33	44.50	47.77	54.00	6.23	Average
3	5460.000	33.76	1.00	31.31	44.53	47.98	54.00	6.02	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

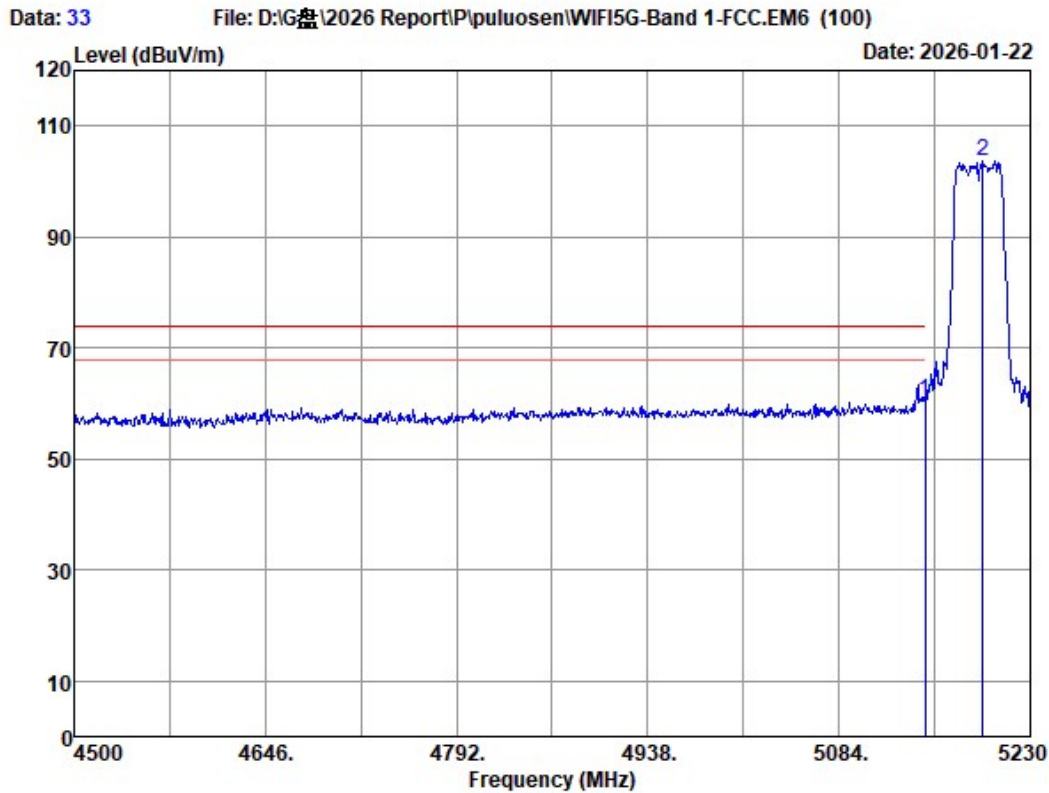

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	57.30	60.33	74.00	13.67	Peak
2	5193.500	33.23	1.00	31.36	100.67	103.54	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

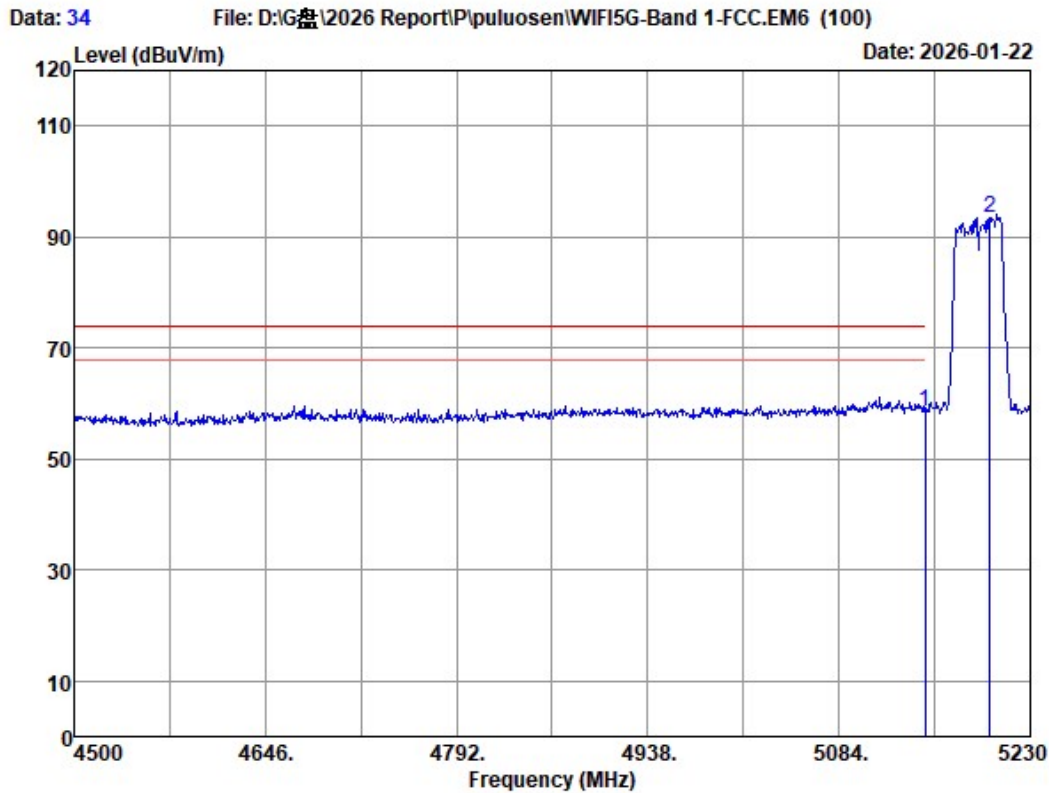

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	55.45	58.48	74.00	15.52	Peak
2	5199.340	33.20	1.00	31.36	90.62	93.46	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

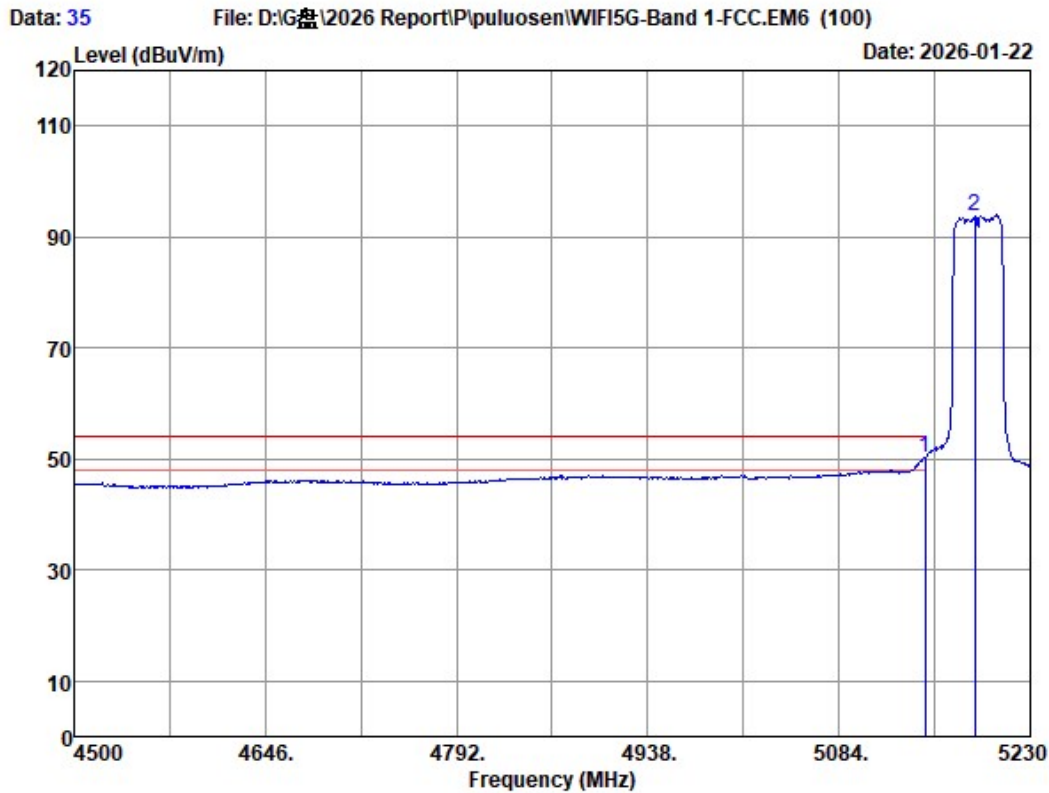

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	47.18	50.21	54.00	3.79	Average
2	5187.660	33.25	1.00	31.36	90.91	93.80	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

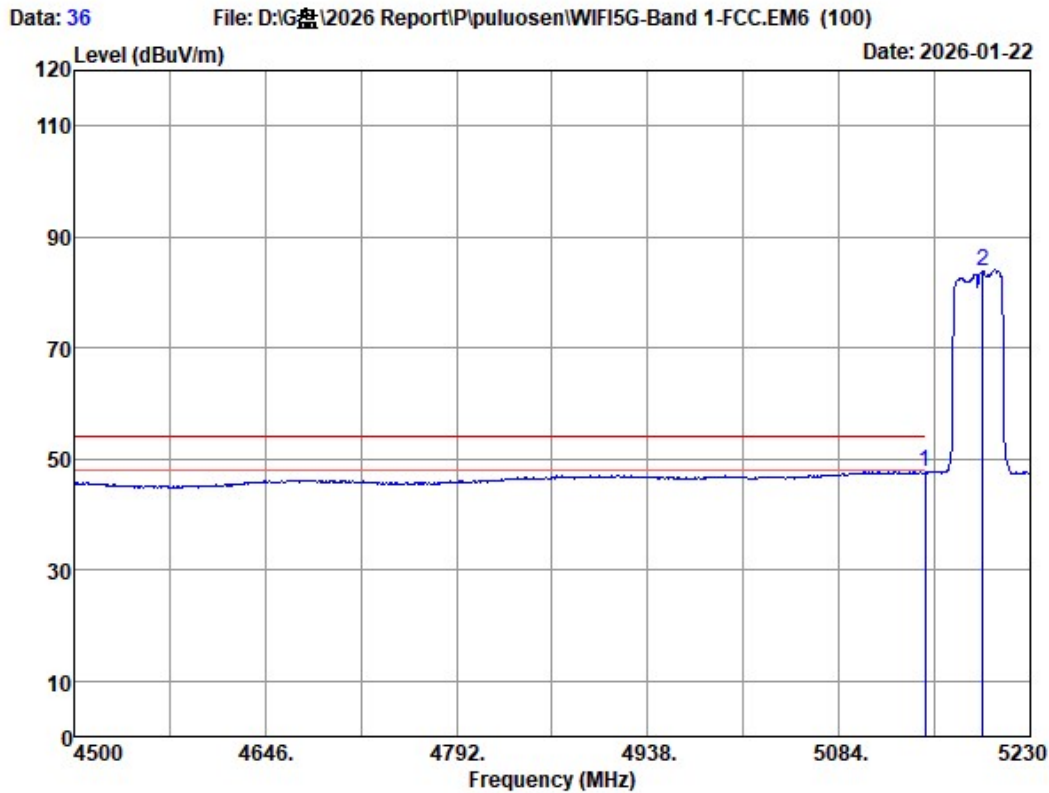

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5190MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5150.000	33.40	1.00	31.37	44.55	47.58	54.00	6.42	Average
2	5193.500	33.23	1.00	31.36	80.89	83.76	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

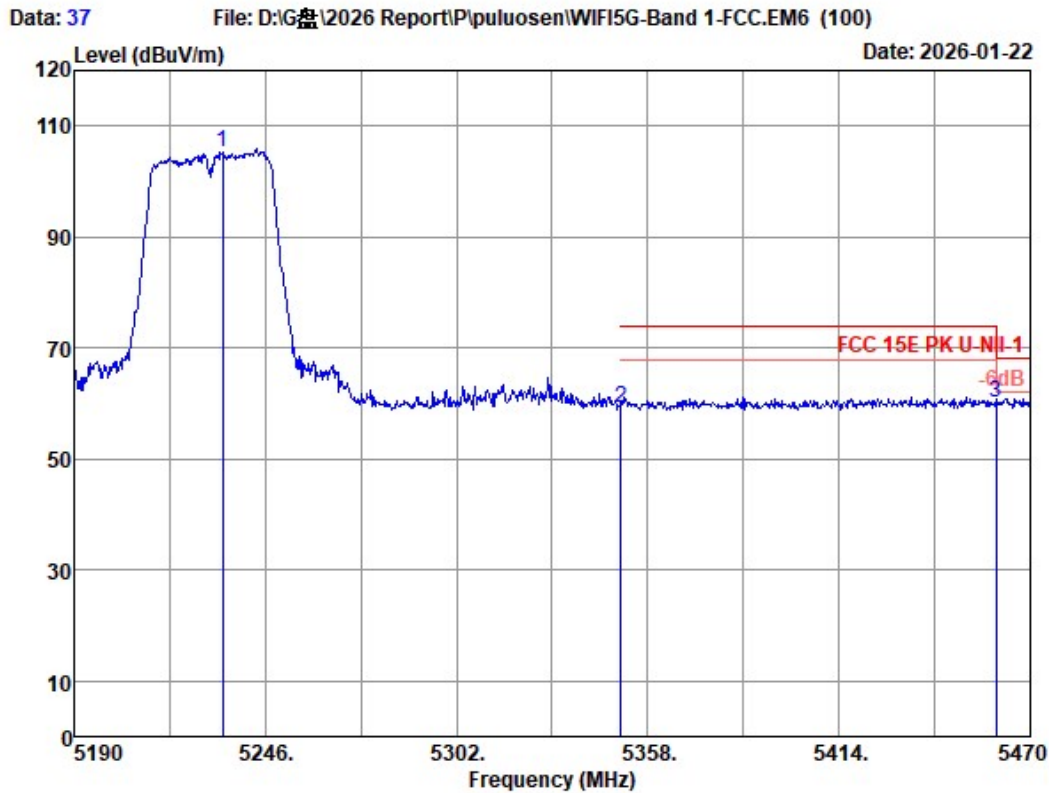

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5233.400	33.53	1.00	31.35	102.10	105.28	-----	-----	Peak
2	5350.000	33.60	1.00	31.33	56.04	59.31	74.00	14.69	Peak
3	5460.000	33.76	1.00	31.31	56.65	60.10	68.20	8.10	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

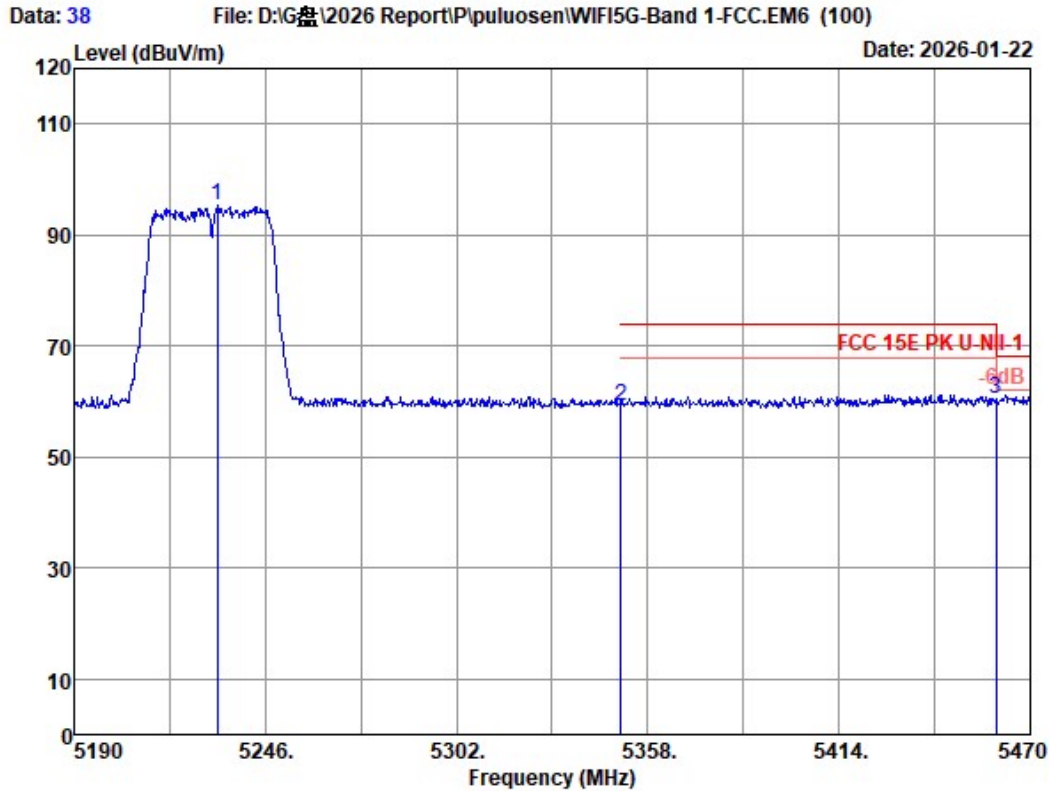

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5232.000	33.52	1.00	31.35	92.14	95.31	-----	-----	Peak
2	5350.000	33.60	1.00	31.33	55.97	59.24	74.00	14.76	Peak
3	5460.000	33.76	1.00	31.31	57.02	60.47	68.20	7.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

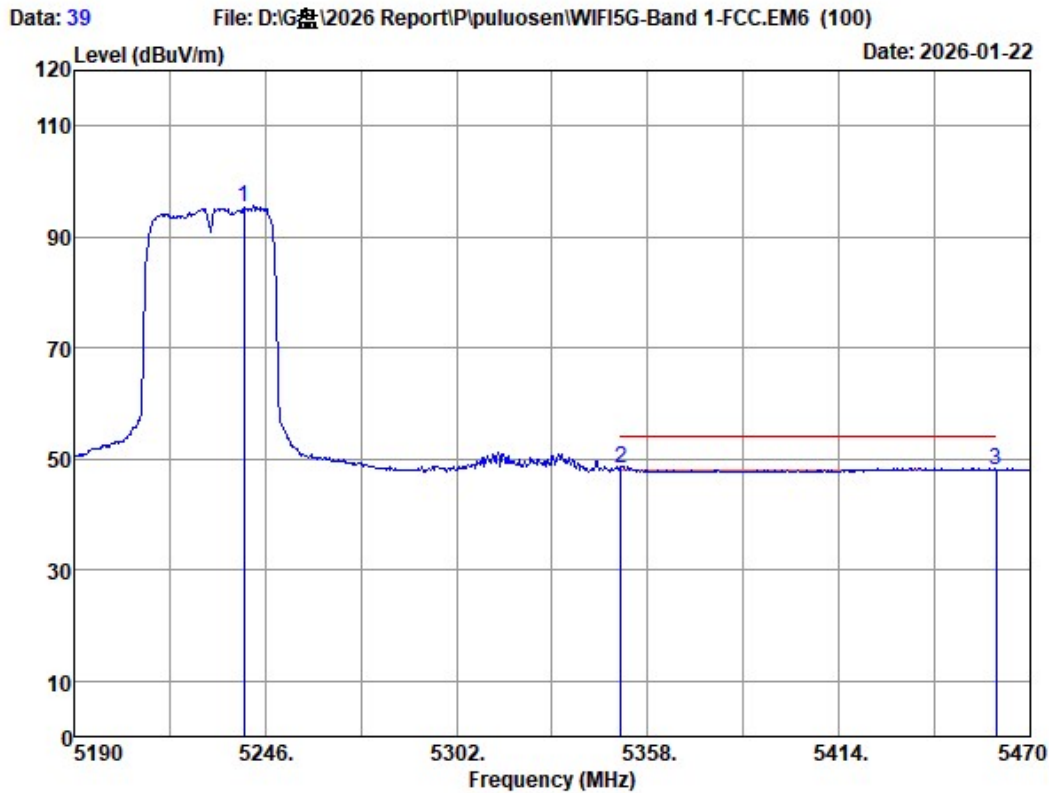

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5239.840	33.60	1.00	31.35	92.00	95.25	-----	-----	Average
2	5350.000	33.60	1.00	31.33	45.12	48.39	54.00	5.61	Average
3	5460.000	33.76	1.00	31.31	44.62	48.07	54.00	5.93	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

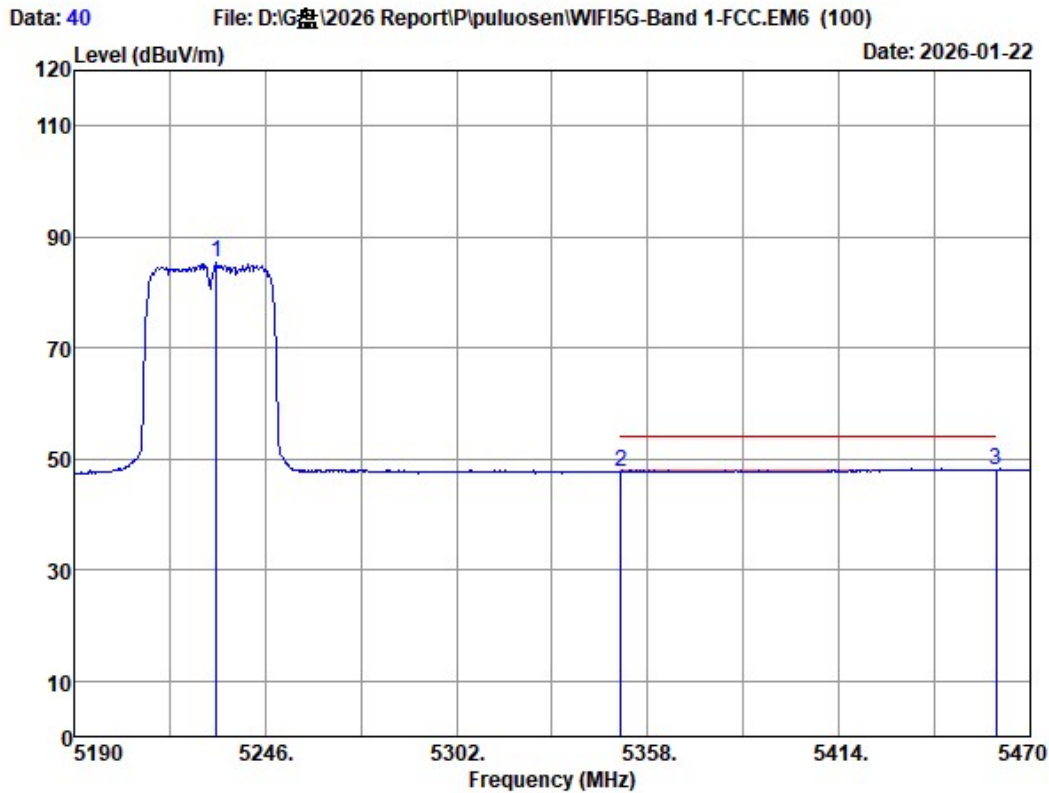

Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5230MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5231.720	33.52	1.00	31.35	82.15	85.32	-----	-----	Average
2	5350.000	33.60	1.00	31.33	44.49	47.76	54.00	6.24	Average
3	5460.000	33.76	1.00	31.31	44.55	48.00	54.00	6.00	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

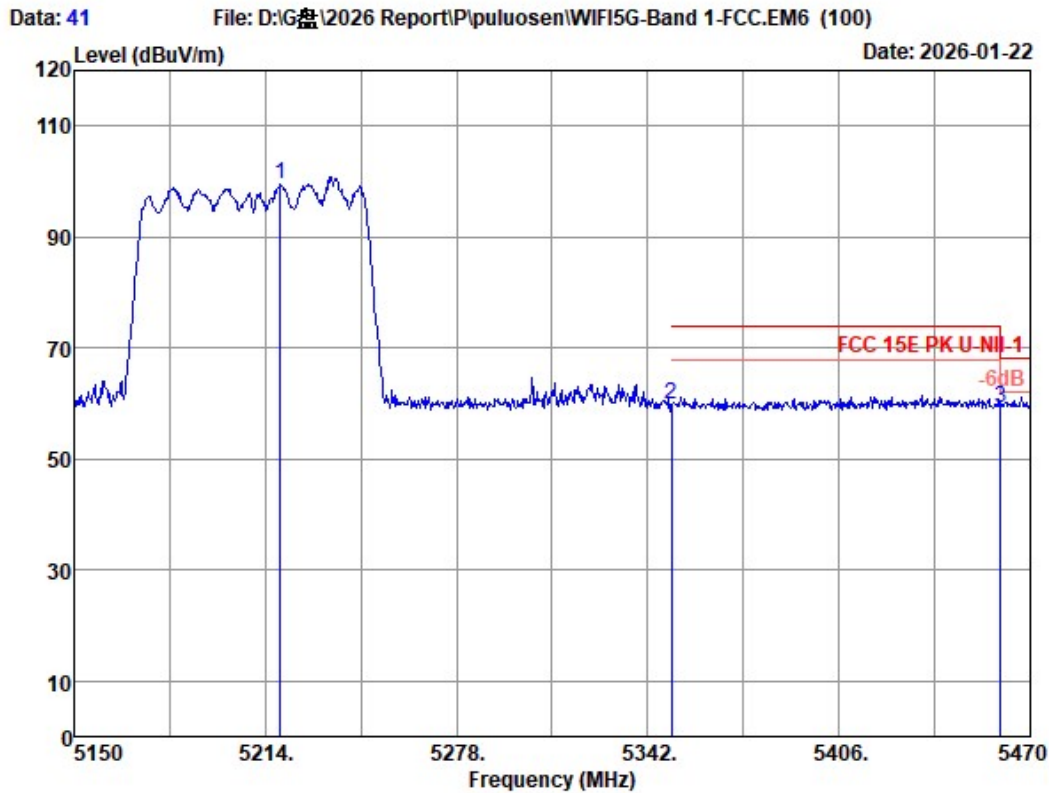

Site no. : 3m Chamber Data no. : 41
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac80 5210MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5219.120	33.39	1.00	31.36	96.35	99.38	-----	-----	Peak
2	5350.000	33.60	1.00	31.33	56.70	59.97	74.00	14.03	Peak
3	5460.000	33.76	1.00	31.31	55.81	59.26	68.20	8.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

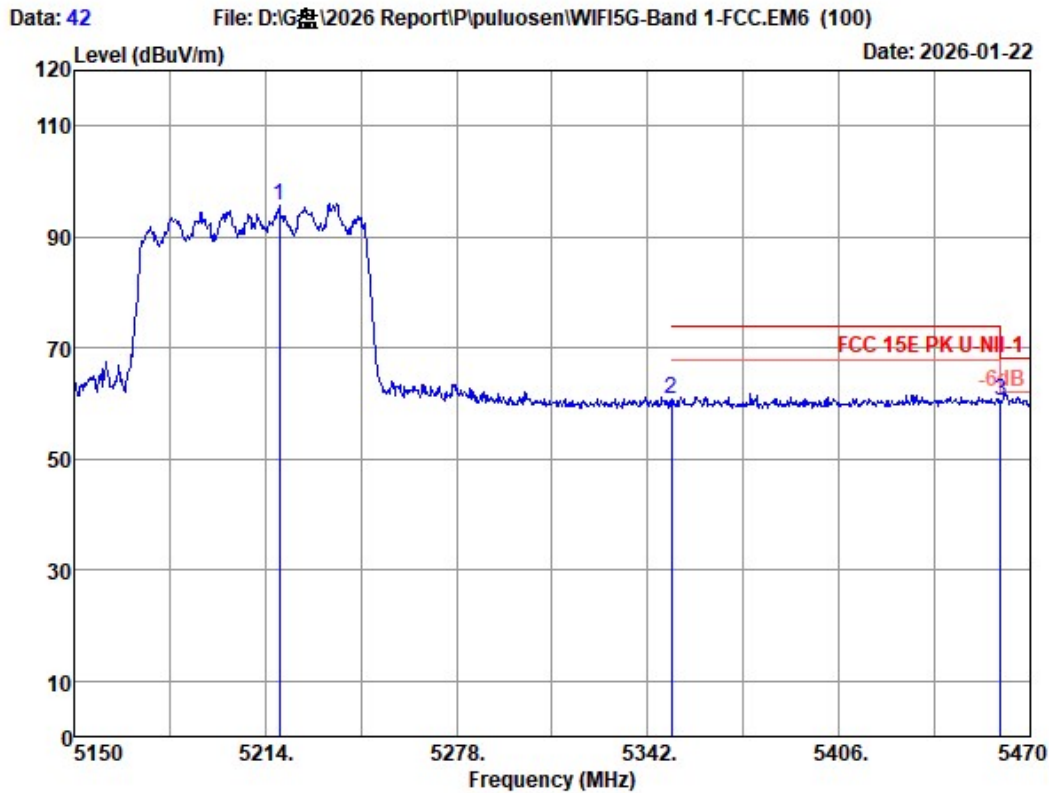

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-1 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac80 5210MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5218.800	33.39	1.00	31.36	92.51	95.54	-----	-----	Peak
2	5350.000	33.60	1.00	31.33	57.55	60.82	74.00	13.18	Peak
3	5460.000	33.76	1.00	31.31	57.05	60.50	68.20	7.70	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

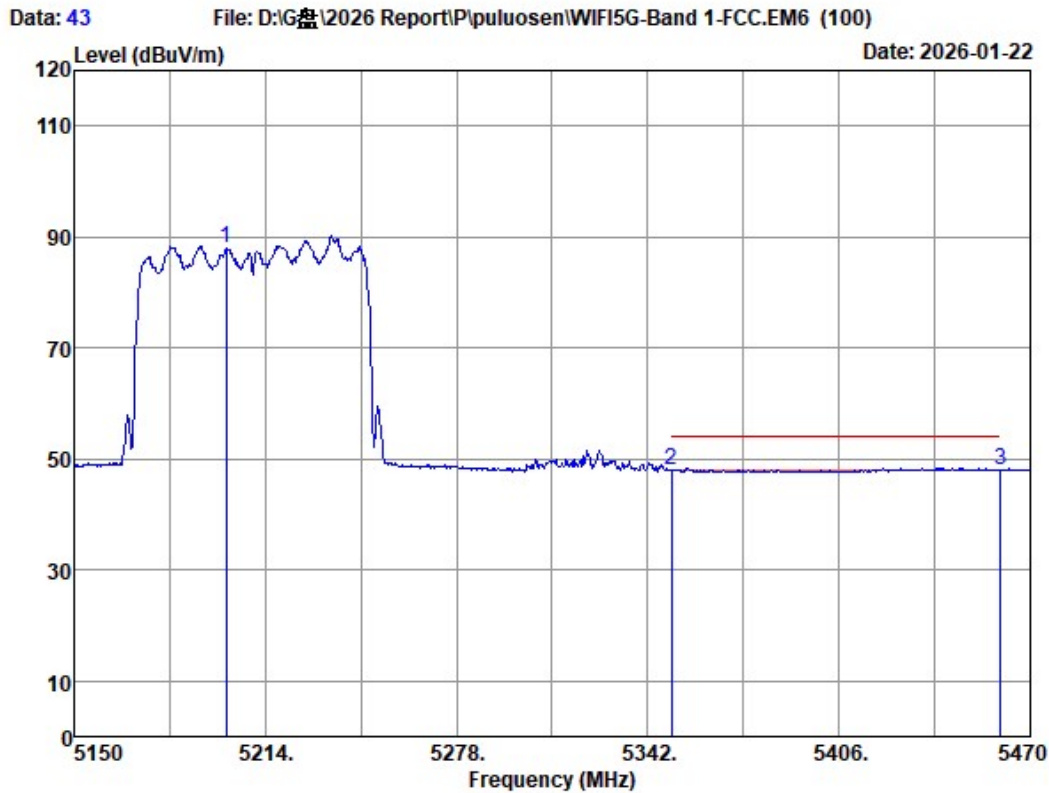

Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac80 5210MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5200.880	33.21	1.00	31.36	85.16	88.01	-----	-----	Average
2	5350.000	33.60	1.00	31.33	44.72	47.99	54.00	6.01	Average
3	5460.000	33.76	1.00	31.31	44.47	47.92	54.00	6.08	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

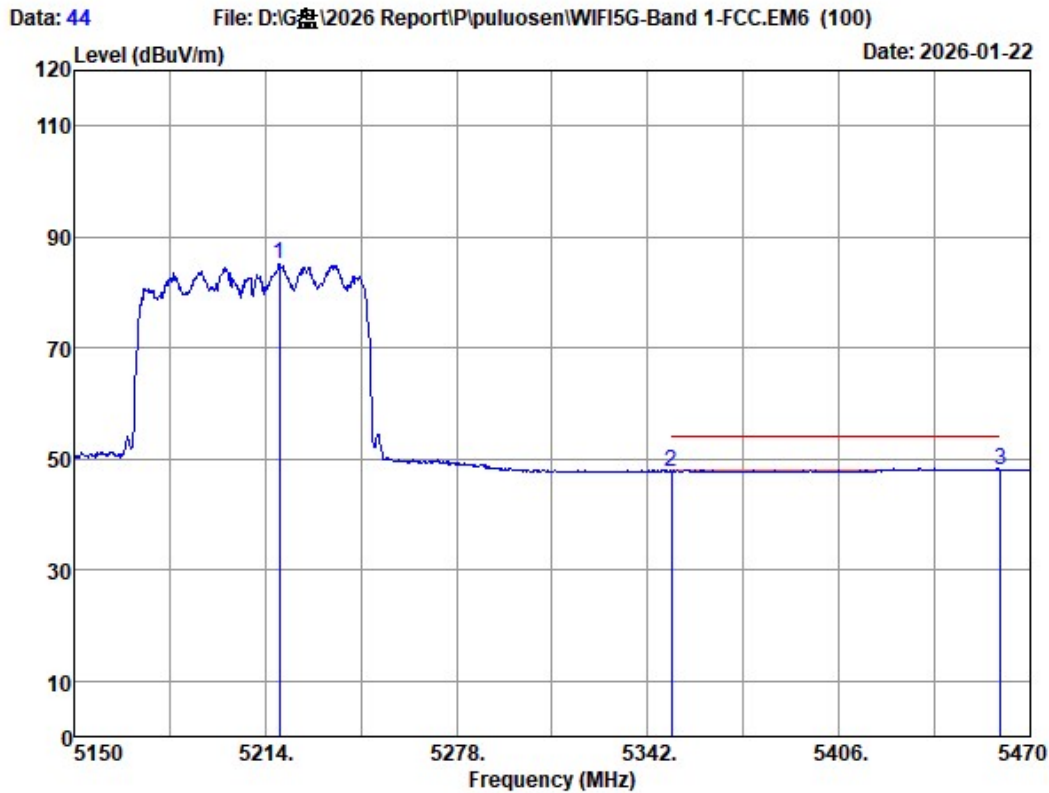

Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac80 5210MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5218.800	33.39	1.00	31.36	82.12	85.15	-----	-----	Average
2	5350.000	33.60	1.00	31.33	44.53	47.80	54.00	6.20	Average
3	5460.000	33.76	1.00	31.31	44.65	48.10	54.00	5.90	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

U-NII-3 Band:

Data: 1

File: D:\G:\2026 Report\p\puluosen\WIFI5G-Band 4-FCC.EM6 (100)

Date: 2026-01-23

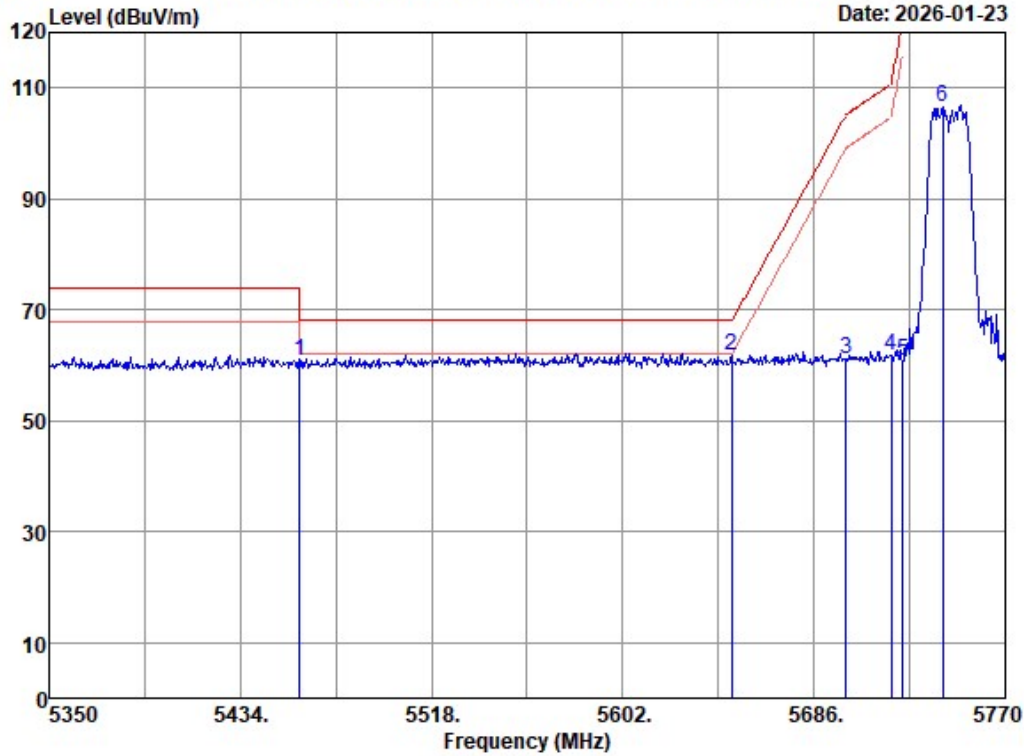


Site no. : 3m Chamber
 Dis. / Ant. : 3m 2025-3115-4580
 Limit : FCC 15E PK U-NII-3
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5745MHz TX Mode

Data no. : 1
 Ant. pol. : VERTICAL
 Engineer : Epoch

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	57.48	60.93	68.20	7.27	Peak
2	5650.000	33.80	1.00	31.27	58.09	61.62	68.20	6.58	Peak
3	5700.000	33.70	1.00	31.26	57.70	61.14	105.20	44.06	Peak
4	5720.000	33.66	1.00	31.26	58.35	61.75	110.80	49.05	Peak
5	5725.000	33.65	1.00	31.26	57.52	60.91	122.80	61.89	Peak
6	5742.700	33.61	1.00	31.25	103.35	106.71	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

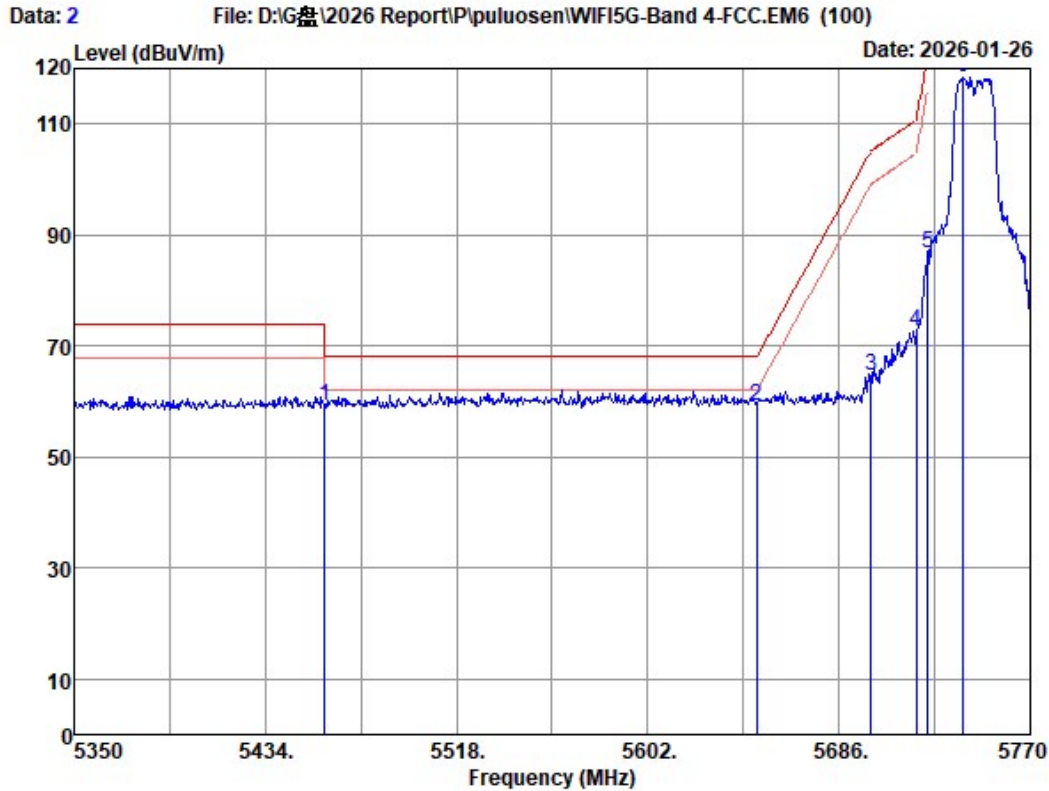

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	55.86	59.31	68.20	8.89	Peak
2	5650.000	33.80	1.00	31.27	55.63	59.16	68.20	9.04	Peak
3	5700.000	33.70	1.00	31.26	61.25	64.69	105.20	40.51	Peak
4	5720.000	33.66	1.00	31.26	69.20	72.60	110.80	38.20	Peak
5	5725.000	33.65	1.00	31.26	83.22	86.61	122.80	36.19	Peak
6	5740.600	33.62	1.00	31.25	114.90	118.27	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

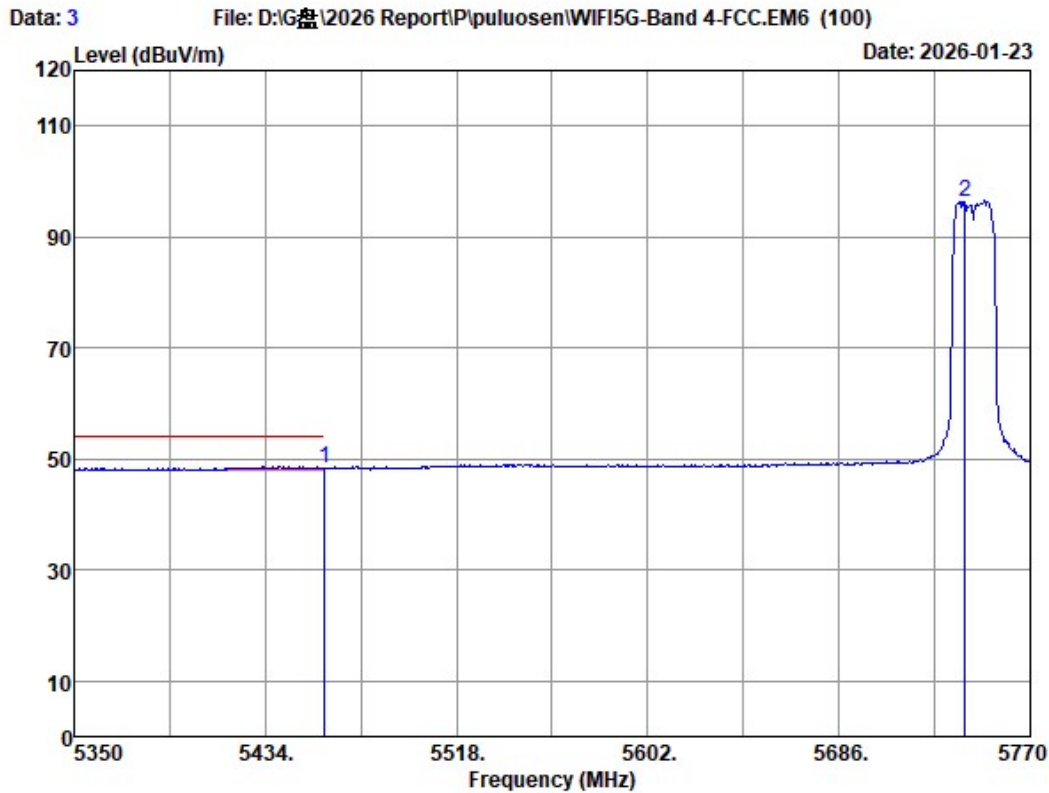

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	44.91	48.36	54.00	5.64	Average
2	5741.440	33.62	1.00	31.25	93.10	96.47	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

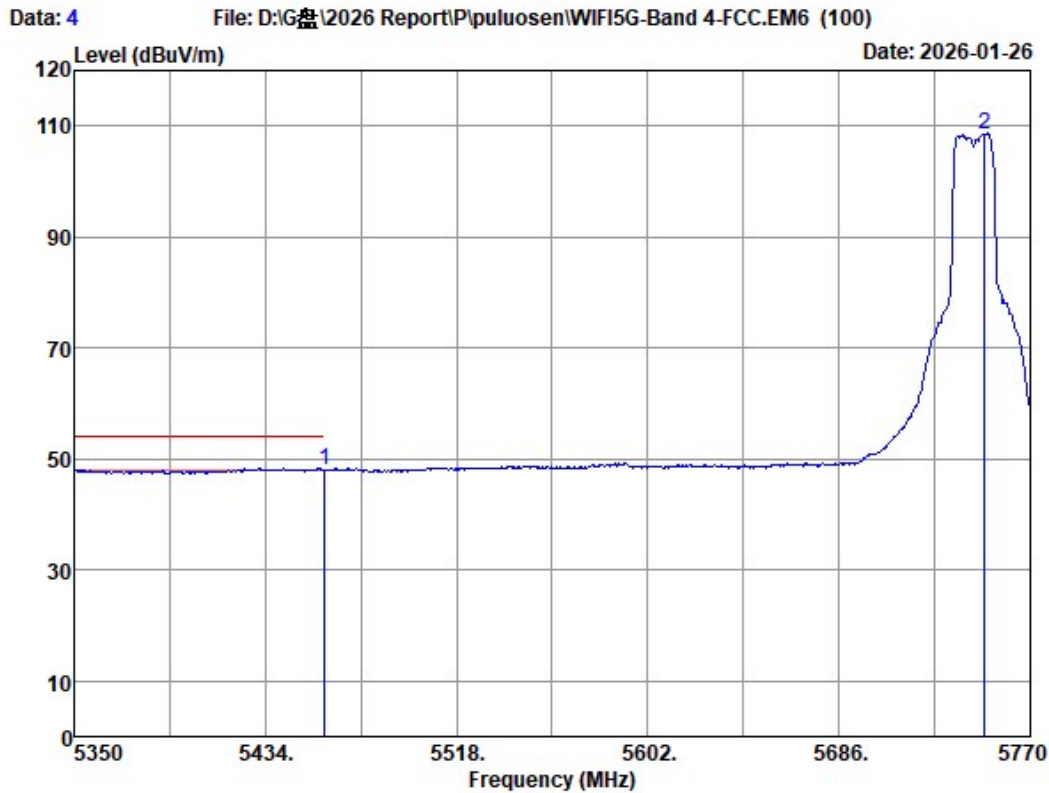

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	44.54	47.99	54.00	6.01	Average
2	5749.840	33.60	1.00	31.25	105.14	108.49	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

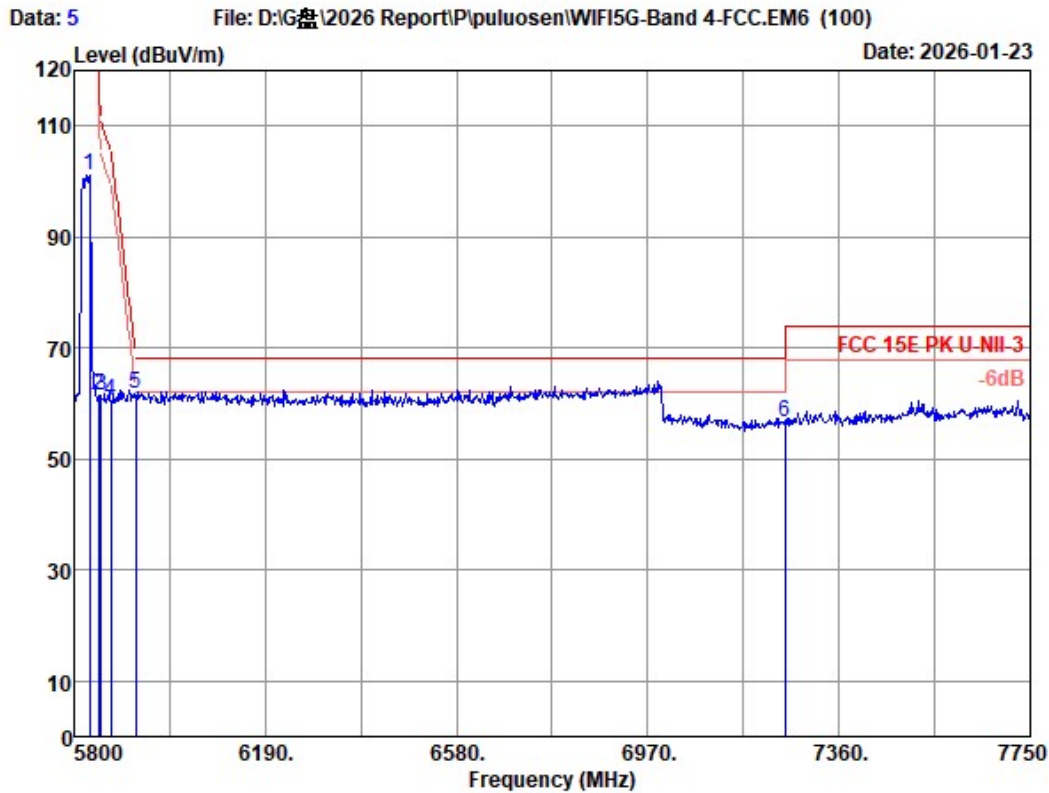

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5831.200	33.92	1.00	31.23	97.57	101.26	-----	-----	Peak
2	5850.000	34.00	1.00	31.23	57.63	61.40	122.20	60.80	Peak
3	5855.000	33.99	1.00	31.23	57.56	61.32	110.80	49.48	Peak
4	5875.000	33.95	1.00	31.23	56.88	60.60	105.20	44.60	Peak
5	5925.000	34.05	1.00	31.22	57.95	61.78	68.20	6.42	Peak
6	7250.000	36.00	1.12	32.25	51.90	56.77	68.20	11.43	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

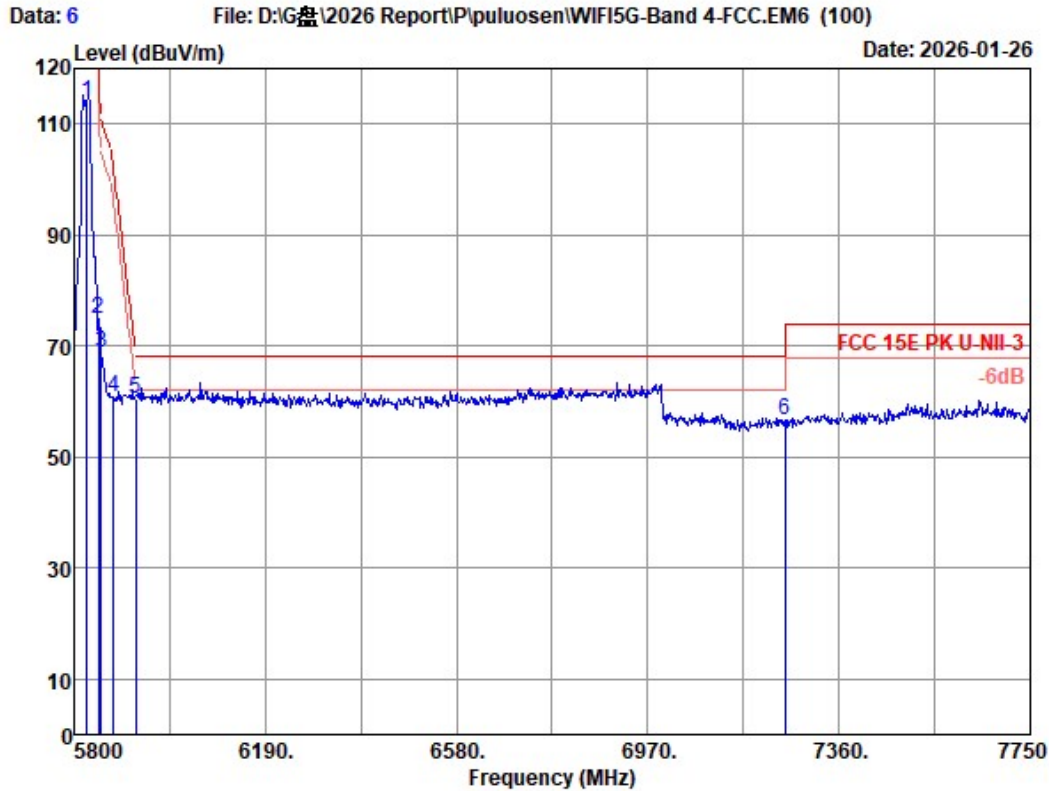

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5825.350	33.90	1.00	31.23	110.37	114.04	-----	-----	Peak
2	5850.000	34.00	1.00	31.23	71.02	74.79	122.20	47.41	Peak
3	5855.000	33.99	1.00	31.23	65.00	68.76	110.80	42.04	Peak
4	5880.000	33.94	1.00	31.22	57.14	60.86	101.50	40.64	Peak
5	5925.000	34.05	1.00	31.22	56.59	60.42	68.20	7.78	Peak
6	7250.000	36.00	1.12	32.25	51.64	56.51	68.20	11.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

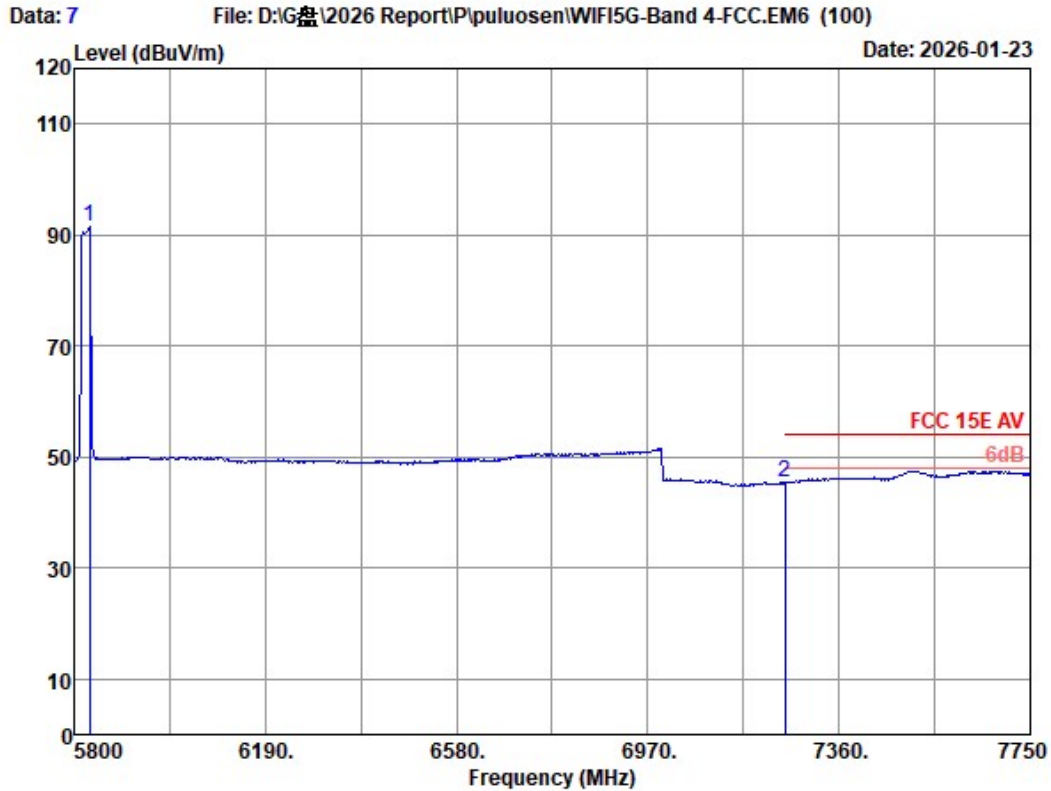

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5831.200	33.92	1.00	31.23	87.94	91.63	-----	-----	Average
2	7250.000	36.00	1.12	32.25	40.53	45.40	54.00	8.60	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

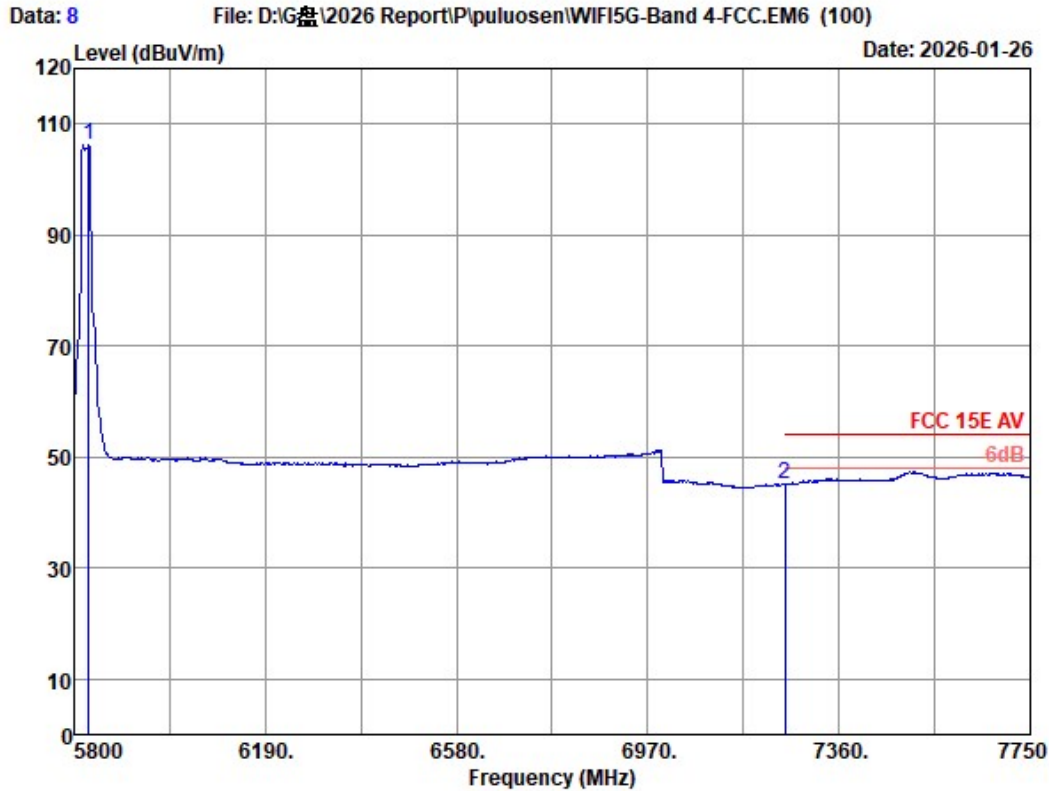

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11a 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5829.250	33.92	1.00	31.23	102.66	106.35	-----	-----	Average
2	7250.000	36.00	1.12	32.25	40.19	45.06	54.00	8.94	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported