



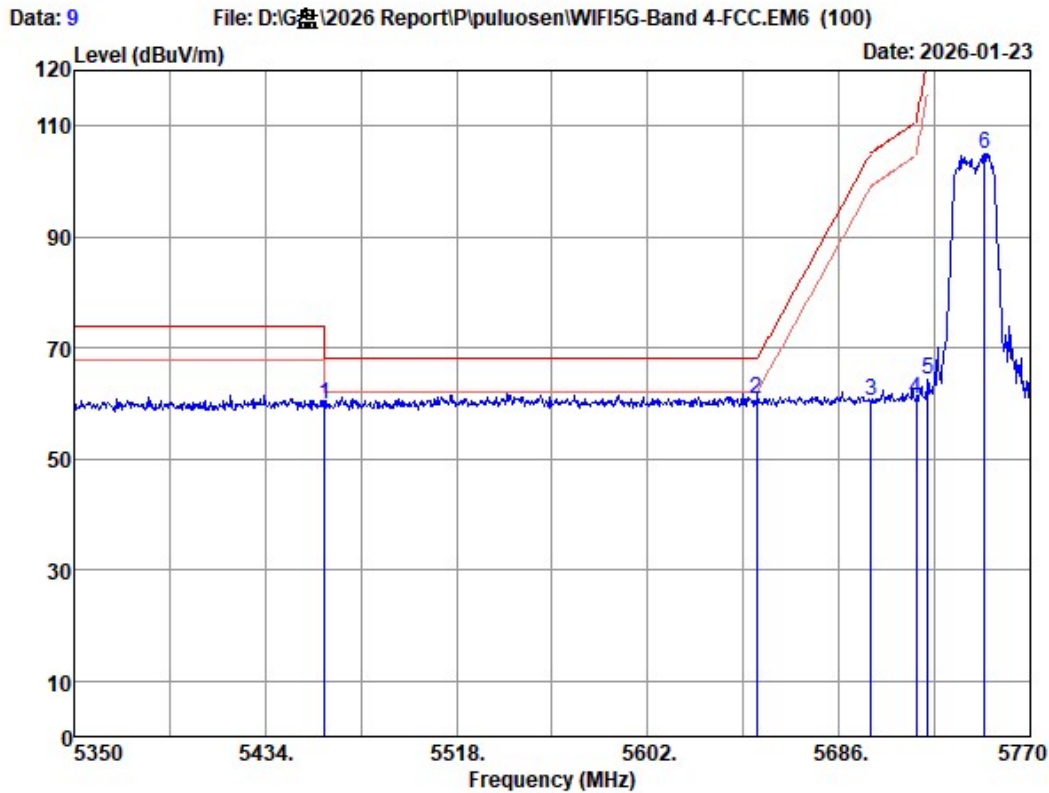

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	56.45	59.90	68.20	8.30	Peak
2	5650.000	33.80	1.00	31.27	57.25	60.78	68.20	7.42	Peak
3	5700.000	33.70	1.00	31.26	56.99	60.43	105.20	44.77	Peak
4	5720.000	33.66	1.00	31.26	57.34	60.74	110.80	50.06	Peak
5	5725.000	33.65	1.00	31.26	61.04	64.43	122.80	58.37	Peak
6	5749.840	33.60	1.00	31.25	101.73	105.08	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

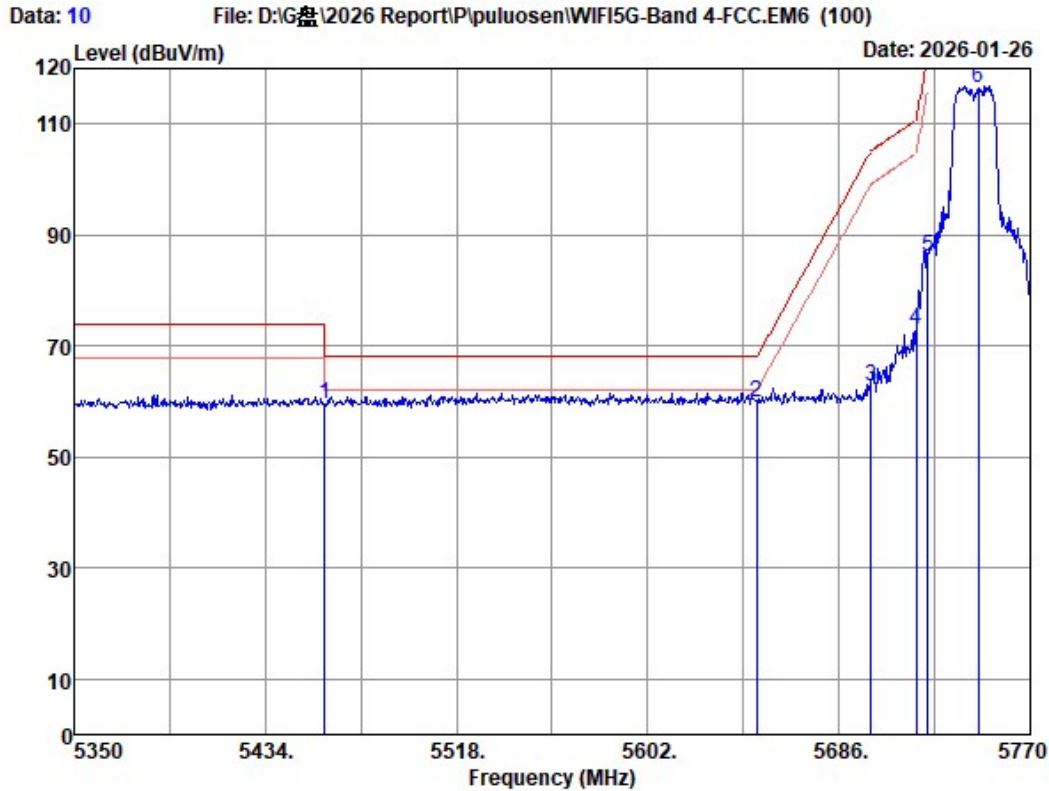

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	55.96	59.41	68.20	8.79	Peak
2	5650.000	33.80	1.00	31.27	56.38	59.91	68.20	8.29	Peak
3	5700.000	33.70	1.00	31.26	59.25	62.69	105.20	42.51	Peak
4	5720.000	33.66	1.00	31.26	69.68	73.08	110.80	37.72	Peak
5	5725.000	33.65	1.00	31.26	82.54	85.93	122.80	36.87	Peak
6	5747.320	33.61	1.00	31.25	113.18	116.54	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

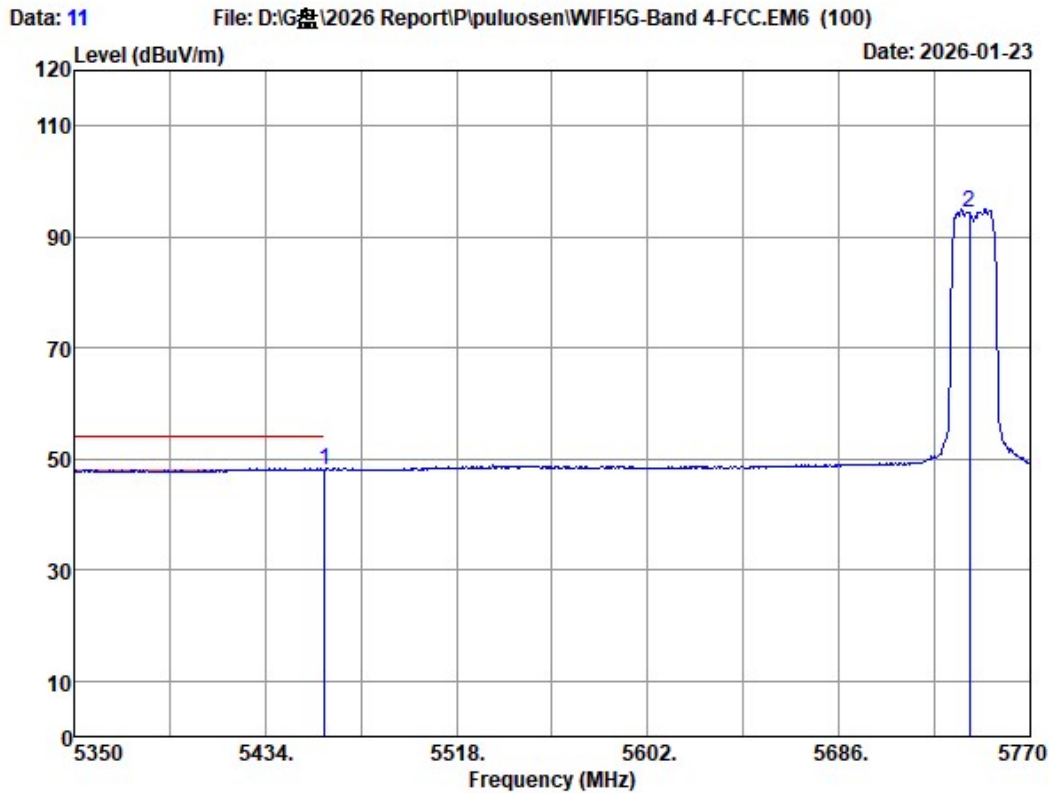

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	44.60	48.05	54.00	5.95	Average
2	5743.120	33.61	1.00	31.25	91.06	94.42	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

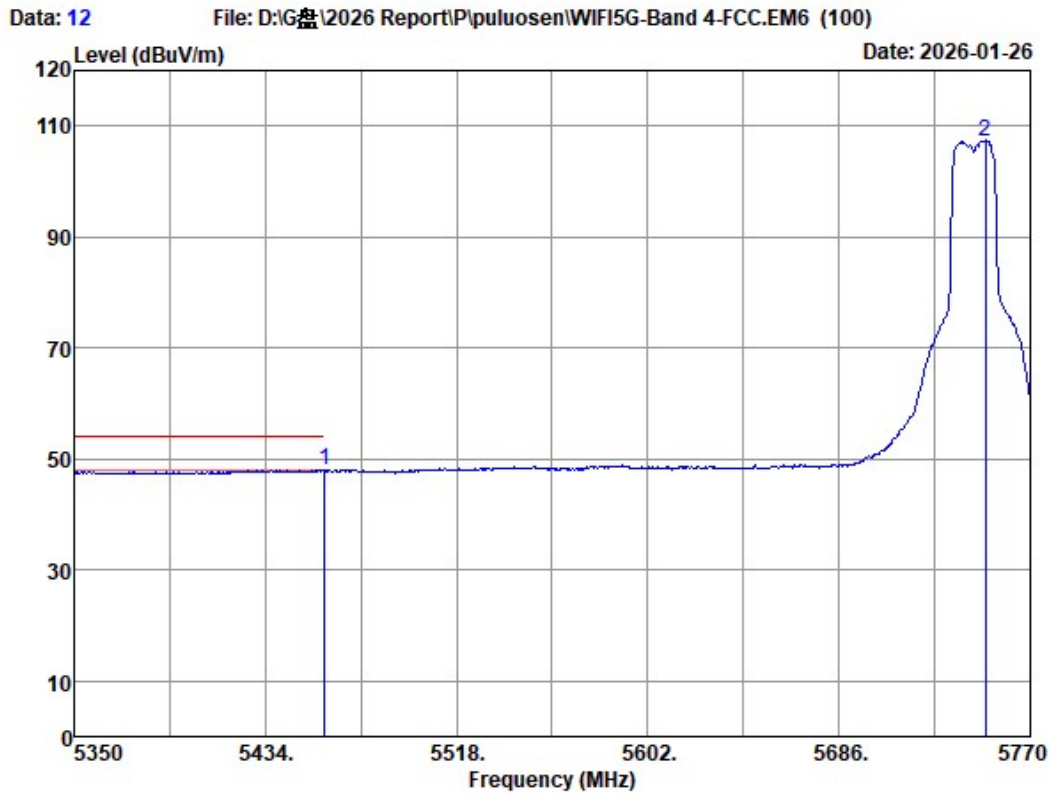

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	44.40	47.85	54.00	6.15	Average
2	5750.260	33.60	1.00	31.25	103.93	107.28	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

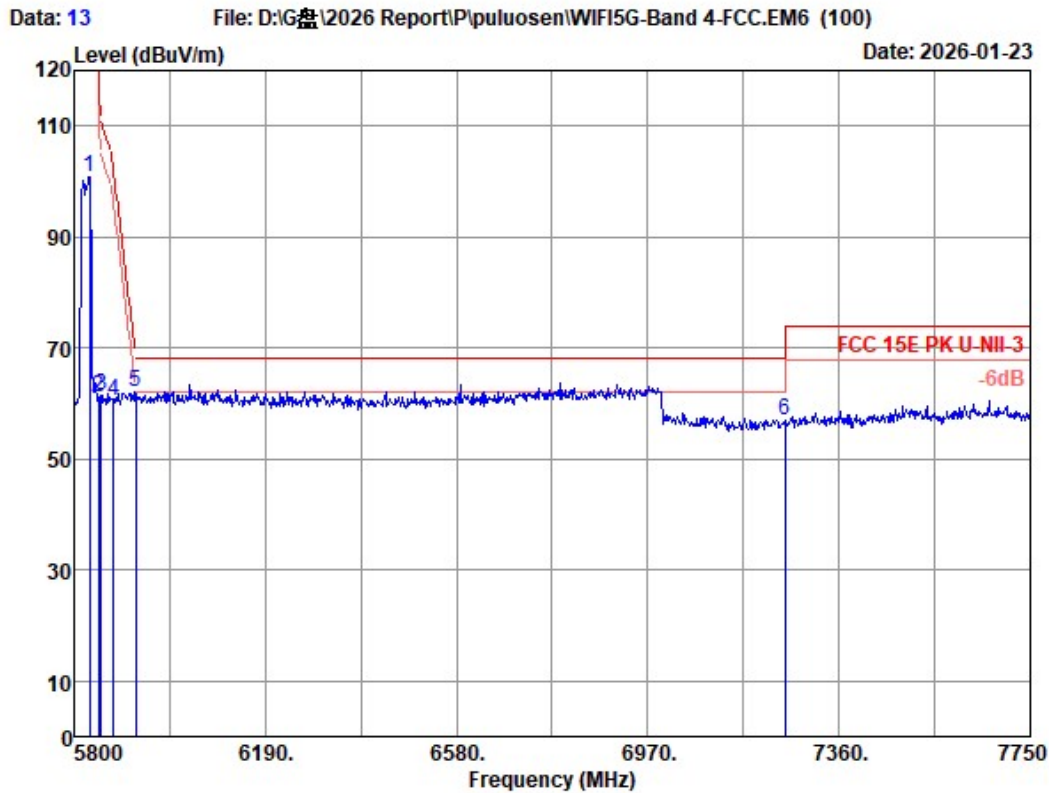

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5831.200	33.92	1.00	31.23	97.17	100.86	-----	-----	Peak
2	5850.000	34.00	1.00	31.23	57.30	61.07	122.20	61.13	Peak
3	5855.000	33.99	1.00	31.23	57.65	61.41	110.80	49.39	Peak
4	5880.000	33.94	1.00	31.22	56.76	60.48	101.50	41.02	Peak
5	5925.000	34.05	1.00	31.22	58.22	62.05	68.20	6.15	Peak
6	7250.000	36.00	1.12	32.25	52.19	57.06	68.20	11.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

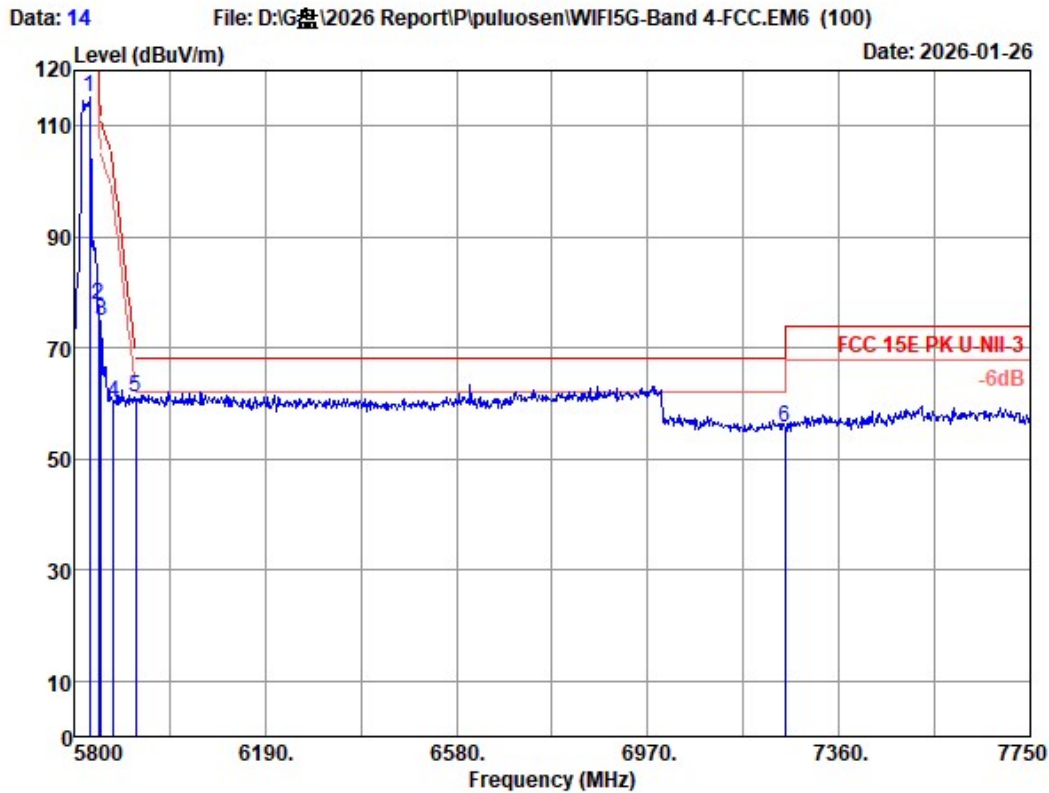

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5831.200	33.92	1.00	31.23	111.41	115.10	-----	-----	Peak
2	5850.000	34.00	1.00	31.23	74.01	77.78	122.20	44.42	Peak
3	5855.000	33.99	1.00	31.23	71.23	74.99	110.80	35.81	Peak
4	5880.000	33.94	1.00	31.22	56.46	60.18	101.50	41.32	Peak
5	5925.000	34.05	1.00	31.22	57.17	61.00	68.20	7.20	Peak
6	7250.000	36.00	1.12	32.25	50.84	55.71	68.20	12.49	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

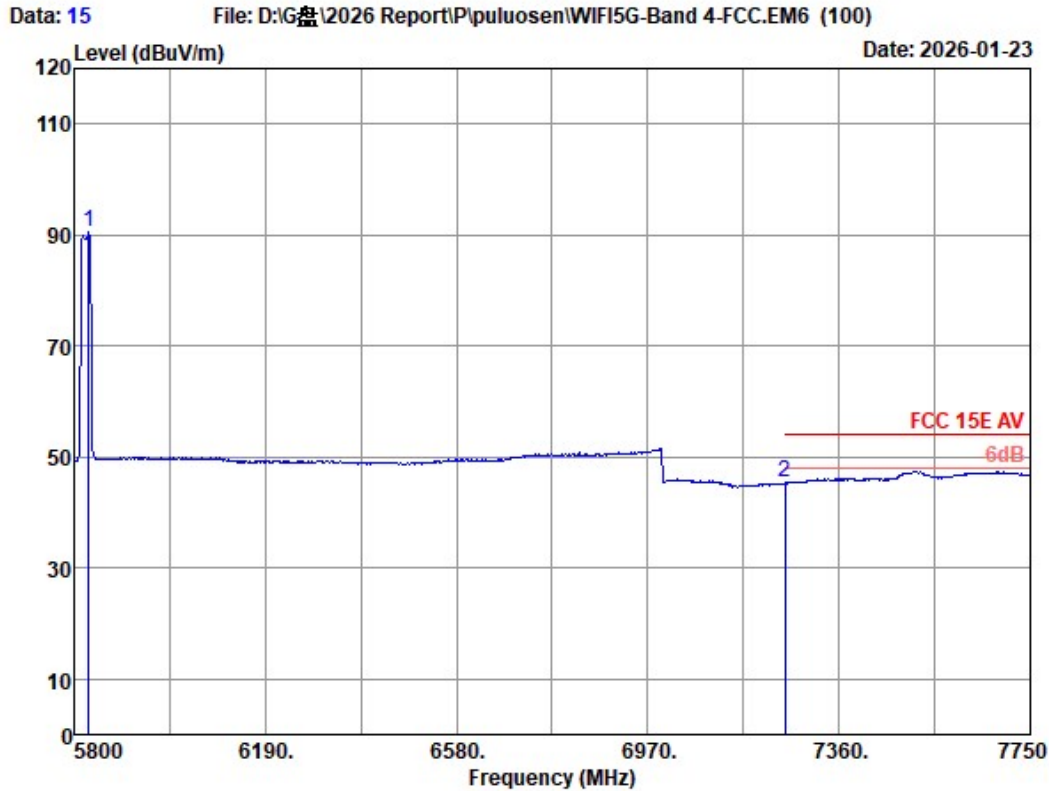

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5829.250	33.92	1.00	31.23	86.88	90.57	-----	-----	Average
2	7250.000	36.00	1.12	32.25	40.46	45.33	54.00	8.67	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

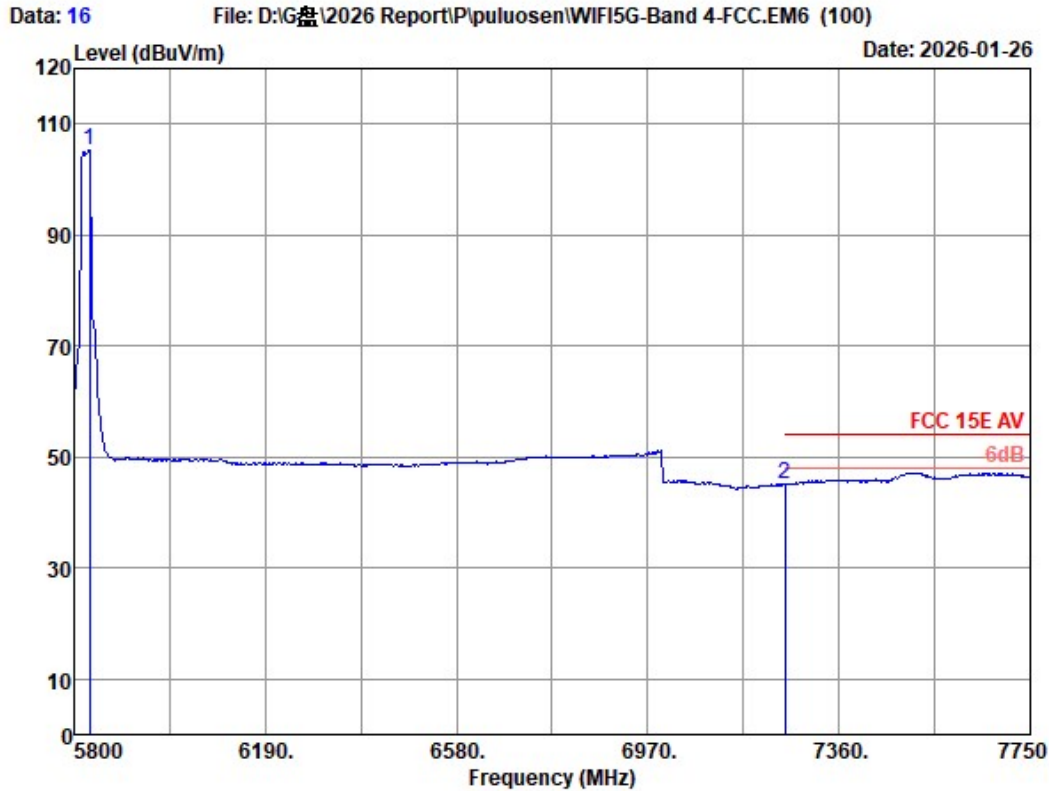

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5831.200	33.92	1.00	31.23	101.59	105.28	-----	-----	Average
2	7250.000	36.00	1.12	32.25	40.13	45.00	54.00	9.00	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

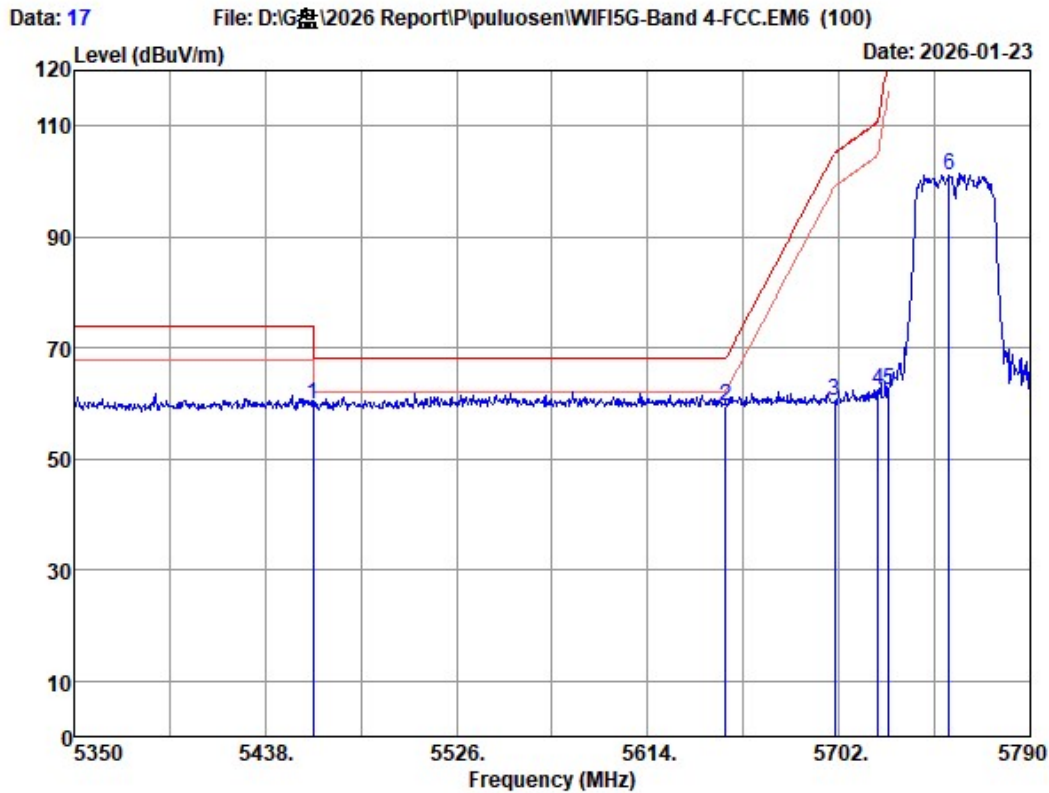

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	56.54	59.99	68.20	8.21	Peak
2	5650.000	33.80	1.00	31.27	55.96	59.49	68.20	8.71	Peak
3	5700.000	33.70	1.00	31.26	57.13	60.57	105.20	44.63	Peak
4	5720.000	33.66	1.00	31.26	59.07	62.47	110.80	48.33	Peak
5	5725.000	33.65	1.00	31.26	59.02	62.41	122.80	60.39	Peak
6	5752.600	33.61	1.00	31.25	97.89	101.25	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

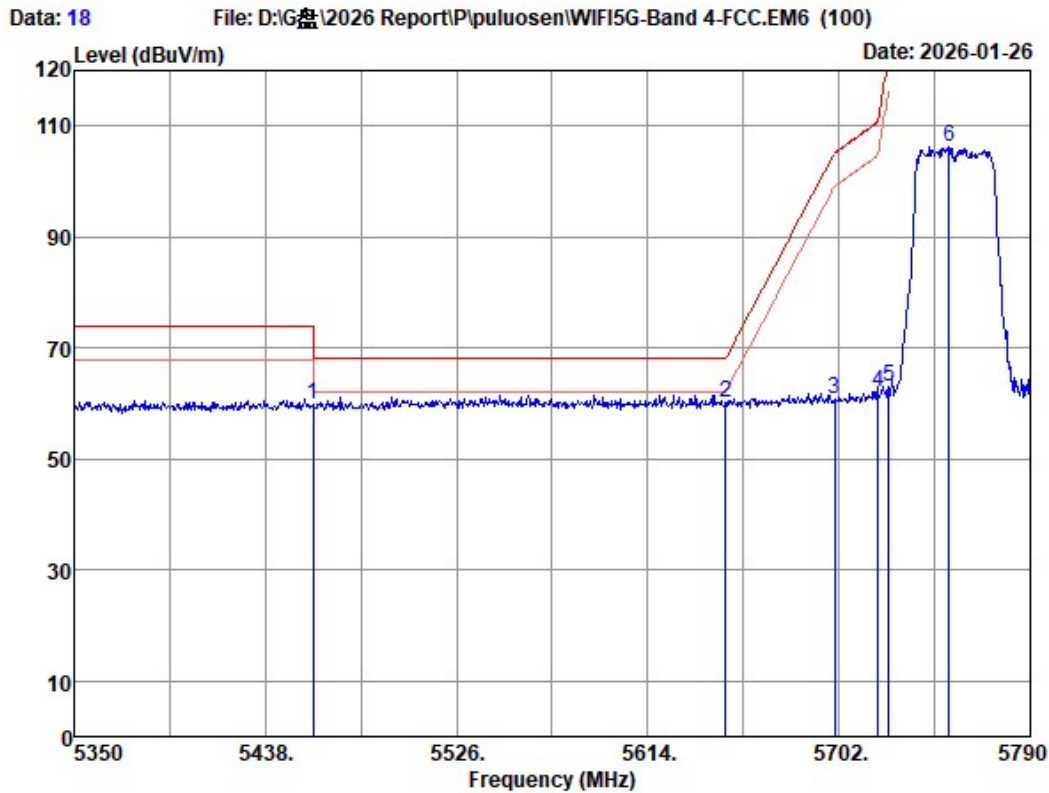

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	56.40	59.85	68.20	8.35	Peak
2	5650.000	33.80	1.00	31.27	56.74	60.27	68.20	7.93	Peak
3	5700.000	33.70	1.00	31.26	57.23	60.67	105.20	44.53	Peak
4	5720.000	33.66	1.00	31.26	58.71	62.11	110.80	48.69	Peak
5	5725.000	33.65	1.00	31.26	59.61	63.00	122.80	59.80	Peak
6	5752.600	33.61	1.00	31.25	102.84	106.20	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

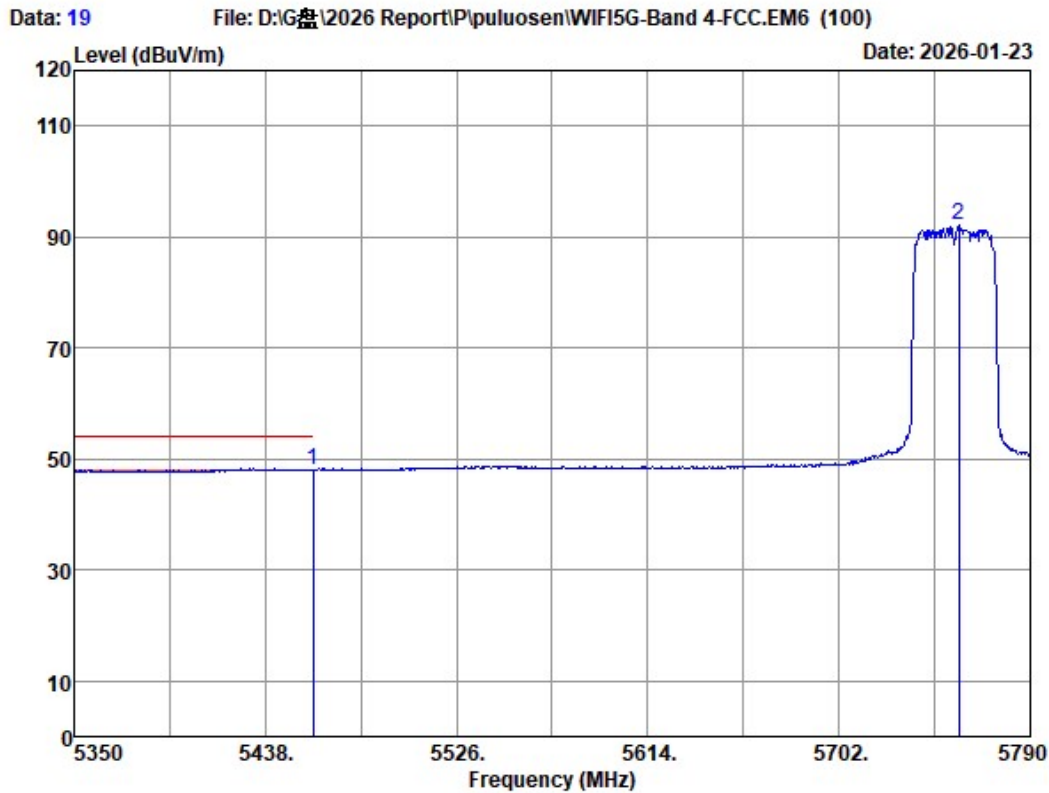

Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	44.66	48.11	54.00	5.89	Average
2	5757.000	33.63	1.00	31.25	88.73	92.11	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

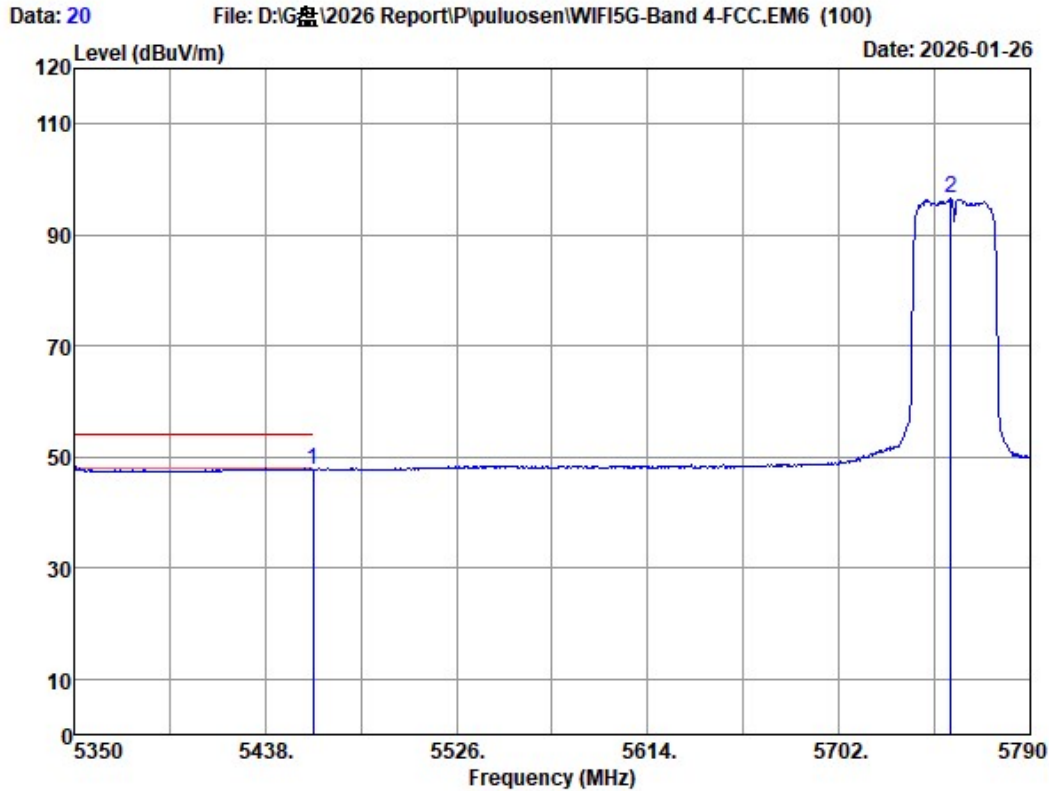

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	44.23	47.68	54.00	6.32	Average
2	5753.480	33.61	1.00	31.25	93.31	96.67	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

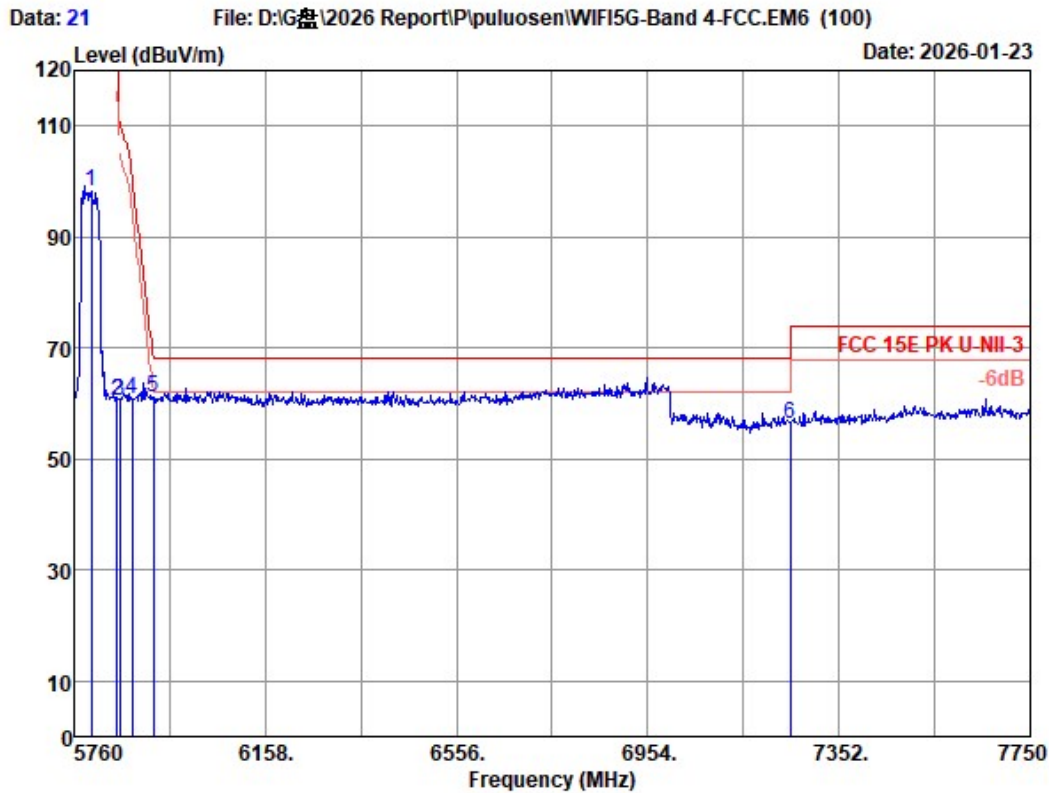

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5795.820	33.78	1.00	31.24	94.58	98.12	-----	-----	Peak
2	5850.000	34.00	1.00	31.23	56.75	60.52	122.20	61.68	Peak
3	5855.000	33.99	1.00	31.23	56.79	60.55	110.80	50.25	Peak
4	5880.000	33.94	1.00	31.22	57.02	60.74	101.50	40.76	Peak
5	5925.000	34.05	1.00	31.22	57.17	61.00	68.20	7.20	Peak
6	7250.000	36.00	1.12	32.25	51.41	56.28	68.20	11.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

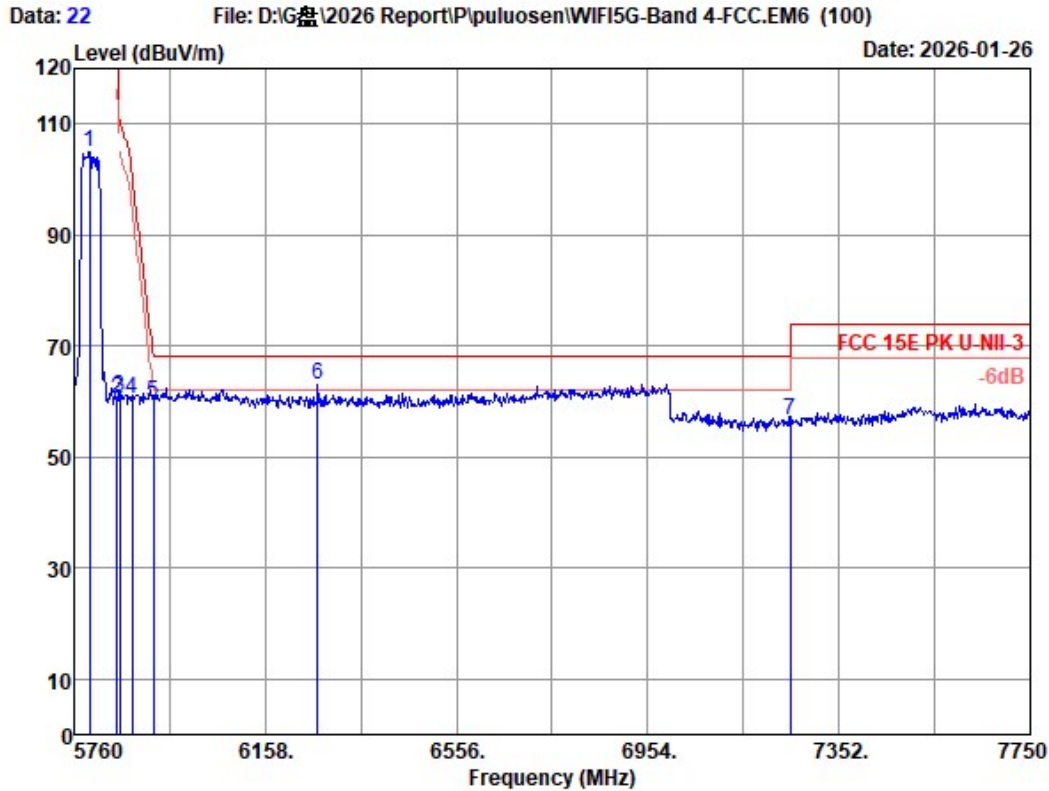

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5791.840	33.77	1.00	31.24	101.46	104.99	-----	-----	Peak
2	5850.000	34.00	1.00	31.23	56.81	60.58	122.20	61.62	Peak
3	5855.000	33.99	1.00	31.23	57.00	60.76	110.80	50.04	Peak
4	5880.000	33.94	1.00	31.22	56.76	60.48	101.50	41.02	Peak
5	5925.000	34.05	1.00	31.22	55.95	59.78	68.20	8.42	Peak
6	6267.450	34.30	1.03	31.49	59.23	63.07	68.20	5.13	Peak
7	7250.000	36.00	1.12	32.25	51.76	56.63	68.20	11.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

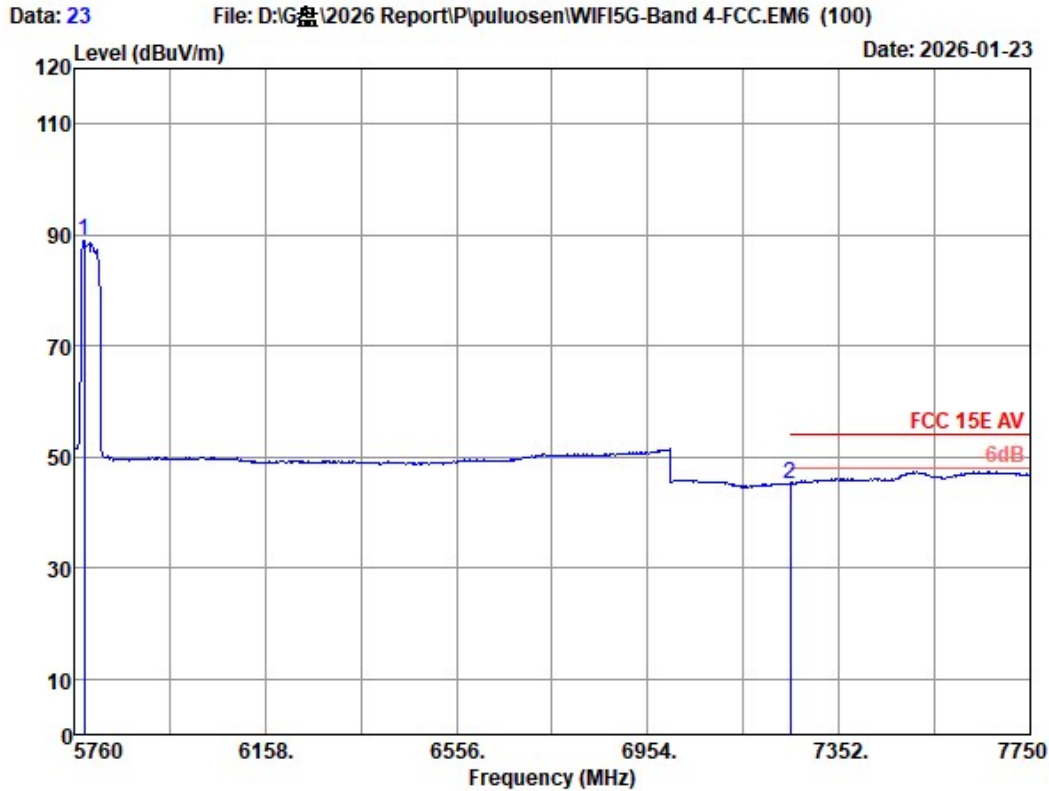

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5781.890	33.73	1.00	31.24	85.37	88.86	-----	-----	Average
2	7250.000	36.00	1.12	32.25	40.40	45.27	54.00	8.73	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

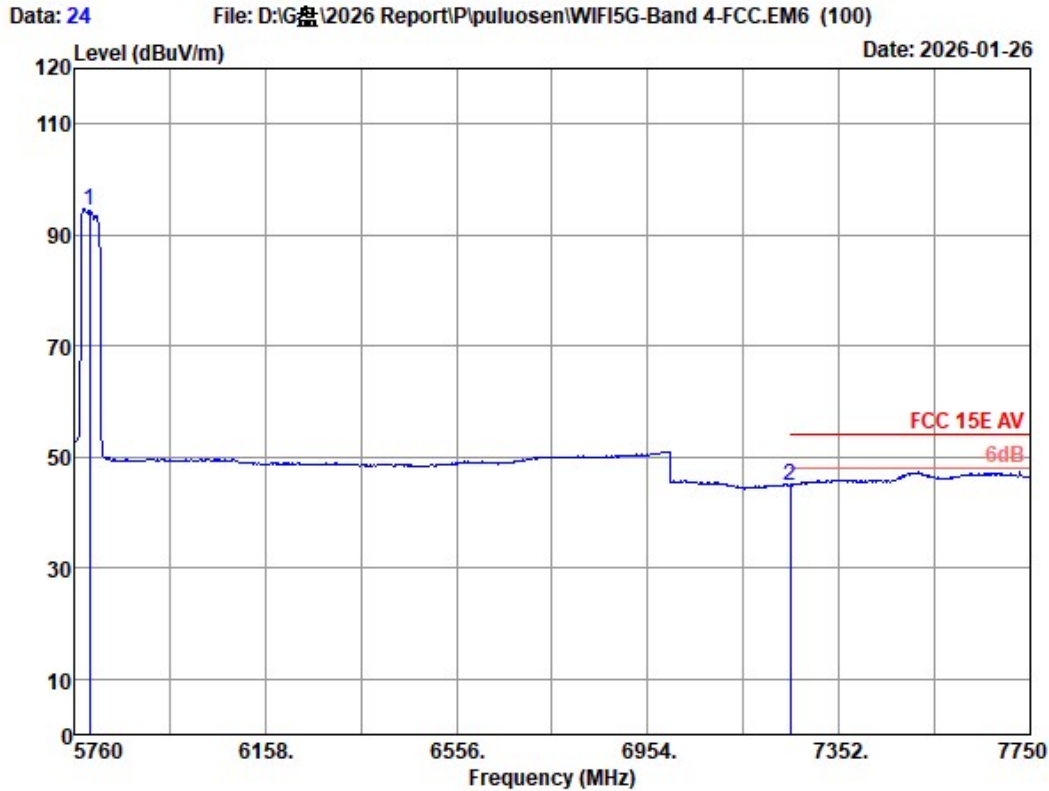

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11n40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5791.840	33.77	1.00	31.24	90.93	94.46	-----	-----	Average
2	7250.000	36.00	1.12	32.25	40.07	44.94	54.00	9.06	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

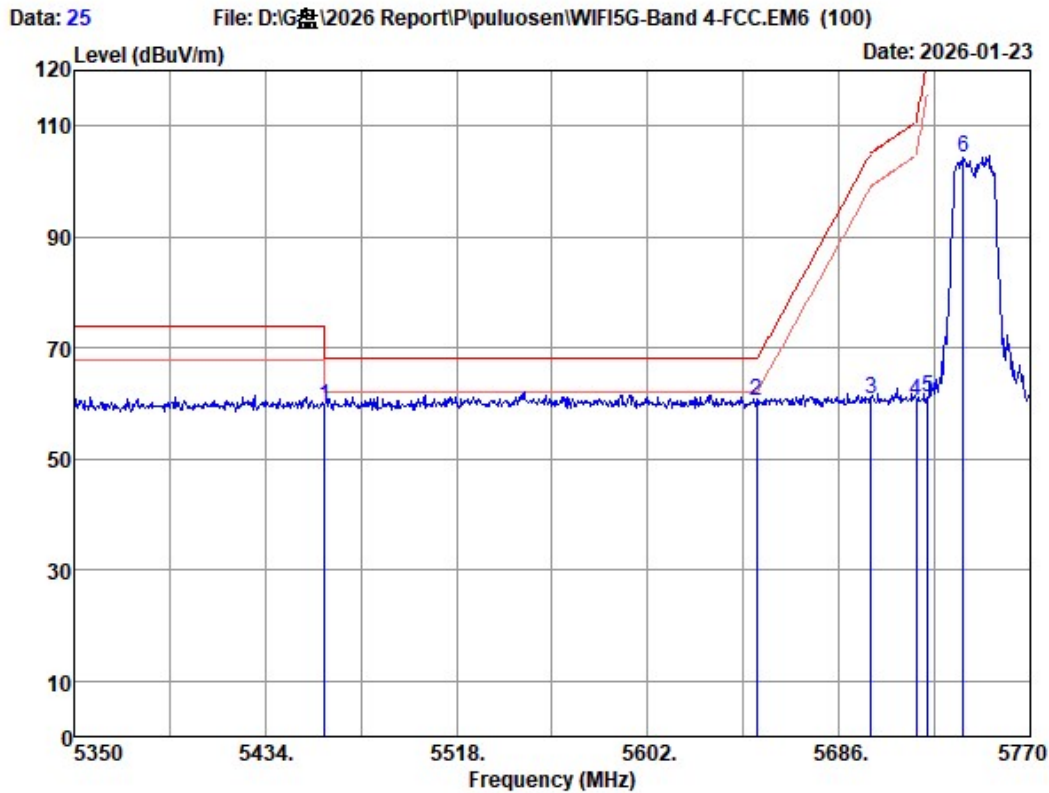

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	56.04	59.49	68.20	8.71	Peak
2	5650.000	33.80	1.00	31.27	56.84	60.37	68.20	7.83	Peak
3	5700.000	33.70	1.00	31.26	57.41	60.85	105.20	44.35	Peak
4	5720.000	33.66	1.00	31.26	57.06	60.46	110.80	50.34	Peak
5	5725.000	33.65	1.00	31.26	57.66	61.05	122.80	61.75	Peak
6	5740.600	33.62	1.00	31.25	100.94	104.31	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

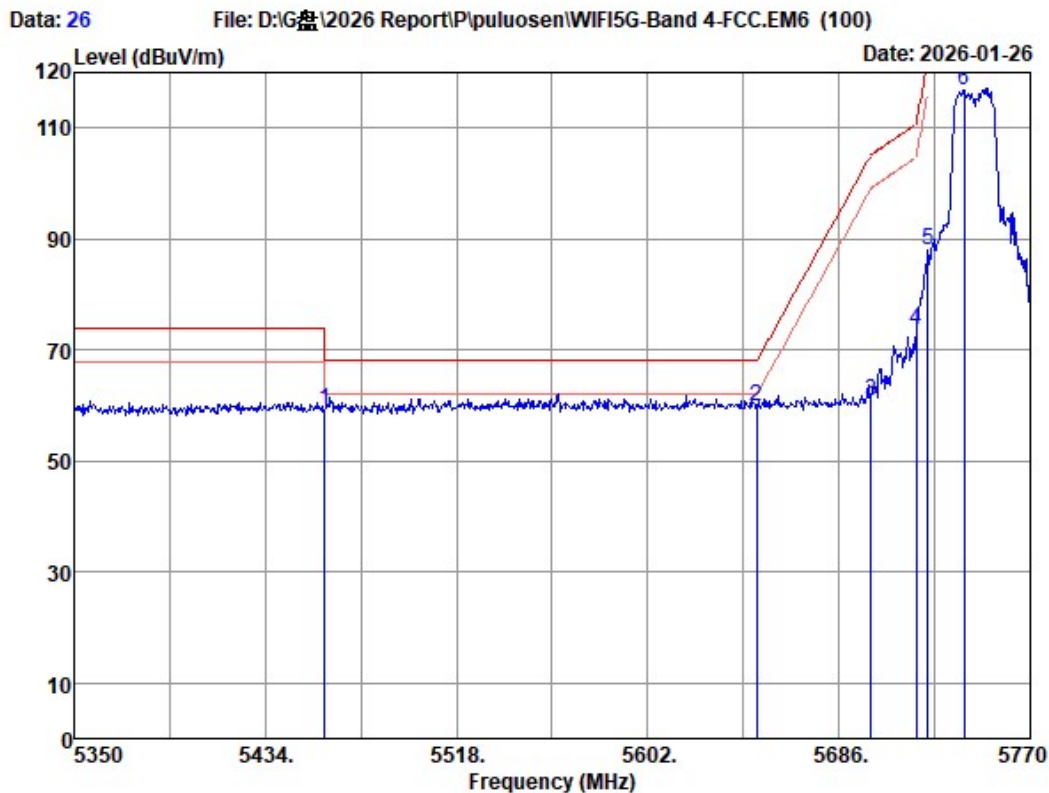

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	55.73	59.18	68.20	9.02	Peak
2	5650.000	33.80	1.00	31.27	56.24	59.77	68.20	8.43	Peak
3	5700.000	33.70	1.00	31.26	57.36	60.80	105.20	44.40	Peak
4	5720.000	33.66	1.00	31.26	70.31	73.71	110.80	37.09	Peak
5	5725.000	33.65	1.00	31.26	84.47	87.86	122.80	34.94	Peak
6	5741.020	33.62	1.00	31.25	113.53	116.90	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

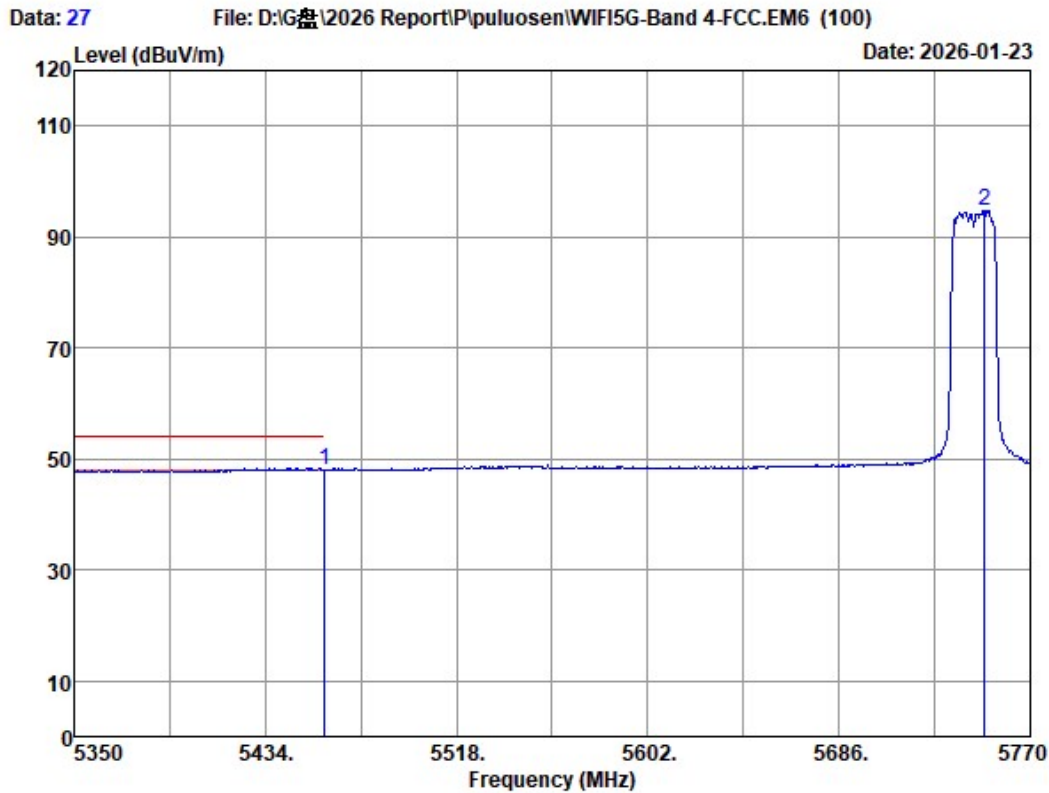

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	44.50	47.95	54.00	6.05	Average
2	5749.840	33.60	1.00	31.25	91.48	94.83	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

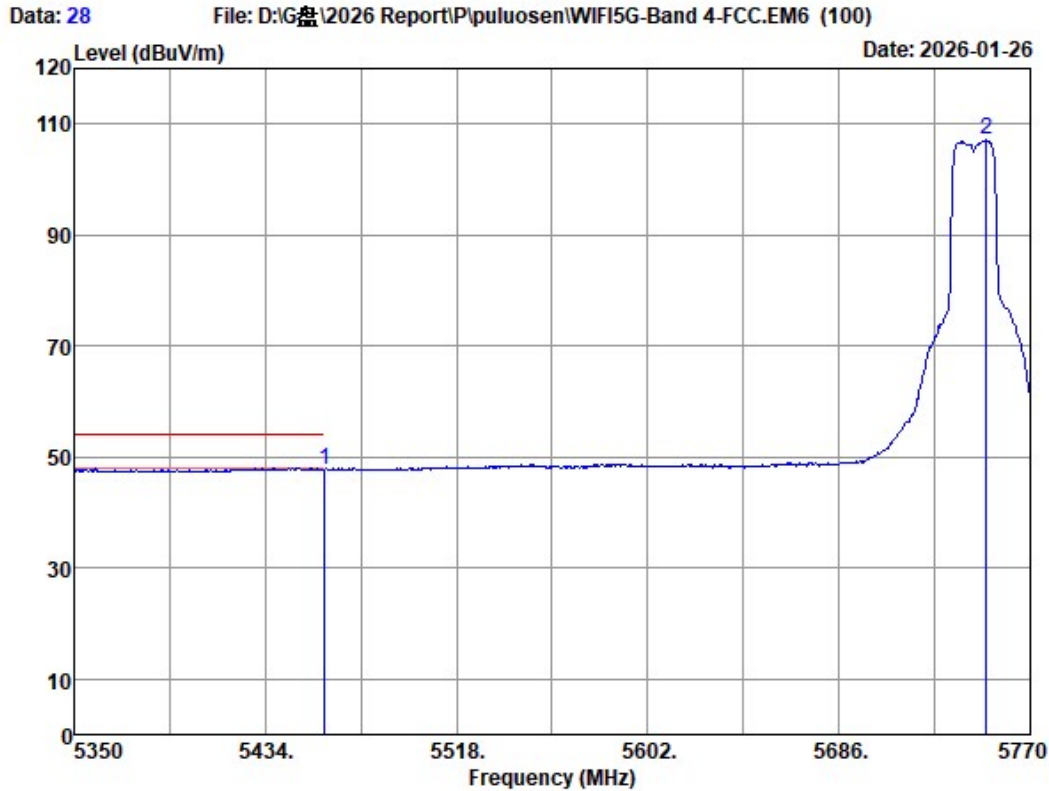

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5745MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	44.33	47.78	54.00	6.22	Average
2	5750.680	33.60	1.00	31.25	103.74	107.09	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

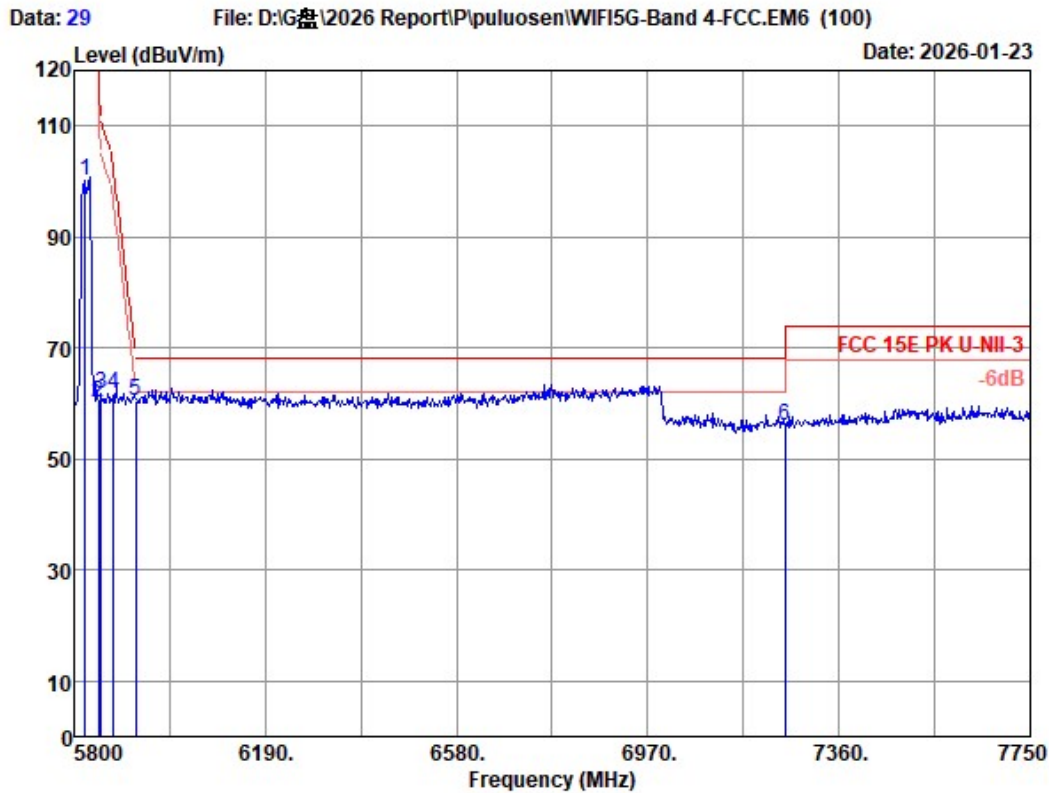

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5823.400	33.89	1.00	31.24	96.63	100.28	-----	-----	Peak
2	5850.000	34.00	1.00	31.23	56.47	60.24	122.20	61.96	Peak
3	5855.000	33.99	1.00	31.23	58.09	61.85	110.80	48.95	Peak
4	5880.000	33.94	1.00	31.22	58.13	61.85	101.50	39.65	Peak
5	5925.000	34.05	1.00	31.22	56.69	60.52	68.20	7.68	Peak
6	7250.000	36.00	1.12	32.25	51.05	55.92	68.20	12.28	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

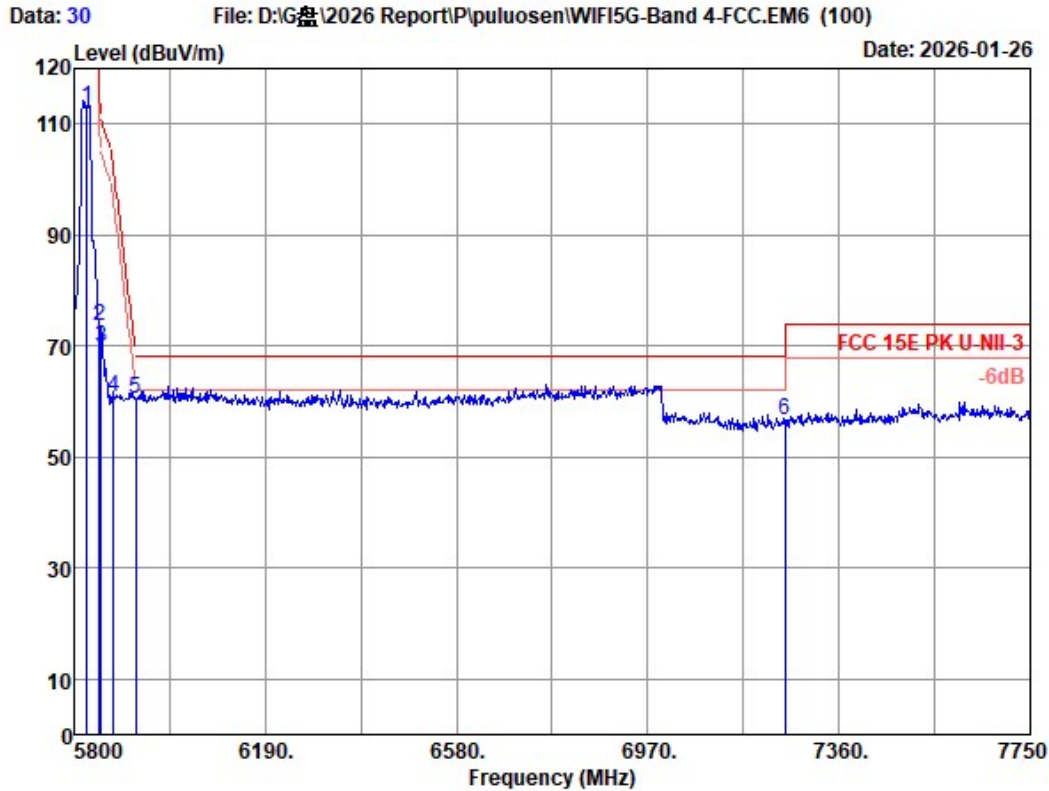

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5825.350	33.90	1.00	31.23	109.33	113.00	-----	-----	Peak
2	5850.700	34.00	1.00	31.23	69.82	73.59	120.60	47.01	Peak
3	5855.000	33.99	1.00	31.23	66.01	69.77	110.80	41.03	Peak
4	5880.000	33.94	1.00	31.22	57.16	60.88	101.50	40.62	Peak
5	5925.000	34.05	1.00	31.22	56.54	60.37	68.20	7.83	Peak
6	7250.000	36.00	1.12	32.25	51.70	56.57	68.20	11.63	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

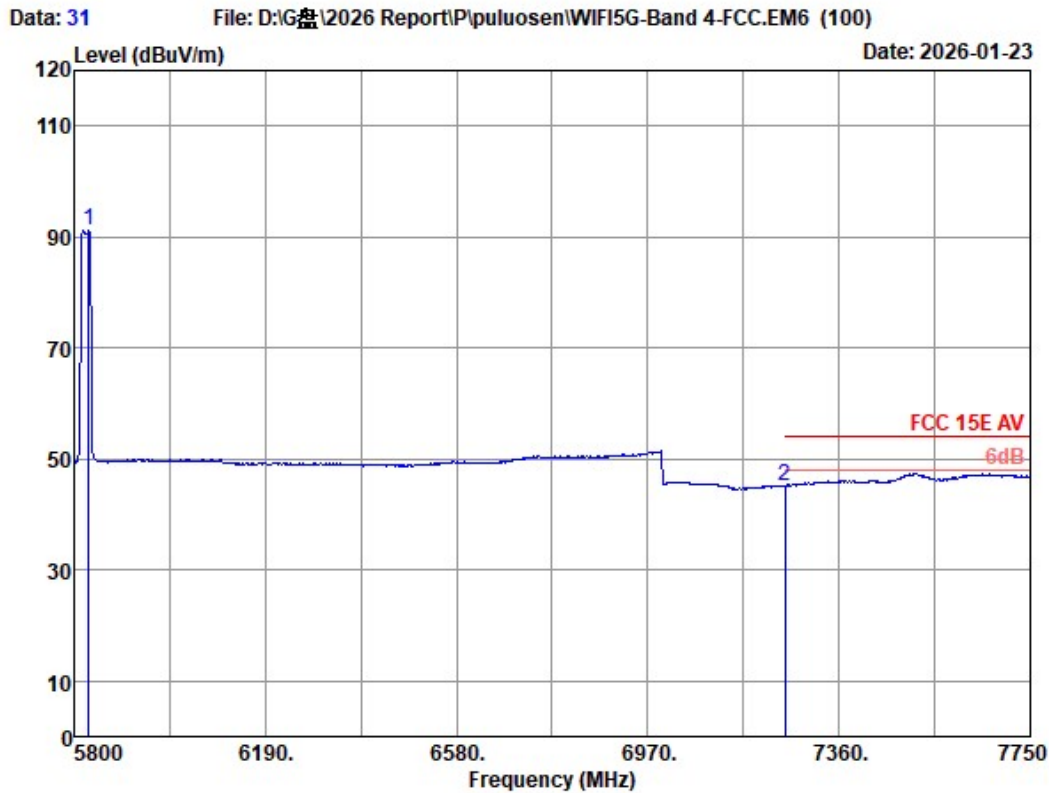

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5829.250	33.92	1.00	31.23	87.59	91.28	-----	-----	Average
2	7250.000	36.00	1.12	32.25	40.29	45.16	54.00	8.84	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

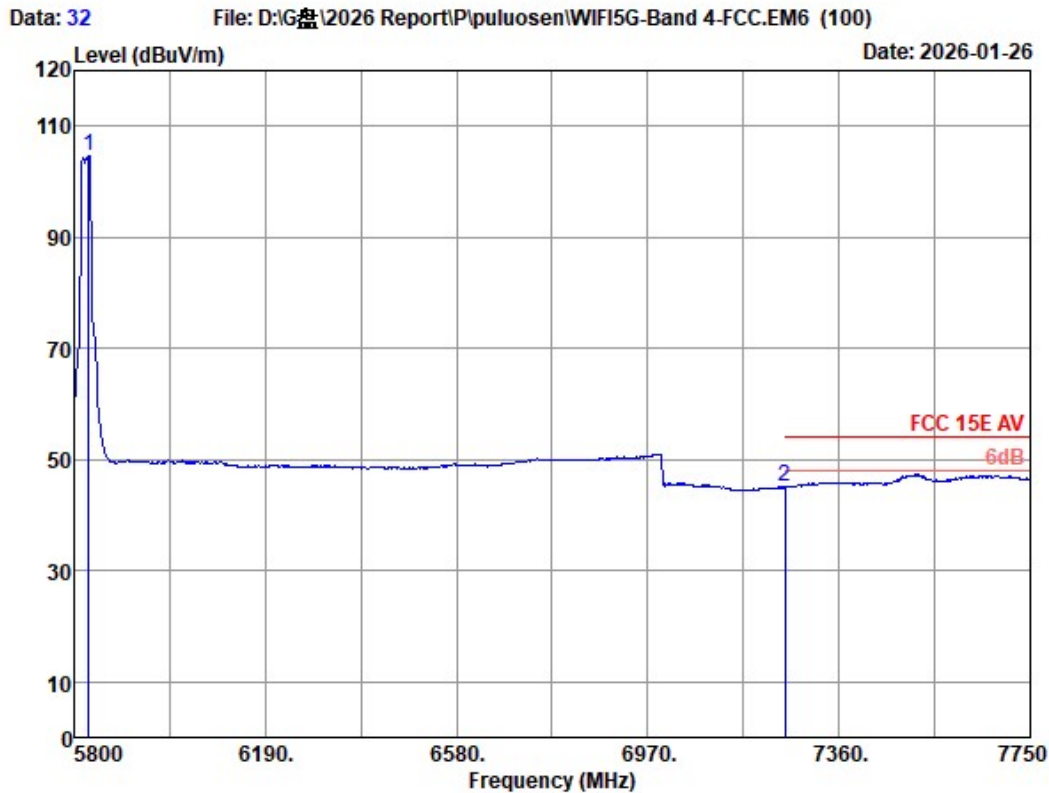

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac20 5825MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5829.250	33.92	1.00	31.23	101.07	104.76	-----	-----	Average
2	7250.000	36.00	1.12	32.25	40.24	45.11	54.00	8.89	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

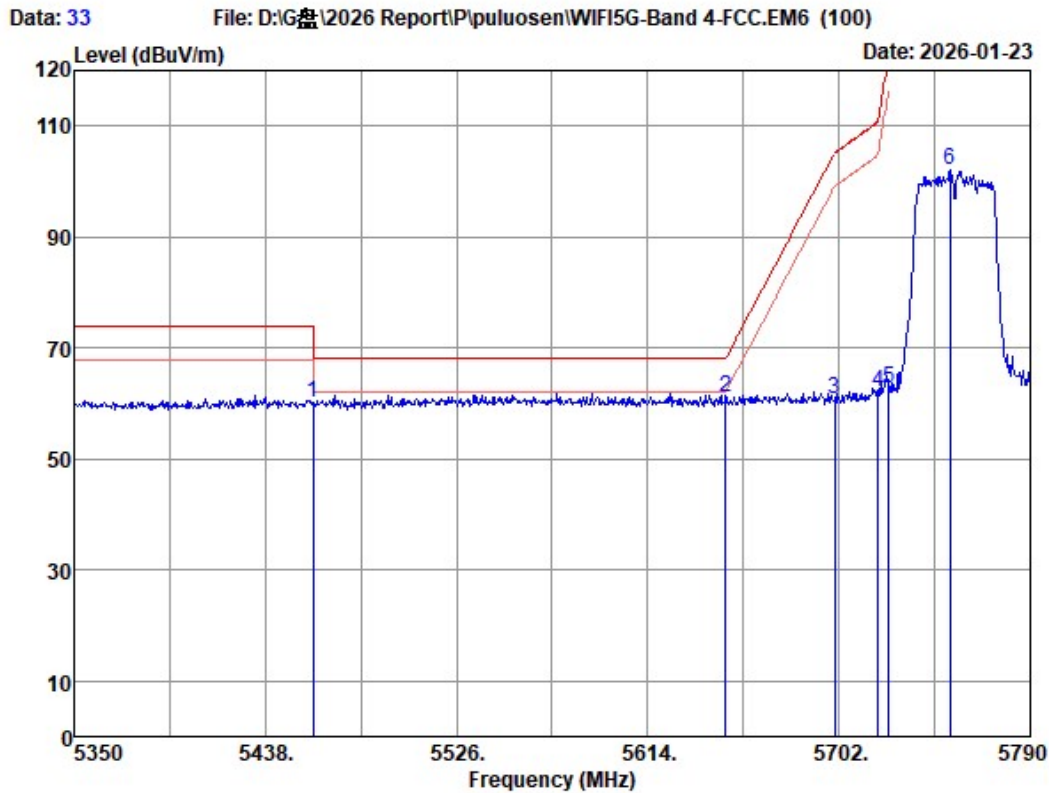

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	56.74	60.19	68.20	8.01	Peak
2	5650.000	33.80	1.00	31.27	57.52	61.05	68.20	7.15	Peak
3	5700.000	33.70	1.00	31.26	57.22	60.66	105.20	44.54	Peak
4	5720.000	33.66	1.00	31.26	58.52	61.92	110.80	48.88	Peak
5	5725.000	33.65	1.00	31.26	59.31	62.70	122.80	60.10	Peak
6	5753.040	33.61	1.00	31.25	98.63	101.99	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

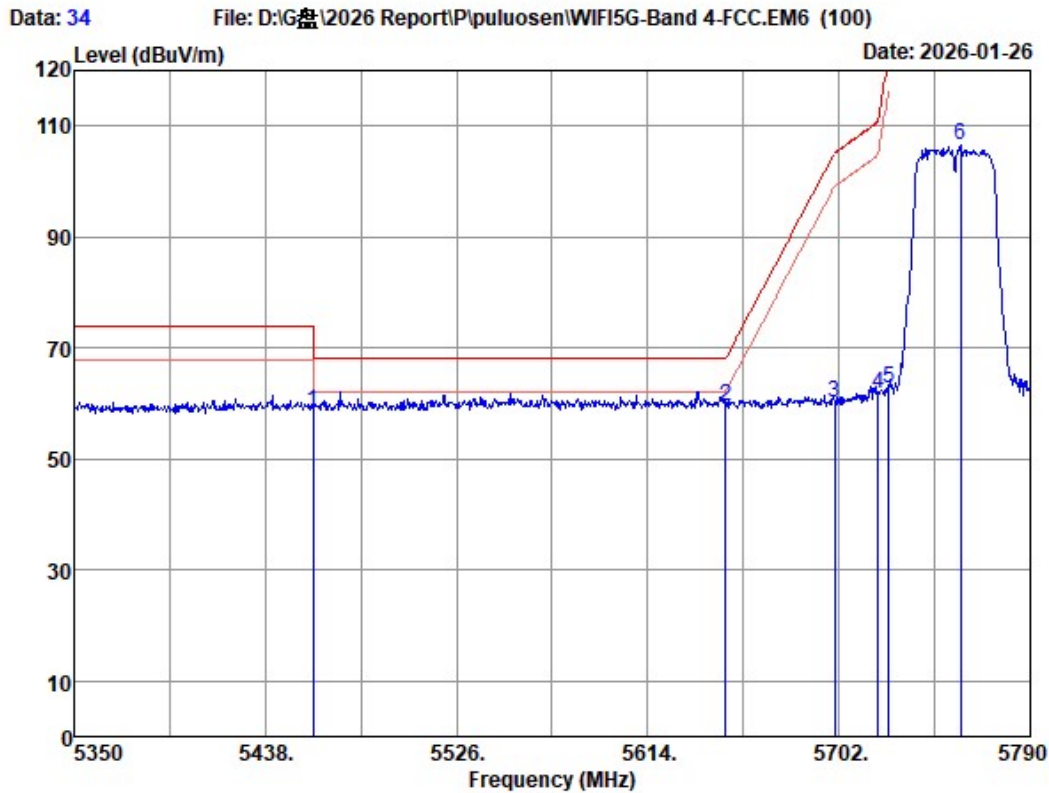

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	55.12	58.57	68.20	9.63	Peak
2	5650.000	33.80	1.00	31.27	55.89	59.42	68.20	8.78	Peak
3	5700.000	33.70	1.00	31.26	56.75	60.19	105.20	45.01	Peak
4	5720.000	33.66	1.00	31.26	58.24	61.64	110.80	49.16	Peak
5	5725.000	33.65	1.00	31.26	59.43	62.82	122.80	59.98	Peak
6	5757.880	33.63	1.00	31.25	103.03	106.41	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

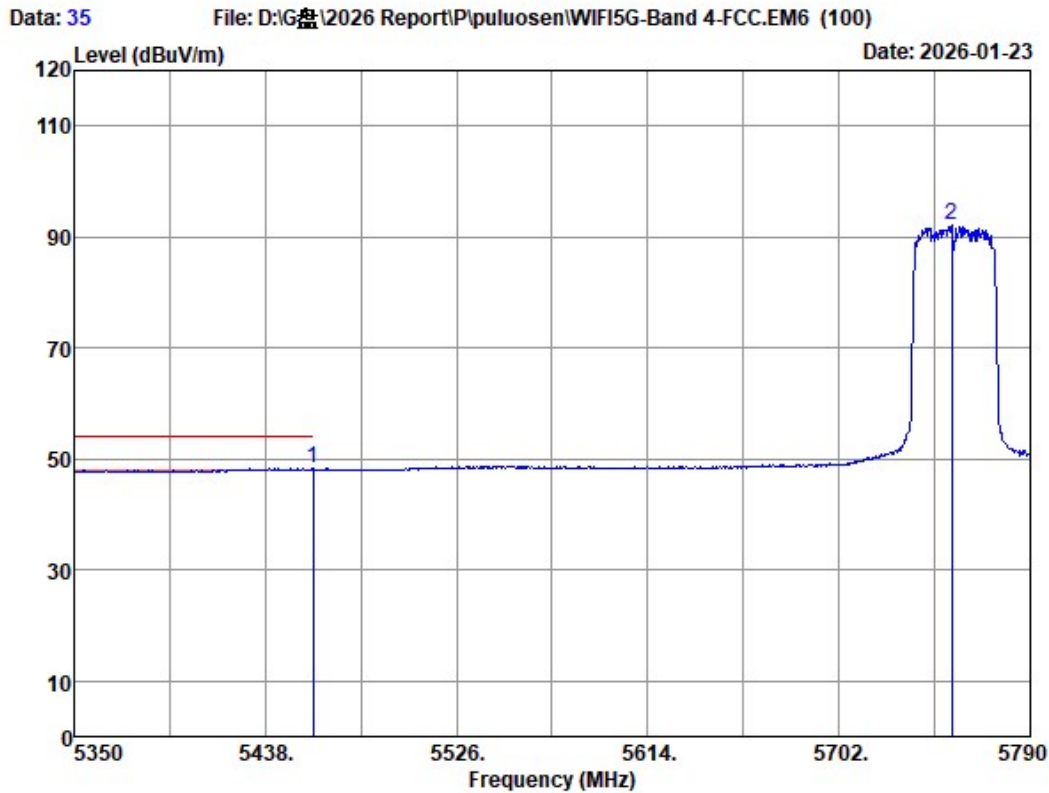

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	44.90	48.35	54.00	5.65	Average
2	5753.920	33.62	1.00	31.25	88.64	92.01	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

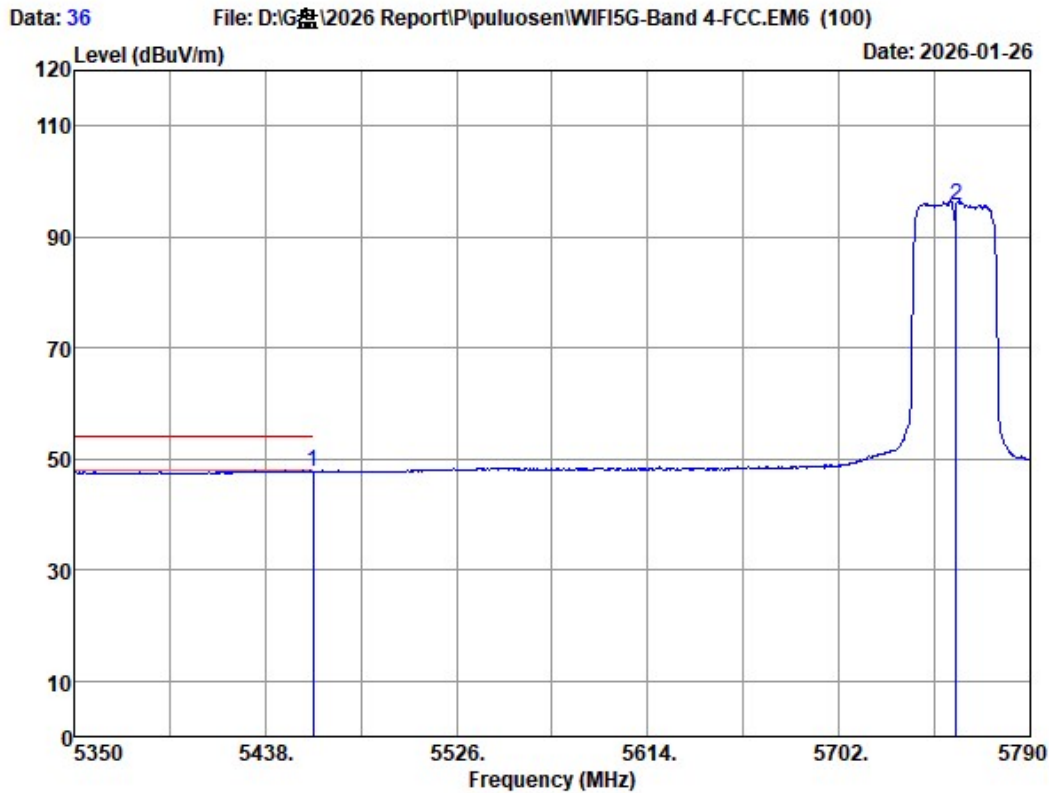

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5755MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5460.000	33.76	1.00	31.31	44.35	47.80	54.00	6.20	Average
2	5756.120	33.62	1.00	31.25	92.46	95.83	-----	-----	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

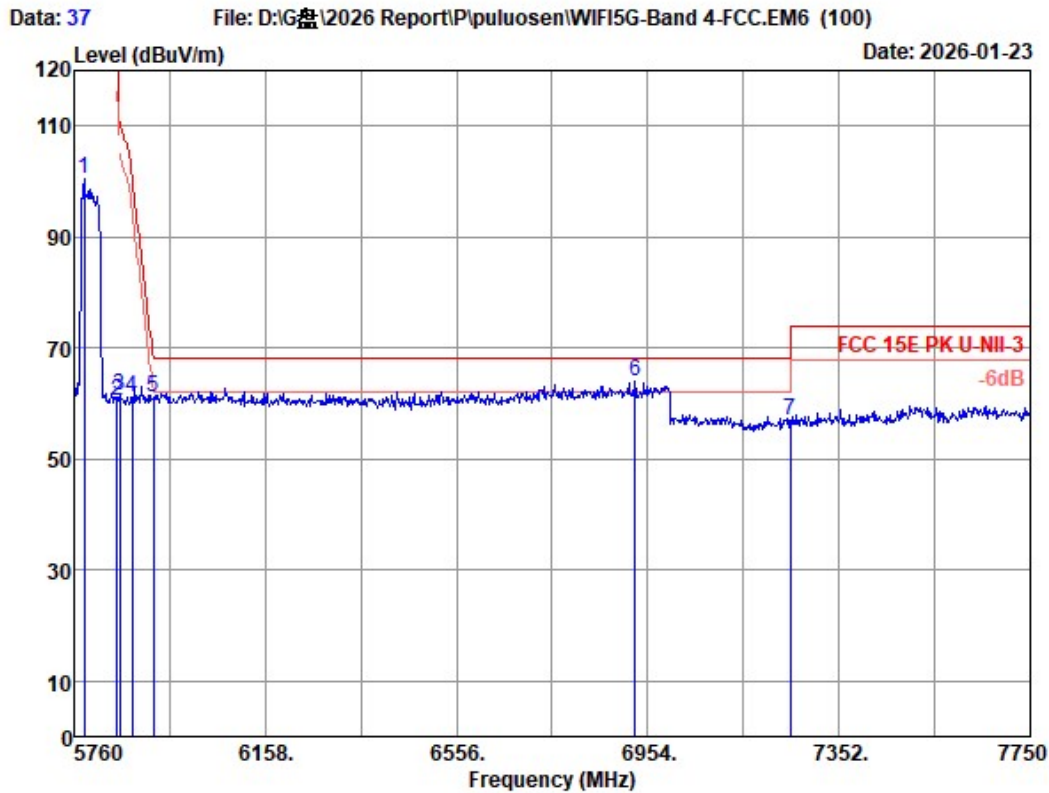

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin Limits (dB)	Remark
1	5781.890	33.73	1.00	31.24	97.10	100.59	-----	-----	Peak
2	5850.000	34.00	1.00	31.23	56.86	60.63	122.20	61.57	Peak
3	5855.000	33.99	1.00	31.23	57.84	61.60	110.80	49.20	Peak
4	5880.000	33.94	1.00	31.22	57.39	61.11	101.50	40.39	Peak
5	5925.000	34.05	1.00	31.22	57.28	61.11	68.20	7.09	Peak
6	6928.130	34.96	1.09	32.22	60.07	63.90	68.20	4.30	Peak
7	7250.000	36.00	1.12	32.25	52.16	57.03	68.20	11.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

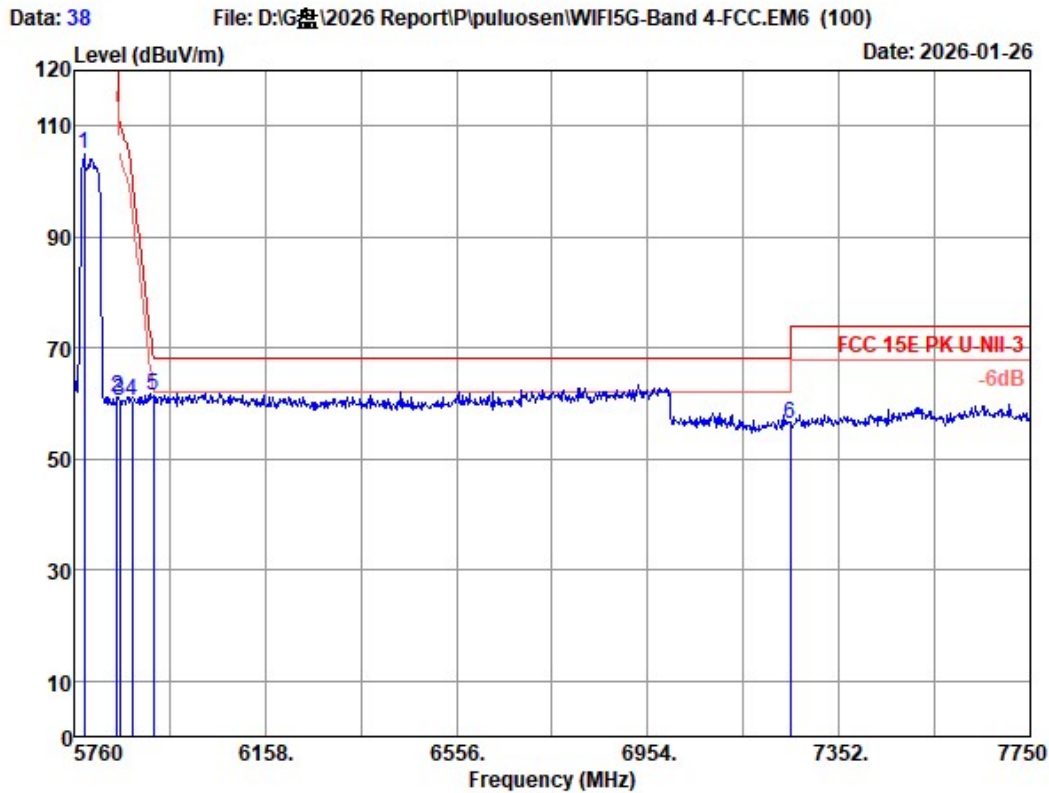

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5781.890	33.73	1.00	31.24	101.62	105.11	-----	-----	Peak
2	5850.000	34.00	1.00	31.23	57.30	61.07	122.20	61.13	Peak
3	5855.000	33.99	1.00	31.23	56.75	60.51	110.80	50.29	Peak
4	5880.000	33.94	1.00	31.22	56.78	60.50	101.50	41.00	Peak
5	5925.000	34.05	1.00	31.22	57.70	61.53	68.20	6.67	Peak
6	7250.000	36.00	1.12	32.25	51.41	56.28	68.20	11.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

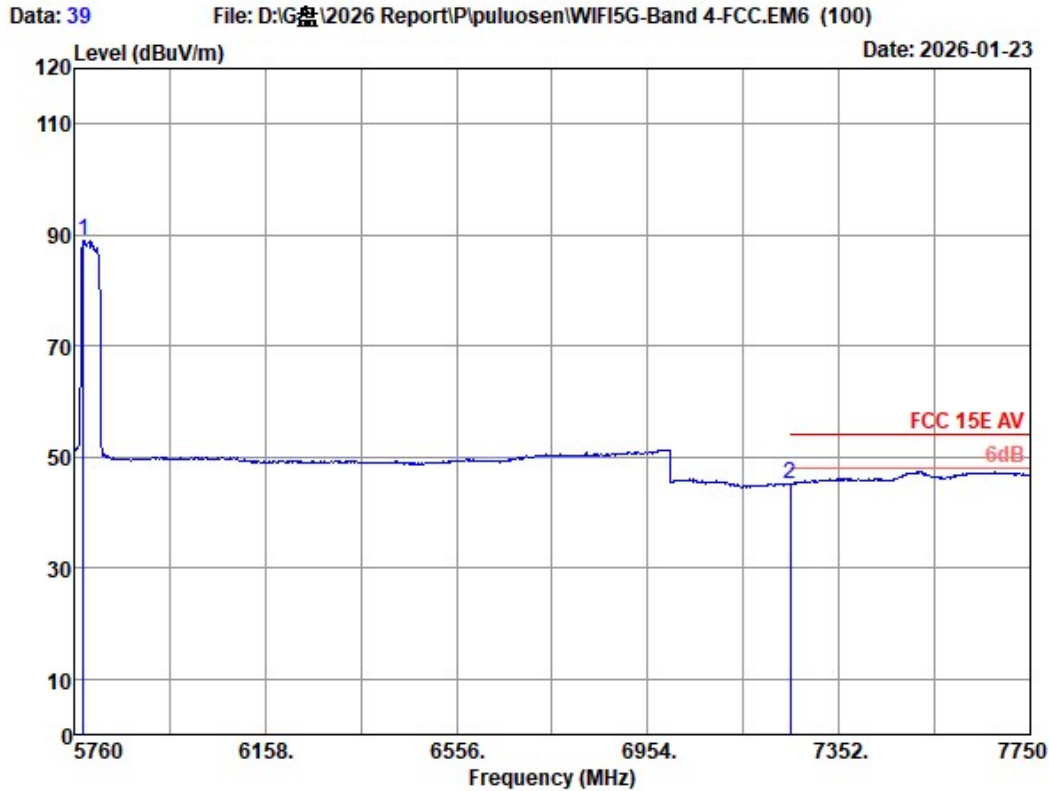

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5779.900	33.72	1.00	31.24	85.51	88.99	-----	-----	Average
2	7250.000	36.00	1.12	32.25	40.29	45.16	54.00	8.84	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official
 limit are not reported

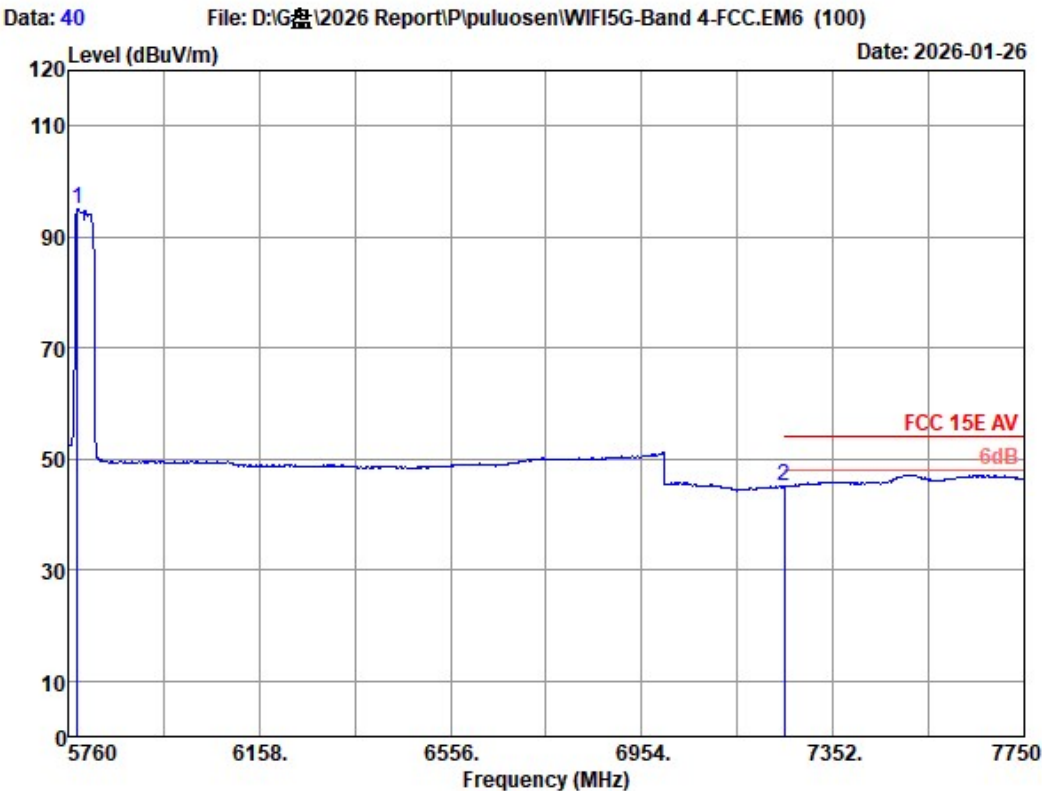

Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC 15E AV Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac40 5795MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5779.900	33.72	1.00	31.24	91.63	95.11	-----	-----	Average
2	7250.000	36.00	1.12	32.25	40.16	45.03	54.00	8.97	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported

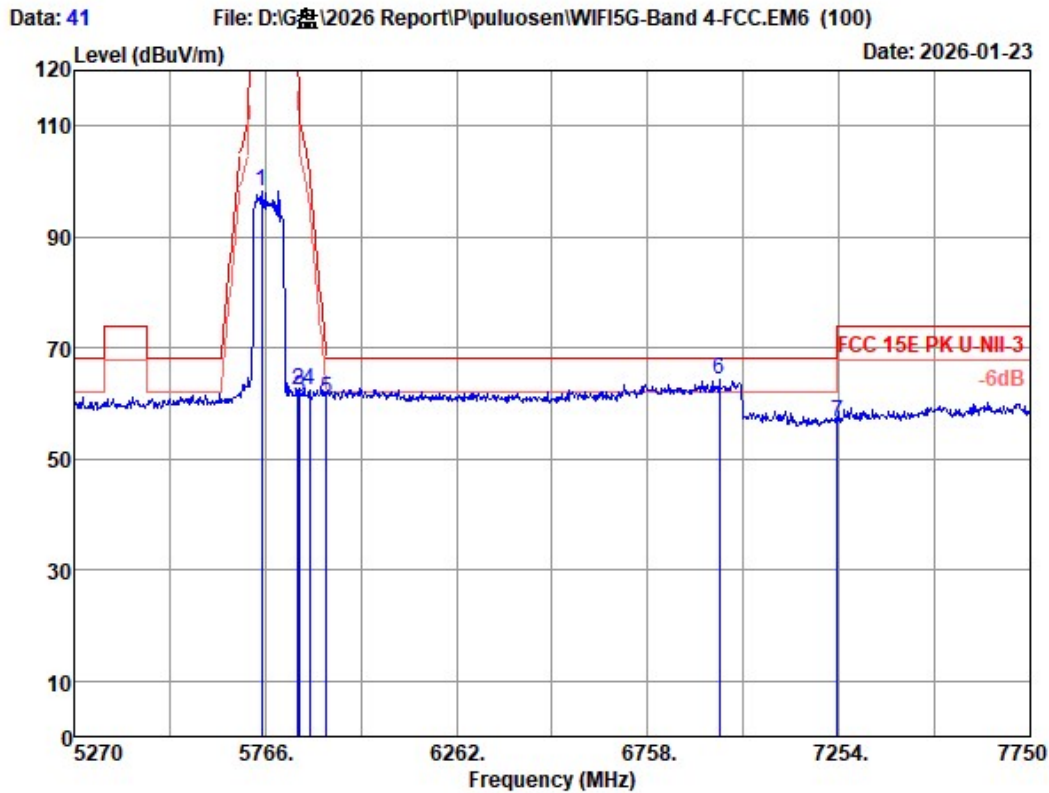

Site no. : 3m Chamber Data no. : 41
 Dis. / Ant. : 3m 2025-3115-4580 Ant. pol. : VERTICAL
 Limit : FCC 15E PK U-NII-3 Engineer : Epoch
 Env. / Ins. : 23.2°C/52.6%
 Test Mode : WIFI5G 11ac80 5775MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin Limits (dB)	Remark
1	5756.080	33.62	1.00	31.25	94.74	98.11	-----	-----	Peak
2	5850.000	34.00	1.00	31.23	58.57	62.34	122.20	59.86	Peak
3	5855.000	33.99	1.00	31.23	57.28	61.04	110.80	49.76	Peak
4	5880.000	33.94	1.00	31.22	58.58	62.30	101.50	39.20	Peak
5	5925.000	34.05	1.00	31.22	56.90	60.73	68.20	7.47	Peak
6	6944.000	34.99	1.09	32.24	60.33	64.17	68.20	4.03	Peak
7	7250.000	36.00	1.12	32.25	51.86	56.73	68.20	11.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 -Amp factor(peak)
 2. The emission levels that are 20dB below the official limit are not reported