



RF TEST REPORT

Product Name: UNMANNED SURFACE VEHICLE

Model Number: Tboat20, Tboat10

FCC ID: 2BCUE-TBOAT20

Issued For : Guangzhou Toksurvey Information Technology Co., Ltd
No.9 Caipin Road, Building B, Room 801-6, Huangpu District,
Guangzhou, China

Issued By : Shenzhen LGT Test Service Co., Ltd.
Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT26C208RF09

Sample Received Date: Mar. 26, 2026

Date of Test: Mar. 26, 2026 ~ Aug. 04, 2026

Date of Issue: Aug. 04, 2026

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.

TEST REPORT CERTIFICATION

Applicant: Guangzhou Toksurvey Information Technology Co., Ltd
Address: No.9 Caipin Road, Building B, Room 801-6, Huangpu District, Guangzhou, China
Manufacturer: Guangzhou Toksurvey Information Technology Co., Ltd
Address: No.9 Caipin Road, Building B, Room 801-6, Huangpu District, Guangzhou, China
Product Name: UNMANNED SURFACE VEHICLE
Trademark: TOKNAV
Model Number: Tboat20, Tboat10
Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 22H and 24E, 27, 90 KDB 971168 D01 v03r01, ANSI C63.26(2015)	PASS

Prepared by:

chris chen

Chris Chen
Engineer

Approved by:

Vita Li

Vita Li
Technical Director



Table of Contents	Page
1. TEST LABORATORY & MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
3. CONDUCTED OUTPUT POWER	13
4. RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER	14
5. RADIATED SPURIOUS EMISSION	16
6. FREQUENCY STABILITY	19
APPENDIX I-TEST DATA	20
RADIATED SPURIOUS EMISSION	20
APPENDIX II-PHOTOS OF TEST SETUP	29

Revision History

Rev.	Issue Date	Revisions
00	Aug. 04, 2026	Initial Issue

1. TEST LABORATORY & MEASUREMENT UNCERTAINTY

1.1 TEST LABORATORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate:	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Occupied Channel Bandwidth	$\pm 0.46\%$
2	RF Output Power, Conducted	$\pm 0.71\text{dB}$
3	Power Spectral Density, Conducted	$\pm 1.57\text{dB}$
4	Unwanted Emission, Conducted	$\pm 0.63\text{dB}$
5	Conducted emission	$\pm 2.80\text{dB}$
6	All Emissions, Radiated (0.009-30MHz)	$\pm 2.16\text{dB}$
7	All Emissions, Radiated (30MHz-1GHz)	$\pm 4.61\text{dB}$
8	All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49\text{dB}$
9	Temperature	$\pm 0.5^{\circ}\text{C}$
10	Humidity	$\pm 2\%$
11	Duty Cycle	$\pm 2.3\%$

Note: The measurement uncertainty is not included in the test result.

2. GENERAL INFORMATION

2.1 TECHNICAL SPECIFICATIONS AND REGULATIONS

2.1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Name:	UNMANNED SURFACE VEHICLE
Test Model Number:	Tboat20
Series Number:	Tboat10
Model Difference:	1. Dimensional differences (Tboat10 model: 980*520*254mm, Tboat20 model: 1280*580*430mm) 2. Number of network ports: (Tboat10 model comes standard with a single network port, Tboat20 model comes standard with dual network ports)
Frequency Bands:	Band 2/4/5/7/12/13/25/26/38/41
SIM Card:	Only supports one SIM card
Antenna Type:	Dipole Antenna
Antenna gain:	Band 2: 5.5dBi, Band 4: 5.5dBi, Band 5: 3.5dBi, Band 7: 4.6dBi, Band 12: 3.5dBi, Band 13: 3.5dBi, Band 25: 5.5dBi, Band 26: 3.5dBi, Band 38: 4.6dBi, Band 41: 4.6dBi
Adapter:	Input: AC 100-240V 50/60Hz 5A Output: DC 33.6V 12.5A
Battery:	Capacity: 25mAh Rated Voltage: 29.6V
Extreme Vol. Limits:	26.64V to 33.6V (Nominal 29.6V)
Extreme Temp. Tolerance:	0°C to +55°C
Hardware version:	N/A
Software version:	N/A

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.

2.1.2 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Product Specification Subjective To This Standard	
Tx Frequency	LTE Band 2:1850~1910MHz LTE Band 4:1710~1755MHz LTE Band 5: 824~849MHz LTE Band 7:2500~2570MHz LTE Band 12: 699-716MHz LTE Band 13: 777-787MHz LTE Band 25: 1850-1915MHz LTE Band 26: 814-824MHz/824-849MHz LTE Band 38: 2570-2620MHz LTE Band 41: 2496-2690MHz
Rx Frequency	LTE Band 2: 1930-1990MHz LTE Band 4: 2110-2155MHz LTE Band 5: 869-894MHz LTE Band 7: 2620-2690MHz LTE Band 12: 729-746MHz LTE Band 13: 746-756MHz LTE Band 25: 1930-1995MHz LTE Band 26: 859-869MHz/869-894MHz LTE Band 38: 2570-2620MHz LTE Band 41: 2496-2690MHz
Bandwidth	LTE Band 2: 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4: 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz /20MHz LTE Band 5: 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7: 5MHz / 10MHz / 15MHz /20MHz LTE Band 12: 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 13: 5MHz / 10MHz LTE Band 25: 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz /20MHz LTE Band 26: 1.4MHz / 3MHz / 5MHz / 10MHz/15MHz LTE Band 38: 5MHz / 10MHz / 15MHz /20MHz LTE Band 41: 5MHz / 10MHz / 15MHz /20MHz
Type of Modulation	QPSK/16QAM

2.1.3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 v03r01 and ANSI C63.26 2015 Power Meas. License Digital Systems with maximum output power. Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Remark:

1. The mark 'v' means that this configuration is chosen for testing
2. The mark '-' means that this bandwidth is not supported.
3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated.

ITEMS	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
E.R.P.& E.I.R.P.	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v			v	v	v	v	v	v	v	v
	7			v	v	v	v	v	v	v	v	v	v	v	v
	12	v	v	v	v			v	v	v	v	v	v	v	v
	13			v	v			v	v	v	v	v	v	v	v
	25	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	26	v	v	v	v	v		v	v	v	v	v	v	v	v
	38			v	v	v	v	v	v	v	v	v	v	v	v
	41			v	v	v	v	v	v	v	v	v	v	v	v
Peak&Avera Ratio	2	v	v	v	v	v	v	v	v	v			v	v	v
	4	v	v	v	v	v	v	v	v	v			v	v	v
	5	v	v	v	v			v	v	v			v	v	v
	7			v	v	v	v	v	v	v			v	v	v
	12	v	v	v	v			v	v	v			v	v	v
	13			v	v			v	v	v			v	v	v
	25	v	v	v	v	v	v	v	v	v			v	v	v
	26	v	v	v	v	v		v	v	v			v	v	v
	38			v	v	v	v	v	v	v			v	v	v
	41			v	v	v	v	v	v	v			v	v	v
26dB&99% Bandwidth	2	v	v	v	v	v	v	v	v			v	v	v	v
	4	v	v	v	v	v	v	v	v			v	v	v	v
	5	v	v	v	v			v	v			v	v	v	v
	7			v	v	v	v	v	v			v	v	v	v
	12	v	v	v	v			v	v			v	v	v	v
	13			v	v			v	v			v	v	v	v
	25	v	v	v	v	v	v	v	v			v	v	v	v
	26	v	v	v	v	v		v	v			v	v	v	v
	38			v	v	v	v	v	v			v	v	v	v
	41			v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v		v	v	v	v
	4	v	v	v	v	v	v	v	v	v		v	v	v	v
	5	v	v	v	v			v	v	v		v	v	v	v

	7			v	v	v	v	v	v	v		v	v	v	v
	12	v	v	v	v			v	v	v		v	v	v	v
	13			v	v			v	v	v		v	v	v	v
	25	v	v	v	v	v	v	v	v	v		v	v	v	v
	26	v	v	v	v	v		v	v	v		v	v	v	v
	38			v	v	v	v	v	v	v		v	v	v	v
	41			v	v	v	v	v	v	v		v	v	v	v
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v			v	v	v	v
	4	v	v	v	v	v	v	v	v			v	v	v	v
	5	v	v	v	v			v	v			v	v	v	v
	7			v	v	v	v	v	v			v	v	v	v
	12	v	v	v	v			v	v			v	v	v	v
	13			v	v			v	v			v	v	v	v
	25	v	v	v	v	v	v	v	v			v	v	v	v
	26	v	v	v	v	v		v	v			v	v	v	v
	38			v	v	v	v	v	v			v	v	v	v
	41			v	v	v	v	v	v			v	v	v	v
Frequency Stability	2						v	v	v			v		v	
	4						v	v	v			v		v	
	5				v			v	v			v		v	
	7						v	v	v			v		v	
	12				v			v	v			v		v	
	13				v			v	v			v		v	
	25						v	v	v			v		v	
	26				v	v		v	v			v		v	
	38						v	v	v			v		v	
	41						v	v	v			v		v	
Radiated Spurious Emission	2						v	v		v			v	v	v
	4						v	v		v			v	v	v
	5				v			v		v			v	v	v
	7						v	v		v			v	v	v
	12				v			v		v			v	v	v
	13				v			v		v			v	v	v
	25						v	v		v			v	v	v
	26				v	v		v		v			v	v	v
	38						v	v		v			v	v	v
	41						v	v		v			v	v	v

2.1.4 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for filing to comply with the 47 CFR Part 2, 22H, 24(E), 27.

2.1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with eut intended for fcc grant together.

2.1.6 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.1.7 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.1.8 CONFIGURATION OF EUT SYSTEM

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.




Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	Length	Note
N/A				N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.

2.1.9 MEASUREMENT INSTRUMENTS

The radiated emission testing was performed according to the procedures of ANSI C63.26 2015 and FCC CFR 47 rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2026-03-02	2027-03-01
Spectrum Analyzer	Keysight	N9010B	MY60242508	2026-03-03	2027-03-02
Active loop Antenna	ETS	6502	00049544	2025-03-11	2028-03-10
Trilog Broadband Antenna (30M-1G)	SCHWARZBECK	VULB 9168	2705	2024-05-17	2027-05-16
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2025-03-10	2028-03-09
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2026-03-02	2027-03-01
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2026-03-02	2027-03-01
Wireless Communications Test Set	R&S	CMW 500	137737	2026-03-03	2027-03-02
Antenna Tower	SAEMC	BK-4AT-BS-D	SK2021093008	N.A	N.A
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2026-03-05	2027-03-04
Testing Software	EMC-I_V1.4.0.3_SKET				

Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2026-03-03	2027-03-02
Signal Analyzer	Keysight	N9020A	MY52510057	2026-03-02	2027-03-01
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2026-03-03	2027-03-02
Wireless Communications Test Set	R&S	CMW 500	137737	2026-03-03	2027-03-02
Temperature & Humidity test chamber	AISRY	LX-1000L	171200018	2025-07-30 2026-07-29	2026-07-29 2027-07-28
Attenuator	eastsheep	90db	N.A	2026-03-02	2027-03-01
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2026-03-05	2027-03-04
Digital multimeter	FLUKE	F101	N.A	2026-03-03	2027-03-02
DC source	Keysight	E3634A	MY58036468	2026-03-05	2027-03-04
Testing Software	MTS8200_V2.0.0.0_MW				

3. CONDUCTED OUTPUT POWER


3.1 DESCRIPTION OF THE CONDUCTED OUTPUT POWER MEASUREMENT

3.1.1 MEASUREMENT METHOD

A system simulator was used to establish communication with the eut. Its parameters were set to force the eut transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

Configuration follows KDB 971168 D01 v03r01.

3.1.2 TEST SETUP



3.1.3 TEST PROCEDURES

1. The transmitter output port was connected to system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest/middle/highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.1.4 TEST RESULTS

Note: The test data please reference to attachment "LGT26C208RF09 Appendix LTE".

4. RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER

4.1 DESCRIPTION OF THE ERP/EIRP MEASUREMENT


4.1.1 MEASUREMENT METHOD

Effective radiated power output measurements by substitution method according to ANSI C63.26 2015, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems. Mobile and portable (hand-held) stations operating are limited to average ERP, Equivalent isotropic radiated power output measurements by substitution method according to ANSI C63.26 2015, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas, Mobile and portable (hand-held) stations operating are limited to average EIRP.


4.1.2 TEST SETUP

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = R_x \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + \text{Gain (dBi)} - 107 \text{ (dBuV to dBm)}$ The SA is calibrated using following setup.

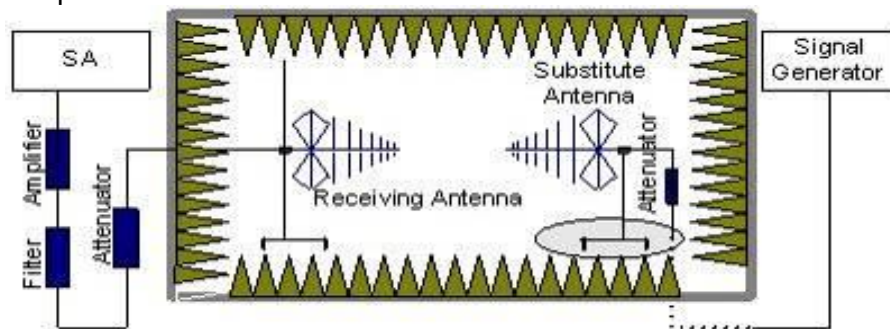

b) EUT was placed on a 1.5m non-conductive stand at a 3 m test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 m from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic measured with peak detector and 1MHz bandwidth.

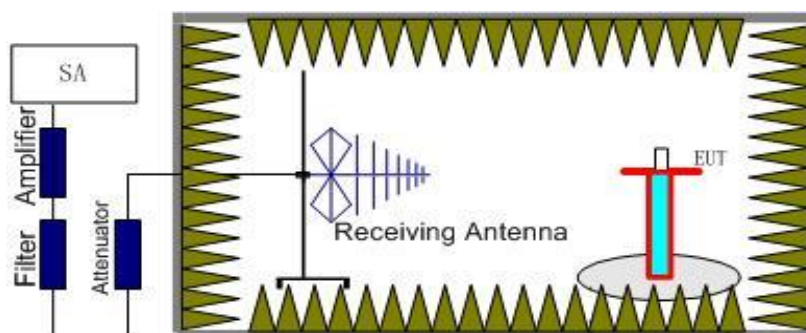

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below:

$\text{Power} = \text{PMea} + \text{ARpl}$

4.1.3 TEST PROCEDURES

1. The testing follows FCC KDB 971168 D01v03r01 Section 5.6 and ANSI C63.26 2015 Section 5.2.
2. The EUT was placed on a non-conductive rotating platform 1.5 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with Peak detector.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 m in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to ANSI C63.26 2015. The EUT was replaced by dipole antenna (substitution antenna) at same location and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. $EIRP = S.G \text{ Level} + \text{Gain} - \text{Cable loss}$; $ERP = S.G \text{ Level} + \text{Gain} - \text{Cable loss} - 2.15$.
5. RB Set greater than bandwidth, VB Set spectrum analyzer Maximum support.

4.1.4 TEST RESULTS

Note: Test is divided into three directions, X/Y/Z. X pattern for the worst.

Note: The test data please reference to attachment "LGT26C208RF09 Appendix LTE".

5. RADIATED SPURIOUS EMISSION

5.1 DESCRIPTION OF RADIATED SPURIOUS EMISSION

5.1.1 MEASUREMENT METHOD

The radiated spurious emission was measured by substitution method according to ANSI C63.26 2015. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7 The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

5.1.2 TEST SETUP


The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = Rx(\text{dBuV}) + CL(\text{dB}) + SA(\text{dB}) + \text{Gain}(\text{dBi}) - 107(\text{dBuV to dBm})$ The SA is calibrated using following setup.


b) EUT was placed on 1.5 m non-conductive stand at a 3 m test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 m from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic measured with peak detector and 1MHz bandwidth.

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.


The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: $\text{Power} = P_{\text{Mea}} + \text{ARpl}$
For radiated test from 9KHz to 30MHz

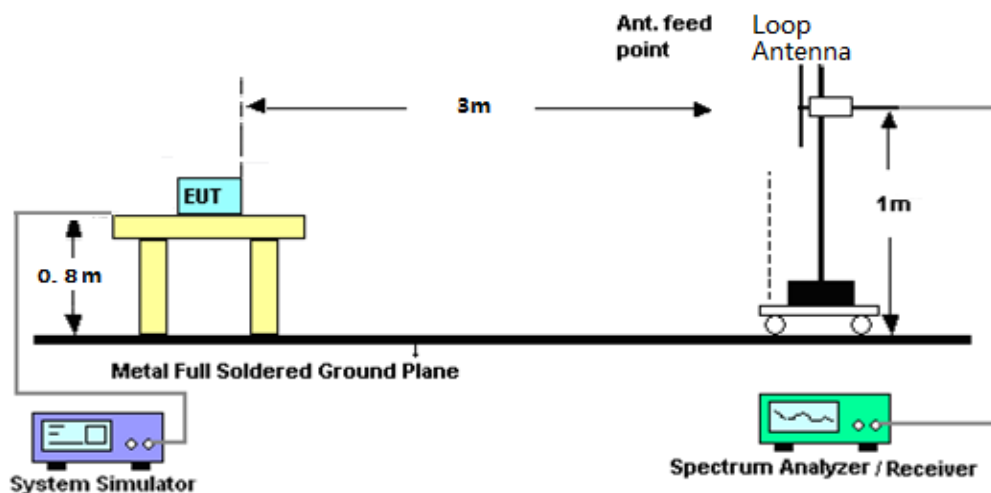

For radiated test from 30MHz to 1GHz

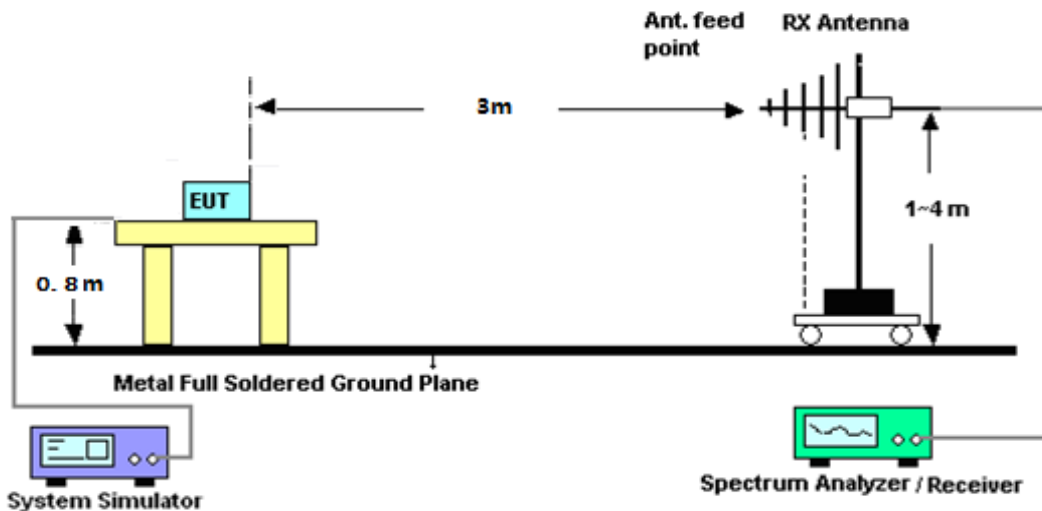

For radiated test from above 1GHz

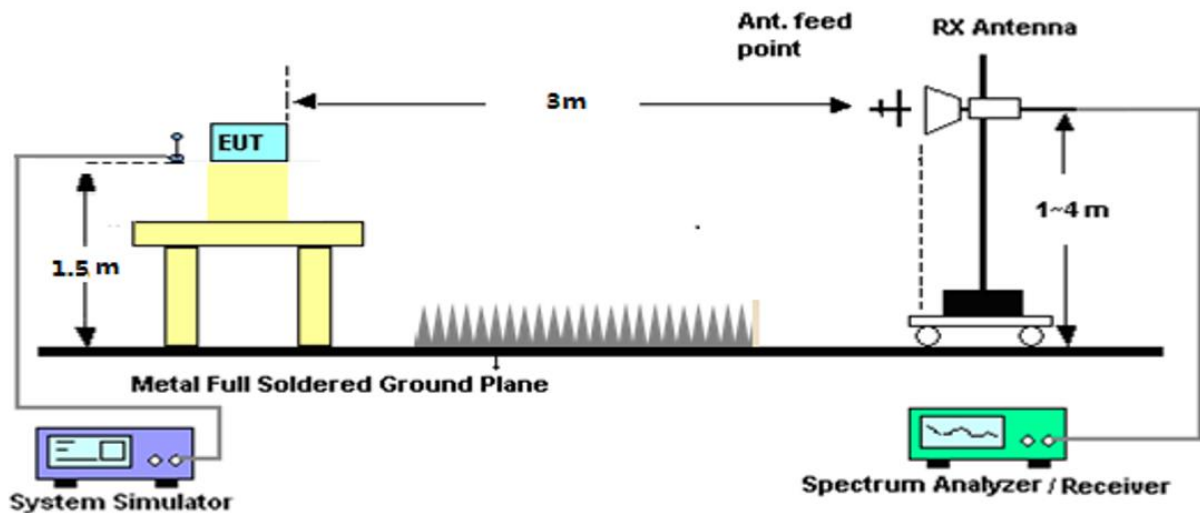

5.1.3 TEST PROCEDURES

1. The testing FCC KDB 971168 D01 Section 7 and ANSI C63.26 2015 Section 5.5.
2. The EUT was placed on a rotatable wooden table with 1.5 meter above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency

band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P (Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}$$

.

For Band 7:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P (Watts)

$$= [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)}$$

$$= -25\text{dBm}$$

$$P_{\text{Mea}} = \text{S.G Level} + \text{Ant-Cable loss}; \text{Margin} = P_{\text{Mea}} - \text{Limit}.$$

5.1.4 TEST RESULTS

Note: Test chart See Appendix I.


6. FREQUENCY STABILITY

6.1 DESCRIPTION OF FREQUENCY STABILITY MEASUREMENT

6.1.1 MEASUREMENT METHOD

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

6.1.2 TEST SETUP

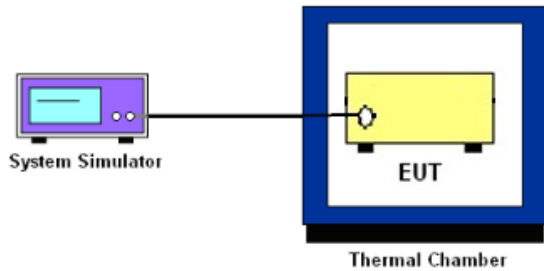

6.1.3 TEST PROCEDURES FOR TEMPERATURE VARIATION

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

6.1.4 TEST PROCEDURES FOR VOLTAGE VARIATION

1. The testing follows FCC KDB 971168 D01v01r03 Section 9.
2. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

6.1.5 TEST RESULTS

Note: The test data please reference to attachment "LGT26C208RF09 Appendix LTE".

APPENDIX I-TEST DATA

RADIATED SPURIOUS EMISSION

Note:

(1) The test frequency range is from 9KHz to 10th. Spurious emissions which are attenuated by more than 20dB below the permissible value for frequency below 1000MHz. Therefore, the data was not included in the report.

(2) Test is divided into three directions, X/Y/Z. X pattern for the worst.

(3) All mode has been tested, only shown the worst data in this report.

LTE Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3720.05	-32.06	7.00	12.93	-37.99	-13.00	-24.99	H
5580.54	-26.73	8.40	17.11	-35.44	-13.00	-22.44	H
7439.80	-20.23	8.10	22.20	-34.33	-13.00	-21.33	H
3720.05	-31.44	7.00	12.93	-37.37	-13.00	-24.37	V
5580.54	-26.58	8.40	17.11	-35.29	-13.00	-22.29	V
7439.80	-20.25	8.10	22.20	-34.35	-13.00	-21.35	V
LTE Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.19	-31.44	7.00	12.93	-37.37	-13.00	-24.37	H
5640.28	-26.08	8.40	17.11	-34.79	-13.00	-21.79	H
7520.16	-21.43	8.10	22.20	-35.53	-13.00	-22.53	H
3760.19	-31.75	7.00	12.93	-37.68	-13.00	-24.68	V
5640.28	-26.19	8.40	17.11	-34.90	-13.00	-21.90	V
7520.16	-20.22	8.10	22.20	-34.32	-13.00	-21.32	V
LTE Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3800.19	-31.43	7.00	12.93	-37.36	-13.00	-24.36	H
5699.92	-26.34	8.40	17.11	-35.05	-13.00	-22.05	H
7599.93	-20.87	8.10	22.20	-34.97	-13.00	-21.97	H
3800.19	-31.32	7.00	12.93	-37.25	-13.00	-24.25	V
5699.92	-26.49	8.40	17.11	-35.20	-13.00	-22.20	V
7599.93	-20.20	8.10	22.20	-34.30	-13.00	-21.30	V

LTE Band 4 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3440.23	-31.75	7.20	12.56	-37.11	-13.00	-24.11	H
5160.23	-27.44	8.10	16.32	-35.66	-13.00	-22.66	H
6880.48	-21.48	8.30	21.13	-34.31	-13.00	-21.31	H
3440.23	-32.14	7.20	12.56	-37.50	-13.00	-24.50	V
5160.23	-26.24	8.10	16.32	-34.46	-13.00	-21.46	V
6880.48	-20.10	8.30	21.13	-32.93	-13.00	-19.93	V
LTE Band 4 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3464.77	-32.09	7.20	12.56	-37.45	-13.00	-24.45	H
5196.78	-26.12	8.10	16.32	-34.34	-13.00	-21.34	H
6929.60	-20.49	8.30	21.13	-33.32	-13.00	-20.32	H
3464.77	-32.44	7.20	12.56	-37.80	-13.00	-24.80	V
5196.78	-27.09	8.10	16.32	-35.31	-13.00	-22.31	V
6929.60	-20.78	8.30	21.13	-33.61	-13.00	-20.61	V
LTE Band 4 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3490.37	-31.10	7.20	12.56	-36.46	-13.00	-23.46	H
5235.06	-26.45	8.10	16.32	-34.67	-13.00	-21.67	H
6979.41	-21.06	8.30	21.13	-33.89	-13.00	-20.89	H
3490.37	-32.32	7.20	12.56	-37.68	-13.00	-24.68	V
5235.06	-26.42	8.10	16.32	-34.64	-13.00	-21.64	V
6979.41	-21.36	8.30	21.13	-34.19	-13.00	-21.19	V

LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1657.50	-33.31	7.40	9.72	-35.63	-13.00	-22.63	H
2486.16	-32.16	8.30	10.86	-34.72	-13.00	-21.72	H
3315.48	-29.78	7.20	11.57	-34.15	-13.00	-21.15	H
1657.50	-34.46	7.40	9.72	-36.78	-13.00	-23.78	V
2486.16	-33.12	8.30	10.86	-35.68	-13.00	-22.68	V
3315.48	-30.38	7.20	11.57	-34.75	-13.00	-21.75	V
LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1672.19	-33.03	7.40	9.72	-35.35	-13.00	-22.35	H
2509.00	-33.37	8.30	10.86	-35.93	-13.00	-22.93	H
3345.28	-29.50	7.20	11.57	-33.87	-13.00	-20.87	H
1672.19	-33.63	7.40	9.72	-35.95	-13.00	-22.95	V
2509.00	-32.32	8.30	10.86	-34.88	-13.00	-21.88	V
3345.28	-30.35	7.20	11.57	-34.72	-13.00	-21.72	V
LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1687.60	-34.36	7.40	9.72	-36.68	-13.00	-23.68	H
2531.22	-33.23	8.30	10.86	-35.79	-13.00	-22.79	H
3375.60	-30.45	7.20	11.57	-34.82	-13.00	-21.82	H
1687.60	-33.96	7.40	9.72	-36.28	-13.00	-23.28	V
2531.22	-33.08	8.30	10.86	-35.64	-13.00	-22.64	V
3375.60	-30.48	7.20	11.57	-34.85	-13.00	-21.85	V

LTE Band 7 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
5020.98	-41.30	8.00	15.86	-49.16	-25.00	-24.16	H
7531.27	-36.02	8.30	19.28	-47.00	-25.00	-22.00	H
10258.81	-31.16	8.10	23.19	-46.25	-25.00	-21.25	H
5020.98	-41.05	8.00	15.86	-48.91	-25.00	-23.91	V
7531.27	-36.94	8.30	19.28	-47.92	-25.00	-22.92	V
10258.81	-32.21	8.10	23.19	-47.30	-25.00	-22.30	V
LTE Band 7 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
5069.74	-40.73	8.00	15.86	-48.59	-25.00	-23.59	H
7604.77	-36.03	8.30	19.28	-47.01	-25.00	-22.01	H
10139.67	-31.39	8.10	23.19	-46.48	-25.00	-21.48	H
5069.74	-40.71	8.00	15.86	-48.57	-25.00	-23.57	V
7604.77	-36.19	8.30	19.28	-47.17	-25.00	-22.17	V
10139.67	-31.19	8.10	23.19	-46.28	-25.00	-21.28	V
LTE Band 7 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
5118.82	-40.91	8.00	15.86	-48.77	-25.00	-23.77	H
7678.41	-37.21	8.30	19.28	-48.19	-25.00	-23.19	H
10237.86	-31.60	8.10	23.19	-46.69	-25.00	-21.69	H
5118.82	-40.02	8.00	15.86	-47.88	-25.00	-22.88	V
7678.41	-36.99	8.30	19.28	-47.97	-25.00	-22.97	V
10237.86	-31.19	8.10	23.19	-46.28	-25.00	-21.28	V

LTE Band 12 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1407.96	-34.29	6.70	9.34	-36.93	-13.00	-23.93	H
2111.53	-33.13	7.80	10.42	-35.75	-13.00	-22.75	H
2815.73	-31.60	8.00	11.12	-34.72	-13.00	-21.72	H
1407.96	-33.52	6.70	9.34	-36.16	-13.00	-23.16	V
2111.53	-33.33	7.80	10.42	-35.95	-13.00	-22.95	V
2815.73	-32.25	8.00	11.12	-35.37	-13.00	-22.37	V
LTE Band 12 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1414.69	-33.89	6.70	9.34	-36.53	-13.00	-23.53	H
2122.27	-32.08	7.80	10.42	-34.70	-13.00	-21.70	H
2829.62	-31.97	8.00	11.12	-35.09	-13.00	-22.09	H
1414.69	-33.47	6.70	9.34	-36.11	-13.00	-23.11	V
2122.27	-33.00	7.80	10.42	-35.62	-13.00	-22.62	V
2829.62	-31.39	8.00	11.12	-34.51	-13.00	-21.51	V
LTE Band 12 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1421.96	-34.23	6.70	9.34	-36.87	-13.00	-23.87	H
2132.69	-32.71	7.80	10.42	-35.33	-13.00	-22.33	H
2843.97	-32.06	8.00	11.12	-35.18	-13.00	-22.18	H
1421.96	-33.91	6.70	9.34	-36.55	-13.00	-23.55	V
2132.69	-32.47	7.80	10.42	-35.09	-13.00	-22.09	V
2843.97	-31.40	8.00	11.12	-34.52	-13.00	-21.52	V

LTE Band 13 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1563.83	-59.79	7.40	9.72	-62.11	-40.00	-22.11	H
2346.13	-52.99	8.30	10.86	-55.55	-13.00	-42.55	H
3128.01	-47.51	7.70	11.57	-51.38	-13.00	-38.38	H
1563.83	-60.19	7.40	9.72	-62.51	-40.00	-22.51	V
2346.13	-52.12	8.30	10.86	-54.68	-13.00	-41.68	V
3128.01	-47.13	7.70	11.57	-51.00	-13.00	-38.00	V

LTE Band 25 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3720.09	-30.04	7.00	12.93	-35.97	-13.00	-22.97	H
5580.54	-27.21	8.40	17.11	-35.92	-13.00	-22.92	H
7439.93	-21.14	8.10	22.20	-35.24	-13.00	-22.24	H
3720.09	-29.89	7.00	12.93	-35.82	-13.00	-22.82	V
5580.54	-27.15	8.40	17.11	-35.86	-13.00	-22.86	V
7439.93	-20.57	8.10	22.20	-34.67	-13.00	-21.67	V
LTE Band 25 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.24	-30.17	7.00	12.93	-36.10	-13.00	-23.10	H
5639.81	-27.15	8.40	17.11	-35.86	-13.00	-22.86	H
7519.95	-21.38	8.10	22.20	-35.48	-13.00	-22.48	H
3760.24	-29.34	7.00	12.93	-35.27	-13.00	-22.27	V
5639.81	-27.22	8.40	17.11	-35.93	-13.00	-22.93	V
7519.95	-20.20	8.10	22.20	-34.30	-13.00	-21.30	V
LTE Band 25 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3800.01	-30.03	7.00	12.93	-35.96	-13.00	-22.96	H
5699.90	-26.27	8.40	17.11	-34.98	-13.00	-21.98	H
7600.09	-21.45	8.10	22.20	-35.55	-13.00	-22.55	H
3800.01	-30.01	7.00	12.93	-35.94	-13.00	-22.94	V
5699.90	-26.39	8.40	17.11	-35.10	-13.00	-22.10	V
7600.09	-20.93	8.10	22.20	-35.03	-13.00	-22.03	V

LTE Band 26(824-849MHz) / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1663.39	-33.48	7.40	9.72	-35.80	-13.00	-22.80	H
2494.38	-32.29	8.30	10.86	-34.85	-13.00	-21.85	H
3325.82	-31.57	7.20	11.57	-35.94	-13.00	-22.94	H
1663.39	-33.43	7.40	9.72	-35.75	-13.00	-22.75	V
2494.38	-33.25	8.30	10.86	-35.81	-13.00	-22.81	V
3325.82	-31.45	7.20	11.57	-35.82	-13.00	-22.82	V
LTE Band 26(824-849MHz) / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1673.03	-34.44	7.40	9.72	-36.76	-13.00	-23.76	H
2509.03	-32.08	8.30	10.86	-34.64	-13.00	-21.64	H
3345.98	-31.49	7.20	11.57	-35.86	-13.00	-22.86	H
1673.03	-33.11	7.40	9.72	-35.43	-13.00	-22.43	V
2509.03	-32.23	8.30	10.86	-34.79	-13.00	-21.79	V
3345.98	-31.83	7.20	11.57	-36.20	-13.00	-23.20	V
LTE Band 26(824-849MHz) / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1683.50	-33.44	7.40	9.72	-35.76	-13.00	-22.76	H
2524.45	-32.26	8.30	10.86	-34.82	-13.00	-21.82	H
3366.59	-32.10	7.20	11.57	-36.47	-13.00	-23.47	H
1683.50	-34.39	7.40	9.72	-36.71	-13.00	-23.71	V
2524.45	-33.35	8.30	10.86	-35.91	-13.00	-22.91	V
3366.59	-31.82	7.20	11.57	-36.19	-13.00	-23.19	V

LTE Band 26(814-824MHz)/ 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1672.86	-33.45	7.40	9.72	-35.77	-13.00	-22.77	H
2508.91	-32.90	8.30	10.86	-35.46	-13.00	-22.46	H
3345.89	-31.21	7.20	11.57	-35.58	-13.00	-22.58	H
1672.86	-34.30	7.40	9.72	-36.62	-13.00	-23.62	V
2508.91	-32.53	8.30	10.86	-35.09	-13.00	-22.09	V
3345.89	-32.49	7.20	11.57	-36.86	-13.00	-23.86	V

LTE Band 38 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
5130.33	-40.38	8.10	15.86	-48.14	-25.00	-23.14	H
7694.94	-37.01	9.00	19.28	-47.29	-25.00	-22.29	H
10259.91	-33.37	8.70	23.19	-47.86	-25.00	-22.86	H
5130.33	-40.68	8.10	15.86	-48.44	-25.00	-23.44	V
7694.94	-37.05	9.00	19.28	-47.33	-25.00	-22.33	V
10259.91	-33.39	8.70	23.19	-47.88	-25.00	-22.88	V
LTE Band 38 /20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
5210.21	-40.88	8.10	15.86	-48.64	-25.00	-23.64	H
7815.32	-36.60	9.00	19.28	-46.88	-25.00	-21.88	H
10420.07	-32.65	8.70	23.19	-47.14	-25.00	-22.14	H
5210.21	-40.81	8.10	15.86	-48.57	-25.00	-23.57	V
7815.32	-37.23	9.00	19.28	-47.51	-25.00	-22.51	V
10420.07	-32.82	8.70	23.19	-47.31	-25.00	-22.31	V
LTE Band 38 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
5289.82	-40.92	8.10	15.86	-48.68	-25.00	-23.68	H
7935.05	-36.74	9.00	19.28	-47.02	-25.00	-22.02	H
10580.21	-32.88	8.70	23.19	-47.37	-25.00	-22.37	H
5289.82	-40.10	8.10	15.86	-47.86	-25.00	-22.86	V
7935.05	-36.78	9.00	19.28	-47.06	-25.00	-22.06	V
10580.21	-32.20	8.70	23.19	-46.69	-25.00	-21.69	V

LTE Band 41 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
5011.88	-40.60	7.90	15.86	-48.56	-25.00	-23.56	H
7517.85	-36.19	9.00	19.28	-46.47	-25.00	-21.47	H
10024.30	-32.26	8.70	23.19	-46.75	-25.00	-21.75	H
5011.88	-41.25	7.90	15.86	-49.21	-25.00	-24.21	V
7517.85	-36.35	9.00	19.28	-46.63	-25.00	-21.63	V
10024.30	-32.25	8.70	23.19	-46.74	-25.00	-21.74	V
LTE Band 41 /20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
5186.10	-40.15	7.90	15.86	-48.11	-25.00	-23.11	H
7778.90	-37.38	9.00	19.28	-47.66	-25.00	-22.66	H
10371.91	-32.70	8.70	23.19	-47.19	-25.00	-22.19	H
5186.10	-40.30	7.90	15.86	-48.26	-25.00	-23.26	V
7778.90	-36.47	9.00	19.28	-46.75	-25.00	-21.75	V
10371.91	-33.34	8.70	23.19	-47.83	-25.00	-22.83	V
LTE Band 41 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
5360.20	-41.03	7.90	15.86	-48.99	-25.00	-23.99	H
8040.14	-37.12	9.00	19.28	-47.40	-25.00	-22.40	H
10719.91	-32.82	8.70	23.19	-47.31	-25.00	-22.31	H
5360.20	-41.03	7.90	15.86	-48.99	-25.00	-23.99	V
8040.14	-36.59	9.00	19.28	-46.87	-25.00	-21.87	V
10719.91	-33.37	8.70	23.19	-47.86	-25.00	-22.86	V

APPENDIX II-PHOTOS OF TEST SETUP

Note: Please see the attached RF_Test Setup photos for FCC ID.

※※※※※END OF THE REPORT※※※※※