

RF Exposure Test Report

Report No.: **CTC2026277003**

FCC ID.....: **2BCVO-TP-C172**

Applicant.....: **GUANGDONG PISEN ELECTRONICS CO., LTD.**

Address.....: Building 5, 1st Floor, Building 1-5, Building 9, Qinfu 1st Street,
Liuyouan Community, Henggang Street, Longgang District,
Shenzhen

Manufacturer.....: **GUANGDONG PISEN ELECTRONICS CO., LTD.**

Address.....: Building 5, 1st Floor, Building 1-5, Building 9, Qinfu 1st Street,
Liuyouan Community, Henggang Street, Longgang District,
Shenzhen

Product Name.....: **Charger**

Trade Mark.....: /

Model/Type reference.....: TP-C172

Listed Model(s): /

Standard.....: **47 CFR FCC Part 1.1307**
47 CFR FCC Part 1.1310
KDB680106 D01

Test Report Form No......: CTC-TR-058_A5

Master TRF.....: Dated 2026-06-01

Date of receipt of test sample...: May 28, 2026

Date of testing.....: May 28, 2026 ~ Jun. 17, 2026

Date of issue.....: Jun. 26, 2026

Result.....: **PASS**

Compiled by:

(Printed name+signature)

Alicia Liu

Alicia Liu

Supervised by:

(Printed name+signature)

Eric Zhang

Eric Zhang

Approved by:

(Printed name+signature)

Totti Zhao

Totti Zhao

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

Table of Contents	Page
1. TEST SUMMARY	3
1.1. TEST STANDARDS	3
1.2. REPORT VERSION	3
1.3. TEST FACILITY	4
1.4. MEASUREMENT UNCERTAINTY	5
1.5. ENVIRONMENTAL CONDITIONS	5
2. GENERAL INFORMATION	6
2.1. CLIENT INFORMATION	6
2.2. GENERAL DESCRIPTION OF EUT	6
2.3. ACCESSORY EQUIPMENT INFORMATION	7
2.4. DESCRIPTION OF TEST MODES	7
2.5. MEASUREMENT INSTRUMENTS LIST	7
2.6. EQUIPMENT APPROVAL CONSIDERATIONS	8
2.7. RF EXPOSURE	9

1.TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[ANSI C95.1–1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

[FCC KDB publication 680106 D01 Wireless Power Transfer v04](#): RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications.

[FCC CFR 47 Part 1.1307](#): Actions that may have a significant environmental effect, for which Environmental Assessments (EAs) must be prepared.

[FCC CFR 47 Part 1.1310](#): Radiofrequency radiation exposure limits.

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2026277003	Jun. 26, 2026	Original

1.3. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: Room 107, 108, 207, 208 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

1.4. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test	Frequency Range	Uncertainty	Note
Electric Field Strength	100kHz ~ 30MHz	2.5dB	/
Magnetic Field Strength	100kHz ~ 30MHz	4.2dB	/

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.5. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	20~25 °C
Relative Humidity:	50~55 %RH
Atmospheric Pressure:	101 kPa

2. GENERAL INFORMATION

2.1. Client Information

Applicant:	GUANGDONG PISEN ELECTRONICS CO., LTD.
Address:	Building 5, 1st Floor, Building 1-5, Building 9, Qinfu 1st Street, Liuyouan Community, Henggang Street, Longgang District, Shenzhen
Manufacturer:	GUANGDONG PISEN ELECTRONICS CO., LTD.
Address:	Building 5, 1st Floor, Building 1-5, Building 9, Qinfu 1st Street, Liuyouan Community, Henggang Street, Longgang District, Shenzhen
Factory:	DongGuan OPAQI Electronic Technology Co., Ltd.
Address:	Room 401, 501, 601, 701, 801, 901, Building 1, No.1 Xinzhou East Street, Lincun Village, Tangxia Town, Dongguan, Guangdong, China

2.2. General Description of EUT

Product Name:	Charger
Trade Mark:	/
Model/Type reference:	TP-C172
Listed Model(s):	/
Model Differences:	/
Power supply:	Input:110-240V~ 50/60Hz, 1.5A Max
Sample ID:	CTC-GC260327-002-S020
Hardware version:	/
Software version:	/
Wireless Charger	
Operation Frequency:	325kHz
Modulation Type:	ASK
Antenna Type:	Induction Coil
Exposure category:	General population/uncontrolled environment
Device Type:	Fixed Device

2.3. Accessory Equipment information

Equipment Information			
Name	Model	S/N	Manufacturer
Apple Watch	Apple	MNJP3CH/A	K99KJF65YW
Cable Information			
Name	Shielded Type	Ferrite Core	Length
/	/	/	/

2.4. Description of Test Modes

As the function of the EUT, test mode selected to test as below to conform this standard.

Test mode	Description
1	Wireless charging (2.5W), Frequency: 325kHz

Pre-scan above all test mode, Found below test mode which it was worse case mode. So only show the test data for worse case mode (Test mode 8) on the test report.

2.5. Measurement Instruments List

Item	Equipment No.	Test Equipment	Manufacturer	Model	Serial No.	Calibrated date	Due date
1	HB-E077	Magnetic Amplitude and Gradient Probe System	Schmid & Partner Engineering AG	Schmid & Partner Engineering AG	3107	2026-05-11	2027-05-10
2	HB-E078	Magnetic Amplitude and Gradient Probe System	Schmid & Partner Engineering AG	MAGPy-DAS	3097	2026-05-11	2027-05-10

Note: The Cal. Interval was one year.

2.6. Equipment Approval Considerations

The EUT does comply with KDB 680106 D01 v04 as follows table;

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operates in the frequency: 325 kHz.
Output power from each primary coil is less than 15 watts	Yes	The maximum output power of the primary coil is less than 15W.
The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes	The transfer system includes single coil that is able to detect receiver device.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	No	This device is fixed
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes	See the test result in item 2.7

In all other cases, unless excluded above, an RF exposure evaluation report must be reviewed and accepted through a KDB or PBA inquiry to enable authorization of the equipment. When evaluation is required to show compliance; for example, using field strength, power density, SAR measurements or computational modeling etc., the specific authorization requirements will be determined based on the results of the RF exposure evaluation.

2.7. RF Exposure

LIMIT

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation.

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.1-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500	/	/	f/300	6
1,500-100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.1-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30

F=frequency in MHz


*=Plane-wave equivalent power density

According to FCC KDB 680106 D01 Section 3. RF Exposure Requirements clause 3 the Emission-Limits in the frequency range from 100 KHz to 300 KHz should be assessed versus the limits at 300 KHz in Table 1 of CFR 47 – Section 1.310 as following (measured distance shall be 15cm from the center of the probe to the edge of the device):

	E-filed	H-filed	B-filed
Frequency	V/m	A/m	uT
0.1 MHz – 1.34 MHz	614	1.63	2.0
1.34 MHz – 30 MHz	824/f(=27.5 _{30MHz})	2.19/f(=0.073 _{30MHz})	--

A KDB inquire was required to determine/confirm the applicable limits below 100 KHz.

TEST CONFIGURATION

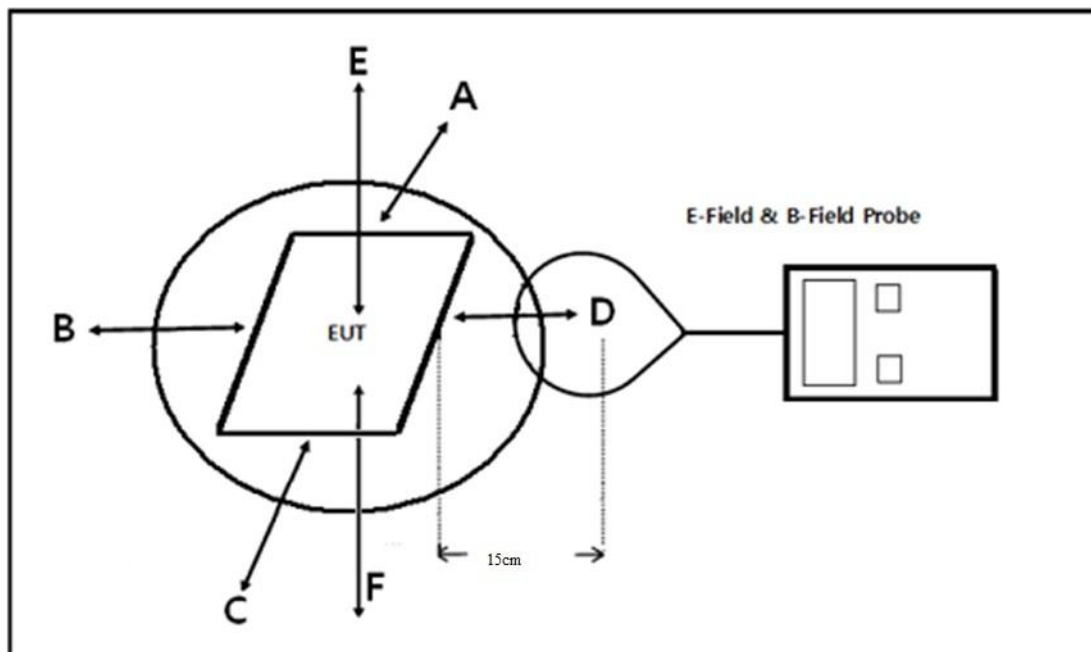

TEST PROCEDURE

- A. The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- B. The measurement probe was placed at test distance (20cm) which is between the edge of the charger and the geometric center of probe.
- C. The turn table was rotated 360 degree to search of highest strength.
- D. The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- E. The EUT were measured according to the dictates of KDB 680106D01v04.

TEST MODE

Please refer to the clause 2.4.

TEST RESULTS

H-field strengths levels should less than 50% of MPE limit.

Operation frequency(kHz)	Test Distance (cm)	Test Position	Probe Measure Result(A/m)	50% Limit (A/m)
325	20	A	0.03	0.815
		B	0.02	0.815
		C	0.01	0.815
		D	0.01	0.815
		E	0.02	0.815

E-field strengths levels should less than 50% of MPE limit.

Operation frequency(kHz)	Test Distance (cm)	Test Position	Probe Measure Result(V/m)	50% Limit (V/m)
325	20	A	0.24	307
		B	0.62	307
		C	0.44	307
		D	0.40	307
		E	0.45	307

Note: The test data meets the limit requirements. Test result: Pass.

*****THE END*****