SUPPIED PARTS

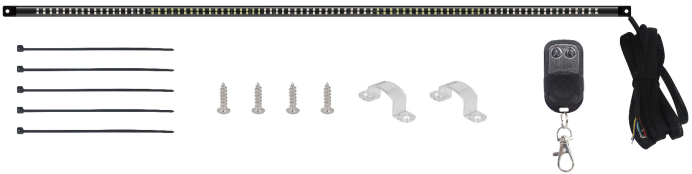

Package includes 1 strobe strip lights, 1 wireless remote, 6 zip-ties, 2 clear wiring snap Locks and 4 screws.

INSTALLATION

XRIDONSEN chase strobe light strip is very simple to install and use. Clean the position where the light strip need to be installed. Stick the strips and lock with the clear wiring snap locks to strengthen the fixation.

WIRING DIAGRAM

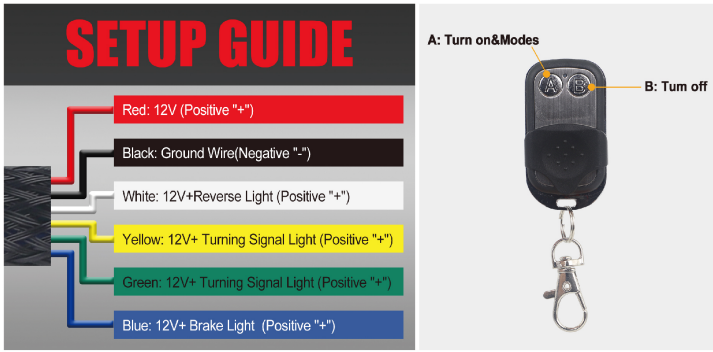

Wiring: Black wire to negative. Red wire to positive. White wire to reverse light. Blue wire to brake light. Green and Yellow wire to turning signals lights.

INSTALLATION EFFECT

WARM TIPS:

Prior to installation, please connect this LED tail light strip to a 12-volt power source and test for full functionality.

FCC Statement
This device complies with part 15 of the FCC Rules. Operation is subject to the following
two conditions:
(1)This device may not cause harmful interference, and
(2)this device must accept any interference received, including interference that may cause undesired operation.
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.
These limits are designed to provide reasonable protection against harmful interference in a residential installation.
This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions,may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.
If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
Reorient or relocate the receiving antenna.
.Increase the separation between the equipment and receiver.
.Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
.Consult the dealer or an experienced radio/TV technician for help.
Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.
RF Exposure Information
The device was evaluated to meet general RF exposure requirements . This equipment should be installed and used with a minimum distance of 0 mm between the radiator and your body.

CHASE STROBE LIGHT STRIP

Instruntion Manual

SKU: XR-AT-40