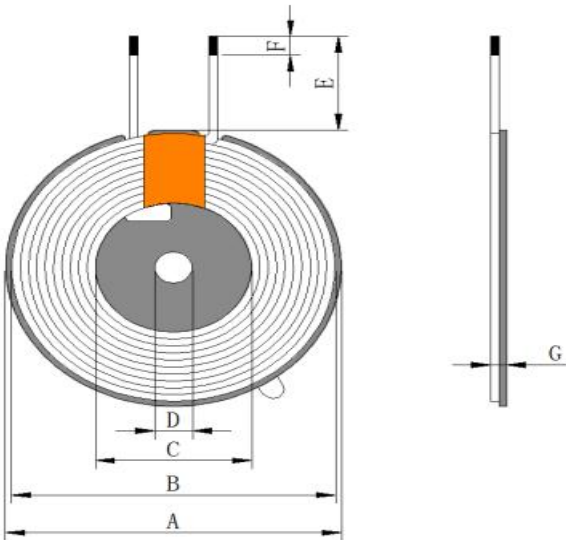
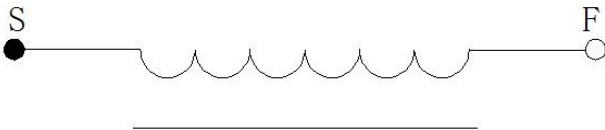

Antenna Specification

Manufacturer	Guangdong BiQiO Electronics Co., Ltd
Address	105, 1101, 1102, 1103, 1104, No.10-2, 7th Street, Sanlian, Gulao Town, Heshan City, Guangdong Province,China
ANT MODE	Φ43.5MMX5.3MMX0.8MM
DATE:	2024.06.27
Version:	A.0

Version Change History

[illegible]

SPECIFICATION

产 品 型 号: DESC		Φ20.5MMX43.5-6.3uH-0.07*100P*10TS		版本 Rev: A.0	客户 CUST:																																																										
					客户料号 CUST P/N:																																																										
一、尺寸 DIMENSION:(mm)  二、原理图 SCHEMATIC DIAGRAM:  三、绕线参数 Winding Specification: <table><tr><th>序号 NO.</th><th colspan="2">端子 TERMINAL</th><th>线径 WIRE</th><th>圈数 Turns</th><th>绕线方向 Winding Direction</th></tr><tr><td>1</td><td>S</td><td>F</td><td>丝包线 0.07*100P</td><td>10Ts</td><td>CCW</td></tr></table> 四、电气特性 ELECTRICAL CHARACTERISTICS: 温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20% <table><tr><th>序号 NO.</th><th>项目 ITEM</th><th>端子 TERMINAL</th><th>标准 SPECIFICATION</th><th>测试条件 TEST FREQUENCY</th><th>测试仪器 TEST EQUIPMENTS</th></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>3.8uH ±10%单独线圈</td><td>100KHz/1.0V</td><td>LCZ METER 1062B</td></tr><tr><td>2</td><td>IND.</td><td>S-F</td><td>6.3uH ±10%加磁盘</td><td>100KHz/1.0V</td><td>LCZ METER 1062B</td></tr><tr><td>3</td><td>DCR</td><td>S-F</td><td>≤50m Ω</td><td>100KHz/1.0V</td><td>LCZ METER 502B</td></tr><tr><td>4</td><td>Q</td><td>S-F</td><td>≥68</td><td>100KHz/1.0V</td><td>LCZ METER 502B</td></tr></table>					序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction	1	S	F	丝包线 0.07*100P	10Ts	CCW	序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	1	IND.	S-F	3.8uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B	2	IND.	S-F	6.3uH ±10%加磁盘	100KHz/1.0V	LCZ METER 1062B	3	DCR	S-F	≤50m Ω	100KHz/1.0V	LCZ METER 502B	4	Q	S-F	≥68	100KHz/1.0V	LCZ METER 502B	A 43.5±0.5	B 42±1.0	C 20.5±0.5	D 5.0±0.5	E 40±1.5	F 5±1	G 2.3±0.2										
					序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction																																																					
					1	S	F	丝包线 0.07*100P	10Ts	CCW																																																					
					序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS																																																					
					1	IND.	S-F	3.8uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B																																																					
					2	IND.	S-F	6.3uH ±10%加磁盘	100KHz/1.0V	LCZ METER 1062B																																																					
					3	DCR	S-F	≤50m Ω	100KHz/1.0V	LCZ METER 502B																																																					
					4	Q	S-F	≥68	100KHz/1.0V	LCZ METER 502B																																																					
					注:																																																										
					1. Cross outgoing line;																																																										
					2. Wrap 8mm (ref) wide high-temperature adhesive tape 1-2Ts around the outlet position;																																																										
					3. The coil is attached with a circular hard magnetic disc with slots, with a magnetic disc size of 43.5 ± 0.5mm, an inner hole of 5.0 ± 0.5mm, and a thickness of 1 ± 0.1mm.																																																										
					4. Stick Double-sided tape on the back of the coil																																																										

| 拟制/日期 PREPARED BY/DATE | | | | | 审核/日期 CHECKED BY/DATE | |
| 2023.06.27 | | | | | 2024.06.27 | |