

QP-TQ4DCC-012/1.0

*为必填项

采购件供应商文件评审

Title

PCB天线模块（791MHz~960MHz）

Item*

693186

Description*

ANT-C6512-510044-A_1A_H

Project No.

AK01

Supplier

Security Level.

C

Remark


					Name	Date
					Draft	白 云 海 2021.06.11
S3	CN-AC21-246	YH.B	2021.06.11		Check	张 瑞 2021.06.11
S2	CN AC21-150	YH.B	2021.04.07			
S1	inital	YH.B	2021.03.18		Approval	闵 海 军 2021.06.11
Rev.	ECN	Name	Date			



WHA YU INDUSTRIAL CO., LTD.(HEAD OFFICE)
DONGGUAN AEON TECH CO.,LTD.(CHINA)

SPECIFICATION FOR APPROVAL

CUSTOMER:	羅森伯格		
PART NAME:	PIFA Antenna		
PART NO.:	693186	REVISION:	
W. Y. P/NO.:	C6512-510044-A(SZ2101-036)	REV.:	X2

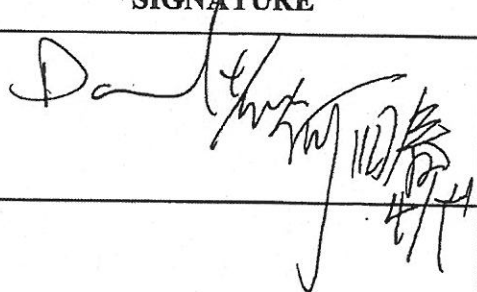	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
APPROVED BY :		
DATE :		

WHA YU GROUP

WHA YU INDUSTRIAL CO., LTD.(HEAD OFFICE)

譚裕實業股份有限公司

Address: No. 326, Sec. 2, Kung Tao 5 Road, Hsin Chu City, Taiwan, R.O.C.

Tel: +886-3-5714225(REP.) Fax: + 886-3-5713853 · + 886-3-5723600

DONGGUAN AEON TECH CO., LTD.(CHINA)

東莞台霖電子通訊有限公司

Address: Hupan Industrial District, Tai Ling Shan Town, Dong Guan City, Guangdong, China

Tel: +86-769-85655858 Fax: +86-769-85655258

Contents

<i>Item</i>	<i>Description</i>	<i>Page</i>
1.	規格表	 1
2.	成品圖	 2
3.	測試報告	 3~15

PIFA Antenna

Specification




1. Electrical Properties : With Housing

- 1.1 Frequency Range..... 0.791-0.96 GHz
- 1.2 Impedance 50Ω Nominal
- 1.3 VSWR 2.5 : 1 Max.
- 1.4 Return Loss 7.36 dB Min.
- 1.5 Radiation Omni-directional
- 1.6 Peak Gain..... 2.63 dBi Max.@0.791-0.96 GHz
- 1.7 Polarization..... Linear

2. Physical Properties :

- 2.1 Operating Temp. -40°C ~ +85°C
- 2.2 Storage Temp. -40°C ~ +85°C

REV		DATE	DESCRIPTION
X1	04/07-2021		New Issue
X2	06/01-2021	PIN脚取消打孔&增加铁件尺寸	

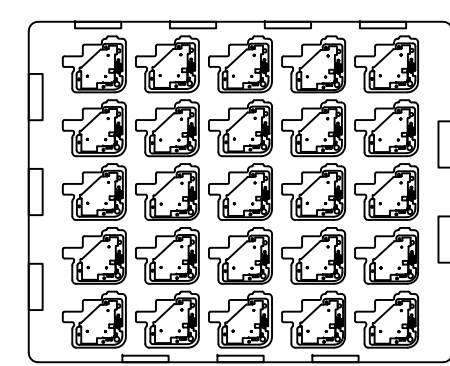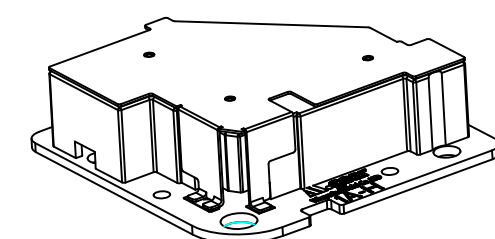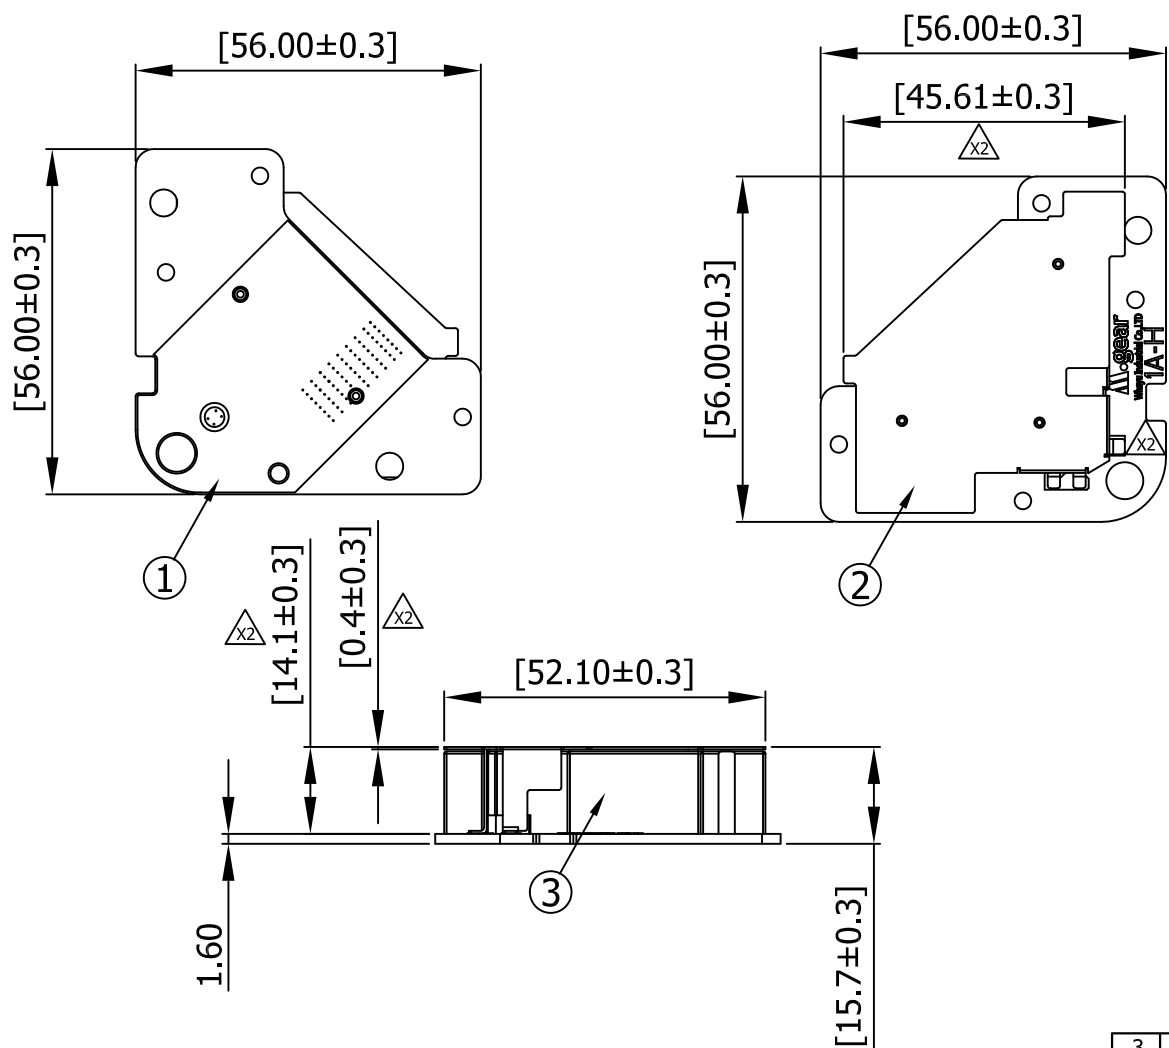

Packing:25PCS/Tray

3	Holder	LCP	1	black
2	PIFA	SUS430;(L)52.1*(W)45.61*(H)14.1*(T)0.4mm	1	
1	PCB	FR4,雙面板; (L)56*(W)56*(T)1.6mm	1	black
NO	DESCRIPTION		Q'TY	REMARK

CUSTOMER'S SINGATURE	XX.	±3.0	APPROVED Spring	CUSTOMER: 羅森伯格	
	X.	±1.0		PART NO : 693186	
	.X	±0.5	CHECKED	PART NAME: RF Antenna Assembly	
	.XX	±0.2		W.Y P/NO : C6512-510044-A	
	.XXX	±0.1	DRAWING 白玉俠	REV	UNIT
				X2	mm

**Wha Yu Group**

THIS DRAWING, AND IT'S INHERANT DESIGN CONCEPTS, ARE THE PROPERTY OF WHA YU AND AS SUCH MAY NOT BE COPIED, REPRODUCED, OR GIVEN TO THIRD PARTIES WITHOUT THE WRITTEN CONSENT OF WHA YU.

C6512-510044-A

HG-20019

Version: V 1.00

Released Date: 2021/03/16

Prepared By: huanggengen

Reviewed By: Pingxiaodong

Contents

- Revised History
- Conclusion & Comments
- Specification
- Antenna Placement & Solution
- Test Setup for S-parameter Measurement
- Return Loss Results & Isolation Results
- Test Setup for Radiation Pattern Measurement
- 2D Radiation Pattern Results
- Results Summary (return loss, isolation, peak gain, efficiency)

Revision History

Released Date	Version	Record
2021/03/16	1.00	Antenna Test

Specification

受控文件

CONTROLLED DOCUMENT

保密等级

一般保密

SECURITY:

NORMAL


Requirements of Antenna Design

RF Function	Number of ANT	Frequency Band	Remark
LTE	1	791-960MHz	

Requirements of Measurement


Test Item	Specification	Remark
VSWR	<2.5	
Peak gain	>0.5dBi	
Efficiency	>50%	

Test Setup for S-parameter Measurement

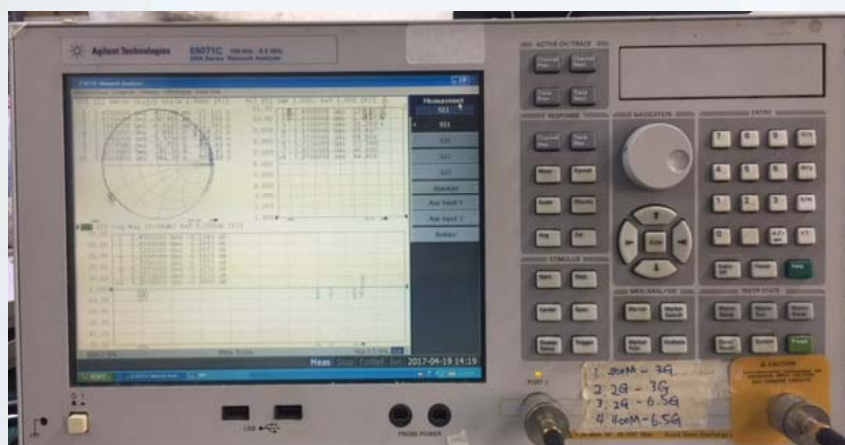


Equipment	Brand	Model	S/N
Network Analyzer	Keysight	E5071C	MY46107744

Antenna Placement & Solution

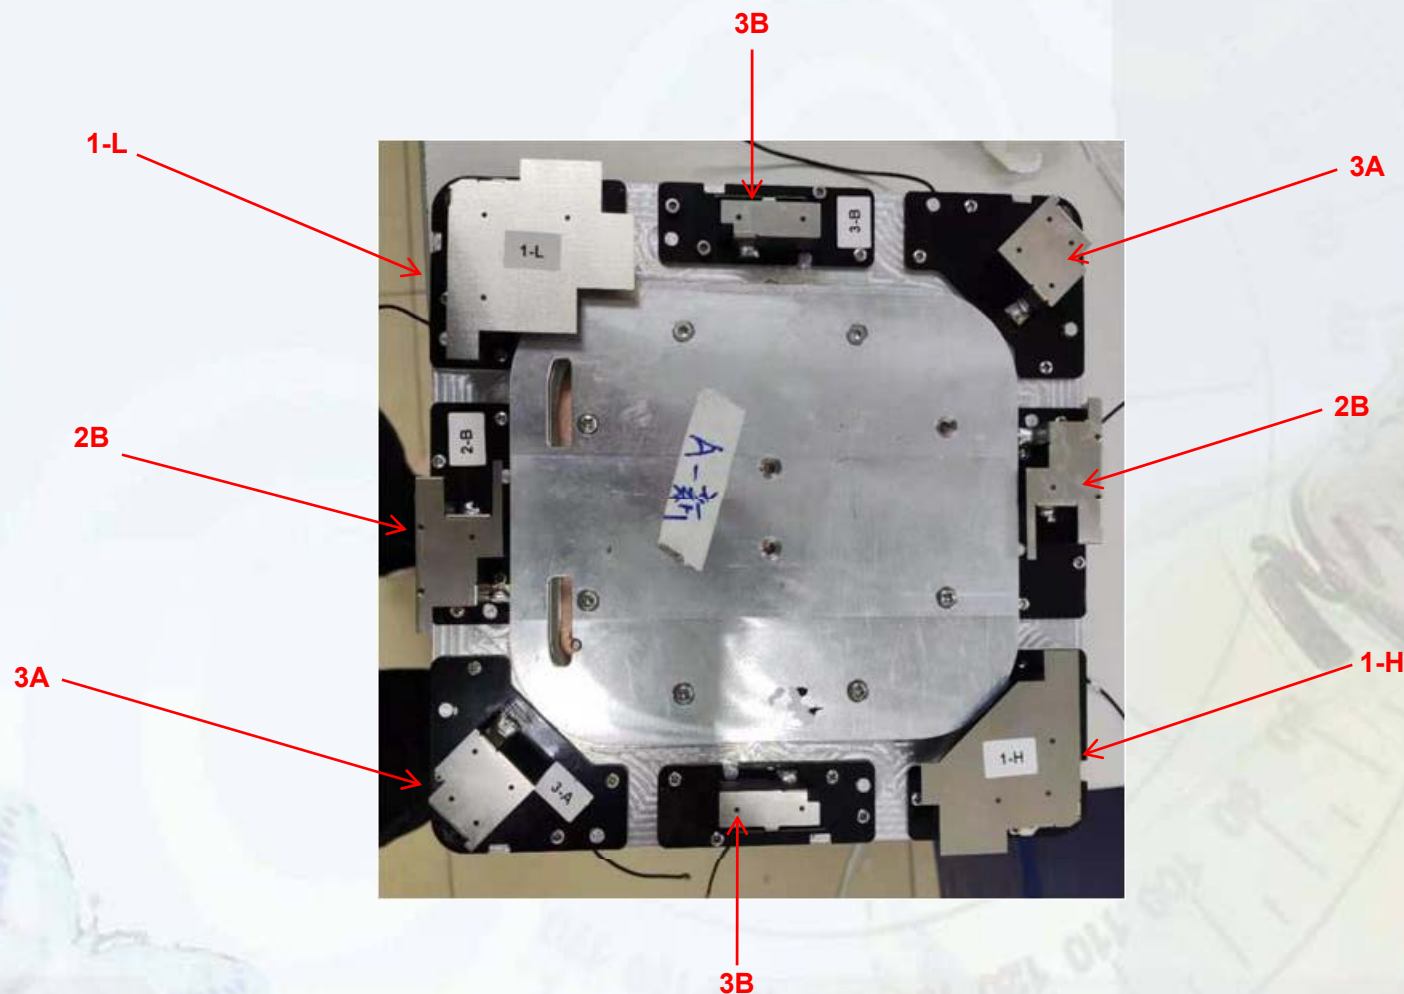


VSWR


ANT 1-H (791-960MHz)

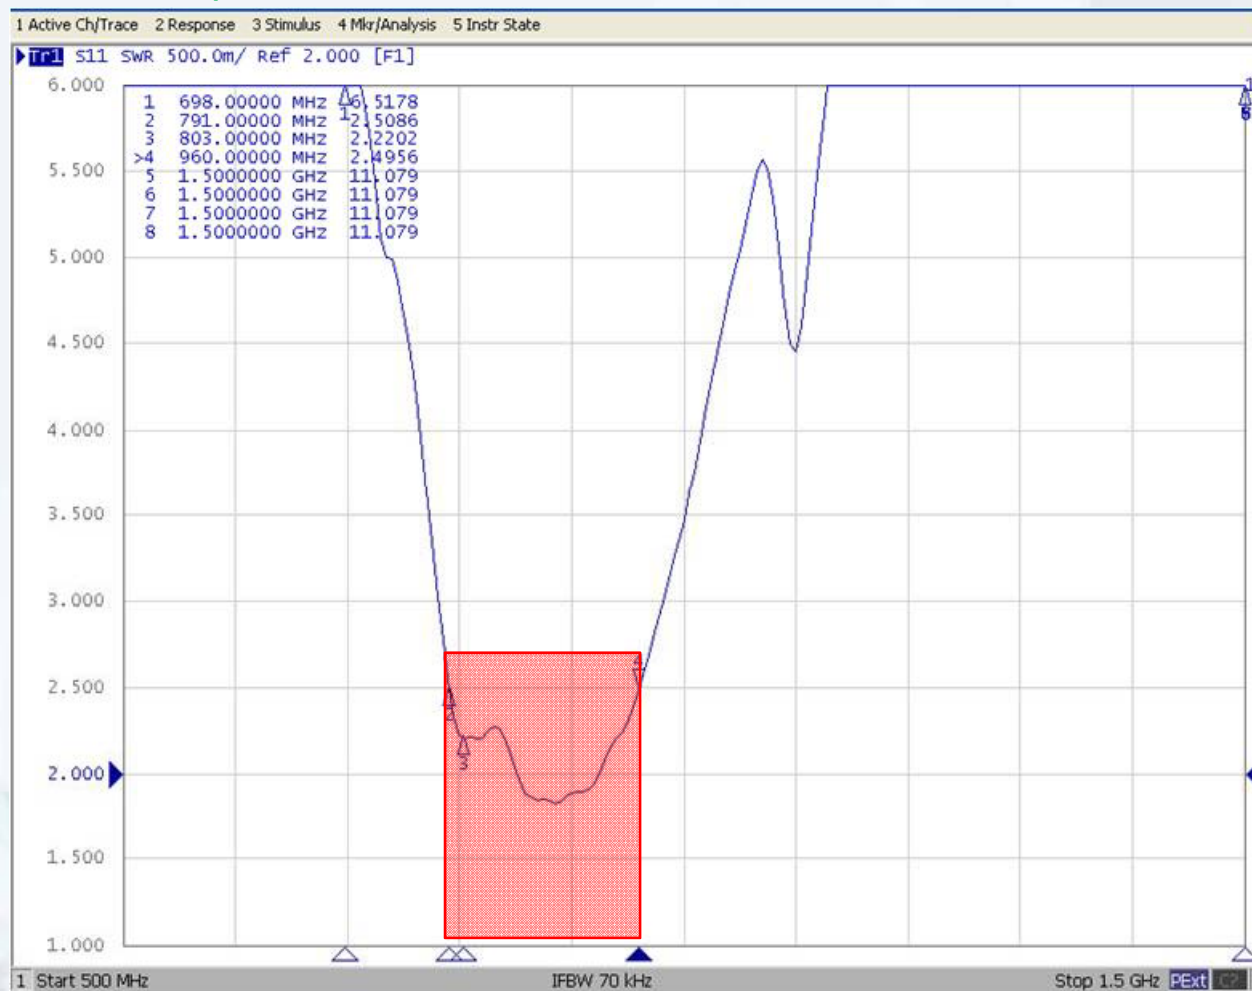

Chamber Information

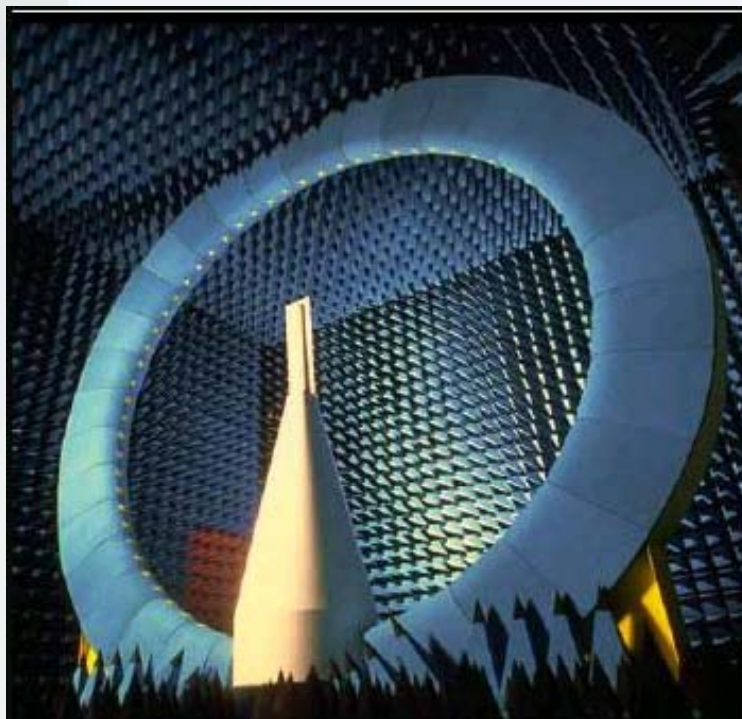


Chamber	Brand	Model	Location
SATIMO	SATIMO	SG-24	Suzhou HG

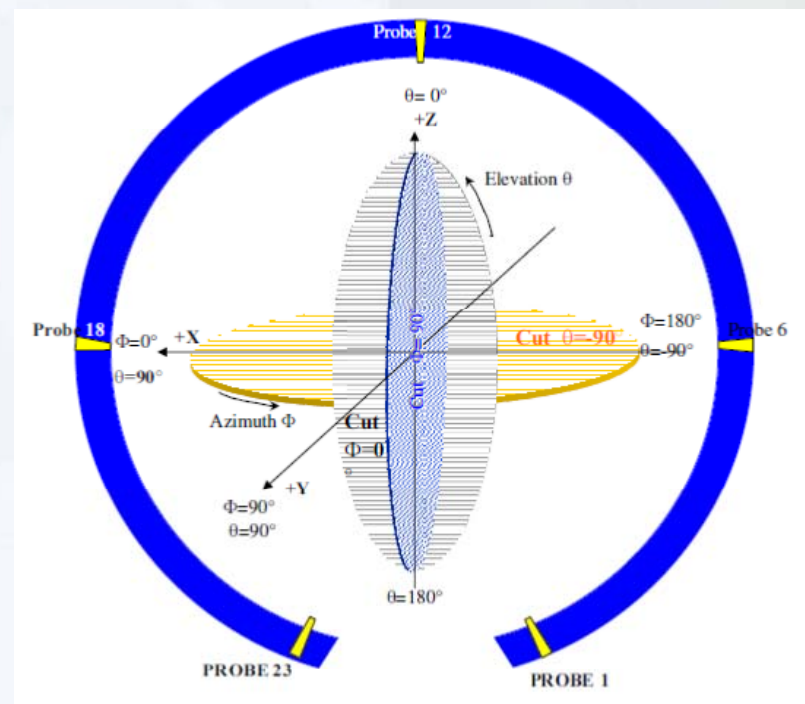


	θ	ϕ
Total angle	175°	360°
How many angle scan one point	5°	5°
Total scan point	36	73

Test Setup for Radiation Pattern Measurement

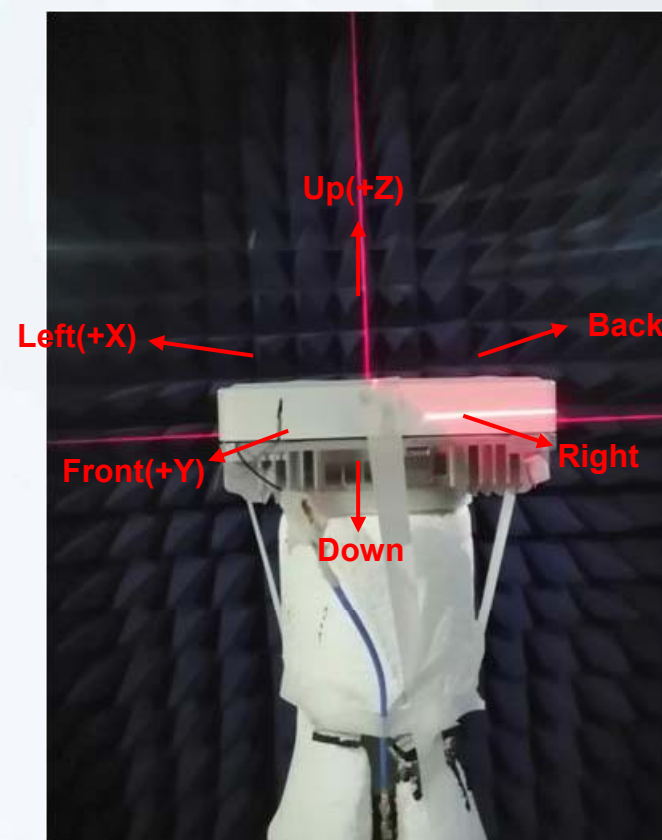


3D

Ant 1-H (791-960MHz)

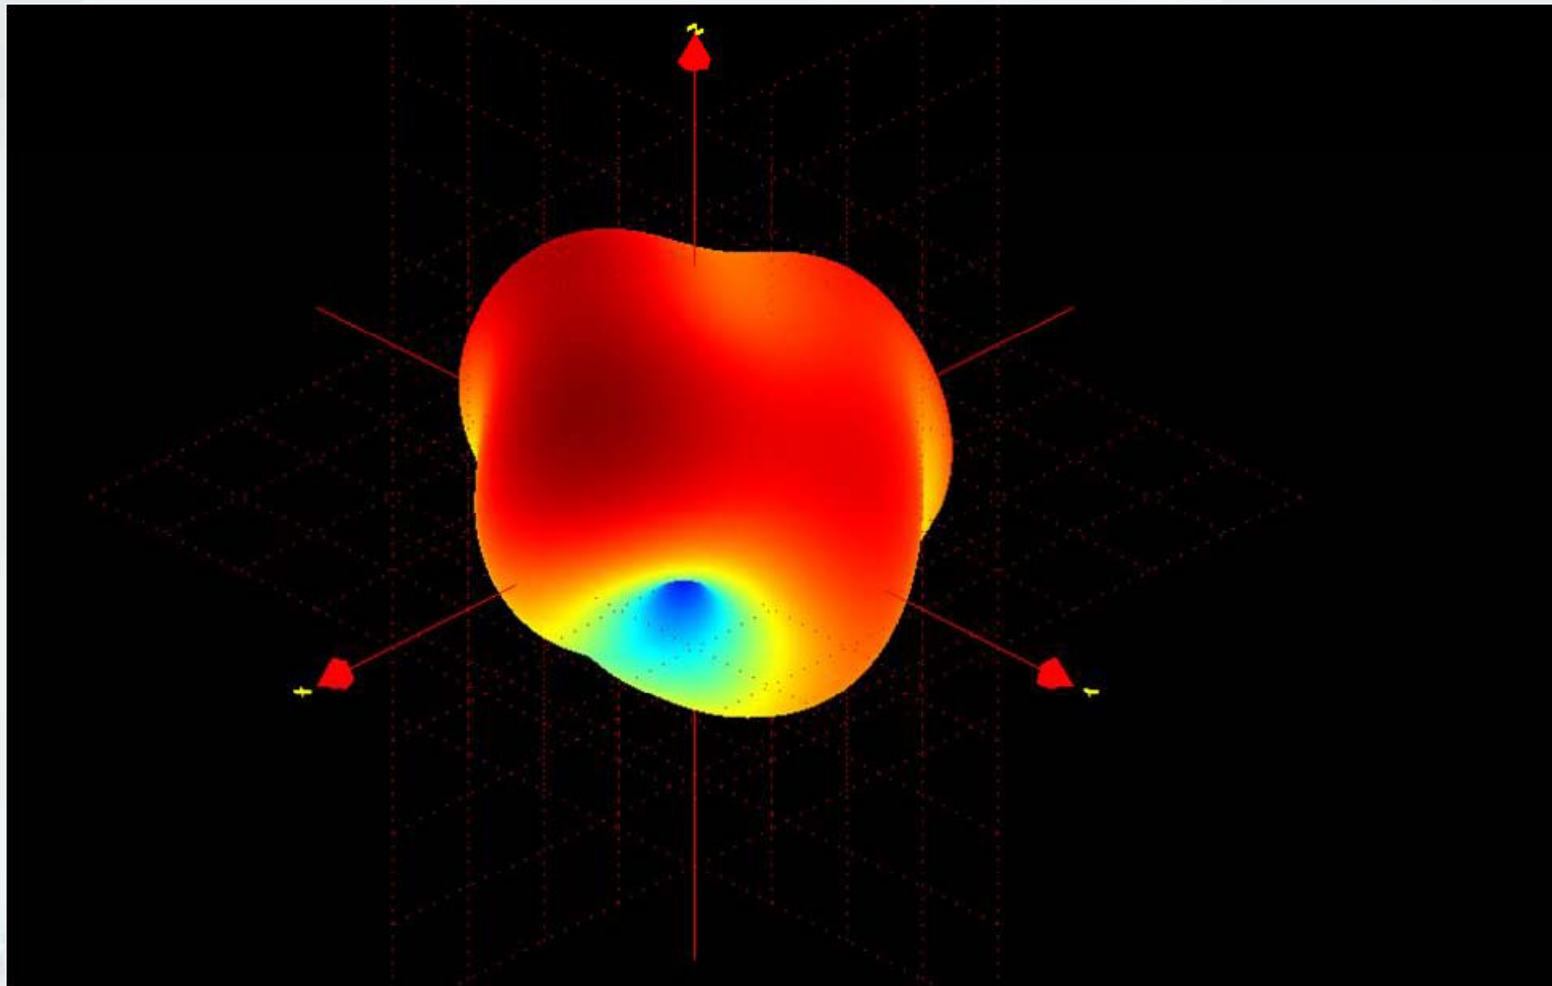


2D Radiation Pattern Results


Ant 1-H (791-960MHz)




90

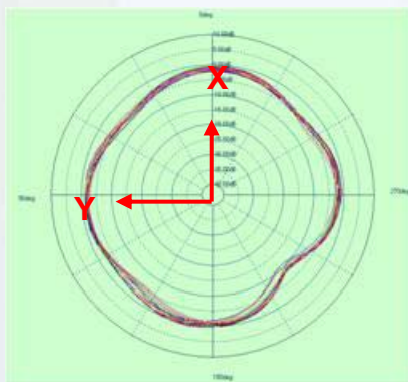


0




90

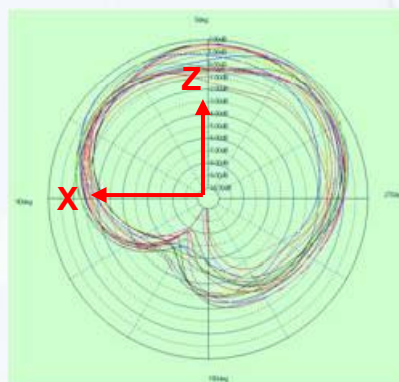

0

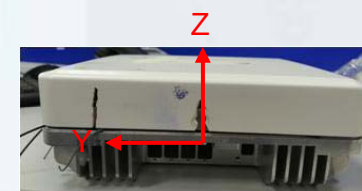

90

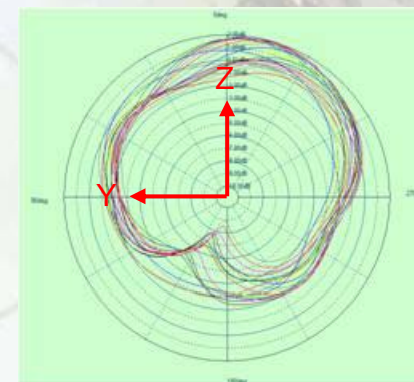

0

Results Summary

VSWR

Ant 1-H (791~960MHz)

Frequency	
791MHz	2.50
960MHz	2.49

Results Summary

Peak gain & Efficiency

Frequency (MHz)	Peak Gain (dBi)	Efficiency (%)
790MHz	0.64	51%
800MHz	0.93	54%
810MHz	0.87	56%
820MHz	1.29	57%
830MHz	1.46	61%
840MHz	2.02	64%
850MHz	2.47	68%
860MHz	2.63	72%
870MHz	2.62	74%
880MHz	2.61	77%
890MHz	2.59	77%
900MHz	2.55	75%
910MHz	2.41	72%
920MHz	2.21	68%
930MHz	1.99	64%
940MHz	1.84	61%
950MHz	1.58	56%
960MHz	1.45	54%