Manufacturer: Shenzhen SHOCII Technology Co, Ltd
Address: Floor 2, Building B, Suojia Science park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen

Notes for antenna installation

Electronic wire installation recommendations :

1:The electron line length is in the 24.60mm.

2: The electronic wire is installed on the side of the horn.

3: The end of the electronic wire is fixed with adhesive paper to make the consistency of the batch production good.

Antenna parameters

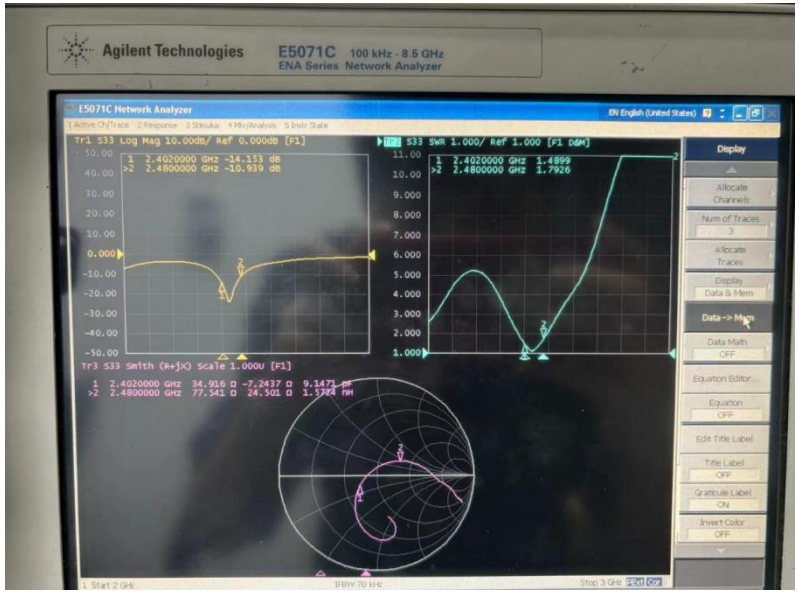

Freq	2.4GHz	2.5GHz	spce
VSWR	1.48	1.79	＜2
Log Mag	-14.15	-10.93	＜-10

Antenna parameters

Frequency/MHz	MaxGain/dBi
2400	-1.84
2410	-1.62
2420	-1.42
2430	-1.3
2440	-1.05
2450	-0.86
2460	-0.76
2470	-0.82
2480	-1.23
2490	-1.39
2500	-1.64

2/3D Apple picture

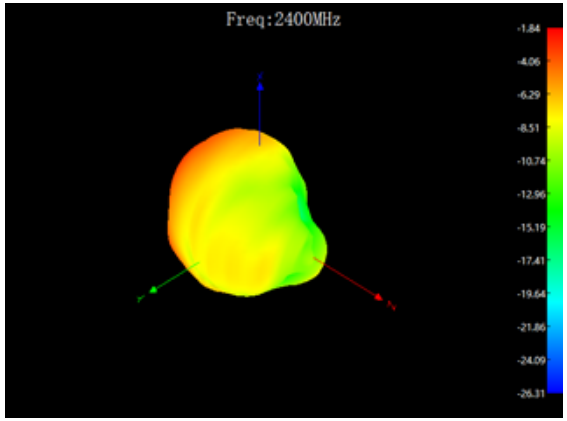

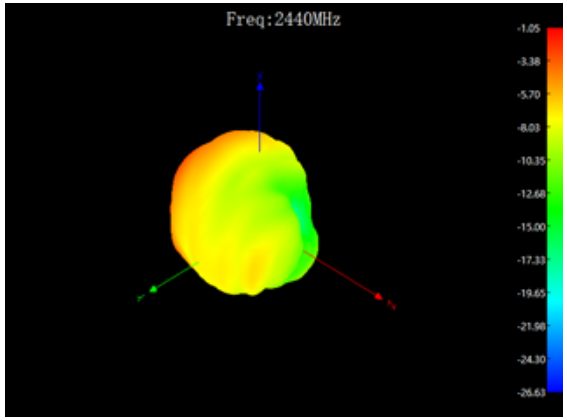

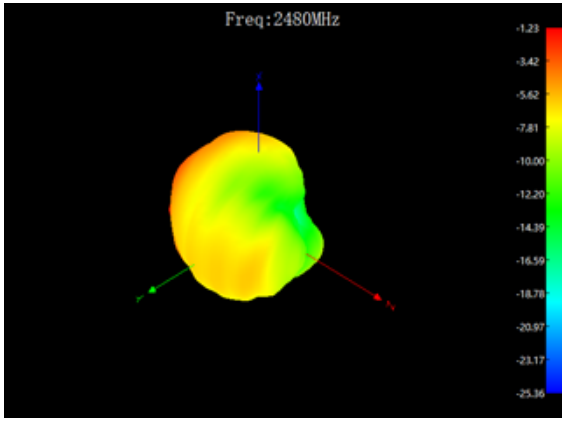

The measured distance on the roof of the building

Project	T11-N	Test date	2024.5.9	
Software release		Test location	The measured distance on the roof of the building	
Model	Measuring distance	Metal watchband	Non-metallic watchband	
IOS	Positive effective distance (≥15m)	18	17	
	Back effective distance (≥10m)	10	6	
Android	Positive effective distance (≥15m)	18	18	
	Back effective distance (≥10m)	9	9	

谢谢，合作愉快！

Thank You!

The Concepts National Income And National Product Have Roughly The Same Value And Can Be Used Interchangeably If Our Interest Is In Their