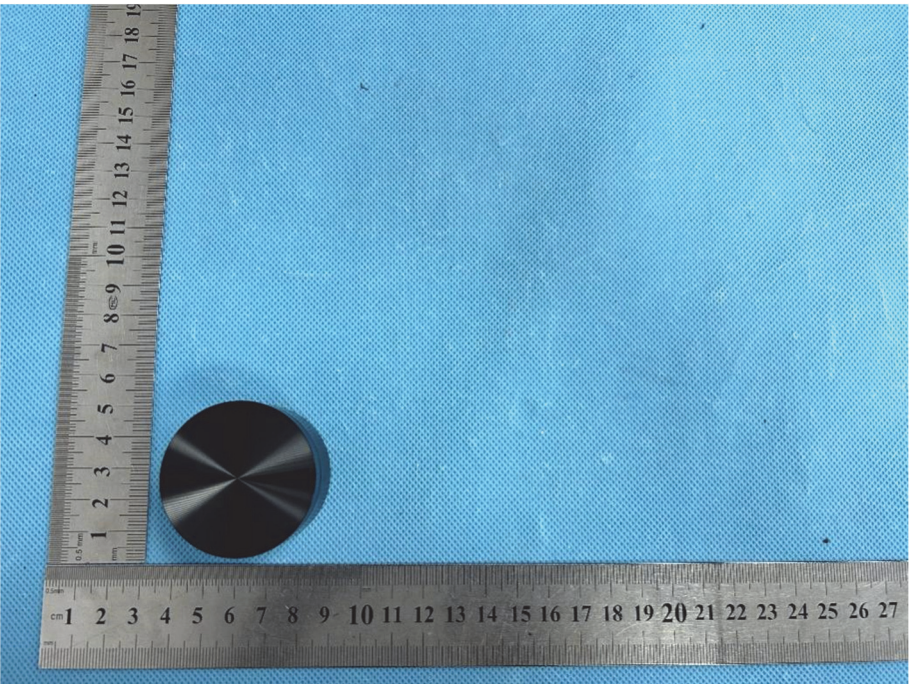
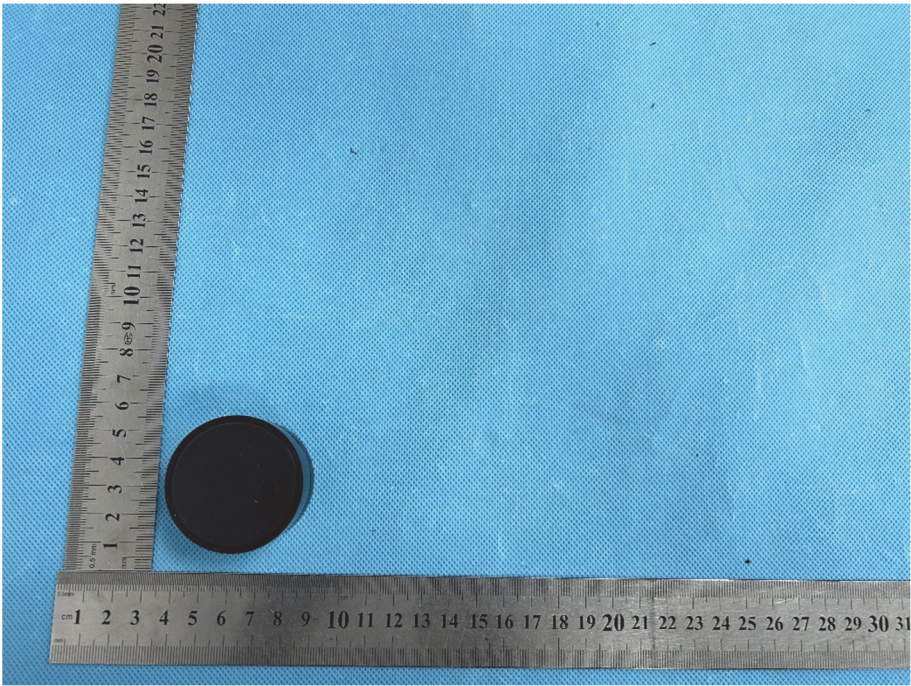
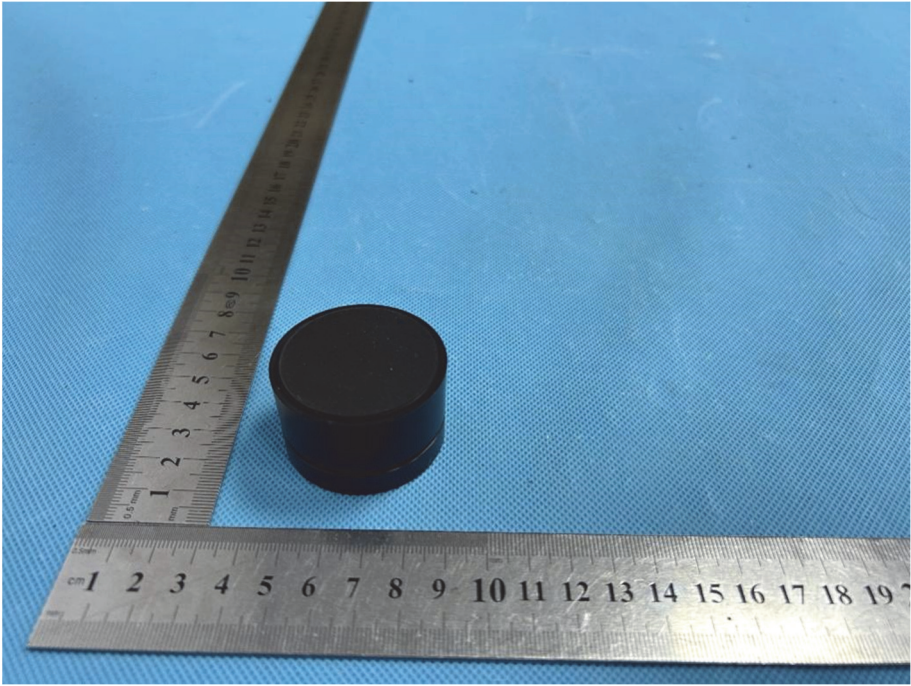
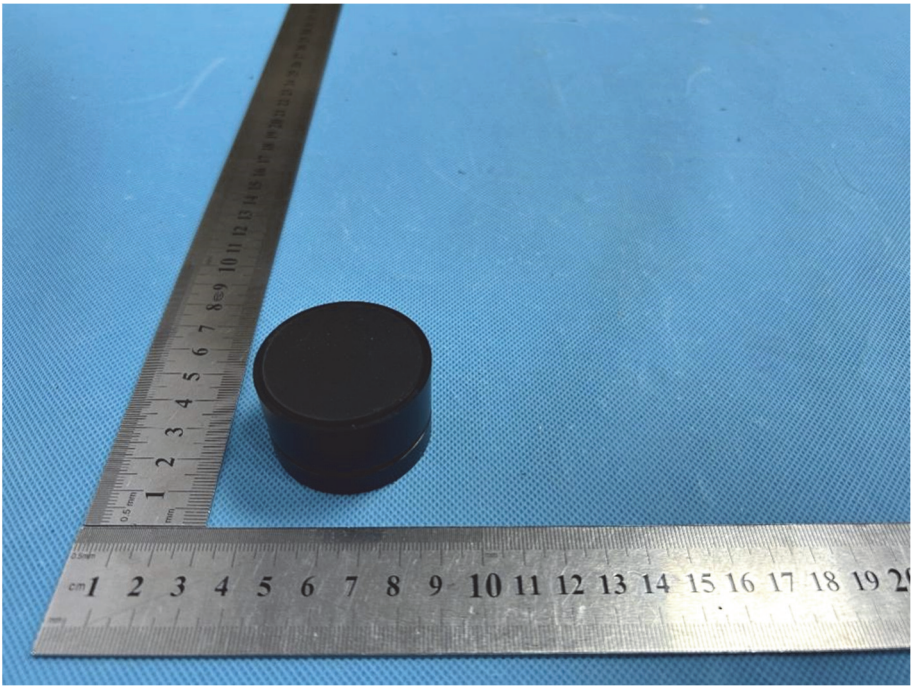
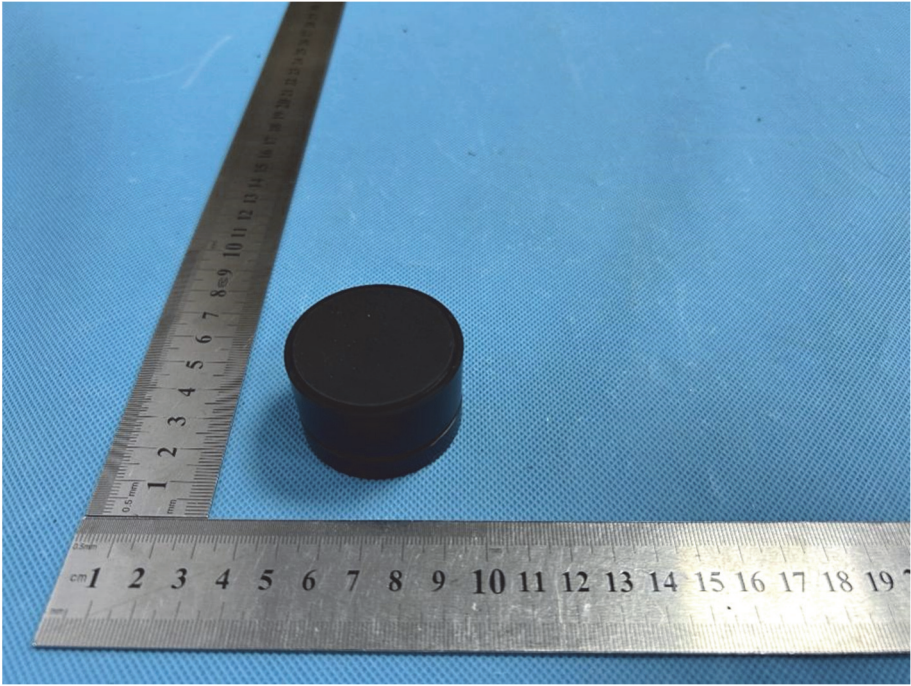



**EXHIBIT 2 - EUT EXTERNAL PHOTOGRAPHS**

|                          |                                                                                      |
|--------------------------|--------------------------------------------------------------------------------------|
| <p><b>EUT View 1</b></p> |   |
| <p><b>EUT View 2</b></p> |  |

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>EUT View 3</p> |  A photograph showing a black cylindrical component (EUT) placed on a blue textured surface. A metal ruler is positioned vertically to the left of the component, with its 0 mark aligned with the bottom edge of the component. The component's diameter is approximately 1.5 cm. The ruler is marked in centimeters from 1 to 31.                                                         |
| <p>EUT View 4</p> |  A photograph showing the same black cylindrical component (EUT) from a different angle. The component is placed on the same blue textured surface. A metal ruler is positioned vertically to the left of the component, with its 0 mark aligned with the bottom edge of the component. The component's diameter is approximately 1.5 cm. The ruler is marked in centimeters from 1 to 19. |

|                   |                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>EUT View 5</p> |  A black cylindrical component is shown next to a ruler on a blue textured surface. The ruler is positioned vertically, with the component placed against it. The ruler has markings in centimeters (0 to 20) and millimeters (0 to 10). The component's diameter is approximately 1.5 cm.  |
| <p>EUT View 6</p> |  A black cylindrical component is shown next to a ruler on a blue textured surface. The ruler is positioned vertically, with the component placed against it. The ruler has markings in centimeters (0 to 20) and millimeters (0 to 10). The component's diameter is approximately 1.5 cm. |

EUT View 7

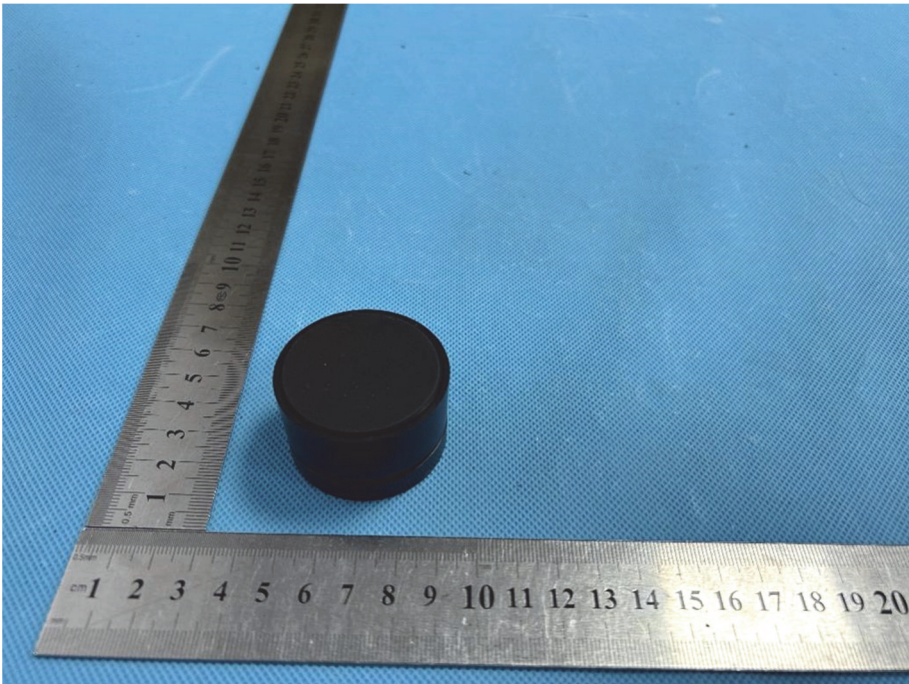

EUT View 8

