

Ice Maker / Machine à Glaçons

SLIM24B-WF

120V AC 60Hz 1Ph

Ice-Making Current / Courant de Fabrication de la Glace : 2.7A

Design Pressure / Pression Nominale

High Side / Haute Pression : 290 psig

Low Side / Basse Pression : 88 psig

Refrigerant / Réfrigérant : R600a 0.57 Oz / 16g

FCC ID: 2BDIH-SLIM24

Serial No. / Numéros de Série. :

Manufacturer: SeaLoon International Group (HONGKONG) Limited



Intertek
3149457

Conforms to UL STD. 563
Certified to CSA STD. C22.2 No.120
Conforme à UL STD.563
Certifié CSA STD C22.2 No.120

Made in China /
Fabriqué en Chine

Address: UNIT 2601-05, 26/F, DELTA HOUSE, NO.3 ON YIU STREET, SHATIN, N.T., HONG KONG

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This page is a technical description, not a printed content

118 mm

67 mm

Ice Maker / Machine à Glaçons

SLIM24B-WF120V AC 60Hz 1Ph

Ice-Making Current / Courant de Fabrication de la Glace : 2.7A

Design Pressure / Pression Nominale

High Side / Haute Pression : 290 psig

Low Side / Basse Pression : 88 psig

Refrigerant / Réfrigérant : R600a 0.57 Oz / 16g

FCC ID: 2BDIH-SLIM24

Serial No. / Numéros de Série. :

Manufacturer: SeaLoon International Group (HONGKONG) Limited

Address: UNIT 2601-05, 26/F, DELTA HOUSE, NO.3 ON YIU STREET, SHATIN, N.T., HONG KONG

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



Intertek
3149457

Conforms to UL STD. 563
Certified to CSA STD. C22.2 No.120
Conforme à UL STD. 563
Certifié CSA STD C22.2 No.120

Made in China /
Fabriqué en Chine


Serial number rules: 240800000
24 means 2024; 08 means August; the last 5 digits are the serial number, starting from 00001 to the total number of orders. For example, the total number of units produced in the month is 1088; the serial number range: 00001-01088

Technical requirements


1. Paper material: synthetic paper, self-adhesive.
2. Printing requirements: can be printed or printed with carbon ribbon (carbon ribbon printing requires anti-friction carbon ribbon printing, such as resin-based C ribbon)
3. Adhesive backing: Adhesive backing is suitable for smooth spray surface adhesion requirements and meets the 120° four-hour aging test requirements.
4. Size: The recommended size is: 118x67mm, must be clear, and the font cannot be deformed
5. Font type: Decimal and Decimal bold
6. Printing: black background with white text, the printed content must be completed before printing
7. Appearance: no obvious dirt or damage on the surface
8. Pasting position: on the main body of the product, it is required not to curl after pasting, and crooked pasting is not allowed

Product pasting position effect


Product label indication

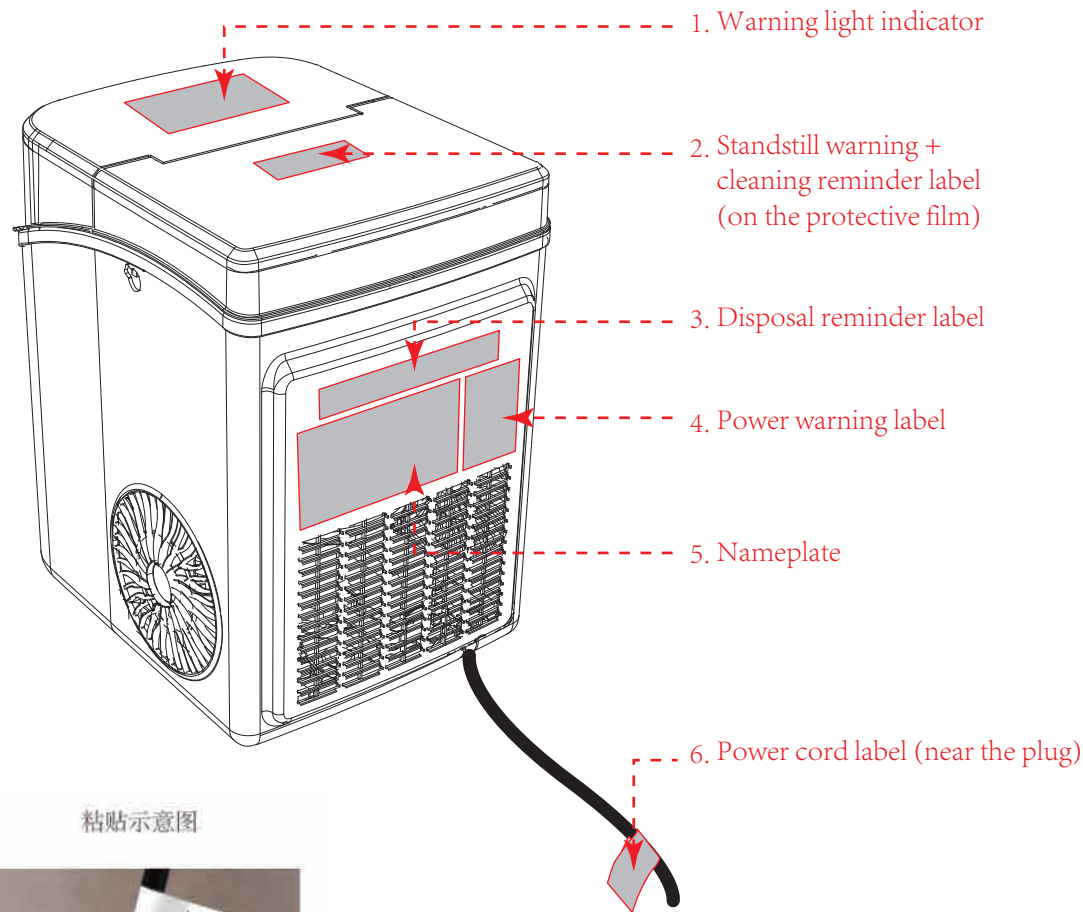

7. Fire warning sign (main housing, near the inside of the engine)

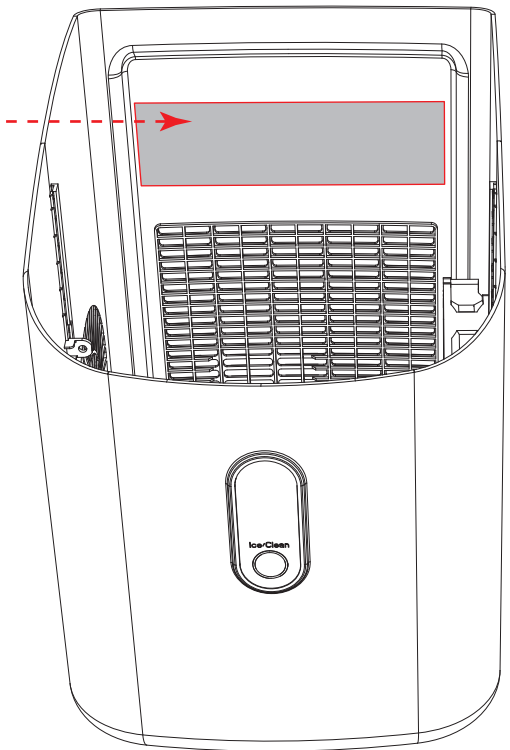

粘贴示意图

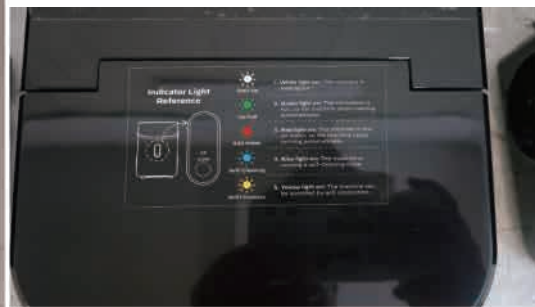

It is required that the product should not curl up after pasting, and crooked pasting is not allowed.

符号标识

版本变更



关键尺寸



编号




参考尺寸

(.XXX)

Effect of packaging pasting position

Packaging label indication

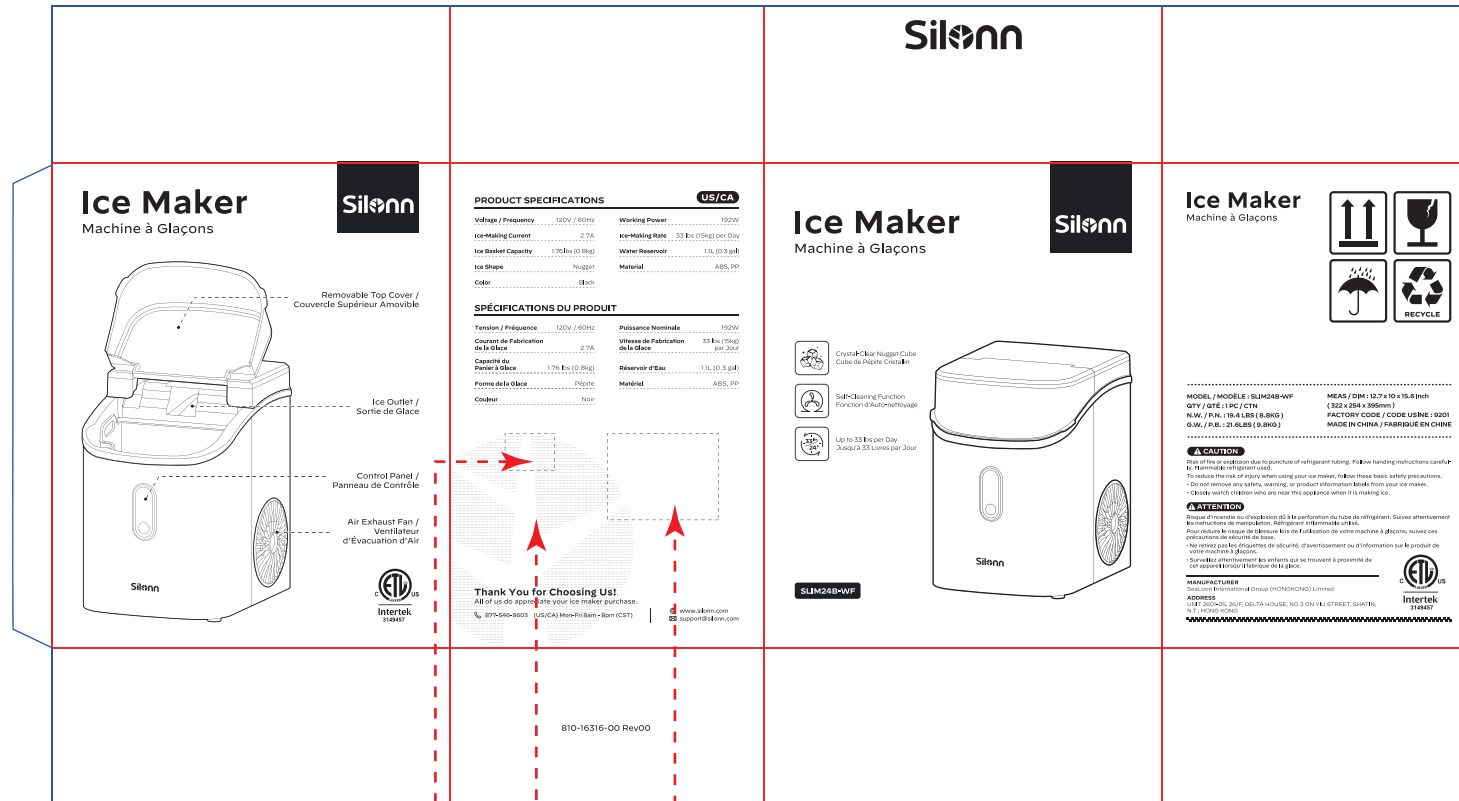

1. FNSKU

3. FBA

2. Transparency Program Tags

It is required that the product should not curl up after pasting, and crooked pasting is not allowed.

符号标识

版本变更



关键尺寸

.XXX

编号

#

参考尺寸

(.XXX)