




Catalogue

No.	Item	Page No.
1	Drawing or Product Image	4
2	Dimensions Test Report	5
3	RF Performance Test Report	6-9
4	Reliability Test Report1	10
5	Package Document	11
6	RoHS Control list for Sample	12
7	Install Wizard or Other	12



Drawing or Product Image

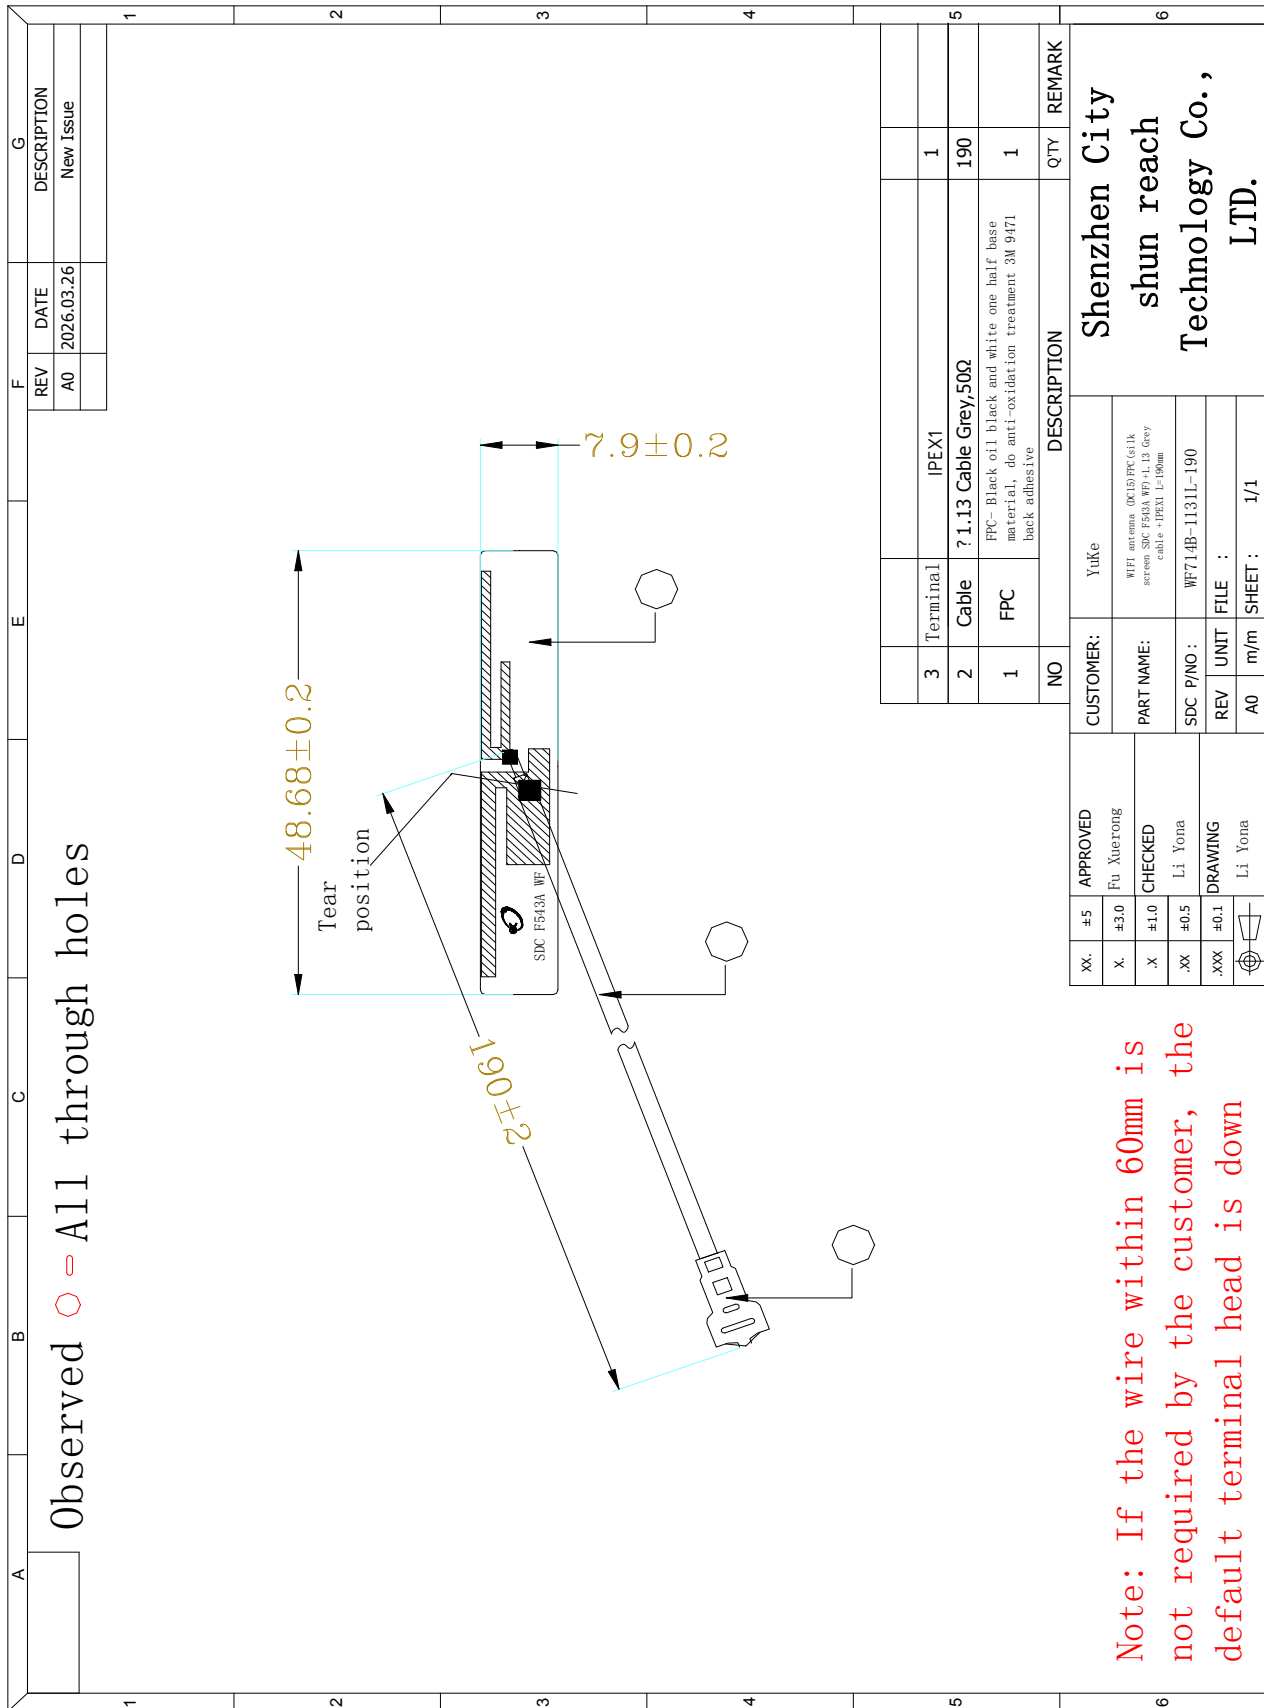



SHUN DA CHENG TECHNOLOGY CO., LTD

Sample Dimensions Test Report


Test Date	2026. 03. 26	Sample Qty.	3	Inspector	Xu Yanfang
Dimension No.	Standard	Sample 1	Sample 2	Sample 3	Pass/NG
①length	48. 68±0. 2mm	48. 7	48. 8	48. 8	Pass
②width	7. 9±0. 2mm	7. 9	8. 0	8. 0	Pass
③thickness	0. 1±0. 03mm	0. 1	0. 1	0. 1	Pass
④wire length	190±2mm	190	191	190	Pass
Conclusion					PASS
Inspector & Date	Xu Yanfang 2026. 03. 26		Approval & Date		



RF Performance Test Report

Antenna Test Equipment Introduction

Test of antenna input characteristics using **Agilent E5071C** and **Agilent 5062A** vector network analyzer; The radiation pattern of the antenna are tested using the guangping 3D near field Anechoic Chamber, and the instrument is used to agilent8960 E5515 and Agilent E4438C. The test coordinates of the darkroom are as follows:

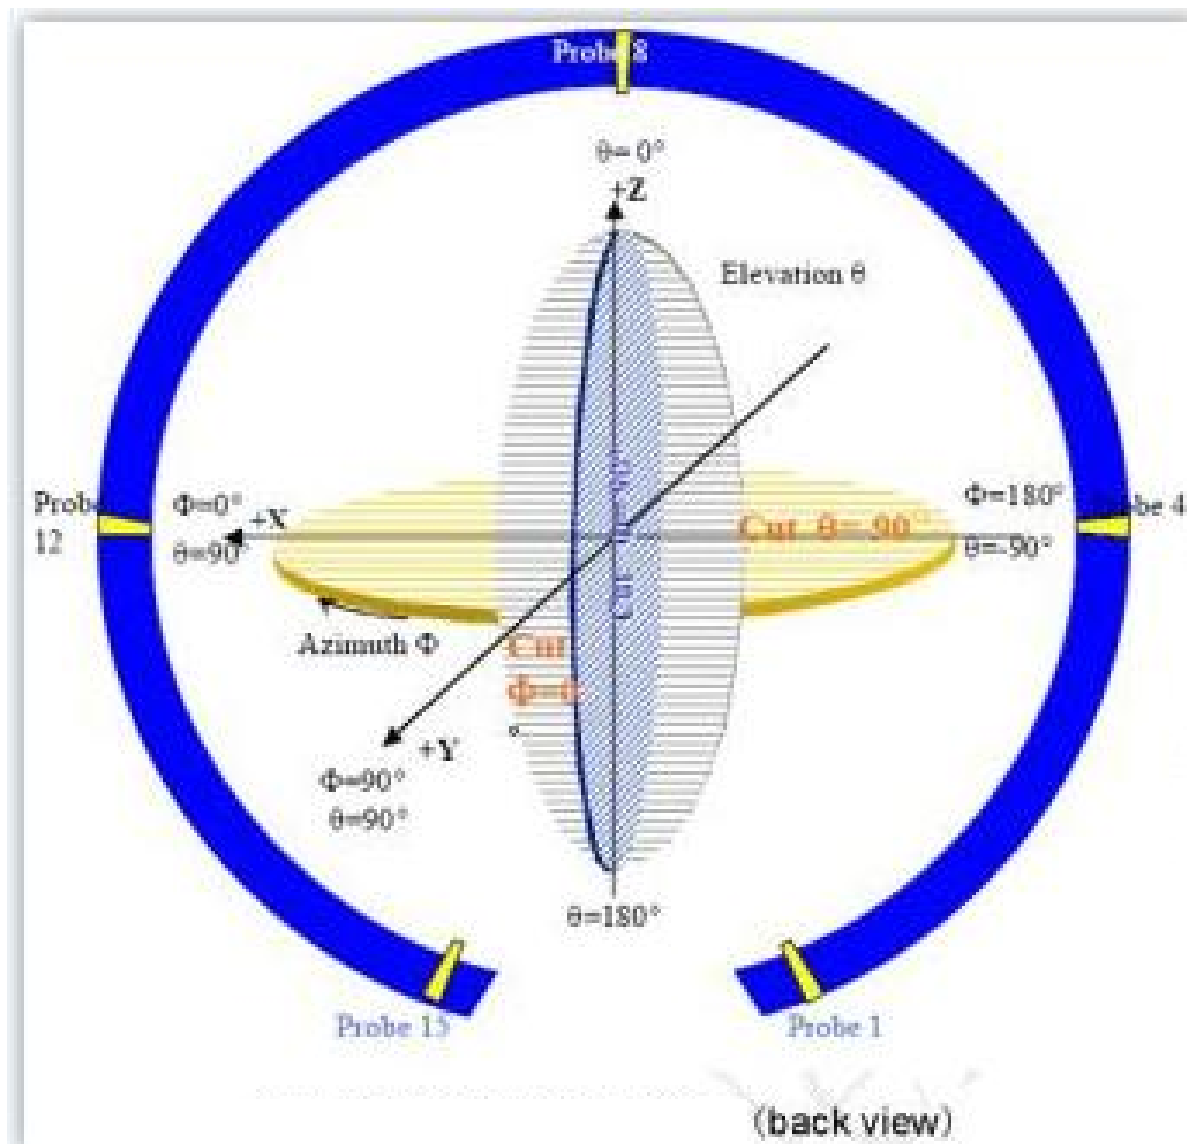


1. S11 Parameter-VSWR


Measuring Method is a 50Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the S11 parameter, Keeping this fixture away from metal at least 20cm.



S11 Parameter-VSWR

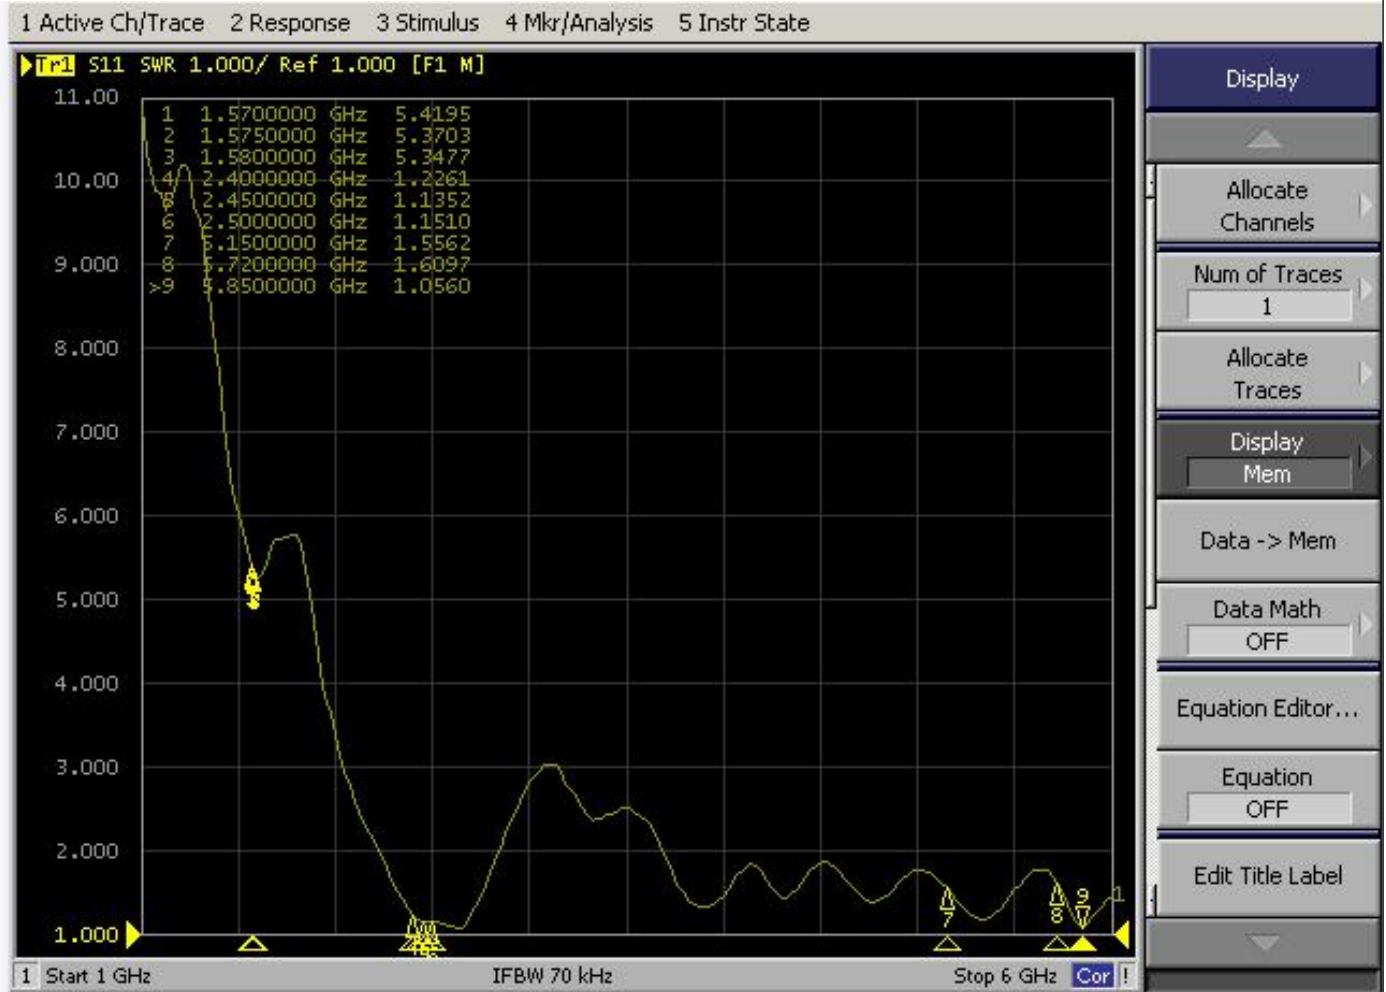

2. Antenna Matching Network

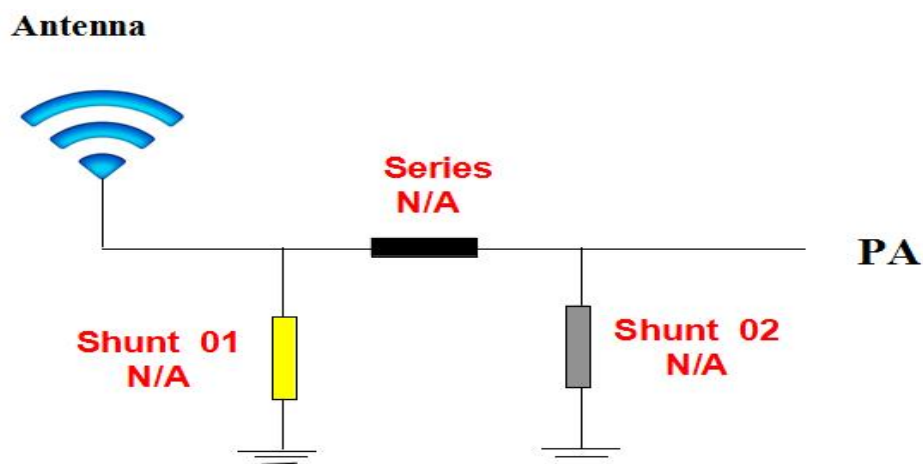




SHUN DA CHENG TECHNOLOGY CO., LTD

3.Gain & Efficiency

Passive Test For 2.4G												
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHIS (%)	DHIS (%)	Max (dB)	Min (dB)	irectivit (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
2400	43.54	-3.61	1.03	-1.12	20.581	22.962	1.03	-15.9	4.64	15	48.93	49.09
2425	45.48	-2.97	1.96	-0.19	23.926	26.555	1.96	-16.48	4.93	15	49.09	49.22
2450	36.53	-4.37	0.87	-1.28	17.136	19.397	0.87	-19.74	5.24	15	49.25	49.27
2475	35.97	-4.44	0.52	-1.63	17.205	18.763	0.52	-23.22	4.96	75	49.98	49.91
2500	36.94	-4.32	0.32	-1.83	17.676	19.267	0.32	-18.36	4.64	75	49.71	49.62

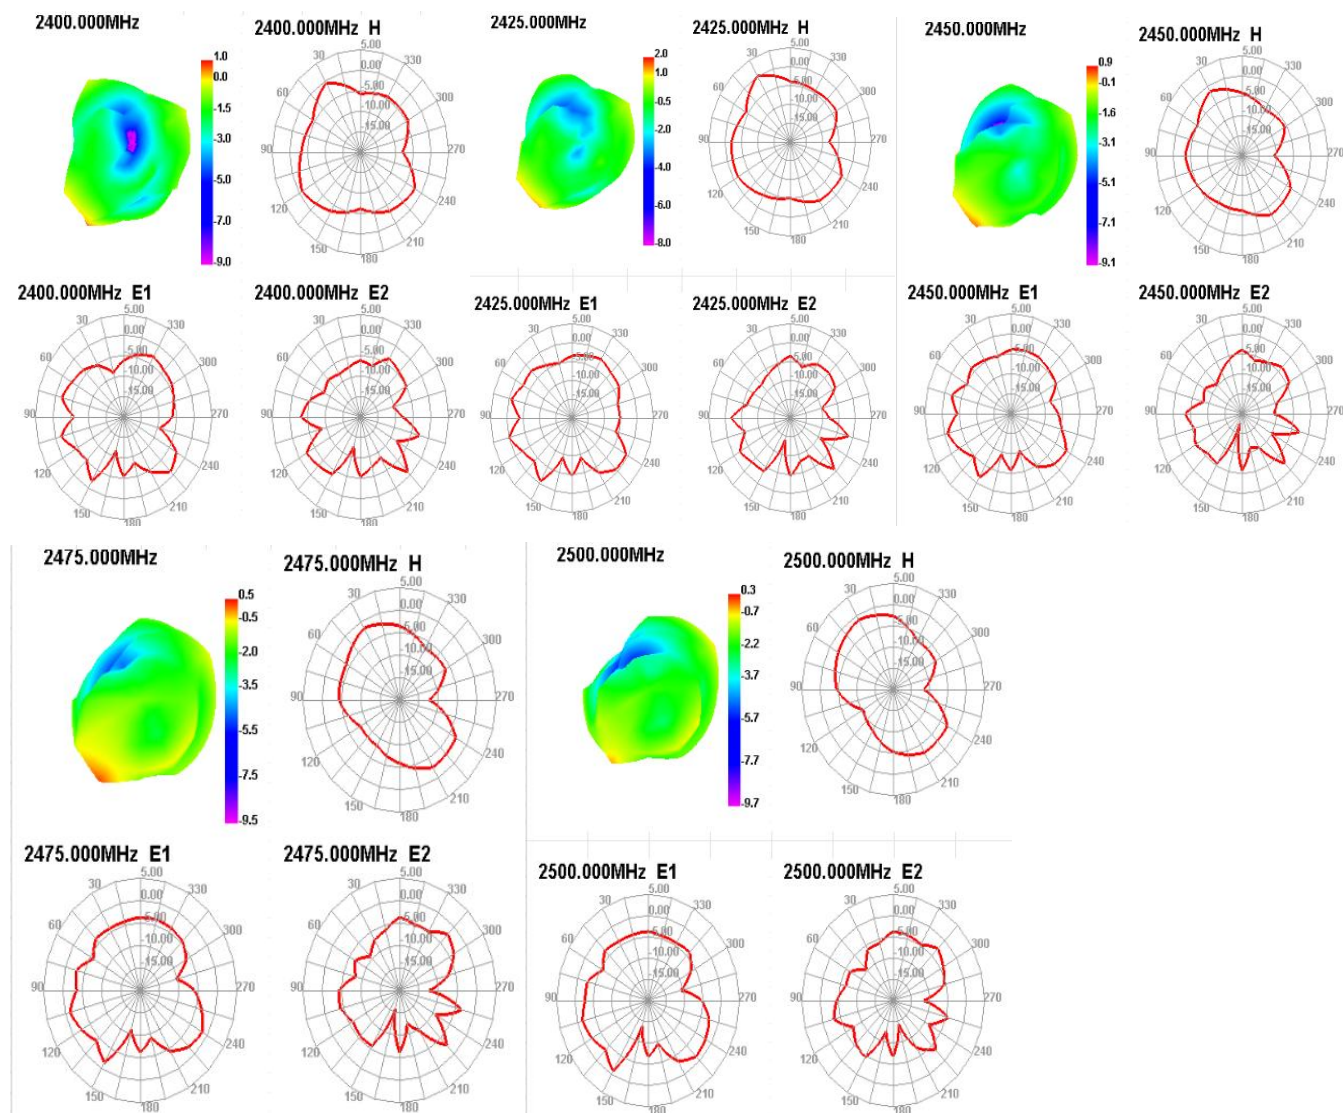




SHUN DA CHENG TECHNOLOGY CO., LTD

Passive Test For 5.8G


Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	irectivit (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
5150	42.13	-3.75	2.36	0.21	16.688	25.441	2.36	-12.69	6.11	0	58.6	58.01
5250	36.5	-4.38	1.37	-0.78	16.245	20.256	1.37	-11.52	5.75	30	58.53	57.74
5350	33.61	-4.73	1.07	-1.08	14.487	19.127	1.07	-15.18	5.81	60	57.99	57.08
5450	38.75	-4.12	2.03	-0.12	14.442	24.308	2.03	-15.14	6.15	0	59.19	57.9
5550	43.16	-3.65	2.14	-0.01	15.599	27.564	2.14	-19.43	5.79	60	60.21	58.81
5650	45.41	-3.43	2.1	-0.05	16.711	28.699	2.1	-20.47	5.53	0	60.31	59.42
5750	46.58	-3.32	2.17	0.02	17.996	28.581	2.17	-18	5.49	30	60.88	60.28
5850	44.83	-3.48	2.78	0.63	18.496	26.336	2.78	-23.77	6.27	30	61.09	60.41

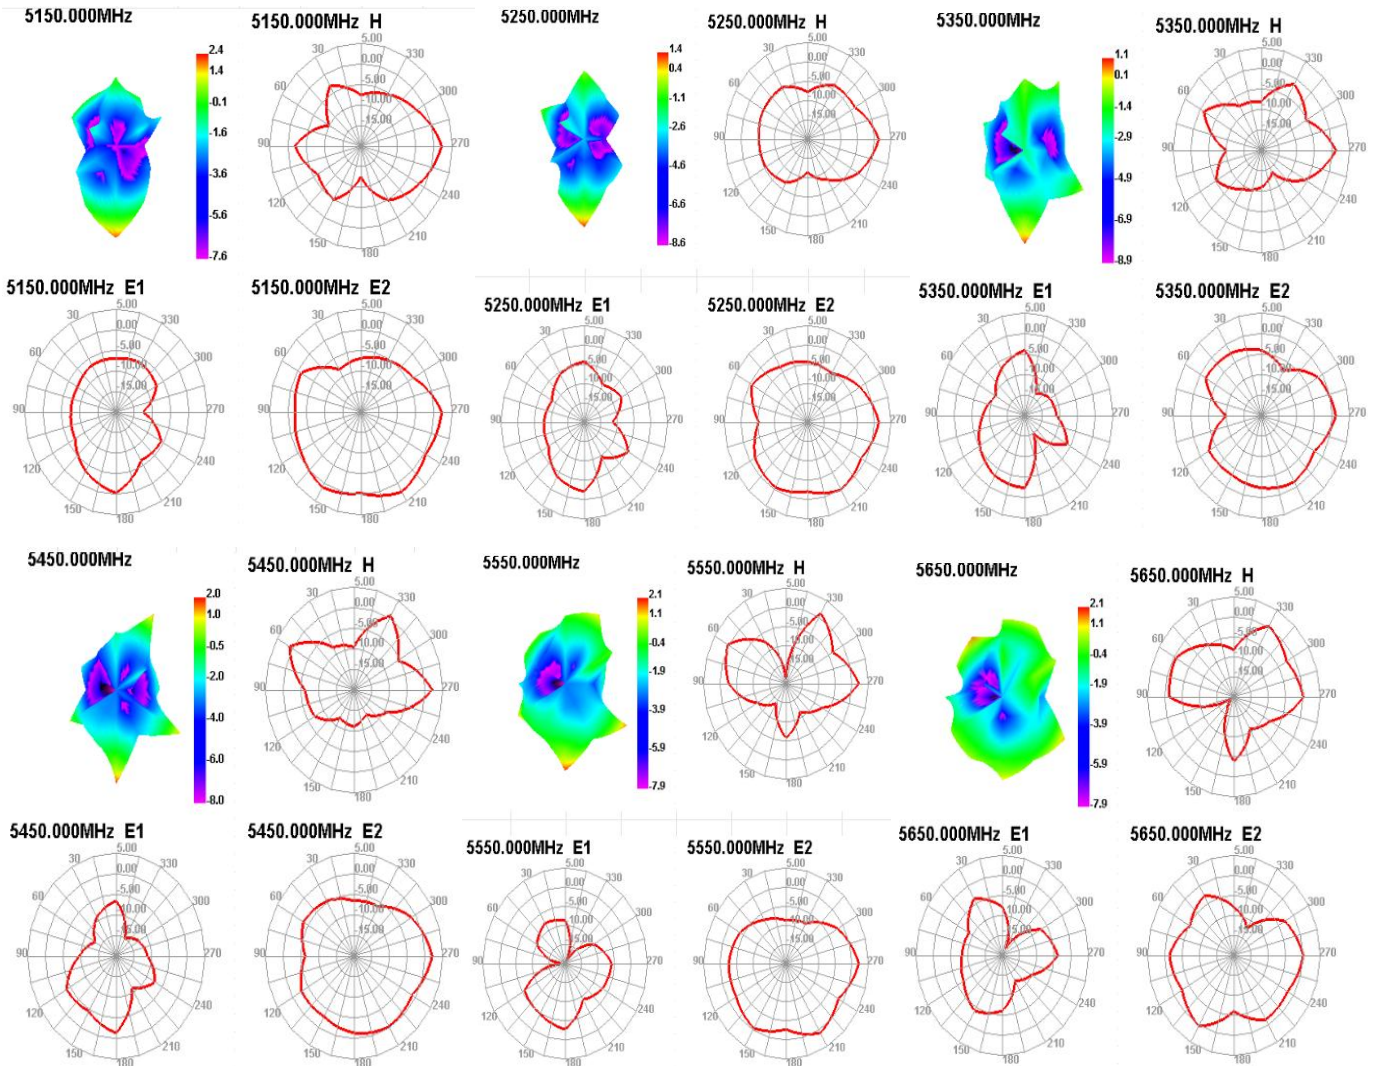

Company Address: 4th Floor, Building B5, Xinfu Industrial Park, Chongqing Road, Fuyong Town, Baoan District, Shenzhen Telephone :0755-27211658 Fax :0755-29485750



SHUN DA CHENG TECHNOLOGY CO., LTD

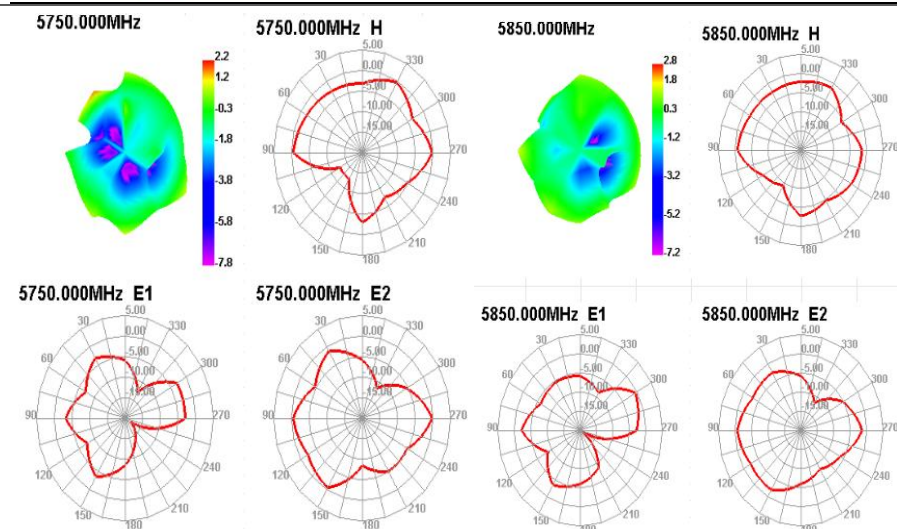

4. WIFI OTA Data

2.4G	802.11b, (2.4G) 11M		
Channel	CH1	CH6	CH11
TRP	13.29	13.5	13.72
9TIS	-81.09	-80.73	-80.55
5.8G	802.11a, (5.8G) 54M		
Channel	CH36	CH60	CH161
TRP	11.19	10.87	11.4
TIS	-70.65	-71.26	-70.48



Reliability Test Report

Test Date	2026. 03. 26	Sample Qty.	3	Inspector	Xu Yanfang	
Test Item	Requirement	testing equipment	Sample 1	Sample 2	Sample 3	PASS/NG
High temperature storage	The test was carried out after 24H exposure at +85℃ and 2H recovery	Constant temperature and humidity box	OK	OK	OK	Pass
Low temperature storage	The test was carried out after 24H exposure at -40℃ and 2H recovery	Constant temperature and humidity box	OK	OK	OK	Pass
High temperature work	At +60℃ for 24H	Constant temperature and humidity box	OK	OK	OK	Pass
Work in low temperature	At -20℃ under the condition of power work for 24H	Constant temperature and humidity box	OK	OK	OK	Pass
Salt spray test	The pH value was 6.5 ~ 7.2, and the temperature of the experimental chamber was (35±2)℃ ☐ 24H ☒ 48H	Salt spray testing machine	OK	OK	OK	Pass
Connector riveting and drawing force	1.13Wire diameter ≥ 10N 0.81Wire diameter ≥ 8N RG174 ≥60N RG178 ≥50N	Push pull meter	≥10N	≥10N	≥10N	Pass
Conclusion						Pass
Inspector & Date	Xu Yanfang 2026. 03. 26		Approval & Date			




Packing rules

Project name: DC15

Product name: FPC antenna


FPC antenna (one)



(two) Each PE bag contains 100pcs of products (subject to actual packaging)



(three) Then put the small antenna bag neatly into (Figure 3) and fill 10 small bags (the actual packaging shall prevail).



(four) The packaged antenna can be put into a carton, which can hold 5 large bags, each box can hold 5000PCS (Figure 4). (Subject to actual packaging)



supplier	
purchase order number	
material code	
specifications and models	
quantity	
date	

(five) After the packaging is completed, the shipping label should be affixed (Figure 5).



SHUN DA CHENG TECHNOLOGY CO., LTD


Install Wizard or Other

Installation process:

Take 1PCS of products and tear off the release paper on the back of the FPC by hand. Then align the positioning holes of the FPC with the positioning holes of the shell (positioning bars or positioning wires) and attach them to the shell smoothly. The specific positions are shown in the figure below:

Precautions for installation:

- ☐ After attaching the antenna, ensure that the FPC is fully attached to the shell;
- ☐ The positioning hole is aligned with the position of the housing positioning column;
- ☐ FPC edges are aligned with housing edges;
- ☐ When connecting the antenna with terminal to the PCBA end of the motherboard, align the terminal first and then close it vertically.
- ☐ When removing the antenna terminal, use a tool (such as a dedicated crowbar) to lift the terminal vertically. Do not pull the cable to remove the terminal directly

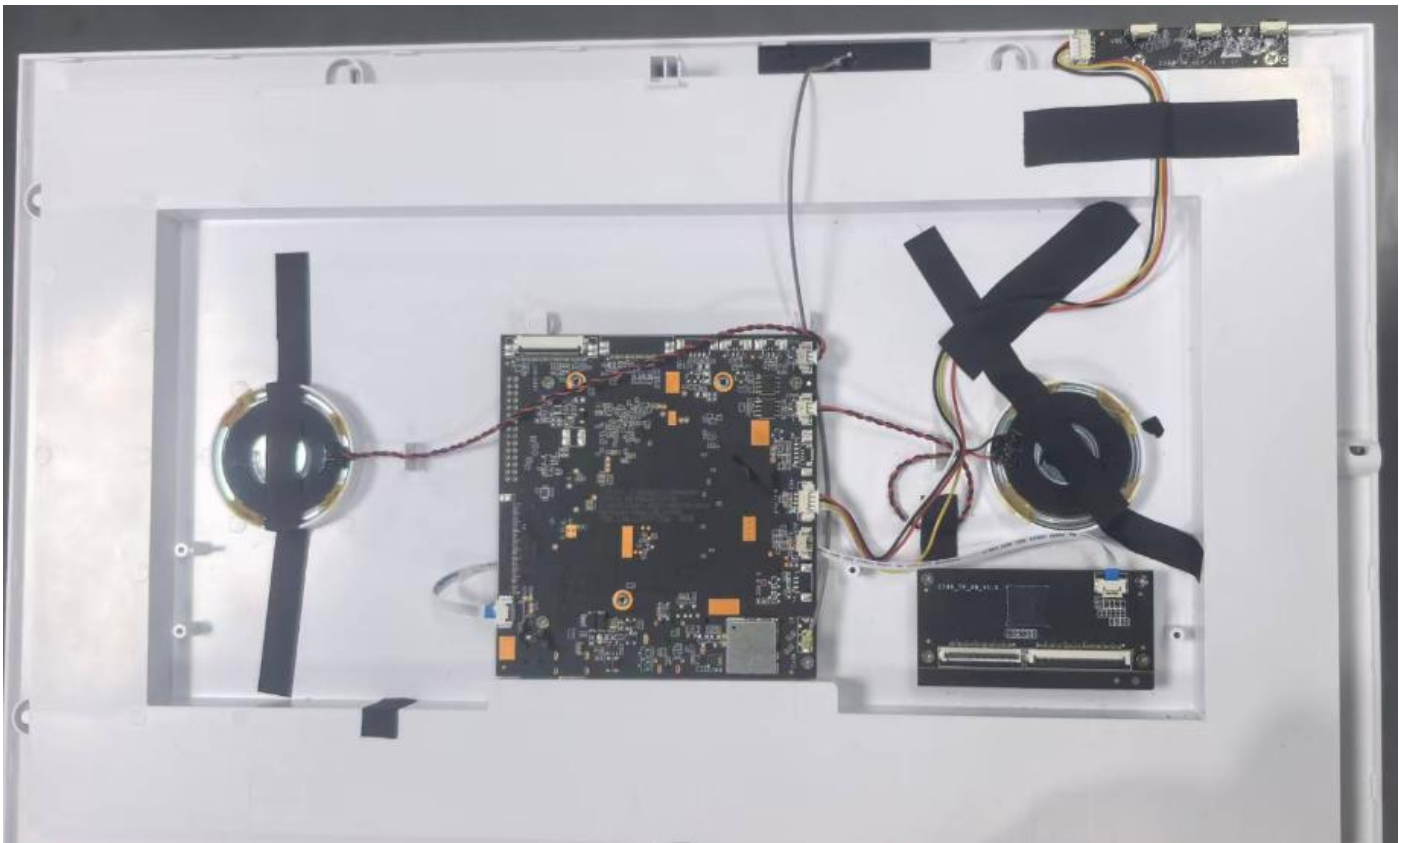



SHUN DA CHENG TECHNOLOGY CO., LTD

ROHS

Certificate

Certificate Number: UNIB25072421HC-01



Product: 5G/4G/WIFI/GPS/BT antenna/M808 antenna
Applicant: ShenZhen ShunDaCheng Technology Co., Ltd.
4th Floor, Building B5, Xinfu Industrial Zone, Fuyong Chongqing Road,
Baoan District, Shenzhen
Manufacturer: ShenZhen ShunDaCheng Technology Co., Ltd.
4th Floor, Building B5, Xinfu Industrial Zone, Fuyong Chongqing Road,
Baoan District, Shenzhen
Model No.: N/A
Trade Mark: N/A
Test Methods: IEC 62321-2:2021, IEC 62321-3-1:2013, IEC 62321-4:2013 +A1:2017,
IEC 62321-5:2013, IEC 62321-6:2015, IEC 62321-7-1:2015
IEC 62321-7-2:2017, IEC 62321-8:2017

The laboratory tested the product provided by the applicant according to the above test methods. According to the test results, the product conforms to RoHS Directive [(2011/65/EU and Amendment (EU) 2015/863)] issued by the European Commission. It is possible to use CE marking to demonstrate the compliance with RoHS Directive.

The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production. It is only valid in connection with the test report number: UNIB25072421HR-01.

Note: According to the requirements of the applicant for testing, details are shown in the test report.

RoHS

Aug. 28, 2025
Issue Date

Hoffer Lau

Shenzhen United Testing Technology Co., Ltd.

Shenzhen: D101&D401, No. 107, Kaicheng High-Tech Park, Taoyuan Community, Dalang Sub-District, Longhua District, Shenzhen, Guangdong, China/518109

Guangzhou: No.47-3, Industrial Road, Zhushan, Dalong Street, Panyu District, Guangzhou, Guangdong, China/511450;

101/F, Building 2, Tongxin Industrial Park, Xinqiao Village, Dalong Street, Panyu District, Guangzhou, Guangdong, China/511450

Tel: +86-755-86180996/+86-020-39277769

Web Site: www.uni-lab.hk/ E-mail: hofferlau@uni-lab.hk



Certificate of Compliance

Company Address: 4th Floor, Building B5, Xinfu Industrial Park, Chongqing Road, Fuyong Town, Baoan District, Shenzhen Telephone :0755-27211658 Fax :0755-29485750