TEST REPORT

Report No.:	BCTC2504325353-2E
Applicant:	SHENZHEN MINEWSEMI CO., LTD
Product Name:	WiFi Module
Test Model:	ME16WS01
Tested Date:	2025-05-06 to 2025-06-20
Issued Date:	2025-06-27

Shenzhen BCTC Testing Co., Ltd.

FCC ID:2BDJ6-ME16WS01

Product Name:	WiFi Module
Trademark:	MINEWSEMI
Model/Type Reference:	ME16WS01,ME16WS0
Prepared For:	SHENZHEN MINEWSEMI CO., LTD
Address:	3rd Floor,I Building, Gangzhilong Science Park, NO.6, Qinglong Road,Longhua District, Shenzhen
Manufacturer:	SHENZHEN MINEWSEMI CO., LTD
Address:	3rd Floor,I Building, Gangzhilong Science Park, NO.6, Qinglong Road,Longhua District, Shenzhen
Prepared By:	Shenzhen BCTC Testing Co., Ltd
Address:	1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date:	2025-05-06
Sample Tested Date:	2025-05-06 to 2025-06-20
Report No.:	BCTC2504325353-2E
Test Standards:	FCC Part15.247 ANSI C63.10:2013
Test Results:	PASS
Remark:	This is WIFI-2.4GHz band radio test report.

Tested by:

Brave Zeng/ Project Handler

Approved by:

Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table of Content

Test Report Declaration Page
1. Version 5
2. Test Summary 6
3. Measurement Uncertainty 7
4. Product Information and Test Setup 8
4.1 Product Information 8
4.2 Test Setup Configuration 9
4.4 Channel List 10
4.5 Test Mode 10
4.6 Table Of Parameters Of Text Software Setting 11
5. Test Facility And Test Instrument Used 12
5.1 Test Facility 12
5.2 Test Instrument Used 12
6. Conducted Emissions 15
6.1 Block Diagram Of Test Setup 15
6.2 Limit 15
6.3 Test procedure 15
6.4 EUT operating Conditions 15
6.5 Test Result 16
7. Radiated Emissions 18
7.1 Block Diagram Of Test Setup 18
7.2 Limit 19
7.3 Test procedure 20
7.4 EUT Operating Conditions 21
7.5 Test Result 21
8. Radiated Band Emission Measurement and Restricted Bands Of Operation 28
8.1 Block Diagram Of Test Setup 28
8.2 Limit 28
8.3 Test procedure 29
8.4 EUT Operating Conditions 29
8.5 Test Result 30
9. Power Spectral Density Test 32
9.1 Block Diagram Of Test Setup 32
9.2 Limit 32
9.3 Test procedure 32
9.4 EUT Operating Conditions 32
9.5 Test Result 33
10. -6dB Bandwidth Test 40
10.1 Block Diagram Of Test Setup 40
10.2 Limit 40
10.3 Test procedure 40
10.4 EUT Operating Conditions 40
10.5 Test Result 41
11. Peak Output Power Test 48
11.1 Block Diagram Of Test Setup 48
11.2 Limit 48
11.3 Test Procedure 48

11.4 EUT Operating Conditions 48
11.5 Test Result 49
12. 100 kHz Bandwidth Of Frequency Band Edge 50
12.1 Block Diagram Of Test Setup 50
12.2 Limit 50
12.3 Test Procedure 50
12.4 EUT Operating Conditions 50
12.5 Test Result 51
13. Duty Cycle Of Test Signal 71
13.1 Standard Requirement 71
13.2 Formula 71
13.3 Test Procedure 71
13.4 Test Result 71
14. Antenna Requirement 72
14.1 Limit 72
14.1 Test Result 72
15. EUT Test Setup Photographs 73

1. Version

Report No.	Issue Date	Description	Approved
BCTC2504325353-2E	2025-06-27	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	6dB Bandwidth	15.247 (a)(2)	PASS
3	Peak Output Power	15.247 (b)	PASS
4	Radiated Spurious Emission	15.247 (d)	PASS
5	Power Spectral Density	15.247 (e)	PASS
6	Restricted Band of Operation	15.205	PASS
7	Band Edge (Out of Band Emissions)	15.247 (d)	PASS
8	Antenna Requirement	15.203	PASS
NOTE1: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59℃

4. Product Information and Test Setup

4.1 Product Information

Model/Type Ref.	ME16WS01,ME16WS0
Model differences:	The following models of units we produce are identical in electrical, mechanical and physical structure; The difference is only in the model name, we finally have ME16WS01 as test model.
Hardware Version:	N/A
Software Version:	N/A
IEEE 802.11 WLAN Mode Supported	802.11b 802.11g 802.11n(20MHz channel bandwidth) 802.11n(40MHz channel bandwidth)
Operation Frequency:	802.11b/g/n 20MHz:2412~2462 MHz 802.11n/ 40MHz:2422~2452 MHz
Type of Modulation:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Number Of Channel:	11 channels for 802.11b/g/n(HT20); 7 Channels for 802.11n(HT40)
Antenna installation:	PCB antenna
Antenna Gain:	1.59dBi
Remark:	The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information.
Ratings:	DC 3.3V

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP Photographs for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission:



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	WiFi Module	N/A	ME16WS01	---	EUT
E-2	PC	N/A	N/A	---	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	N/A	N/A

Notes:
1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List for 802.11b/g/n (20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422
04	2427	05	2432	06	2437
07	2442	08	2447	09	2452
10	2457	11	2462		

Channel List for 802.11n (40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432
06	2437	07	2442	08	2447
09	2452				

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH 01	802.11b
Mode 2	CH 06	
Mode 3	CH 11	
Mode 4	CH 01	802.11g
Mode 5	CH 06	
Mode 6	CH 11	
Mode 7	CH 01	802.11n20
Mode 8	CH 06	
Mode 9	CH 11	
Mode 10	CH 03	802.11n 40
Mode 11	CH 06	
Mode 12	CH 09	
Mode 13	Transmit mode (Conducted emission and Radiated emission)	

Notes:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
3. According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b,6Mbps for 802.11g,13Mbps for 802.11n 20 , 54Mbps for 802.11 n 40

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Frequency	2412 MHz	2437 MHz	2462 MHz
Parameters	DEF	DEF	DEF
Frequency	2422 MHz	2437 MHz	2452 MHz
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.
FCC Test Firm Registration Number: 712850
A2LA certificate registration number is: CN1212
ISED Registered No.: 23583
ISED CAB identifier: CN0017

5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	**Manufacturer**	**Model#**	**Serial#**	**Last Cal.**	**Next Cal.**
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD 9561-F	01323	May 16, 2024	May 15, 2025

Conducted Emissions Test					
Equipment	**Manufacturer**	**Model#**	**Serial#**	**Last Cal.**	**Next Cal.**
Receiver	R&S	ESR3	102075	May 08, 2025	May 07, 2026
LISN	R&S	ENV216	101375	May 14, 2025	May 13, 2026
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD 9561-F	01323	May 14, 2025	May 13, 2026

RF Conducted Test					
Equipment	**Manufacturer**	**Model#**	**Serial#**	**Last Cal.**	**Next Cal.**
Power meter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025

RF Conducted Test					
Equipment	**Manufacturer**	**Model#**	**Serial#**	**Last Cal.**	**Next Cal.**
Power meter	Keysight	E4419	\	May 14, 2025	May 13, 2026
Power Sensor (AV)	Keysight	E9300A	\	May 14, 2025	May 13, 2026
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 14, 2025	May 13, 2026
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 14, 2025	May 13, 2026

Radiated Emissions Test (966 Chamber02)					
Equipment	**Manufacturer**	**Model#**	**Serial#**	**Last Cal.**	**Next Cal.**
966 chamber	SKET	966 Room	966	Oct. 31. 2024	Oct. 30. 2027
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRI7	100010	Oct. 31. 2024	Oct. 30. 2025
Amplifier	SKET	LNPA-30M01G-30	SK2021082004	Oct. 31. 2024	Oct. 30. 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9168	1323	May 21, 2024	May 20, 2025
Loop Antenna(9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenn(18GHz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Radiated Emissions Test (966 Chamber02)					
Equipment	**Manufacturer**	**Model#**	**Serial#**	**Last Cal.**	**Next Cal.**
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR3	102075	May 08, 2025	May 07, 2026
Receiver	R&S	ESRP	101154	May 14, 2025	May 13, 2026
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 14, 2025	May 13, 2026
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 24, 2025	May 23, 2026

Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 24, 2025	May 23, 2026
Amplifier	SKET	LAPA_01G18G-45dB	SK2021040901	May 14, 2025	May 13, 2026
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 24, 2025	May 23, 2026
Amplifier(18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 24, 2025	May 23, 2026
Horn Antenn(18GHz-40GHz)	Schwarzbeck	BBHA9170	00822	May 24, 2025	May 23, 2026
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 14, 2025	May 13, 2026
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

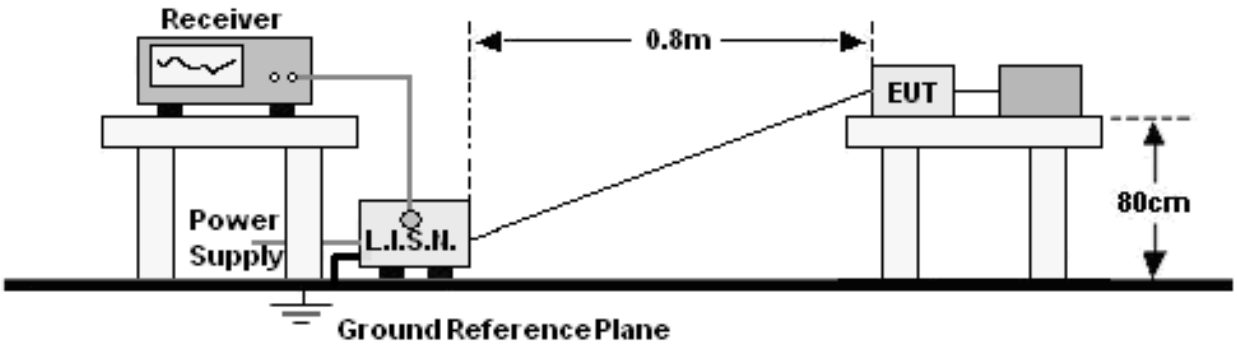

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:
1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

a. The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
b. The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
c. For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 13

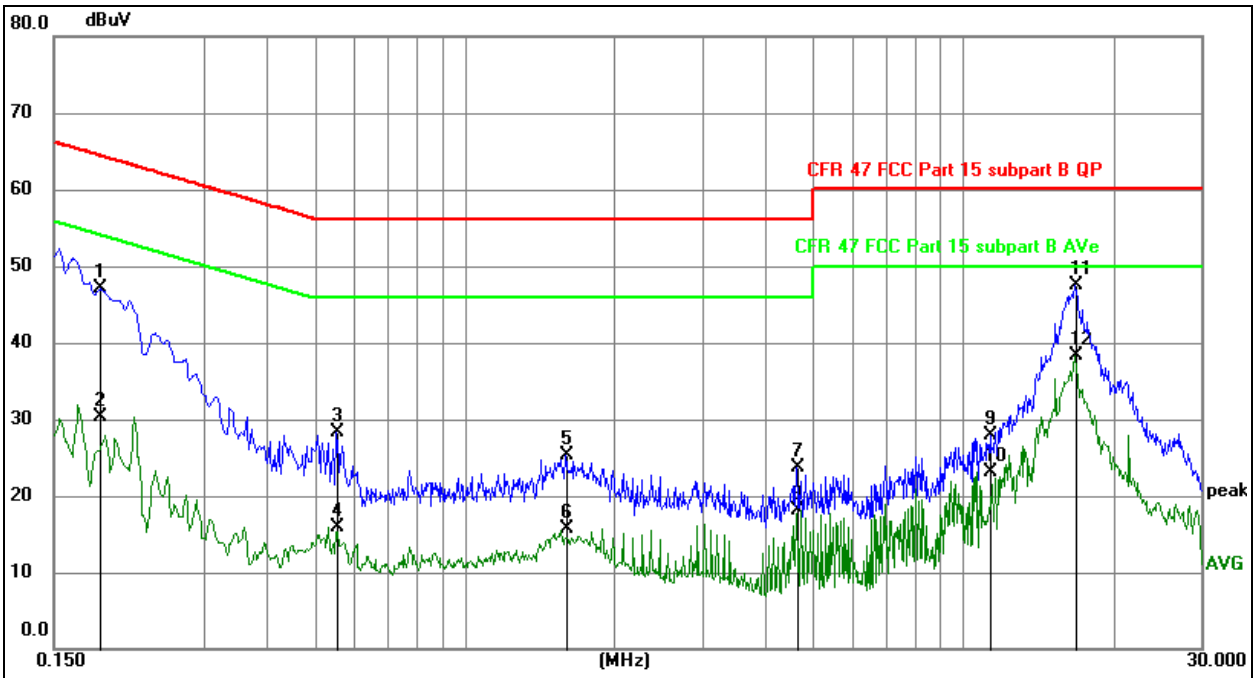

Remark:
1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1860	36.47	10.58	47.05	64.21	-17.16	QP
2	0.1860	19.75	10.58	30.33	54.21	-23.88	AVG
3	0.5550	17.67	10.65	28.32	56.00	-27.68	QP
4	0.5550	5.34	10.65	15.99	46.00	-30.01	AVG
5	1.5990	14.63	10.70	25.33	56.00	-30.67	QP
6	1.5990	4.91	10.70	15.61	46.00	-30.39	AVG
7	4.6455	12.45	11.18	23.63	56.00	-32.37	QP
8	4.6455	6.91	11.18	18.09	46.00	-27.91	AVG
9	11.3730	16.22	11.71	27.93	60.00	-32.07	QP
10	11.3730	11.38	11.71	23.09	50.00	-26.91	AVG
11	16.7775	35.28	12.28	47.56	60.00	-12.44	QP
12 *	16.7775	26.08	12.28	38.36	50.00	-11.64	AVG

Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 13

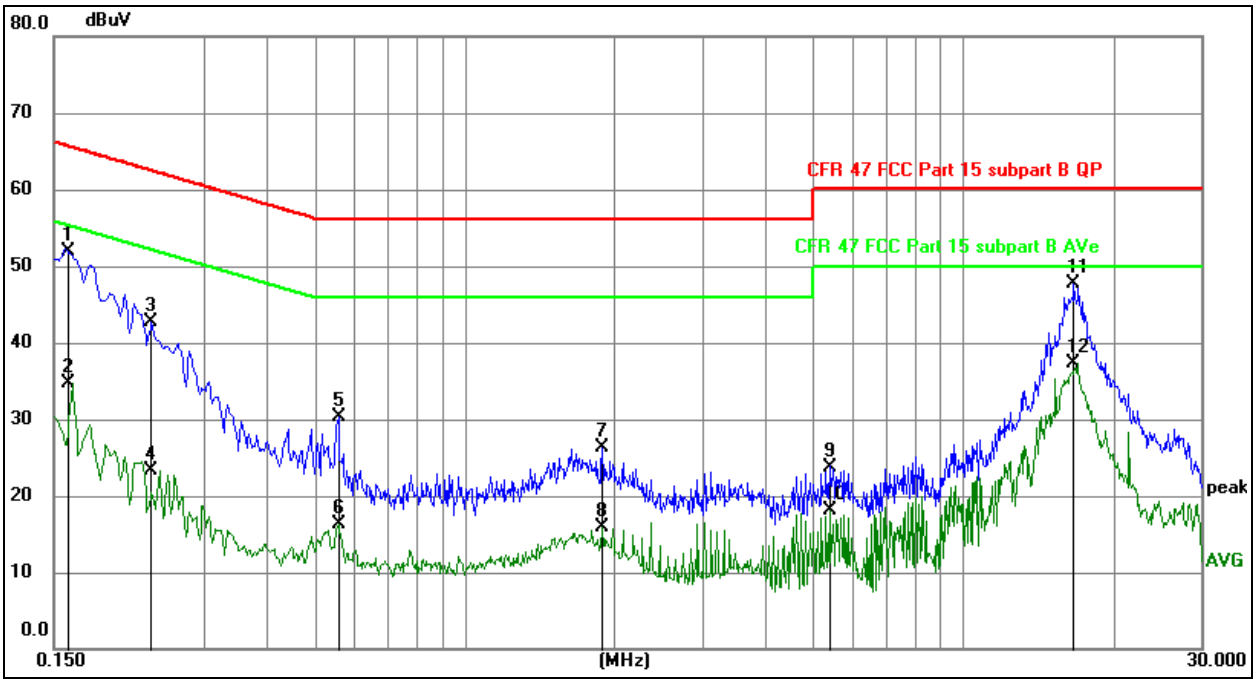

Remark:
1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1598	41.40	10.57	51.97	65.47	-13.50	QP
2	0.1598	24.20	10.57	34.77	55.47	-20.70	AVG
3	0.2353	32.15	10.59	42.74	62.26	-19.52	QP
4	0.2353	12.77	10.59	23.36	52.26	-28.90	AVG
5	0.5581	19.62	10.65	30.27	56.00	-25.73	QP
6	0.5581	5.56	10.65	16.21	46.00	-29.79	AVG
7	1.8879	15.60	10.76	26.36	56.00	-29.64	QP
8	1.8879	5.21	10.76	15.97	46.00	-30.03	AVG
9	5.3900	12.53	11.27	23.80	60.00	-36.20	QP
10	5.3900	6.79	11.27	18.06	50.00	-31.94	AVG
11 *	16.6612	35.35	12.27	47.62	60.00	-12.38	QP
12	16.6612	25.00	12.27	37.27	50.00	-12.73	AVG

7. Radiated Emissions

7.1 Block Diagram Of Test Setup

（A）Radiated Emission Test-Up Frequency Below 30MHz

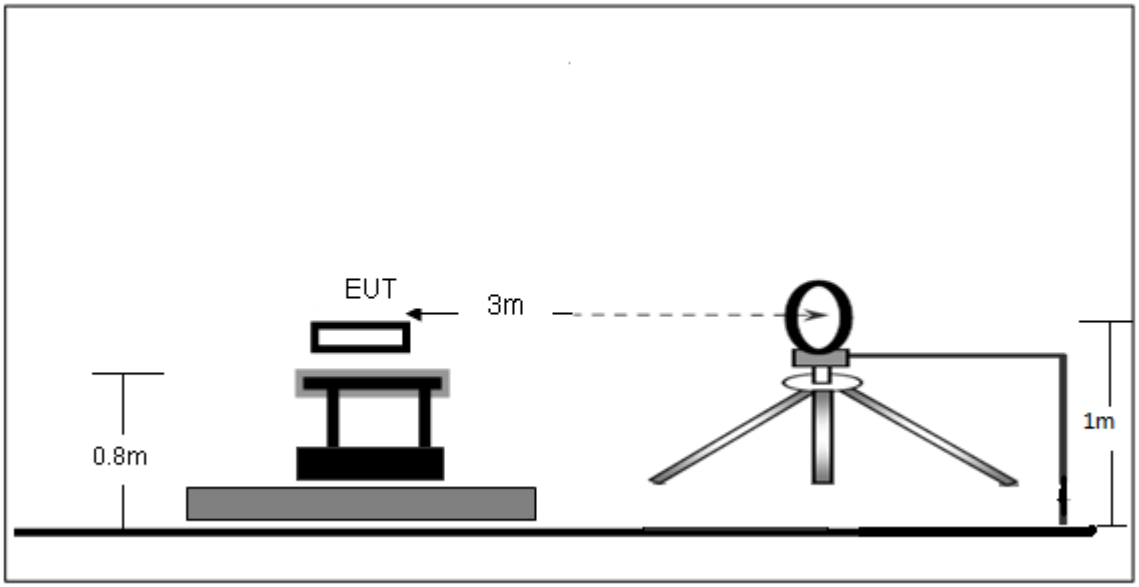

（B）Radiated Emission Test-Up Frequency 30MHz~1GHz

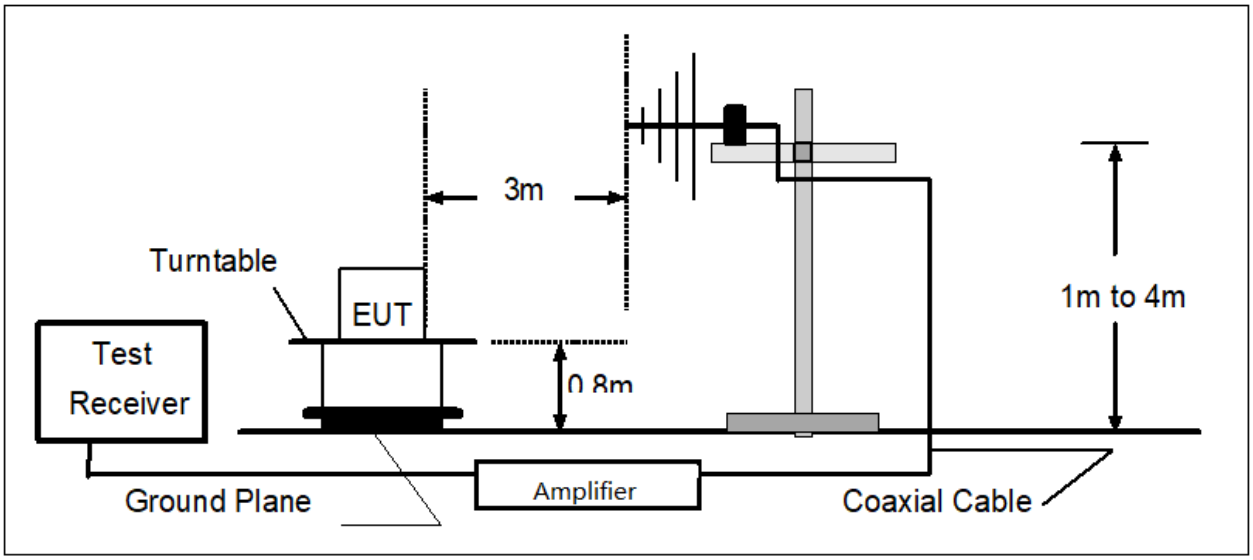

（C）Radiated Emission Test-Up Frequency Above 1GHz

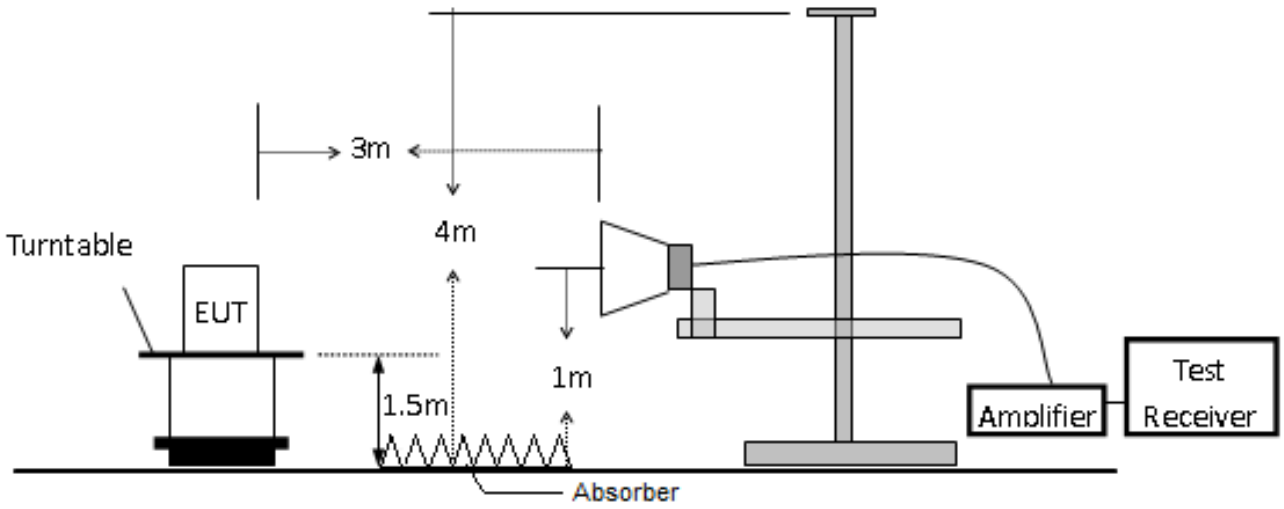

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency	Field Strength	Distance	Field Strength Limit at 3m Distance	
(MHz)	uV/m	(m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:
(1)The limit for radiated test was performed according to FCC PART 15C.
(2)The tighter limit applies at the band edges.
(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
(4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
(5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1)through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:
a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.
Note:
Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	DC 3.3V
Test Mode:	Mode 13	Polarization:	---

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:
The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
Distance extrapolation factor =40 log (specific distance/test distance)(dB);
Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Voltage :	DC 3.3V	Test Mode:	Mode 13

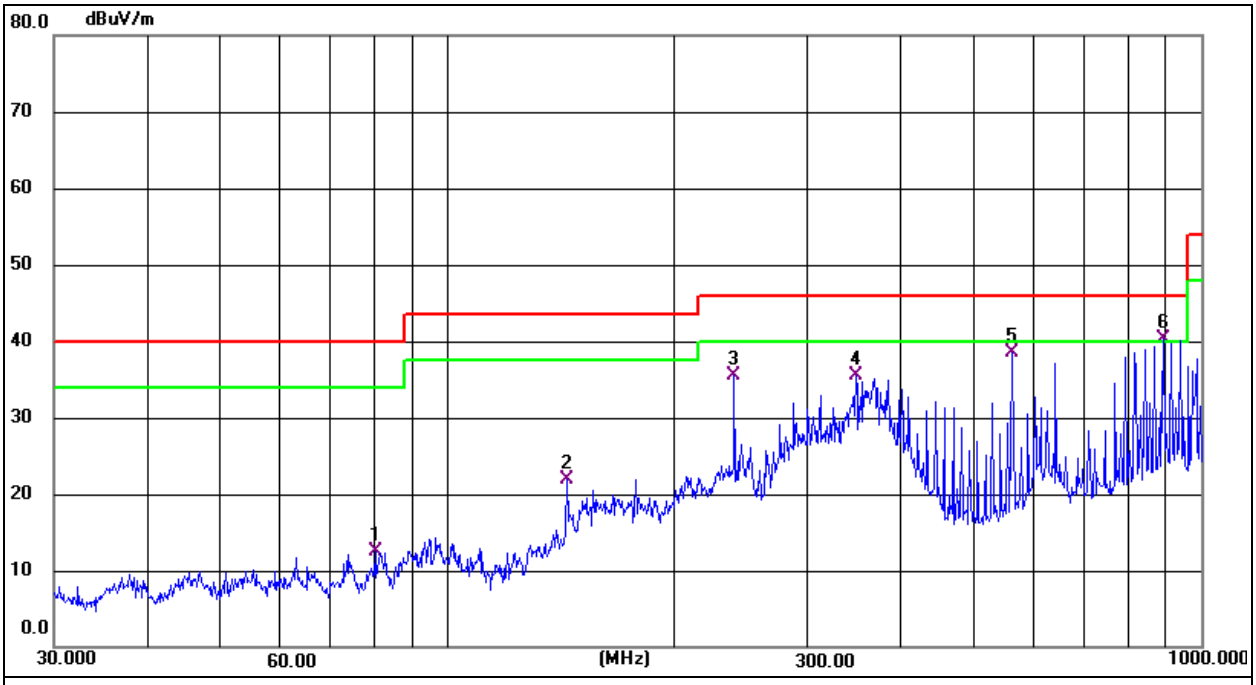

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	80.0806	32.93	-20.40	12.53	40.00	-27.47	QP
2	143.8295	37.64	-15.76	21.88	43.50	-21.62	QP
3	239.9874	52.91	-17.38	35.53	46.00	-10.47	QP
4	348.0274	49.36	-13.90	35.46	46.00	-10.54	QP
5	560.6928	46.54	-8.11	38.43	46.00	-7.57	QP
6 *	890.7278	42.11	-1.80	40.31	46.00	-5.69	QP

Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Voltage :	DC 3.3V	Test Mode:	Mode 13

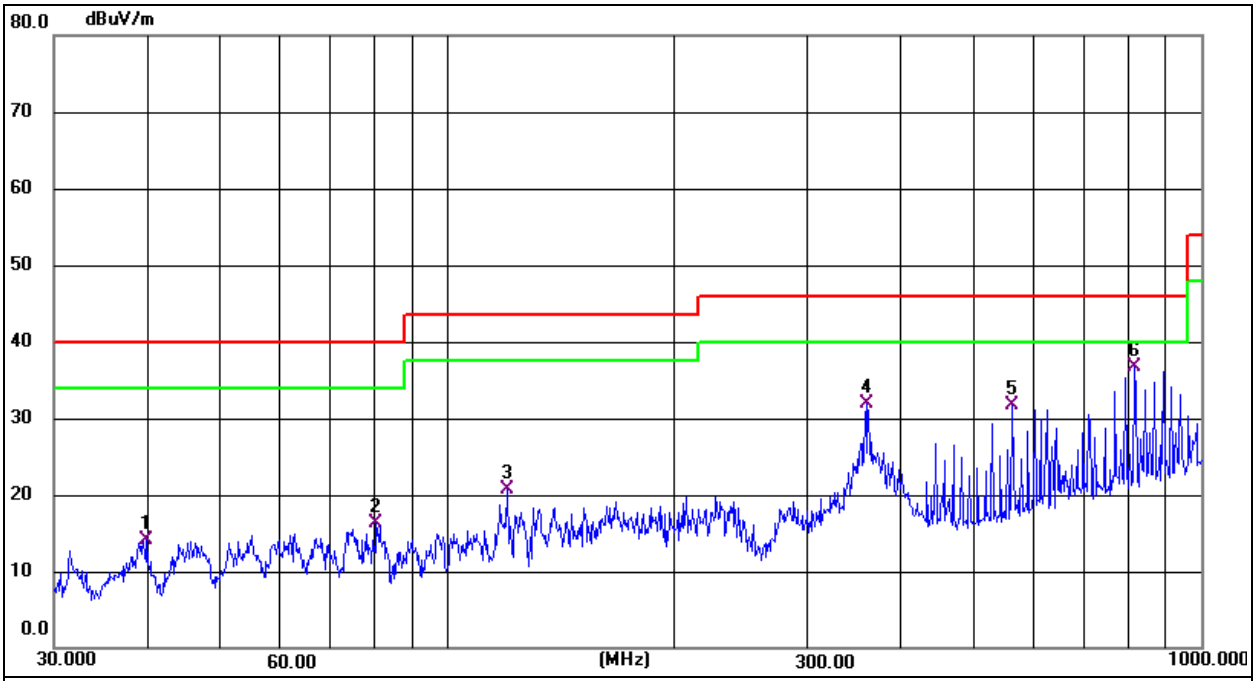

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.8542	31.63	-17.43	14.20	40.00	-25.80	QP
2	80.3619	36.72	-20.40	16.32	40.00	-23.68	QP
3	119.8556	38.39	-17.75	20.64	43.50	-22.86	QP
4	360.4476	45.48	-13.54	31.94	46.00	-14.06	QP
5	560.6928	39.90	-8.11	31.79	46.00	-14.21	QP
6 *	815.9678	39.66	-2.91	36.75	46.00	-9.25	QP

Between 1GHz – 25GHz

802.11b

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure-ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low channel:2412MHz							
V	4824.00	72.84	-19.95	52.89	74.00	-21.11	PK
V	4824.00	63.86	-19.95	43.91	54.00	-10.09	AV
V	7236.00	63.56	-14.14	49.42	74.00	-24.58	PK
V	7236.00	54.15	-14.14	40.01	54.00	-13.99	AV
H	4824.00	70.29	-19.95	50.34	74.00	-23.66	PK
H	4824.00	60.73	-19.95	40.78	54.00	-13.22	AV
H	7236.00	62.56	-14.14	48.42	74.00	-25.58	PK
H	7236.00	53.79	-14.14	39.65	54.00	-14.35	AV
Middle channel:2437MHz							
V	4874.00	71.14	-19.85	51.29	74.00	-22.71	PK
V	4874.00	63.87	-19.85	44.02	54.00	-9.98	AV
V	7311.00	62.50	-13.93	48.57	74.00	-25.43	PK
V	7311.00	53.69	-13.93	39.76	54.00	-14.24	AV
H	4874.00	67.88	-19.85	48.03	74.00	-25.97	PK
H	4874.00	58.28	-19.85	38.43	54.00	-15.57	AV
H	7311.00	59.91	-13.93	45.98	74.00	-28.02	PK
H	7311.00	50.92	-13.93	36.99	54.00	-17.01	AV
High channel:2462MHz							
V	4924.00	73.45	-19.75	53.70	74.00	-20.30	PK
V	4924.00	64.50	-19.75	44.75	54.00	-9.25	AV
V	7386.00	66.50	-13.72	52.78	74.00	-21.22	PK
V	7386.00	57.32	-13.72	43.60	54.00	-10.40	AV
H	4924.00	70.76	-19.75	51.01	74.00	-22.99	PK
H	4924.00	61.36	-19.75	41.61	54.00	-12.39	AV
H	7386.00	65.46	-13.72	51.74	74.00	-22.26	PK
H	7386.00	58.20	-13.72	44.48	54.00	-9.52	AV

Remark:
1.Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure-ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low channel:2412MHz							
V	4824.00	71.21	-19.95	51.26	74.00	-22.74	PK
V	4824.00	60.62	-19.95	40.67	54.00	-13.33	AV
V	7236.00	63.49	-14.14	49.35	74.00	-24.65	PK
V	7236.00	53.54	-14.14	39.40	54.00	-14.60	AV
H	4824.00	68.83	-19.95	48.88	74.00	-25.12	PK
H	4824.00	59.08	-19.95	39.13	54.00	-14.87	AV
H	7236.00	61.72	-14.14	47.58	74.00	-26.42	PK
H	7236.00	53.73	-14.14	39.59	54.00	-14.41	AV
Middle channel:2437MHz							
V	4874.00	68.68	-19.85	48.83	74.00	-25.17	PK
V	4874.00	59.77	-19.85	39.92	54.00	-14.08	AV
V	7311.00	60.07	-13.93	46.14	74.00	-27.86	PK
V	7311.00	51.03	-13.93	37.10	54.00	-16.90	AV
H	4874.00	65.69	-19.85	45.84	74.00	-28.16	PK
H	4874.00	56.35	-19.85	36.50	54.00	-17.50	AV
H	7311.00	58.77	-13.93	44.84	74.00	-29.16	PK
H	7311.00	51.58	-13.93	37.65	54.00	-16.35	AV
High channel:2462MHz							
V	4924.00	71.48	-19.75	51.73	74.00	-22.27	PK
V	4924.00	60.71	-19.75	40.96	54.00	-13.04	AV
V	7386.00	64.23	-13.72	50.51	74.00	-23.49	PK
V	7386.00	53.79	-13.72	40.07	54.00	-13.93	AV
H	4924.00	70.11	-19.75	50.36	74.00	-23.64	PK
H	4924.00	60.89	-19.75	41.14	54.00	-12.86	AV
H	7386.00	61.40	-13.72	47.68	74.00	-26.32	PK
H	7386.00	53.45	-13.72	39.73	54.00	-14.27	AV

Remark:
1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure-ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low channel:2412MHz							
V	4824.00	72.46	-19.95	52.51	74.00	-21.49	PK
V	4824.00	61.91	-19.95	41.96	54.00	-12.04	AV
V	7236.00	64.70	-14.14	50.56	74.00	-23.44	PK
V	7236.00	55.69	-14.14	41.55	54.00	-12.45	AV
H	4824.00	71.21	-19.95	51.26	74.00	-22.74	PK
H	4824.00	61.18	-19.95	41.23	54.00	-12.77	AV
H	7236.00	62.04	-14.14	47.90	74.00	-26.10	PK
H	7236.00	54.35	-14.14	40.21	54.00	-13.79	AV
Middle channel:2437MHz							
V	4874.00	71.15	-19.85	51.30	74.00	-22.70	PK
V	4874.00	62.74	-19.85	42.89	54.00	-11.11	AV
V	7311.00	61.39	-13.93	47.46	74.00	-26.54	PK
V	7311.00	52.97	-13.93	39.04	54.00	-14.96	AV
H	4874.00	68.66	-19.85	48.81	74.00	-25.19	PK
H	4874.00	59.12	-19.85	39.27	54.00	-14.73	AV
H	7311.00	59.27	-13.93	45.34	74.00	-28.66	PK
H	7311.00	51.17	-13.93	37.24	54.00	-16.76	AV
High channel:2462MHz							
V	4924.00	72.83	-19.75	53.08	74.00	-20.92	PK
V	4924.00	63.50	-19.75	43.75	54.00	-10.25	AV
V	7386.00	65.85	-13.72	52.13	74.00	-21.87	PK
V	7386.00	56.78	-13.72	43.06	54.00	-10.94	AV
H	4924.00	70.35	-19.75	50.60	74.00	-23.40	PK
H	4924.00	61.13	-19.75	41.38	54.00	-12.62	AV
H	7386.00	63.65	-13.72	49.93	74.00	-24.07	PK
H	7386.00	56.42	-13.72	42.70	54.00	-11.30	AV

Remark:
1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n40

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure-ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low channel:2422MHz							
V	4844.00	72.88	-19.91	52.97	74.00	-21.03	PK
V	4844.00	62.90	-19.91	42.99	54.00	-11.01	AV
V	7266.00	62.00	-14.06	47.94	74.00	-26.06	PK
V	7266.00	52.01	-14.06	37.95	54.00	-16.05	AV
H	4844.00	70.19	-19.91	50.28	74.00	-23.72	PK
H	4844.00	60.87	-19.91	40.96	54.00	-13.04	AV
H	7266.00	59.48	-14.06	45.42	74.00	-28.58	PK
H	7266.00	51.39	-14.06	37.33	54.00	-16.67	AV
Middle channel:2437MHz							
V	4874.00	68.96	-19.85	49.11	74.00	-24.89	PK
V	4874.00	61.61	-19.85	41.76	54.00	-12.24	AV
V	7311.00	59.94	-13.93	46.01	74.00	-27.99	PK
V	7311.00	51.63	-13.93	37.70	54.00	-16.30	AV
H	4874.00	64.06	-19.85	44.21	74.00	-29.79	PK
H	4874.00	54.58	-19.85	34.73	54.00	-19.27	AV
H	7311.00	58.59	-13.93	44.66	74.00	-29.34	PK
H	7311.00	51.56	-13.93	37.63	54.00	-16.37	AV
High channel:2452MHz							
V	4904.00	71.04	-19.79	51.25	74.00	-22.75	PK
V	4904.00	61.43	-19.79	41.64	54.00	-12.36	AV
V	7356.00	62.77	-13.80	48.97	74.00	-25.03	PK
V	7356.00	52.04	-13.80	38.24	54.00	-15.76	AV
H	4904.00	68.14	-19.79	48.35	74.00	-25.65	PK
H	4904.00	57.26	-19.79	37.47	54.00	-16.53	AV
H	7356.00	61.75	-13.80	47.95	74.00	-26.05	PK
H	7356.00	54.11	-13.80	40.31	54.00	-13.69	AV

Remark:
1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8. Radiated Band Emission Measurement and Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

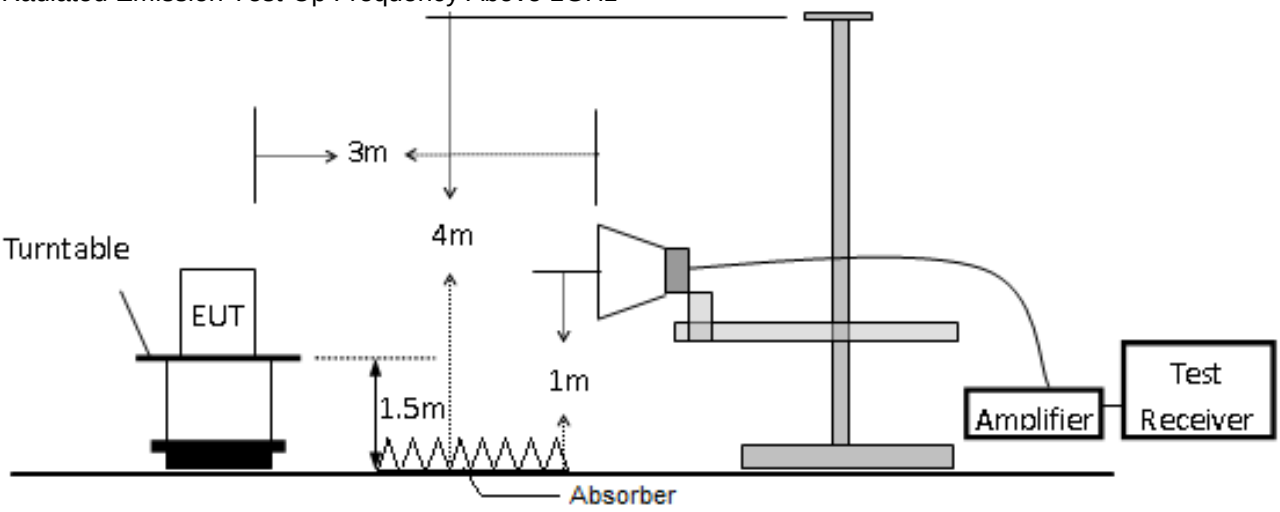

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
[1]0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	([2])
13.36-13.41			

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:
(1)The limit for radiated test was performed according to FCC PART 15C.
(2)The tighter limit applies at the band edges.
(3)Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:
a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.
Note:
Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure-ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11b	Low Channel 2412MHz							
	H	2390.00	73.63	-25.43	48.20	74.00	54.00	PASS
	H	2400.00	76.03	-25.40	50.63	74.00	54.00	PASS
	V	2390.00	72.96	-25.43	47.53	74.00	54.00	PASS
	V	2400.00	72.97	-25.40	47.57	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	72.95	-25.15	47.80	74.00	54.00	PASS
	H	2500.00	69.94	-25.10	44.84	74.00	54.00	PASS
	V	2483.50	72.03	-25.15	46.88	74.00	54.00	PASS
	V	2500.00	67.52	-25.10	42.42	74.00	54.00	PASS
802.11g	Low Channel 2412MHz							
	H	2390.00	72.74	-25.43	47.31	74.00	54.00	PASS
	H	2400.00	75.32	-25.40	49.92	74.00	54.00	PASS
	V	2390.00	73.30	-25.43	47.87	74.00	54.00	PASS
	V	2400.00	73.86	-25.40	48.46	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	70.93	-25.15	45.78	74.00	54.00	PASS
	H	2500.00	68.04	-25.10	42.94	74.00	54.00	PASS
	V	2483.50	72.77	-25.15	47.62	74.00	54.00	PASS
	V	2500.00	69.09	-25.10	43.99	74.00	54.00	PASS

Remark:
1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure-ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11n20	Low Channel 2412MHz							
	H	2390.00	72.91	-25.43	47.48	74.00	54.00	PASS
	H	2400.00	74.96	-25.40	49.56	74.00	54.00	PASS
	V	2390.00	73.81	-25.43	48.38	74.00	54.00	PASS
	V	2400.00	74.87	-25.40	49.47	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	71.45	-25.15	46.30	74.00	54.00	PASS
	H	2500.00	69.60	-25.10	44.50	74.00	54.00	PASS
	V	2483.50	72.76	-25.15	47.61	74.00	54.00	PASS
	V	2500.00	68.20	-25.10	43.10	74.00	54.00	PASS
802.11n40	Low Channel 2422MHz							
	H	2390.00	72.68	-25.43	47.25	74.00	54.00	PASS
	H	2400.00	74.50	-25.40	49.10	74.00	54.00	PASS
	V	2390.00	72.79	-25.43	47.36	74.00	54.00	PASS
	V	2400.00	72.85	-25.40	47.45	74.00	54.00	PASS
	High Channel 2452MHz							
	H	2483.50	72.76	-25.15	47.61	74.00	54.00	PASS
	H	2500.00	69.04	-25.10	43.94	74.00	54.00	PASS
	V	2483.50	72.25	-25.15	47.10	74.00	54.00	PASS
	V	2500.00	68.27	-25.10	43.17	74.00	54.00	PASS

Remark:
1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

9. Power Spectral Density Test

9.1 Block Diagram Of Test Setup

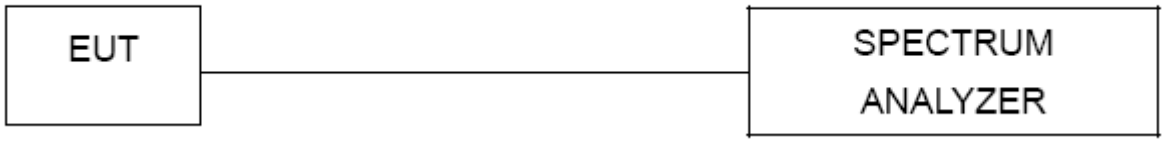

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Limits Of Radiated Emission Measurement (Above 1000MHz)

9.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW ≥ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.
Note: Power Spectral Density(dBm)=Reading+Cable Loss

9.5 Test Result

Temperature:	24℃	Relative Humidity:	50%
Pressure:	101KPa	Test Voltage:	DC 3.3V

Test Mode	Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
TX b Mode	2412 MHz	-8.56	8	PASS
	2437 MHz	-8.71	8	PASS
	2462 MHz	-8.86	8	PASS
TX g Mode	2412 MHz	-15.07	8	PASS
	2437 MHz	-14.5	8	PASS
	2462 MHz	-15.36	8	PASS
TX n Mode(20M)	2412 MHz	-15.49	8	PASS
	2437 MHz	-15.1	8	PASS
	2462 MHz	-15.04	8	PASS
TX n Mode(40M)	2422 MHz	-19.49	8	PASS
	2437 MHz	-17.15	8	PASS
	2452 MHz	-19.75	8	PASS

Test Graphs

PSD NVNT b 2412MHz Ant1

PSD NVNT b 2437MHz Ant1

PSD NVNT b 2462MHz Ant1

PSD NVNT g 2412MHz Ant1

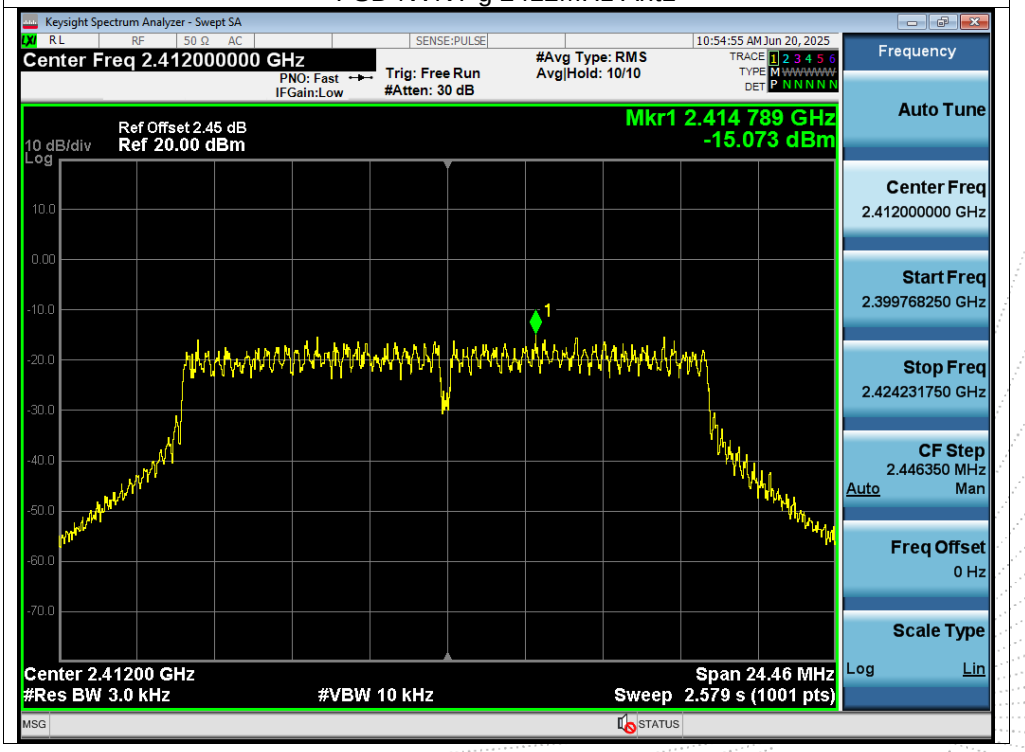

PSD NVNT g 2437MHz Ant1

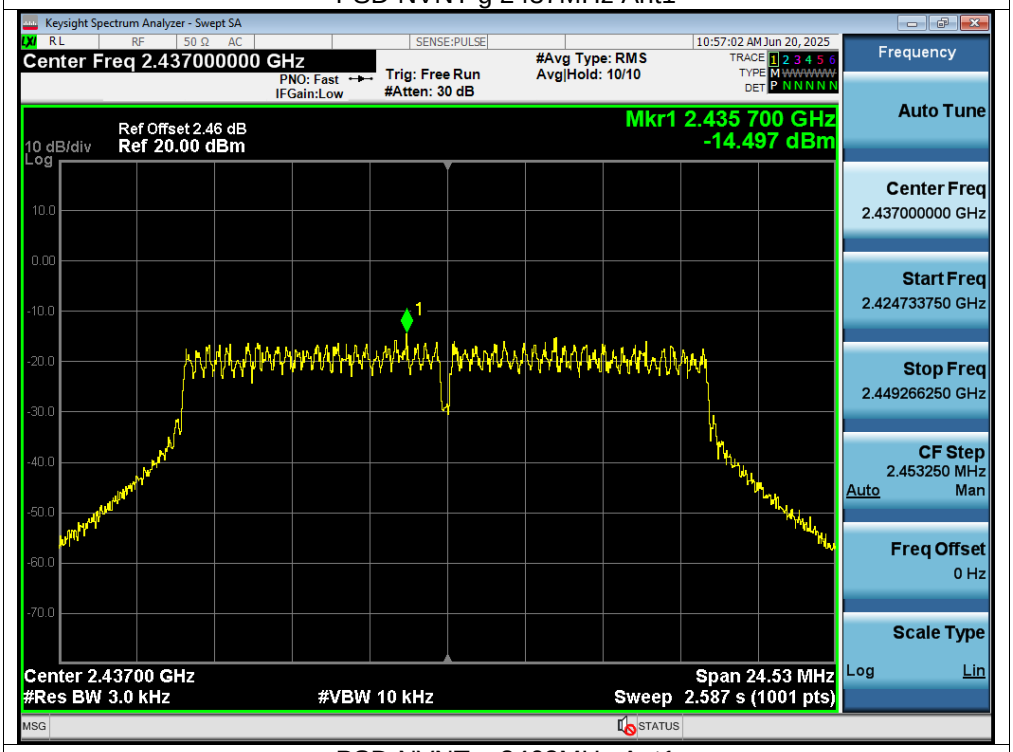

PSD NVNT g 2462MHz Ant1

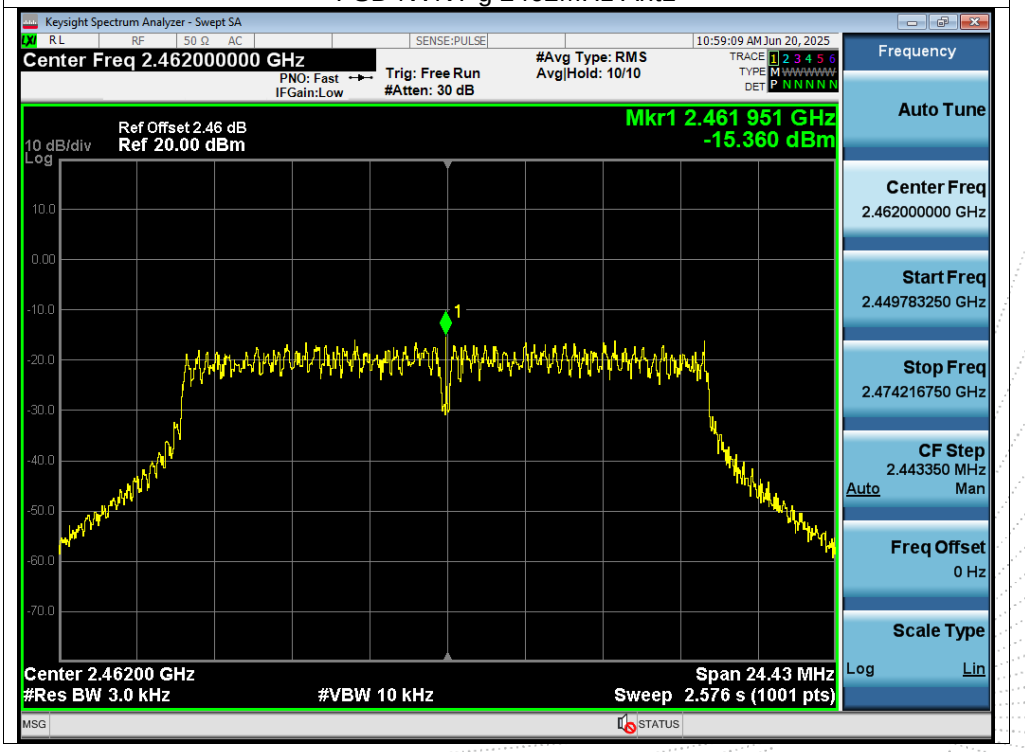

PSD NVNT n20 2412MHz Ant1

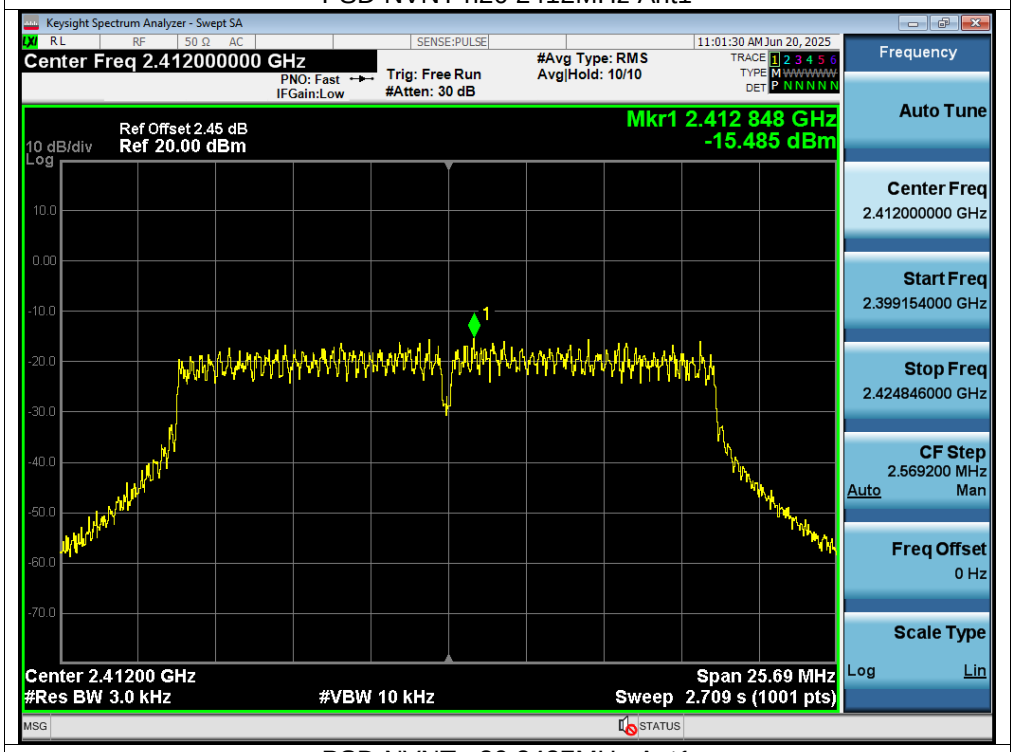
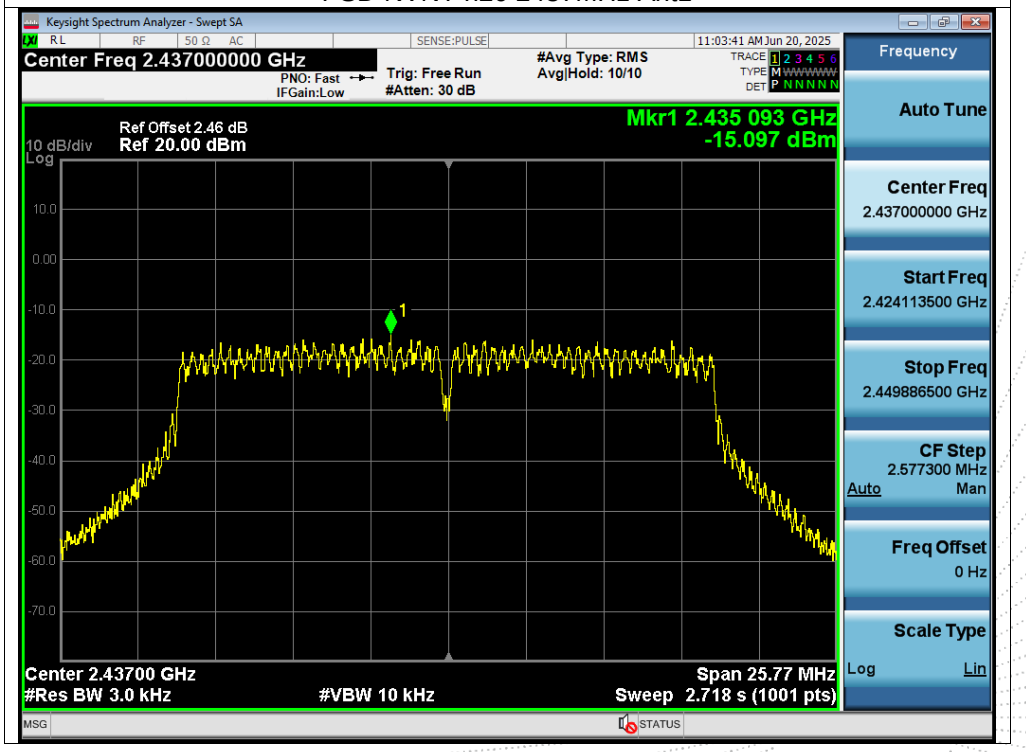
PSD NVNT n20 2437MHz Ant1