

# 承认书

## Acknowledgment Letter

客户名称: 深圳市佳宇创科技  
ShenZhenShiJiaYuChuangTechnology Co.Ltd

客户料号: 25.25131-1

我司型号: YZ-G25-7.6UH-3200GS-8MM

送样日期: 2025 年 2 月 19 日

供应方: 东莞捷瑞思科技有限公司

Dongguan Jierestech Technology Co., Ltd.

|       |       |       |
|-------|-------|-------|
| 绘制    | 审 核   | 批 准   |
| 王 莉 芝 | 邓 祥 桂 | 陆 如 全 |

客户承认:

|     |       |     |
|-----|-------|-----|
| 合 格 | 不 合 格 | 承 认 |
|     |       |     |
| 备 注 |       |     |

东莞捷瑞思科技有限公司

Dongguan Jierestech Technology Co., Ltd.

Tel: \_\_\_\_\_



Fax: 86+13632701380

地址: 东莞市大岭山镇朗湖路 96 号 (金雄达科技园 L 栋 3 楼)

No. 96, Langhu Road, Dalingshan Town, Dongguan City (Building L, 3rd Floor, Jinxiangda Science and Technology Park)

| 客户名称 | 客户料号       | 我司型号                    | 版 本 | 日 期       |
|------|------------|-------------------------|-----|-----------|
| 佳宇创  | 25.25131-1 | YZ-G25-7.6UH-3200GS-8MM | A0  | 2025.2.19 |

一、平面结构图Planar structure diagram: 单位Organization:MM

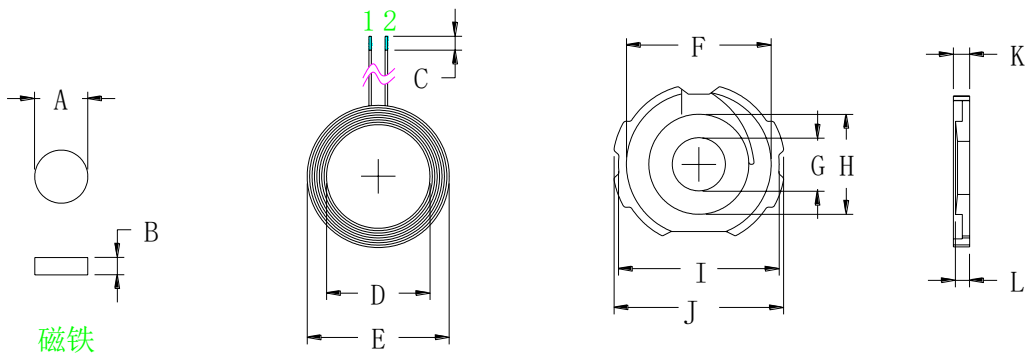

|   |              |
|---|--------------|
| A | 7.65±0.1     |
| B | 2.0±0.1      |
| C | 2.0±1        |
| D | 15±0.2       |
| E | 20.7±0.3     |
| F | 21±0.2       |
| G | 7.7±0.1      |
| H | 14.5±0.2     |
| I | 23.5±0.3     |
| J | 25±0.2       |
| K | 2.6±0.15     |
| L | 2.5±0.15中柱高度 |
| M | 8±1          |

二、产品参数Product parameters:

| 脚 位<br>Foot position | 线 径<br>Path | 圈 数<br>Circle<br>Number | 备 注<br>Note             |
|----------------------|-------------|-------------------------|-------------------------|
| 1 - 2                | 0.08*24P    | 13                      | Hot air<br>twisted yarn |

三、技术要求Technical requirements:

1. Fix the ends of the wires securely to prevent any loosening or breakage of the wires.
2. According to the customer's requirements, cut the excessively long wire ends, apply tin plating, and ensure that the tin plating depth is uniformly 2±1MM.
3. Apply the appropriate white glue on the magnetic sheet and attach the coil. During the process, ensure that the surface of the product remains clean and tidy.
4. The used magnetic disc has round holes and is in good condition without any damage.
- 5.Additional processing (as per customer requirements): Install a 7.65x2.0mm magnet in the middle circular hole of the finished product, and attach a 13\*13mm square double-sided adhesive on the back of the finished product, then package.

四、电性参数Electrical parameters:

1.Inductance value, Q value:

$$\text{PIN 1} - \text{2} = 7.6\text{UH} \pm 0.3\text{UH}$$

$$Q \geq 25$$

以上电感与 Q 值以铨华 1062A 仪器, 以 100KHZ/1.0Vrms 为标准或等同仪器。

The above inductance and Q value were measured using the Quanhua 1062A instrument, with a standard of 100KHZ/1.0Vrms or an equivalent instrument.

五、材料清单Material List:

| 序号<br>Serial<br>Number | 名称<br>Name                       | 材质<br>Material                                      | 供应商<br>Supplier                      | 备 注<br>Note                                                                            |
|------------------------|----------------------------------|-----------------------------------------------------|--------------------------------------|----------------------------------------------------------------------------------------|
| 1                      | Hot air<br>twisted yarn          | 0.08X24P                                            | Uighur-Han or<br>equivalent          |                                                                                        |
| 2                      | Disk                             | G25 Hard<br>substrate                               | Tiantong or<br>equivalent            |                                                                                        |
| 3                      | Tin                              | High-<br>temperature<br>environmental<br>protection | Thousand<br>Islands or<br>equivalent |                                                                                        |
| 4                      | White glue                       | BY882                                               | Bao Yue or<br>equivalent             |                                                                                        |
| 5                      | Strong<br>magnetism              | 7.65*2.0*3200GS                                     | Lianxin or<br>equivalent             | Additional<br>processin<br>g<br>procedure<br>s, as per<br>customer<br>requireme<br>nts |
| 6                      | Double-sided<br>adhesive<br>tape | 513-13*13mm                                         | Honghui or d                         | Square<br>shape                                                                        |
|                        |                                  |                                                     |                                      |                                                                                        |
|                        |                                  |                                                     |                                      |                                                                                        |

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|  |  |  |  |  |