

承認書

SPECIFICATION FOR APPROVAL

客 戶:	创杰电子
CUSTOMER:	Defurly Electronic Technology Co., Ltd.
客 戶 料 號:	
CUST P/N:	
音 澤 料 號:	G40*0.75-20.5-0.07*100P-10TS-6.2UH-W38-L30MM+B
FINE P/N:	J
產 品 型 號:	
DESC:	Φ 40MMX0.8MM
日 期:	
DATE:	2026/05/26
版 本:	
Version:	A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE

东莞市音泽电子科技有限公司

Dongguan Yinzhe Electronic Technology Co., Ltd.

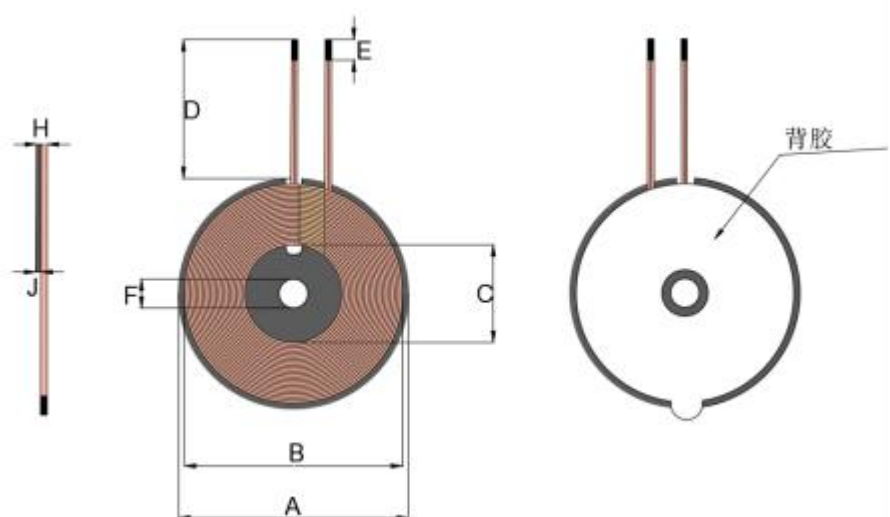
工廠地址：东莞市茶山镇兴韩路（创富中心城）2 栋 901 号

Factory Address: Room 901, Building 2, Xinghan Road (Chuangfu Center City),
Chashan Town, Dongguan City

Version Change History

[illegible]

SPECIFICATION

產 品 型 號: DESC		G40*0.75-20.5-0.07*100P-10T S-6.2UH-W38-L10MM+BJ	版本 Rev: A.0	客戶 CUST:	
				客戶料号 CUST P/N:	
一、尺寸 DIMENSION:(mm) 				A	40±0.5mm
				B	38±0.5mm
				C	20.5±0.5mm
				D	30±2mm
				E	3±2mm
				F	5.3±0.5mm
				H	2.2±0.15mm
				J	0.75±0.05mm
二、原理图 SCHEMATIC DIAGRAM: 				注:	
				1.交叉出线; 1.Crossed line 2.线圈贴 40mm 开槽硬磁片, 磁片尺寸 40±0.5mm, 厚度为 0.75±0.05mm 2.Coil adhesive 40mm slotted hard magnetic sheet, sheet size 40±0.5mm, thickness 0.75± 0.05mm 3.磁片背面贴背胶 3. Adhesive backing for magnetic sheets	

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	丝包线 0.07*100P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.6uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.2uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤60m Ω	100KHz/1.0V	LCZ METER 1062B

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE