

SPECIFICATION FOR APPROVAL

产品规格承认书

CUSTOMER:

(客户名称)

CUSTOMER P/N:

(客户型号)

DESCRIPTION/SPEC:

(品名/规格)

MPP. TX Coil Module

PART NUMBER:

(产品编号)

SAMPLE DATE:

(送样日期)

APPROVAL SIGNATURE (供应商承认签章)

制作 Make	检查 inspect	审核 To examine

APPROVAL SIGNATURE (客户承认签章)

	日 期

兴宁市沐坚旺电子科技有限公司

Xingning Mu Jianwang Electronic Technology Co., Ltd.


地址: 广东省兴宁市宁新街道官汕四路 839 号 1-3 楼

Address: No. 839, Guanshan Fourth Road, Ningxin Subdistrict,
Xingning City, Guangdong Province, 1st to 3rd floors

Mobile: 135 2870 3607

E-mail: 773085417@qq.com

1. DIMENSIONS & MARKING(UNIT:mm):

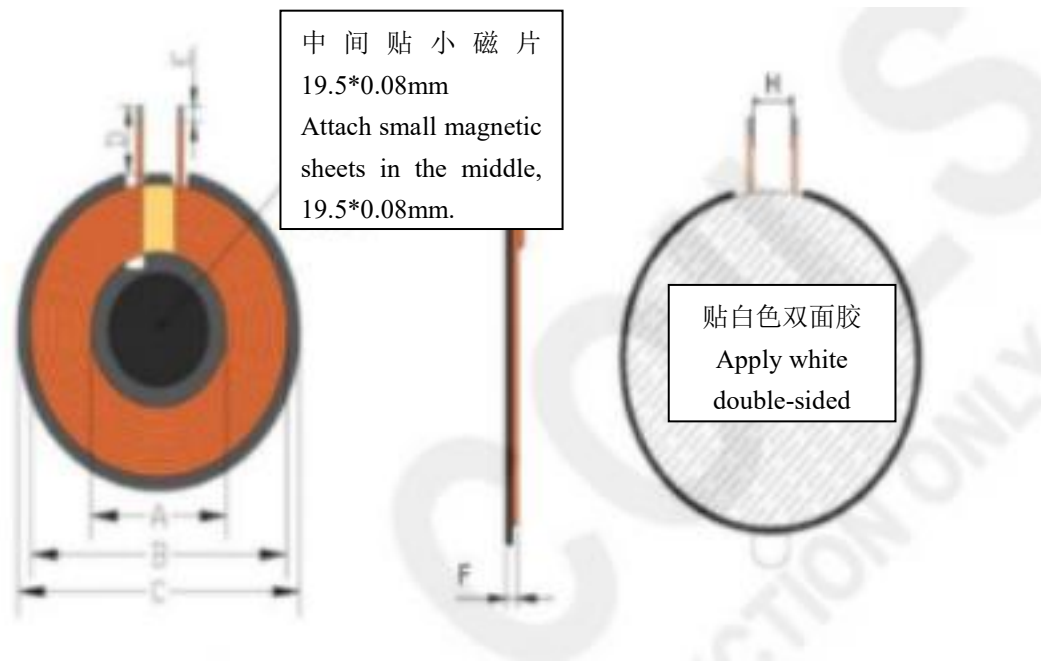

project	A	B	C	D	E
Specifications	20.5±0.5	39±1.0	42.5±0.5	20±1.5	3±1.5
project		F Does not include the thickness of the double-sided adhesive tape.	H		
Specifications		2.3MAX	6±2.0		

Remarks备注:

- 1.1. 线圈交叉出线，包5mm宽高温胶带1-2圈；
The coil has crossed leads, wrapped with 1-2 layers of 5mm-wide high-temperature tape.
- 1.2. 磁片尺寸：42.5*5.0*0.8mm，磁片背贴双面胶（41.5*0.08mm）+中间贴Φ19.5*0.8mm圆片。
Magnetic disc dimensions: 42.5*5.0*0.8mm, with

double-sided adhesive (41.5*0.08mm) on the back and a central circular disc (Φ 19.5*0.8mm).

2.WINDING INSTRUCTION & DESCTIPTION:

序号 No.	起头 S	收尾 F	圈数 TURNS	漆包线 WIRE	高温胶带 HIGH TEMPERATURE TAPE
L	S	F	11 圈 1 层 Circle 11, Level 1	热风绞合线 0.08*75P Hot Air Twisted Wire 0.08*75P	5mm TYP

3. ELECTRICAL SPECIFICATIONS @25°C

3. 1. OCL: S-F=7.7uH $\pm$ 10% @100KHz/1V;

3. 2. RDC: S-F=60m Ω MAX。