

承 認 書

SPECIFICATION FOR APPROVAL

客 戶: CUSTOMER:	德福瑞林
客 戶 料 號: CUST P/N:	
音 澤 料 號: FINE P/N:	G43.2*0.75 中孔 8-20.5-0.08*80P-11TS-8.0UH-L10MM+BJ-中间贴 20*0.8 柱子
產 品 型 號: DESC:	Φ 43.2MMX0.75MMX8MM
日 期: DATE:	2026/09/15
版 本: Version:	A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
何立成	马莉	但可清	

Dongguan Yinze Electronic Technology Co., Ltd

Factory Address: No. 901, Building 2, Xinghan Road (Chuangfu Center City),
Chashan Town, Dongguan City

但可清 TEL: 18617251159


Version Change History

[illegible]

SPECIFICATION


產品型號: DESC	G43.2*0.75-20.5-0.08*80P-11 TS-8.0UH-L10MM+BJ-中间贴 20*0.8 柱子	版本 Rev: A.0	客戶 CUST:	德福瑞林
			客户料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

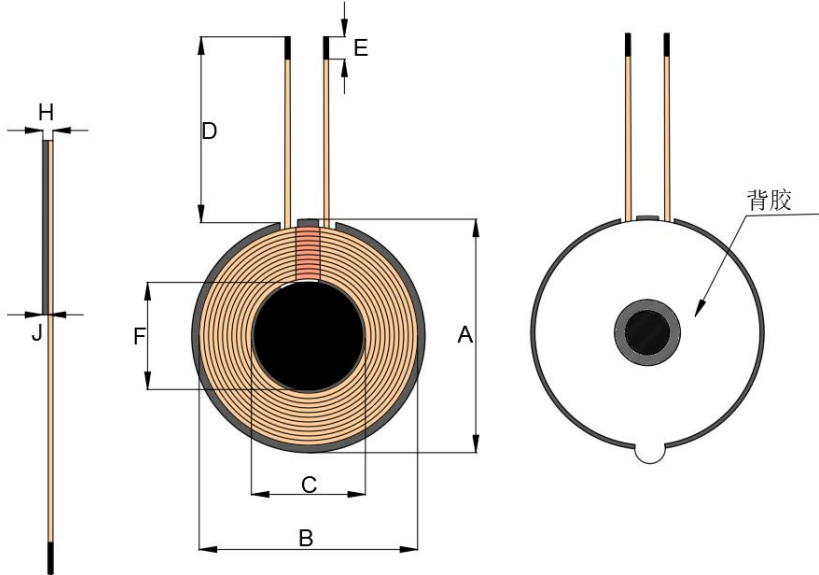

A	43.2±0.5
B	40±0.5
C	20.5±0.5
D	10±2
E	3±1
F	20±0.05
H	2.2±0.15
J	0.75±0.05

二、原理图 SCHEMATIC DIAGRAM:

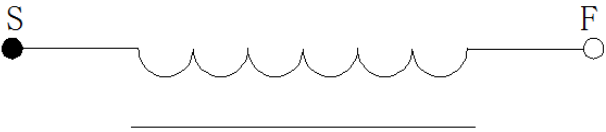

- 注:
- 交叉出线;
 - 线圈贴 43.2mm 双槽磁片, 磁片尺寸 43.2±0.5mm,, 厚度为 0.75±0.05mm.
 - 磁片面贴背胶,
 - 中间贴 20*0.8mm 柱子。

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	热风线 0.08*80P	11Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10 ℃, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	4.7uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	8.0uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤55m Ω	100KHz/1.0V	LCZ METER 1062B

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
何立成 2026.09.15	