



RF MEASUREMENT REPORT

FCC ID: 2BDOJ-COMBINE8HDR
Applicant: RF Venue, Inc.
Product: In-Ear Monitor Transmitter Combiner
Model No.: Combine8 HDR
Brand Name: RFVENUE
FCC Classification: Part 15 Wireless Microphone (DWM)
FCC Rule Part(s): Part 15 Subpart C (Section 15.236)
Result: Complies
Received Date: 2026-05-20
Test Date: 2026-06-16 ~ 2026-06-24

Prepared By:

Aurora Ding

Aurora Ding

Reviewed By:

Jame Yuan

Jame Yuan

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report. Testing was performed in accordance with the applicable measurement procedures. The test results reported herein apply only to the specific item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Shenzhen) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R26S1036056-U201	V01	Initial Report	2026-07-09	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	6
1.7. Input Signal	6
2. Test Configuration	7
2.1. Test Mode	7
2.2. Test Software	7
2.3. Applied Standards.....	7
2.4. Test Environment Condition.....	7
3. Measuring Instrument	8
4. Decision Rules and Measurement Uncertainty.....	9
4.1. Decision Rules	9
4.2. Measurement Uncertainty	9
5. Test Result	10
5.1. Summary	10
5.2. 99% Occupied Bandwidth Measurement.....	11
5.2.1. Test Limit	11
5.2.2. Test Procedure	11
5.2.3. Test Setting	11
5.2.4. Test Setup	11
5.2.5. Test Result	11
5.3. Frequency Tolerance Measurement	12
5.3.1. Test Limit	12
5.3.2. Test Procedure	12
5.3.3. Test Setting	12
5.3.4. Test Setup	13
5.3.5. Test Result	13
5.4. Emission Mask Measurement.....	14
5.4.1. Test Limit	14
5.4.2. Test Procedure	16

5.4.3.	Test Setting	16
5.4.4.	Test Setup	16
5.4.5.	Test Result	16
5.5.	Output Power Measurement	17
5.5.1.	Test Limit	17
5.5.2.	Test Procedure	17
5.5.3.	Test Setting	17
5.5.4.	Test Setup	17
5.5.5.	Test Result	18
5.6.	Spurious Emission Measurement	19
5.6.1.	Test Limit	19
5.6.2.	Test Procedure	20
5.6.3.	Test Setting	20
5.6.4.	Test Setup	21
5.6.5.	Test Result	23
5.7.	AC Conducted Emissions Measurement	24
5.7.1.	Test Limit	24
5.7.2.	Test Setup	24
5.7.3.	Test Result	24
Appendix A - Test Result.....		25
A.1	99% Occupied Bandwidth Test Result	25
A.2	Frequency Tolerance Test Result	29
A.3	Emission Mask Test Result	30
A.4	Output Power Test Result	32
A.5	Spurious Emission Test Result	33
A.6	AC Conducted Emissions Test Result	46
Appendix B - Test Setup Photograph		48
Appendix C - EUT Photograph		49

1. General Information

1.1. Applicant

RF Venue, Inc.

24 Walpole Park South, Unit 1, Walpole, Massachusetts, 02081 USA

1.2. Manufacturer

RF Venue, Inc.

24 Walpole Park South, Unit 1, Walpole, Massachusetts, 02081 USA

1.3. Testing Facility

☐	Test Site - MRT Suzhou Laboratory	
	☐ Laboratory Location (Suzhou - Wuzhong)	
	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China	
	☐ Laboratory Location (Suzhou - SIP)	
	4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China	
	☐ Laboratory Location (Suzhou - Wujiang)	
Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China		
Laboratory Accreditations		
A2LA: 3628.01		CNAS: L10551
FCC: CN1166		ISED: CN0001
☒	Test Site - MRT Shenzhen Laboratory	
	Laboratory Location (Shenzhen)	
	1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China	
	Laboratory Accreditations	
A2LA: 3628.02		
FCC: CN1284		ISED: CN0105

1.4. Product Information

Product Name	In-Ear Monitor Transmitter Combiner
Model No.	Combine8 HDR
EUT Identification No.	Y-2605020-R036-05
Radio Specification	Transmitter Combiner
Operating Temperature	-20 ~ 50 °C
Antenna Information	Refer to section 1.5
Power Type	120 ~ 240 V AC
Note: The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	470 ~ 608 MHz
Channel Spacing	1 MHz
Antenna Type	Dipole Antenna
Max Declared Peak Gain	4.0 dBi

Note: The product is sold without an antenna.

1.6. Working Frequencies

Bottom Channel (MHz)	Middle Channel (MHz)	Top Channel (MHz)
470.200	539.000	607.800

1.7. Input Signal

Signal Source	Signal Parameter	Level (dBm)
SMBV 100B	Analog (FM, Frequency 2.5 kHz, Deviation 75 kHz)	15.0
SMBV 100B	Digital (OFDM)	15.0
Microphone	Digital (16QAM)	15.0

2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by FM
Mode 2: Transmit by OFDM
Mode 3: Transmit by 16QAM

2.2. Test Software

No test software was used for this test.

2.3. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.236
- KDB 206256 D01 v03
- ANSI C63.10-2020
- ANSI C63.10-2020/Cor1-2023
- ANSI C63.10a-2024
- EN 300 422-1 V 2.2.1

2.4. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75%RH

3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Anechoic Chamber	BOOMWAVE	NS-AC1	MRTSUE06496	1 year	2026-07-04	NS-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06572	1 year	2027-02-02	NS-AC1
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06573	1 year	2027-05-10	NS-AC1
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06574	1 year	2026-07-09	NS-AC1
EMI Test Receiver	R&S	ESR3	MRTSUE06575	1 year	2027-03-09	NS-AC1/ NS-SR2
Preamplifier	EMCI	EMC184045SE	MRTSUE06641	1 year	2027-01-05	NS-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2027-04-14	NS-AC1/ NS-TR2
Signal Generator	R&S	SMBV100B	MRTSUE07095	1 year	2027-03-05	NS-AC1/ NS-TR2
Attenuator	MVE	MVE2213	MRTSUE11077	1 year	2027-05-27	NS-TR2
Attenuator	MVE	MVE2213	MRTSUE11078	1 year	2027-05-27	NS-TR2
RF Cable	UCwave	UCE500	MRTSUE07372	1 year	2026-07-20	NS-TR2
RF Cable	UCwave	UCE500	MRTSUE07373	1 year	2026-07-20	NS-TR2
Temperature Chamber	OUKE	OK-TH-100C	MRTSUE06899	1 year	2027-04-04	NS-TR2
Two-Line V-Network	R&S	ENV216	MRTSUE06578	1 year	2027-03-09	NS-SR2
Shielding Room	BOOMWAVE	NS-SR2	MRTSUE06551	5 years	2029-06-10	NS-SR2

Software	Version	Function
EMI V3	V 3.0.0	EMI Test Software
Controller_T-E-TAC-2	1.02	RE Antenna & Turntable

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.

(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
9 kHz ~ 150 kHz:	3.59 dB
150 kHz ~ 30 MHz:	3.20 dB
Radiated Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
Coaxial:	9 kHz ~ 30 MHz: 2.56 dB
Coplanar:	9 kHz ~ 30 MHz: 2.55 dB
Horizontal:	30 MHz ~ 200 MHz: 3.48 dB
	200 MHz ~ 1 GHz: 4.17 dB
	1 GHz ~ 40 GHz: 5.01 dB
Vertical:	30 MHz ~ 200 MHz: 4.09 dB
	200 MHz ~ 1 GHz: 5.30 dB
	1 GHz ~ 40 GHz: 4.85 dB
Spurious Emissions, Conducted	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 2.9 dB	
Output Power	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 1.4 dB	
Occupied Bandwidth	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 2.6%	

5. Test Result

5.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Test Result
15.236(f)(1)	99% Occupied Bandwidth	Conducted	Pass
15.236(f)(1)(iii)	Frequency Tolerance		Pass
15.236(g)(1) & (2)	Emission Mask		Pass
15.236(d)(1)	RF Output Power		Pass
15.236(g)(4)	Spurious Emission	Radiated & Conducted	Pass
15.207	AC Conducted Emissions 150 kHz - 30 MHz	Line Conducted	Pass

Note 1: The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

Note 2: After comparing the output power of all ports on the EUT, the port 6 with the highest output power was selected for testing.

Note 3: Mode 1 and Mode 2 are used for full compliance testing, while Mode 3 is used for simultaneous multi-port transmission spurious emissions verification testing.

5.2. 99% Occupied Bandwidth Measurement

5.2.1. Test Limit

(1)(ii) One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200 kHz.

(2) A wireless multichannel audio system may have an operating bandwidth not exceeding 6 megahertz and must have a mode of operation in which it is capable of operating with at least three audio channels per megahertz. For wireless multichannel audio systems operating in the TV bands (channels 2-36), the 6 megahertz (or less) channel must fall entirely within a single TV channel.

5.2.2. Test Procedure

ANSI C63.10-2020 - Section 6.9.3

5.2.3. Test Setting

1. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
2. Set RBW $\geq$ 1% to 5% of the OBW
3. VBW = Approximately three times RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

5.2.4. Test Setup



5.2.5. Test Result

Refer to Appendix A.1.

5.3. Frequency Tolerance Measurement

5.3.1. Test Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery.

5.3.2. Test Procedure

ANSI C63.10-2020 - Section 6.8

5.3.3. Test Setting

The EUT was programmed to transmit with an unmodulated carrier.

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20 °C operating frequency as reference frequency. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made. Repeat step measure with 10 °C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20 °C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

5.3.4. Test Setup

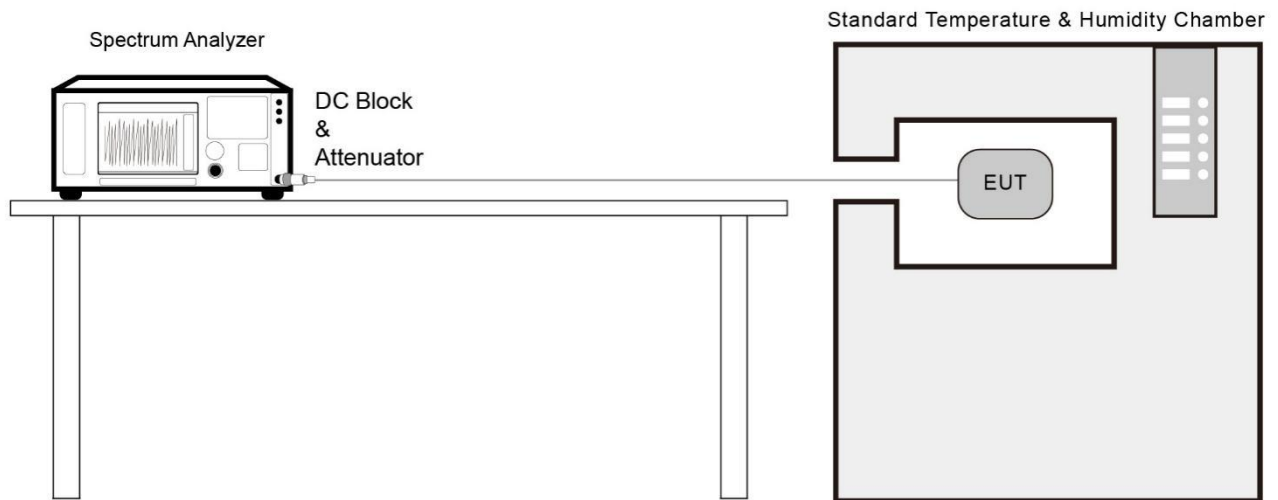

5.3.5. Test Result

Refer to Appendix A.2.

5.4. Emission Mask Measurement

5.4.1. Test Limit

(1) Analog systems. Emissions within the band from $2.5 \times B$ below to $2.5 \times B$ above the carrier frequency, where B is the channel bandwidth, shall comply with the emission mask in Figure 1 of section 4.2.4.2.2 of EN 300 422-1 V2.2.1 (incorporated by reference, see § 15.38).

(2) Digital systems. Emissions within the band from $2.5 \times B$ below to $2.5 \times B$ above the carrier frequency, where B is the channel bandwidth, shall comply with the emission mask in Figure 2 of section 4.2.4.2.2 of EN 300 422-1 V2.2.1 (incorporated by reference, see § 15.38).

(3) Wireless Multichannel Audio Systems. Emissions within the band from $2.5 \times B$ below to $2.5 \times B$ above the carrier frequency, where B is the channel bandwidth, shall comply with the emission mask in Figure 3 of section 4.2.4.2.2 of EN 300 422-1 V2.2.1 (incorporated by reference, see § 15.38).

The mean Power Density, measured with 1 kHz measurement bandwidth and RMS detector, of the transmitter unwanted emissions shall not exceed the limits of the masks provided in figure 1 for equipment employing analogue modulation and figure 2 for equipment employing digital modulation, but excluding WMAS. B is the Declared Channel Bandwidth.

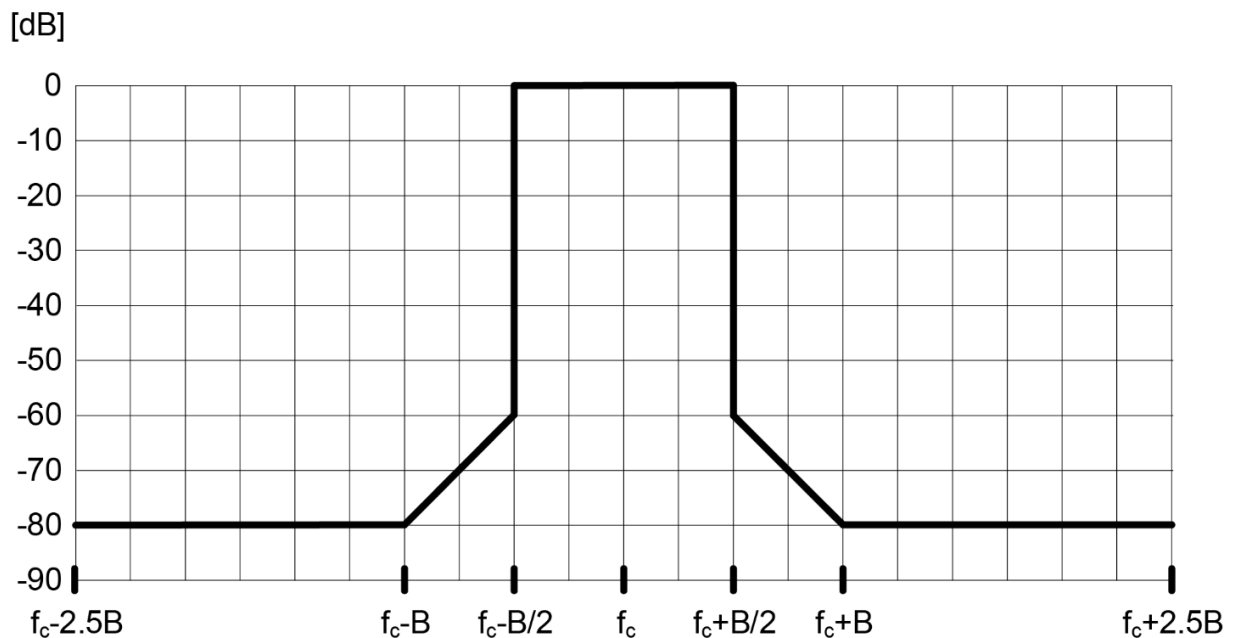


Figure 1: Transmit spectral power mask for equipment employing analogue modulation, RBW = 1 kHz

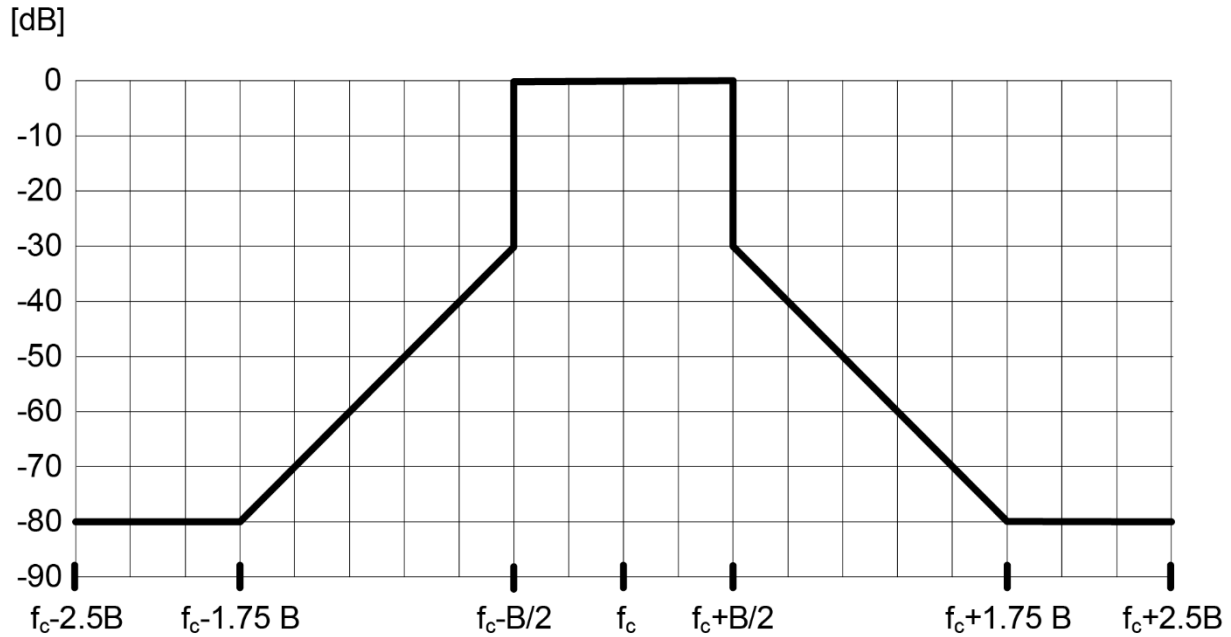


Figure 2: Transmit spectral power mask for equipment employing digital modulation, except WMAS, RBW = 1 kHz

The limits in figure 3 are applicable for WMAS, where B is the Declared Channel Bandwidth.

The mean Power Density, measured with 100 kHz measurement bandwidth and PEAK detector, of the transmitter unwanted emissions shall not exceed the limits of the mask provided in figure 3.

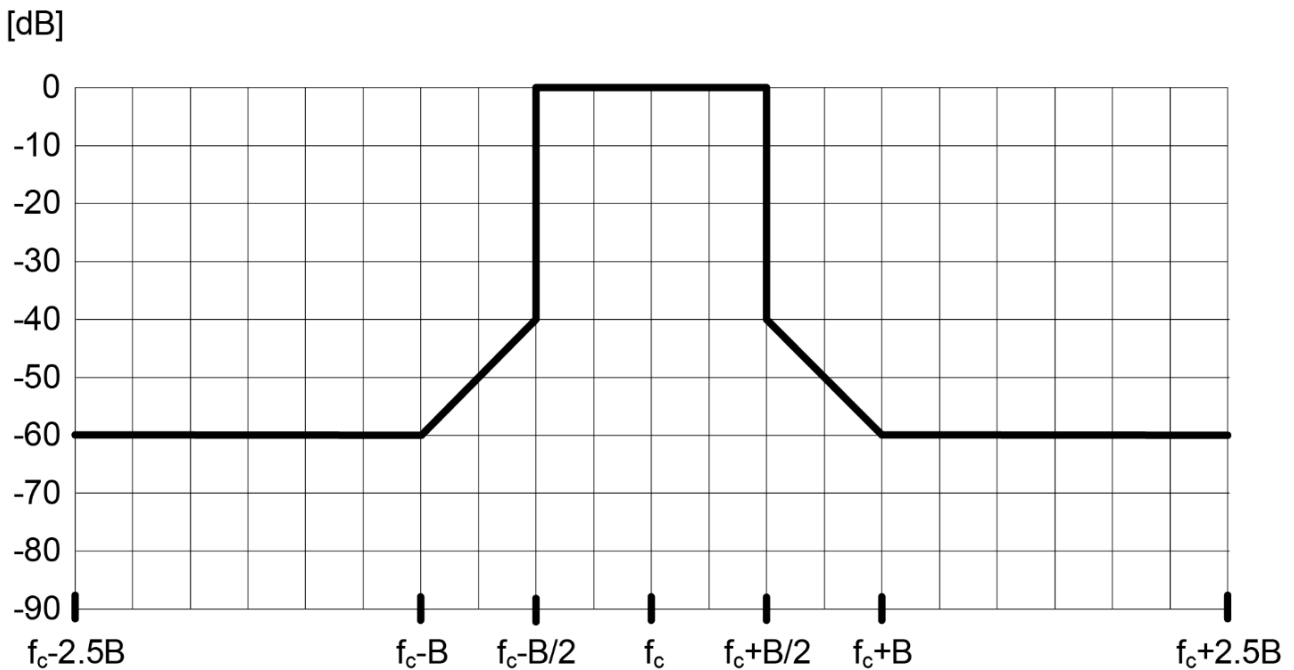


Figure 3: Transmit spectral power mask for WMAS, RBW = 100 kHz

The limits in figure 3 are provided with RBW = 100 kHz. The relevant measurements can also be performed with other RBW for certain ranges of B, accounting that the relevant limit given under RBW = 100 kHz needs to be converted appropriately by adding $c = 10 \times \log_{10} (\text{RBW}/100 \text{ kHz})$ for correction.

Table 1: Correction Factor for different B and applicable RBW

B	RBW, VBW	c = correction factor
$B < 2 \text{ MHz}$	10 kHz	-10 dB
$2 \text{ MHz} \leq B < 5 \text{ MHz}$	25 kHz	-7 dB
$5 \text{ Hz} \leq B \leq 20 \text{ MHz}$	100 kHz	0 dB

5.4.2. Test Procedure


EN 300 422-1 V2.2.1 clause 5.4.3.2.

5.4.3. Test Setting

The EUT was powered up and the transmit frequency & power output of the EUT were selected.

The spectrum analyzer center frequency is set to the nominal EUT channel frequency.

5.4.4. Test Setup

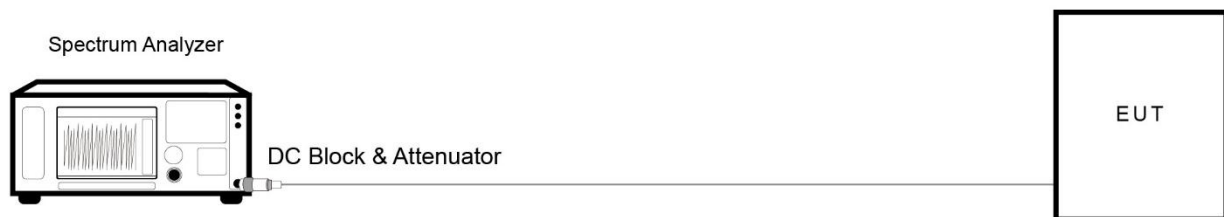

5.4.5. Test Result

Refer to Appendix A.3.

5.5. Output Power Measurement

5.5.1. Test Limit

(1) In the bands allocated and assigned for broadcast television:

- (i) Wireless microphones: 50 mW EIRP.
 - (ii) Wireless multichannel audio systems with a bandwidth up to 1 MHz: 50 mW EIRP.
 - (iii) Wireless multichannel audio systems with a bandwidth greater than 1 MHz: 100 mW EIRP.
- (2) In the 600 MHz guard band and the 600 MHz duplex gap: 20 mW EIRP.


5.5.2. Test Procedure

EN 300 422-1 V2.2.1 clause 5.4.1.2

5.5.3. Test Setting

1. Centre Frequency = f_c
2. Span = $10 * B$
3. RBW $\geq 2.5 * B$
4. VBW $\geq$ RBW
5. Sweep Points ≥ 101
6. Detector = RMS
7. Trace Mode = Clear Write
8. Measurement Time = Sweep Points * 100 ms
9. Sweep Time = Measurement Time
10. Sweep Mode = Single sweep
11. When the sweep has finished, use a marker to find the PEAK of the displayed trace. This value denotes the maximum RF output power

5.5.4. Test Setup

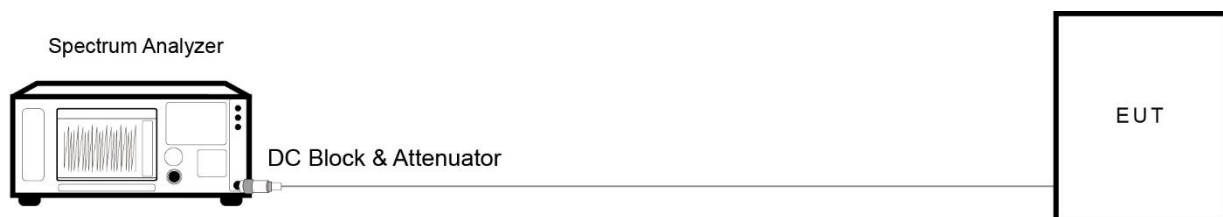

5.5.5. Test Result

Refer to Appendix A.4.

5.6. Spurious Emission Measurement

5.6.1. Test Limit

Spurious emission limits. Emissions outside of the emission masks listed in paragraphs (g)(1) through (g)(3) shall comply with the limits specified in section 4.2.4.1.2 of EN 300 422-1 V2.2.1 (incorporated by reference, see § 15.38).

The level of transmitter unwanted emissions in the spurious domain shall not exceed the limits given in table. Transmitter unwanted emission limits

Frequency Range	Maximum power	RBW
9 kHz - 150 kHz	-36 dBm	1 kHz
150 kHz - 30 MHz	-36 dBm	10 kHz
30 MHz - 1 GHz	-36 dBm	$F_c + 2.5 B \leq f \leq F_c + 4 B$: 1 kHz $F_c + 4 B < f \leq F_c + 10 B$: 10 kHz $f > F_c + 10 B$: 100 kHz $f < F_c - 10 B$: 100 kHz $F_c - 10 B \leq f < F_c - 4 B$: 10 kHz $F_c - 4 B \leq f \leq F_c - 2.5 B$: 1 kHz
Except:		
47 MHz to 74 MHz 87.5 MHz to 118 MHz	-54 dBm	100 kHz
174 MHz to 230 MHz 470 MHz to 862 MHz	-54 dBm	$F_c + 2.5 B \leq f \leq F_c + 4 B$: 1 kHz $F_c + 4 B < f \leq F_c + 10 B$: 10 kHz $f > F_c + 10 B$: 100 kHz $f < F_c - 10 B$: 100 kHz $F_c - 10 B \leq f < F_c - 4 B$: 10 kHz $F_c - 4 B \leq f \leq F_c - 2.5 B$: 1 kHz
$1 \text{ GHz} < f \leq F_{\text{upper}}$	-30 dBm	$F_c + 2.5 B \leq f \leq F_c + 10 B$: 30 kHz $F_c + 10 B < f \leq F_c + 12 B$: 300 kHz $f > F_c + 12 B$: 1 MHz $f < F_c - 12 B$: 1 MHz $F_c - 12 B \leq f < F_c - 10 B$: 300 kHz $F_c - 10 B \leq f \leq F_c - 2.5 B$: 30 kHz
With B being the Declared Channel Bandwidth. F_{upper} is defined in table 2.		

Table 2: Frequency range for measurement of unwanted emissions

Applicable fundamental frequency range	Frequency range for measurements	
	Lower frequency	Upper frequency
9 kHz - 100 MHz	9 kHz	1 GHz
100 MHz - 300 MHz	9 kHz	10th harmonic of the operating frequency
300 MHz - 600 MHz	30 MHz	3 GHz
600 MHz - 3 GHz	30 MHz	5th harmonic of the operating frequency

5.6.2. Test Procedure

EN 300 422-1 V2.2.1 clause 5.4.4

5.6.3. Test Setting**Table 3 - RBW as a function of frequency**

Frequency	RBW
30 ~ 1000 MHz	100 kHz
1000 ~ 7000 MHz	1 MHz

Emissions shall be investigated up to the 10th harmonic of the fundamental.


All the emissions shall be demonstrated using a QP detector below 1 GHz and an RMS Average detector above 1 GHz.

All significant broadband and narrowband signals found in the preliminary sweeps were measured using a peak detector at a test distance of 3 meters.

at each frequency at which a component is detected, the sample shall be rotated to obtain maximum response and the effective radiated power of that component determined by a substitution measurement.


5.6.4. Test Setup

Conducted:

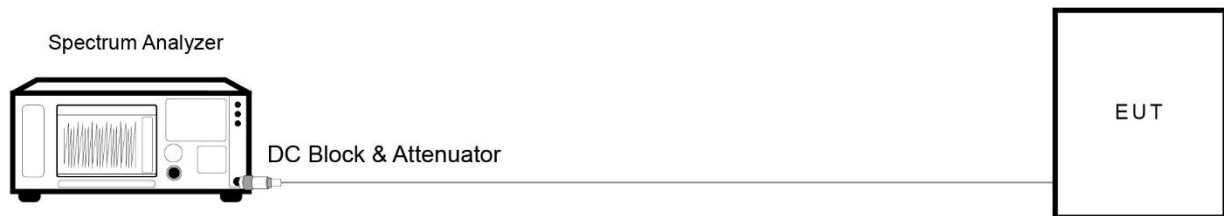


Radiated:

Below 1 GHz Test Setup:

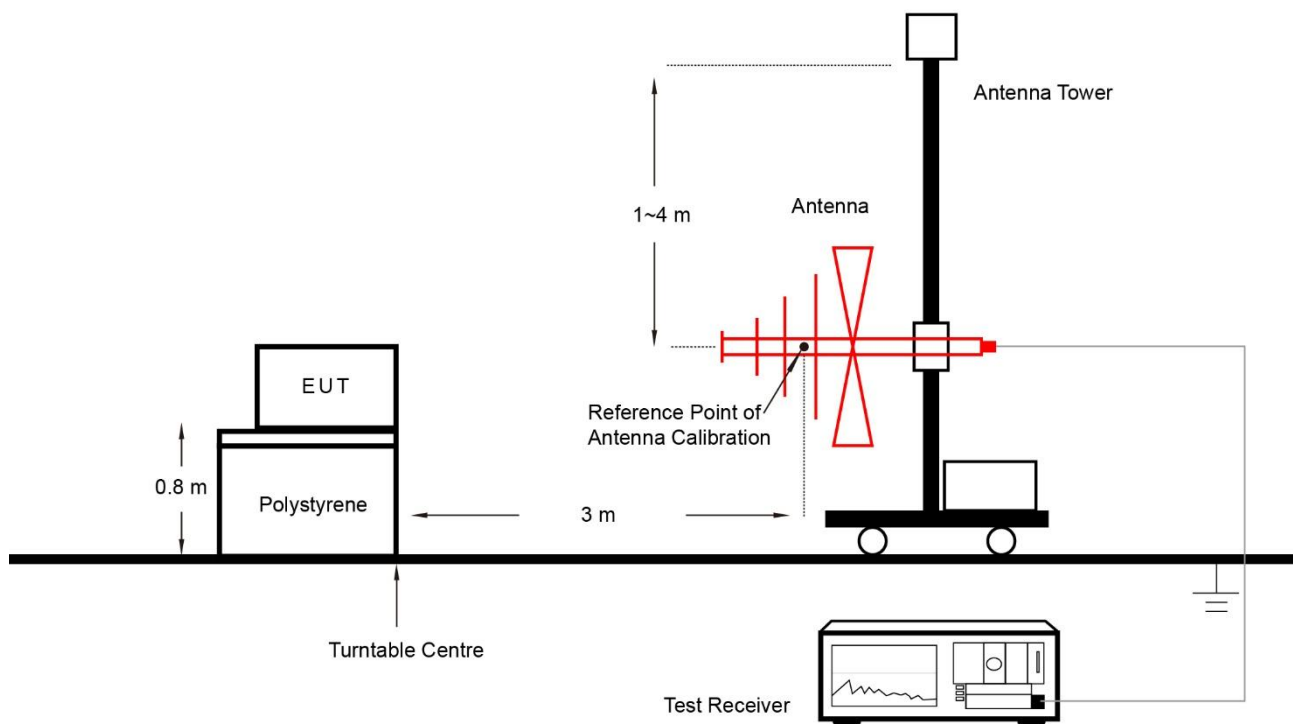

Above 1 GHz Test Setup:

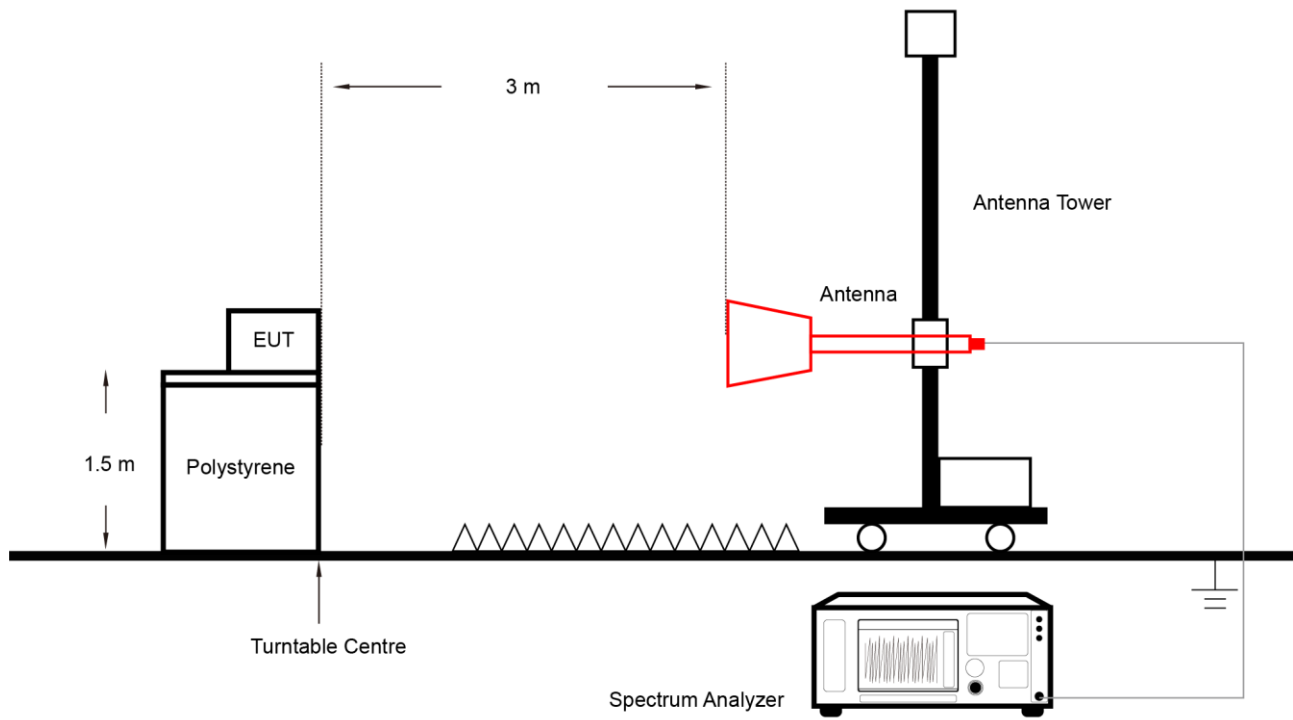

5.6.5. Test Result

Refer to Appendix A.5.

5.7. AC Conducted Emissions Measurement


5.7.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

5.7.2. Test Setup

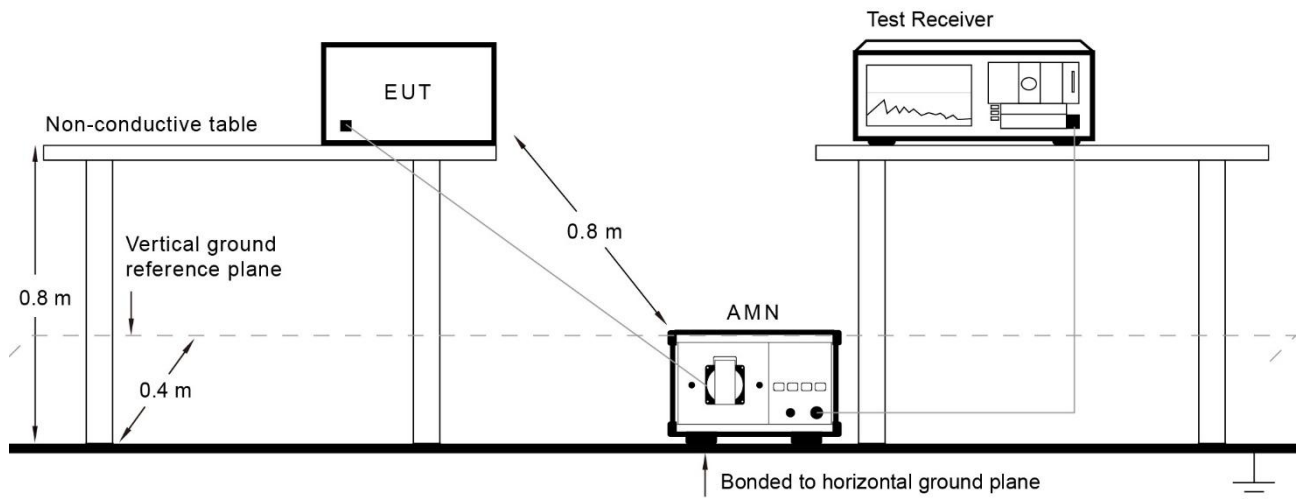

5.7.3. Test Result


Refer to Appendix A.6.


Appendix A - Test Result

A.1 99% Occupied Bandwidth Test Result

Test Site	NS-TR2	Test Engineer	Jeff Yang
Test Date	2026-06-17	Test Mode	Mode 1


Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Result
470.200	159.57	< 200	Pass
539.000	159.56	< 200	Pass
607.800	159.57	< 200	Pass

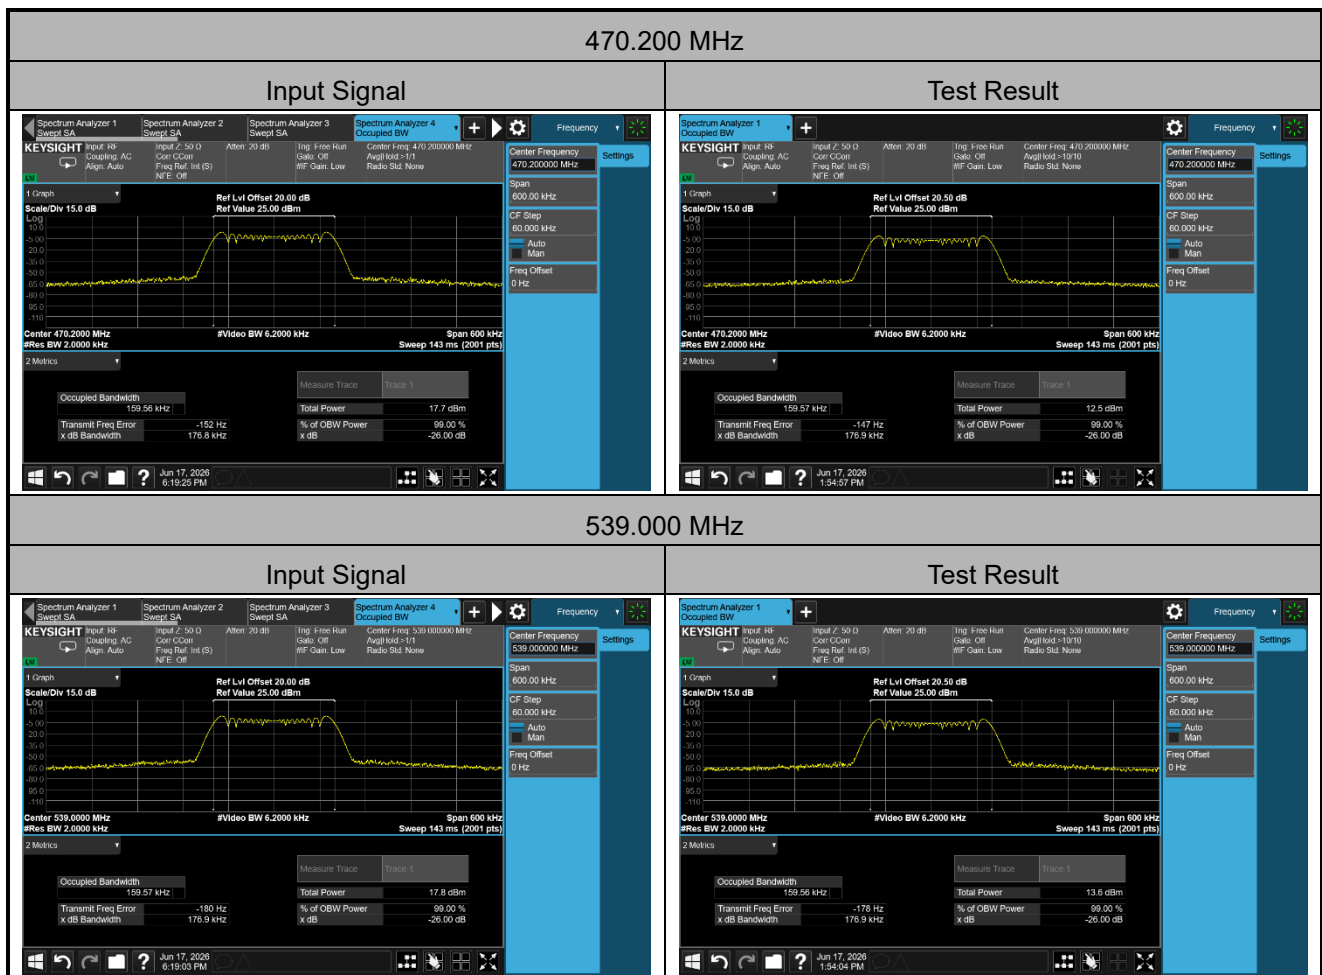


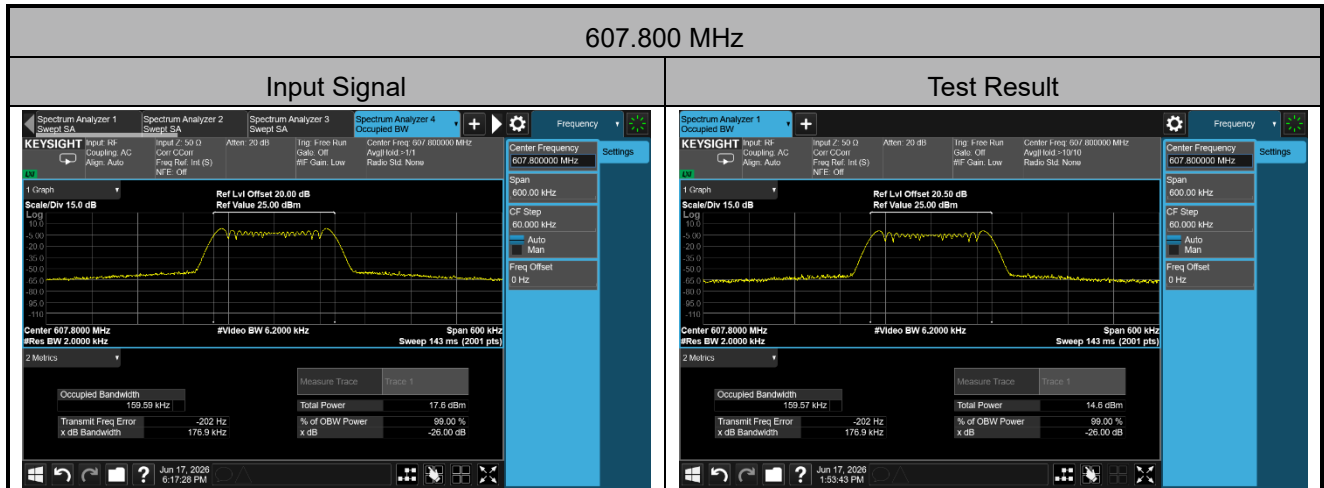

Test Site	NS-TR2	Test Engineer	Jeff Yang
Test Date	2026-06-17	Test Mode	Mode 2

Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Result
470.200	187.62	< 200	Pass
539.000	187.63	< 200	Pass
607.800	187.68	< 200	Pass

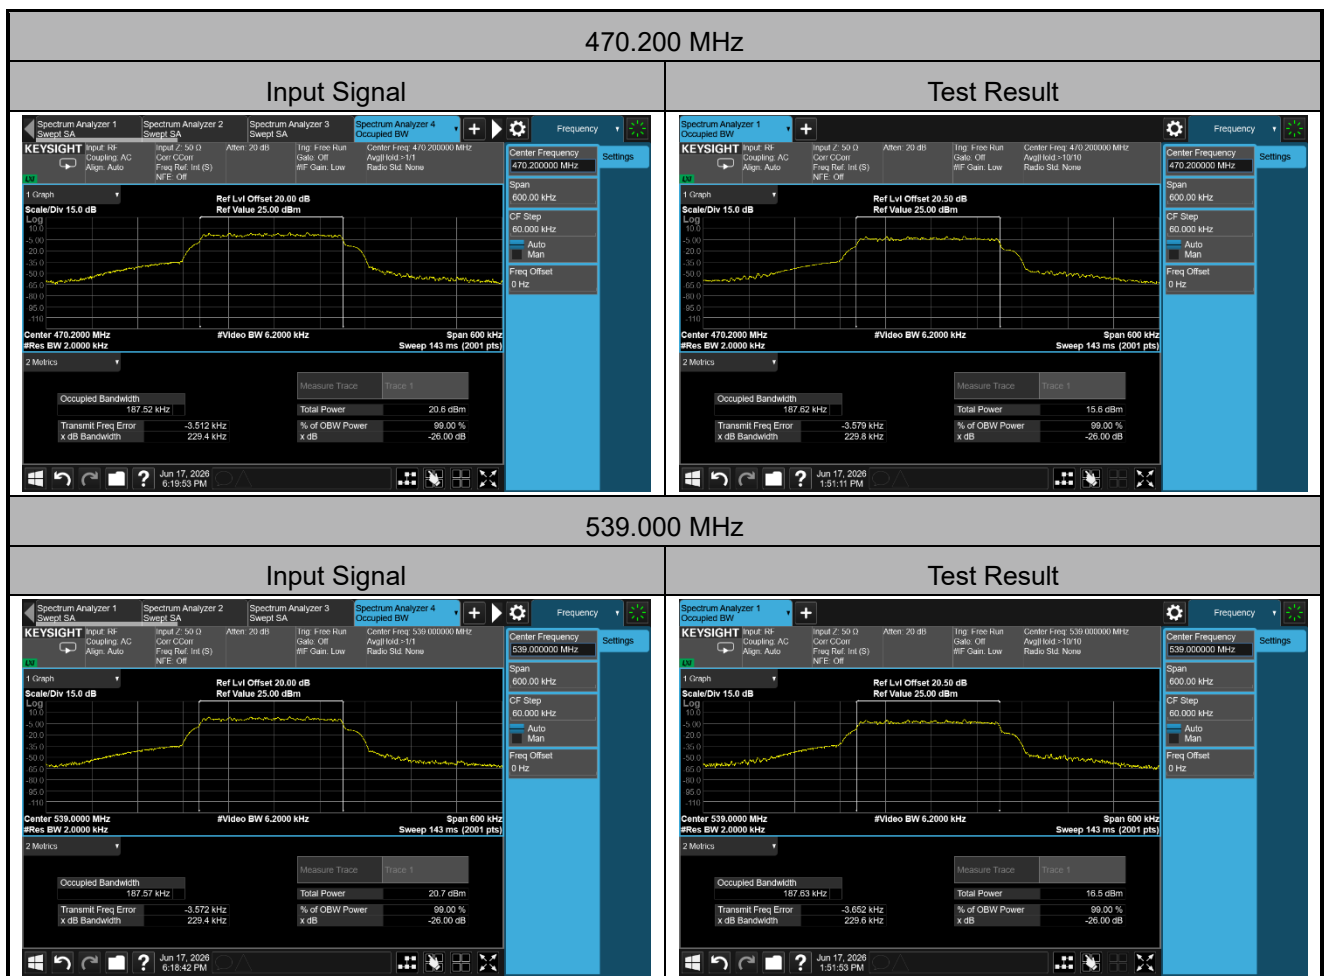

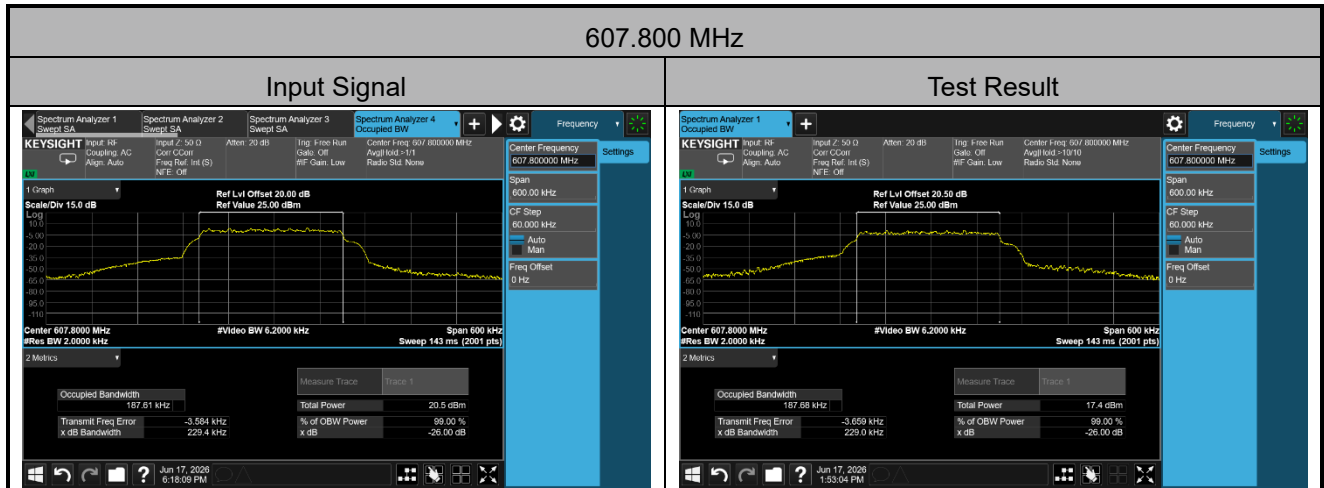

A.2 Frequency Tolerance Test Result

Test Site	NS-TR2	Test Engineer	Jeff Yang
Test Date	2026-06-17	Test Frequency	470.200 MHz


Voltage (%)	Power (AC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	-30	-0.36	-0.36	-0.36	-0.36
		-20	-0.36	-0.36	-0.36	-0.36
		-10	-0.36	-0.36	-0.35	-0.35
		0	-0.36	-0.36	-0.36	-0.36
		+ 10	-0.36	-0.36	-0.36	-0.36
		+ 20	-0.36	-0.36	-0.36	-0.36
		+ 30	-0.35	-0.35	-0.35	-0.35
		+ 40	-0.35	-0.35	-0.35	-0.35
		+ 50	-0.35	-0.35	-0.35	-0.35
115	138	+ 20	-0.36	-0.36	-0.36	-0.36
85	102	+ 20	-0.36	-0.36	-0.36	-0.36
Limit	±50 ppm					
Result	Pass					

Note 1: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} × 10⁶.

Note 2: Limit: 0.005% is equal to 50 ppm.

A.3 Emission Mask Test Result

Test Site	NS-TR2	Test Engineer	Jeff Yang
Test Date	2026-06-16 ~ 2026-06-17	Test Mode	Mode 1

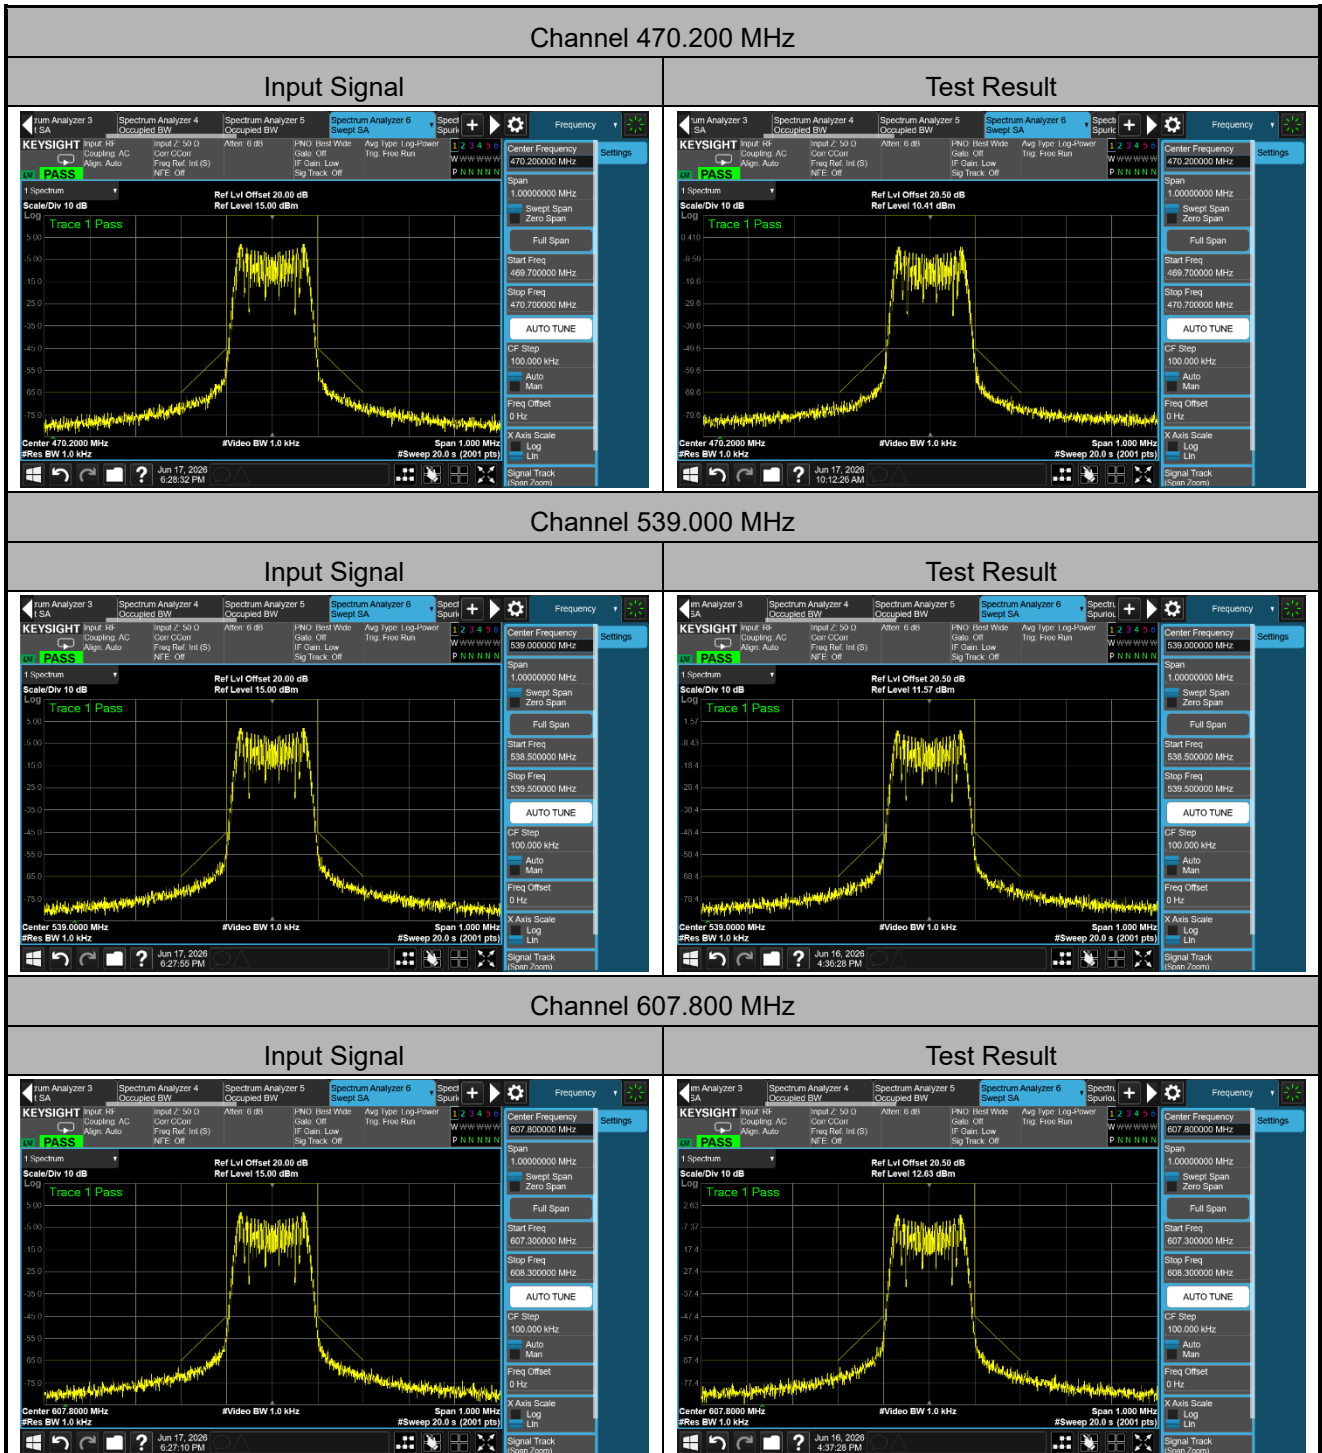

Test Site	NS-TR2	Test Engineer	Jeff Yang
Test Date	2026-06-16 ~ 2026-06-17	Test Mode	Mode 2

Channel 470.200 MHz



Channel 539.000 MHz



Channel 607.800 MHz



A.4 Output Power Test Result

Test Site	NS-TR2	Test Engineer	Jeff Yang
Test Date	2026-06-16 ~ 2026-06-17	Test Mode	Mode 1

Frequency (MHz)	RF Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Result
470.200	10.41	4.00	14.41	≤ 16.99	Pass
539.000	11.57	4.00	15.57	≤ 16.99	Pass
607.800	12.63	4.00	16.63	≤ 16.99	Pass

Note 1: Limit = $10 \times \log(50 \text{ mW}) = 16.99 \text{ dBm}$.

Note 2: EIRP (dBm) = Conducted Power (dBm) + Antenna Gain (dBi).

Test Site	NS-TR2	Test Engineer	Jeff Yang
Test Date	2026-06-16	Test Mode	Mode 2

Frequency (MHz)	RF Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Result
470.200	10.73	4.00	14.73	≤ 16.99	Pass
539.000	11.63	4.00	15.63	≤ 16.99	Pass
607.800	12.69	4.00	16.69	≤ 16.99	Pass

Note 1: Limit = $10 \times \log(50 \text{ mW}) = 16.99 \text{ dBm}$.

Note 2: EIRP (dBm) = Conducted Power (dBm) + Antenna Gain (dBi).

A.5 Spurious Emission Test Result


The power level from an external Antenna port Conducted Measurement:

Test Site	NS-TR2	Test Engineer	Jeff Yang
Test Date	2026-06-16 ~ 2026-06-17	Test Mode	Mode 1


Test Frequency (MHz)	Frequency Range (MHz)	Max Reading Frequency (MHz)	Max Reading Level (dBm)	Limit (dBm)	Result
470.200	30 ~ 1000	505.30000	-63.96	-54	Pass
	468.200 ~ 469.400	469.25000	-75.41	-36	Pass
	469.400 ~ 469.700	469.65500	-82.55	-36	Pass
	470.700 ~ 471.000	470.72550	-82.80	-54	Pass
	471.000 ~ 472.200	472.17960	-75.75	-54	Pass
	1000 ~ 7000	3175.00000	-53.86	-30	Pass
539.000	30 ~ 1000	506.27000	-63.74	-54	Pass
	537.000 ~ 538.200	538.18560	-76.77	-54	Pass
	538.200 ~ 538.500	538.45620	-83.15	-54	Pass
	539.500 ~ 539.800	539.55160	-83.06	-54	Pass
	539.800 ~ 541.000	539.83600	-76.34	-54	Pass
	1000 ~ 7000	3178.00000	-53.92	-30	Pass
607.800	30 ~ 1000	507.24000	-63.32	-54	Pass
	605.800 ~ 607.000	660.99520	-76.80	-54	Pass
	607.000 ~ 607.300	607.29070	-83.17	-54	Pass
	608.300 ~ 608.600	608.55650	-83.58	-54	Pass
	608.600 ~ 609.800	608.67680	-77.02	-54	Pass
	1000 ~ 7000	3061.00000	-53.92	-30	Pass

Transmitter unwanted emissions in the spurious domain - 470.200 MHz


30 ~ 1000 MHz Note

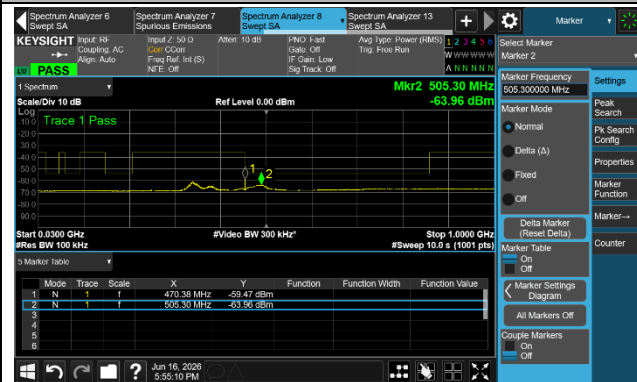


468.200 ~ 469.400 MHz

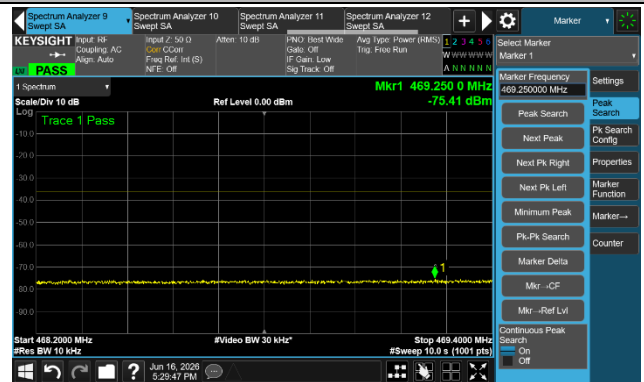


469.400 ~ 469.700 MHz

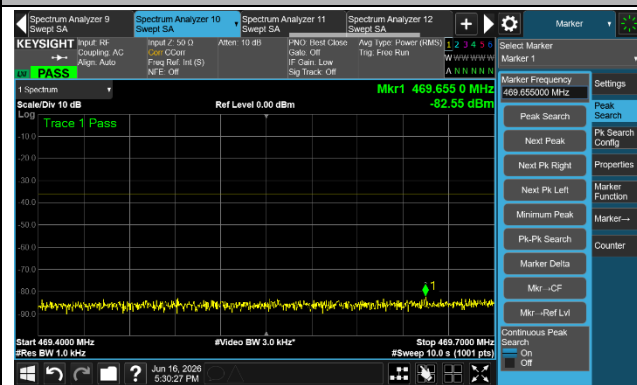


470.700 ~ 471.000 MHz

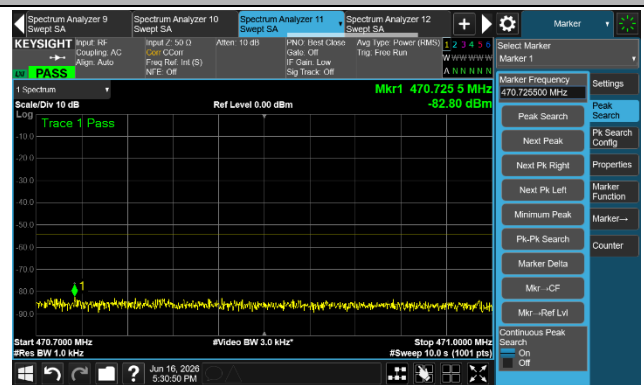

471.000 ~ 472.200 MHz

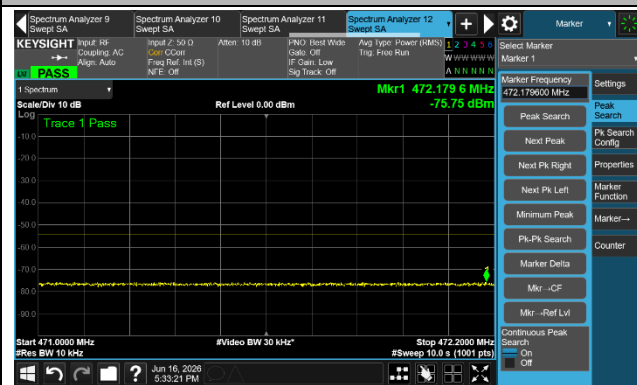


1000 ~ 7000 MHz

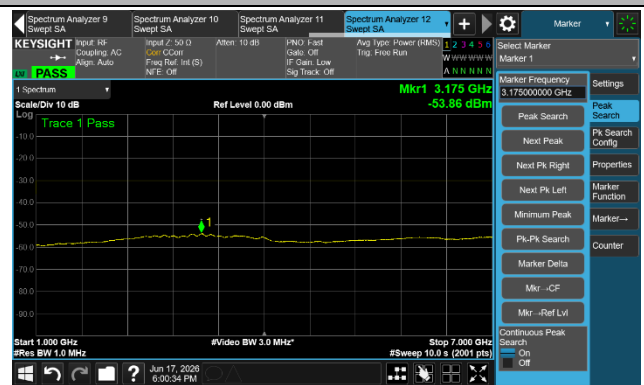


Note: Mark 1 is fundamental frequency that is not evaluated in this item.

Transmitter unwanted emissions in the spurious domain - 539.000 MHz


30 ~ 1000 MHz Note

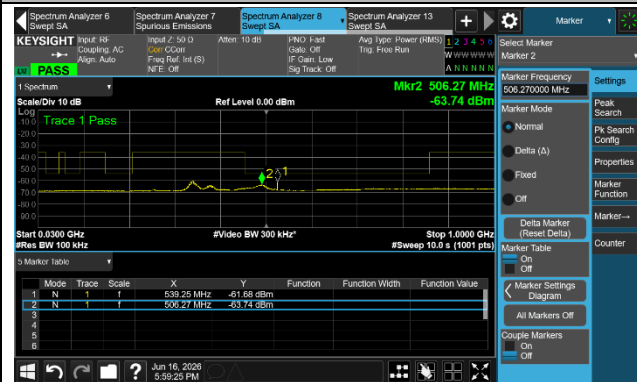


537.000 ~ 538.200 MHz

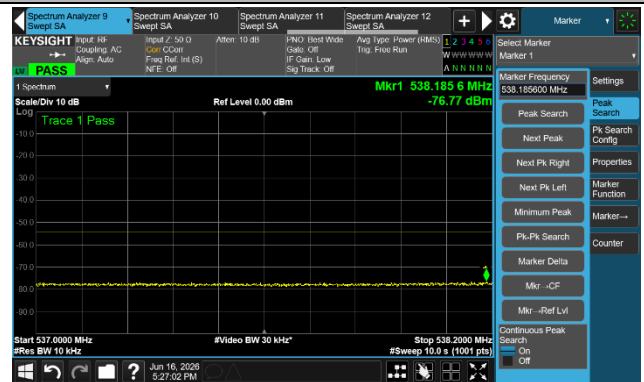


538.200 ~ 538.500 MHz

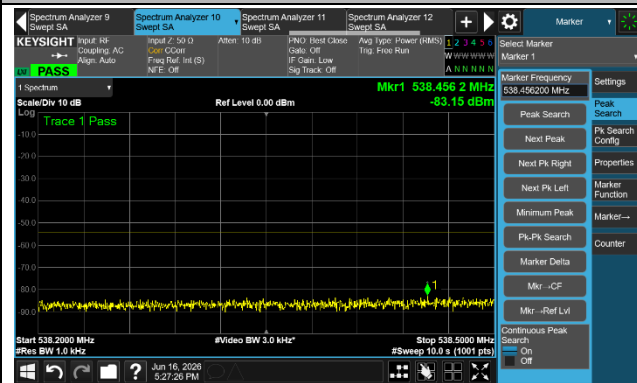


539.500 ~ 539.800 MHz

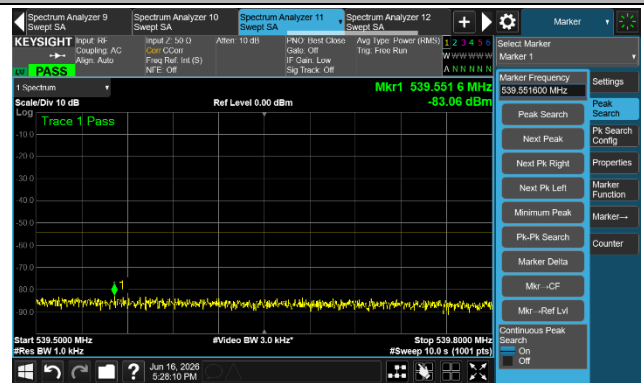

539.800 ~ 541.000 MHz

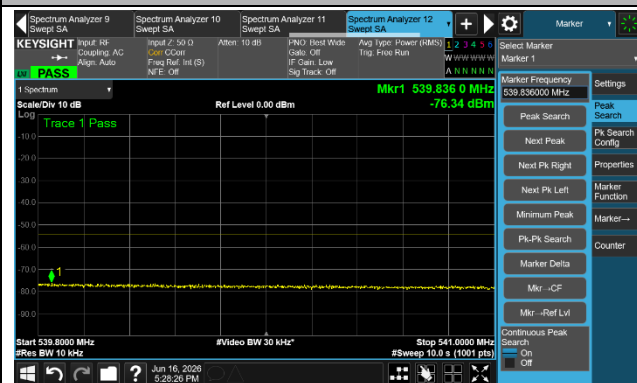


1000 ~ 7000 MHz

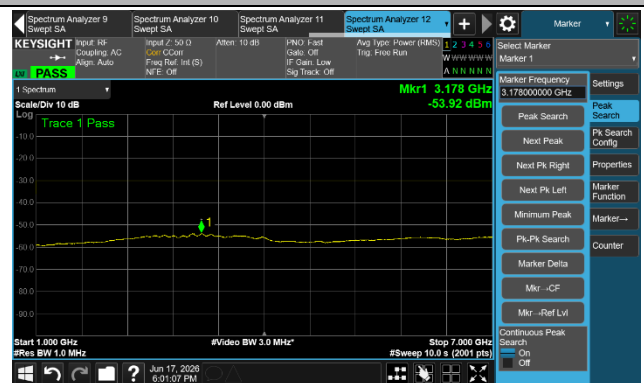


Note: Mark 1 is fundamental frequency that is not evaluated in this item.

Transmitter unwanted emissions in the spurious domain - 607.800 MHz


30 ~ 1000 MHz Note

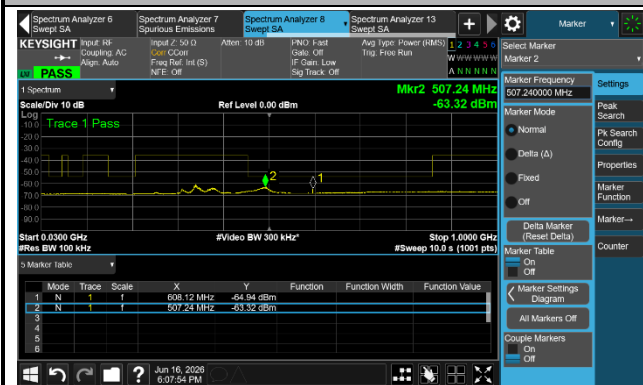


605.800 ~ 607.000 MHz

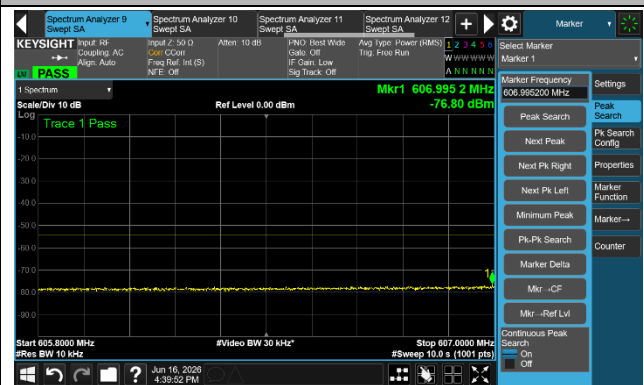


607.000 ~ 607.300 MHz

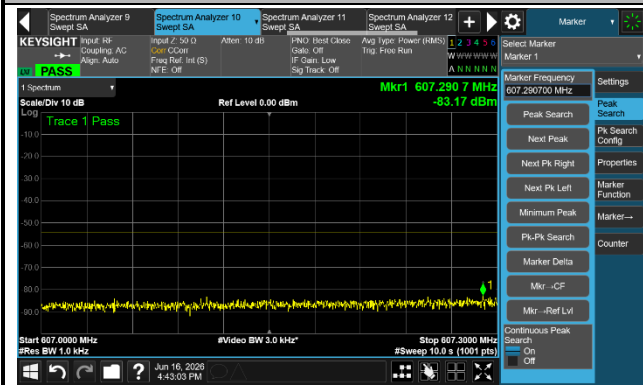


608.300 ~ 608.600 MHz

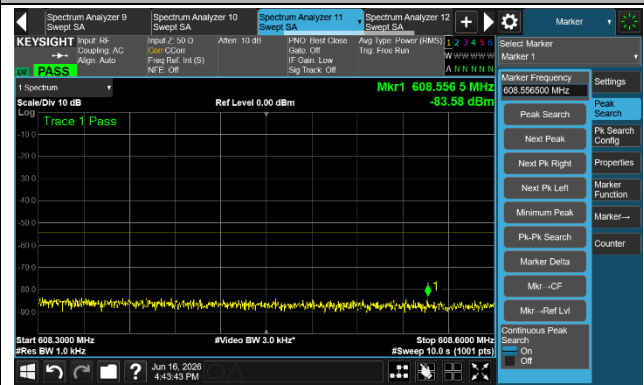

608.600 ~ 609.800 MHz

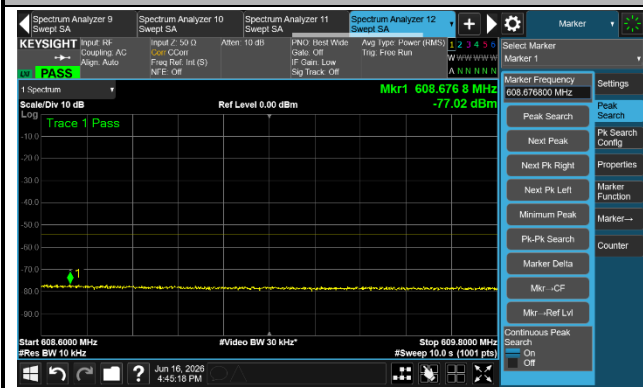

1000 ~ 7000 MHz

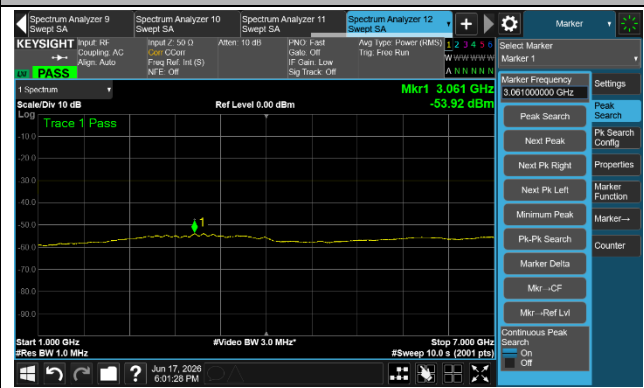

Note: Mark 1 is fundamental frequency that is not evaluated in this item.