
FCC Test Report

Report No.: AGC01284231101FR01

FCC ID : 2BDQ3AR-M6

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : CB Radio

BRAND NAME : ABBREE

MODEL NAME : AR-M6

APPLICANT : Xiamen Aorui Electronics Co.,Ltd

DATE OF ISSUE : Dec. 06, 2023

STANDARD(S) : FCC Part 95 Rules

REPORT VERSION : V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 06, 2023	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List.....	7
2.3 Related Submittal(S) / Grant (S).....	8
2.4 Test Methodology.....	8
2.5 Calculation of Emission Indicators.....	8
2.6 Statement - Compliance To §95.977	8
2.7 Special Accessories	9
2.8 Equipment Modifications.....	9
3. Test Environment	10
3.1 Address of The Test Laboratory.....	10
3.2 Test Facility	10
3.3 Environmental Conditions.....	11
3.4 Measurement Uncertainty.....	11
3.5 List of Equipments Used.....	12
4. System Test Configuration.....	13
4.1 EUT Configuration	13
4.2 EUT Exercise	13
4.3 Configuration of Tested System.....	13
4.4 Equipment Used in Tested System	13
4.5 Summary of Test Results.....	14
5. Description of Test Modes	15
6. Frequency Stability	16
6.1 Provisions Applicable.....	16
6.2 Measurement Procedure	16
6.3 Measurement Setup	16
6.4 Measurement Result.....	17
7. Emission Bandwidth	18
7.1 Provisions Applicable.....	18
7.2 Measurement Procedure	18
7.3 Measurement Setup	18
7.4 Measurement Results.....	19
8. Radiated Spurious Emission	21
8.1 Provisions Applicable.....	21
8.2 Measurement Procedure	21
8.3 Measurement Setup	22
8.4 Measurement Results.....	23
8.5 Emission Mask Plot	30
9. Spurious Emission on Antenna Port.....	32

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

9.1 Provisions Applicable	32
9.2 Measurement Method	32
9.3 Measurement Setup	32
9.4 Measurement Results	33
10. Maximum Transmitter Power	36
10.1 Provisions Applicable	36
10.2 Measurement Method	36
10.3 Measurement Setup	36
10.4 Measurement Results	37
11. Modulation Characteristics	39
11.1 Provisions Applicable	39
11.2 Measurement Method_(Am)	39
11.3 Measurement Method_(Fm)	39
11.4 Measurement Setup	40
11.5 Measurement Results	41
Appendix I: Photographs of Test Setup	45
Appendix II: Photographs of Test EUT	45


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

1. General Information

Applicant	Xiamen Aorui Electronics Co.,Ltd.
Address	Room 302-5, 3rd Floor, No. 2, Malong Road, Torch Park, Torch High-tech Zone, Xiamen, China
Manufacturer	Xiamen Aorui Electronics Co.,Ltd.
Address	Room 302-5, 3rd Floor, No. 2, Malong Road, Torch Park, Torch High-tech Zone, Xiamen, China
Factory	Xiamen Aorui Electronics Co.,Ltd.
Address	Room 302-5, 3rd Floor, No. 2, Malong Road, Torch Park, Torch High-tech Zone, Xiamen, China
Product Designation	CB Radio
Brand Name	ABBREE
Test Model	AR-M6
Deviation from Standard	No any deviation from the test method
Date of receipt of test item	Nov. 23, 2023
Date of Test	Nov. 23, 2023~Dec. 06, 2023
Test Result	Pass

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By



Bibo Zhang
(Project Engineer)

Dec. 06, 2023

Reviewed By



Calvin Liu
(Reviewer)

Dec. 06, 2023

Approved By



Max Zhang
Authorized Officer

Dec. 06, 2023

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

2. Product Information

2.1 Product Technical Description

Hardware Version	PQ808-1
Software Version	V3.0
Power Supply	DC 12V
Communication Type	Voice / Tone only
Operation Frequency Range	26.965MHz-27.405MHz
Modulation Type	AM/FM
Channel Separation	10 KHz
Emission Designator	AM: 8K00A3E FM: 8K00F3E
Number of Channels:	40 Channels
Rated Output Power	4W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)
Maximum Transmitter Power	AM: 35.809dBm FM:35.495dBm
Antenna Designation	Detachable
Antenna Type	External antenna
Antenna Gain	0dBi
Frequency Tolerance	AM:1.097ppm FM:1.076ppm

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

2.2 Test Frequency List

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range Over which EUT operates	Number of Frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

Operation Frequency Each of Channel			
CBRS		CBRS	
Channel	Frequency	Channel	Frequency
1	26.965 MHz	21	27.215 MHz
2	26.975 MHz	22	27.225 MHz
3	26.985 MHz	23	27.255 MHz
4	27.005 MHz	24	27.235 MHz
5	27.015 MHz	25	27.245 MHz
6	27.025 MHz	26	27.265 MHz
7	27.035 MHz	27	27.275 MHz
8	27.055 MHz	28	27.285 MHz
9	27.065 MHz	29	27.295 MHz
10	27.075 MHz	30	27.305 MHz
11	27.085 MHz	31	27.315 MHz
12	27.105 MHz	32	27.325 MHz
13	27.115 MHz	33	27.335 MHz
14	27.125 MHz	34	27.345 MHz
15	27.135 MHz	35	27.355 MHz
16	27.155 MHz	36	27.365 MHz
17	27.165 MHz	37	27.375 MHz
18	27.175 MHz	38	27.385 MHz
19	27.185 MHz	39	27.395 MHz
20	27.205 MHz	40	27.405 MHz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2BDQ3AR-M6** , filing to comply with Part 2, Part 95 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 95	Personal Radio Services
2	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
3	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
4	ANSI EIA/TIA 382-A-1989	Minimum standards – Citizens band radio service amplitude modulated (AM) transceivers operating in the 27MHz band.

2.5 Calculation of Emission Indicators

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

For AM Mode (ChannelSpacing: 10kHz)

Emission Designator 8K00A3E

Bn = 2M, M may vary between 4000 and 10000 depending on the quality desired.

Speech and music, M = 4000, Bandwidth: 8000 Hz= 8 kHz

A3E portion of the designator represents an AM voice transmission.

Therefore, the entire designator for 10 kHz channel spacing AM mode is 8K00A3E.

For FM Mode (ChannelSpacing: 10kHz)

Emission Designator 8K00F3E

Bn = 2M, M may vary between 4000 and 10000 depending on the quality desired.

Speech and music, M = 4000, Bandwidth: 8000 Hz= 8 kHz

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 10 kHz channel spacing FM mode is 8K00F3E.

2.6 Statement - Compliance To §95.977

§95.977 CBRS tone transmissions.

In addition to the tones permitted under §95.377, CBRS transmitter types may be designed to transmit brief tones to indicate the beginning or end of a transmission.

This device is capable of transmitting a brief (less than one second) audio tone, “Roger Beep”, when the PTT button is released on the microphone indicating end of transmission. This function is user selectable and complies with the requirements of §95.377. See User’s Manual .

2.7 Special Accessories

Not available for this EUT intended for grant.

2.8 Equipment Modifications

Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

3.3 Environmental Conditions

	Normal Conditions	Extreme Conditions
Temperature range (°C)	15 - 35	-20 - 50
Relative humidity range	20 % - 75 %	20 % - 75 %
Pressure range (kPa)	86 - 106	86 - 106
Power supply	DC12V	LV: DC 10.2V/HV:DC 13.8V

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty
Frequency stability	$\pm 0.5\%$
Transmitter power conducted	$\pm 0.8\text{dB}$
Transmitter power Radiated	$\pm 1.3\text{dB}$
Conducted spurious emission 9kHz-40 GHz	$\pm 2.7\text{dB}$
Conducted Emission	$\pm 3.2\text{ dB}$
Radiated Emission below 1GHz	$\pm 3.9\text{ dB}$
Radiated Emission above 1GHz	$\pm 4.8\text{ dB}$
Occupied Channel Bandwidth	$\pm 2\%$
FM deviation	$\pm 2\%$
Audio level	$\pm 0.98\text{dB}$
Low Pass Filter Response	$\pm 0.65\text{dB}$
Modulation Limiting	0.42 %
Transient Frequency Behavior	6.8 %

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

3.5 List of Equipments Used

● RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-ER-E086	Spectrum Analyzer	KEYSIGHT	N9020A	MY53300860	2023-06-01	2024-05-31
☒	AGC-EM-E002	Wireless Connectivity Tester	HP	8920B	US35010161	2023-06-02	2024-06-01
☐	AGC-ER-E059	Signal Generator	Agilent	N5182B	MY53050647	2023-03-03	2024-03-02
☐	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2023-06-01	2024-05-31
☒	AGC-ER-E075	Small Environmental Tester	SH-242	ESPEC	93008290	2022-08-03	2024-08-02
☒	AGC-EM-A007	30dB Attenuator	Weinachel	58-30-33	ML030	2023-06-01	2024-05-31
☐	AGC-EM-E040	Directional coupler	Werlatone	C5571-10	99463	2022-03-10	2024-03-09
☒	--	RF Connection Cable	N/A	1#	N/A	Each time	N/A
☒	--	RF Connection Cable	N/A	2#	N/A	Each time	N/A

● Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17
☒	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31
☒	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11
☒	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
☒	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2023-01-05	2024-01-04
☒	AGC-EM-E110	Low Pass Filter	N/A	N/A	N/A	2023-06-01	2024-05-31

● Test Software					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information
☒	AGC-EM-S011	RSE Test System	Tonscend	TS ⁺ Ver2.1(JS36-RSE)	4.0.0.0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

4. System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☒ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	50ohm Load	N/A	Amphenol	DC-3G, Max.50W	N/A

☒ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Hand Microphone	N/A	N/A	N/A	0.8m unshielded

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§ 95.967& 2.1046(a)	Maximum Transmitter Power	Pass
2	§95.975& 2.1047(a) (b)	Modulation Limit	Pass
3	§95.975& 2.1047(a)	Audio Frequency Response	Pass
4	§95.973& 2.1049	Emission Bandwidth	Pass
5	§95.979& 2.1049	Emission Mask	Pass
6	§95.965& 2.1055(a) (1)	Frequency Stability	Pass
7	§95.979& 2.1051	Spurious Emission on Antenna Port	Pass
8	§95.979& 2.1053	Ratiated Spurious Emission	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

5. Description of Test Modes

The EUT (**CB Radio**) has been tested under normal operating condition. (CBRS TX) are chosen for testing at each channel separation.

NO.	TEST MODE DESCRIPTION	CHANNEL SEPARATION
1	CBRS TX CHANNEL 1	10.0 kHz
2	CBRS TX CHANNEL 20	10.0 kHz
3	CBRS TX CHANNEL 40	10.0 kHz

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

6. Frequency Stability

6.1 Provisions Applicable

FCC Part 95.965

Each CBRS transmitter type must be designed such that the transmit carrier frequency (or in the case of SSB transmissions, the reference frequency) remains within 50 parts-per-million of the channel center frequencies specified in §95.963 under all normal operating conditions.

6.2 Measurement Procedure


6.2.1 Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C. Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 12V.
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

6.3 Measurement Setup

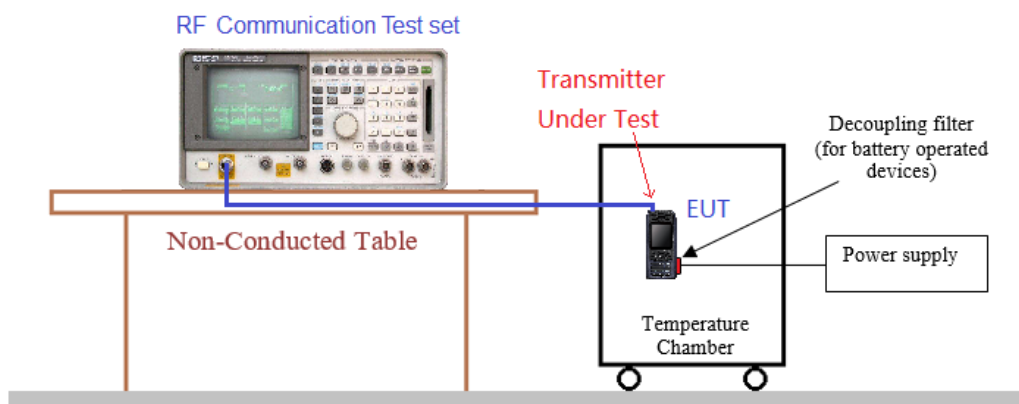

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

6.4 Measurement Result

10 kHz Channel Separation, AM modulation, Assigned Frequency For CBRS						
Test conditions		Frequency error (ppm)			Limit (ppm)	Result
Voltage (V)	Temp (°C)	Test Frequency (MHz)				
		26.965MHz	27.205MHz	27.405MHz		
12.0	-30	0.544	0.653	0.534	50	Pass
	-20	0.594	0.790	0.601		
	-10	0.538	0.999	0.642		
	0	0.605	0.677	1.007		
	10	0.914	0.697	0.540		
	20	1.031	0.647	0.823		
	30	1.031	0.920	1.075		
	40	0.970	1.097	0.917		
	50	0.882	0.825	0.730		
13.8	20	1.028	1.088	0.848		
10.2	20	1.033	1.071	0.959		

10 kHz Channel Separation, FM modulation, Assigned Frequency For CBRS						
Test conditions		Frequency error (ppm)			Limit (ppm)	Result
Voltage (V)	Temp (°C)	Test Frequency (MHz)				
		26.965MHz	27.205MHz	27.405MHz		
12.0	-30	0.628	0.501	0.723	50	Pass
	-20	0.858	0.752	0.501		
	-10	0.933	0.920	0.576		
	0	0.917	0.531	0.798		
	10	0.567	0.532	0.631		
	20	1.029	0.809	1.047		
	30	0.943	0.564	1.020		
	40	0.803	0.730	0.715		
	50	0.643	1.065	1.076		
13.8	20	0.822	0.949	0.592		
10.2	20	0.687	0.690	1.037		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

7. Emission Bandwidth

7.1 Provisions Applicable

FCC Part 95.973, FCC Part 2.1049

Each CBRS transmitter type must be designed such that the occupied bandwidth does not exceed the authorized bandwidth for the emission type under test.


(a) AM and FM. The authorized bandwidth for emission type A3E and F3E is 8 kHz.

(b)SSB.The authorized bandwidth for emission types J3E, R3E, and H3E is 4 kHz.

7.2 Measurement Procedure

1. Connect the equipment as illustrated
2. The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.
Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).
3. Spectrum set as follow:
Centre frequency = the nominal EUT channel center frequency,
The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient)
 $\text{RBW} = 1\% \text{ to } 5\% \text{ of the anticipated OBW}$, $\text{VBW} \geq 3 \times \text{RBW}$, Sweep = auto, Detector function = peak,
Trace = max hold
4. Set 99% Occupied Bandwidth and 26dB Bandwidth
5. Measure and record the results in the test report.

7.3 Measurement Setup

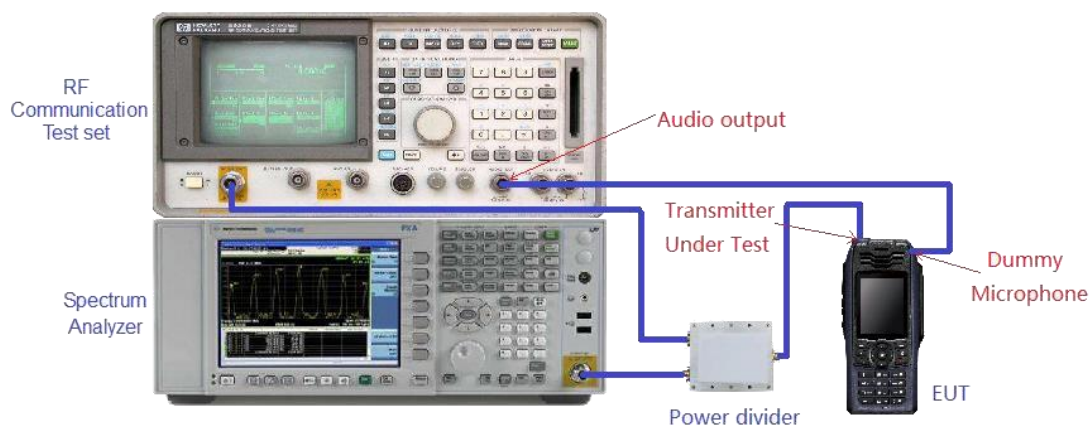


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by aqc01@aqcert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: aac@aaccert.com Web: <http://www.aaccert.com/>

7.4 Measurement Results

Emission Bandwidth Measurement Result-CBRS				
Operating Frequency	10 kHz Channel Separation			
	Occupied Bandwidth	Emission Bandwidth	Limits	Result
26.965 MHz	5.517 kHz	5.819 kHz	8.0 kHz	Pass
27.205 MHz	5.515 kHz	5.822 kHz	8.0 kHz	Pass
27.405 MHz	5.514 kHz	5.821 kHz	8.0 kHz	Pass


Test plot as follows:

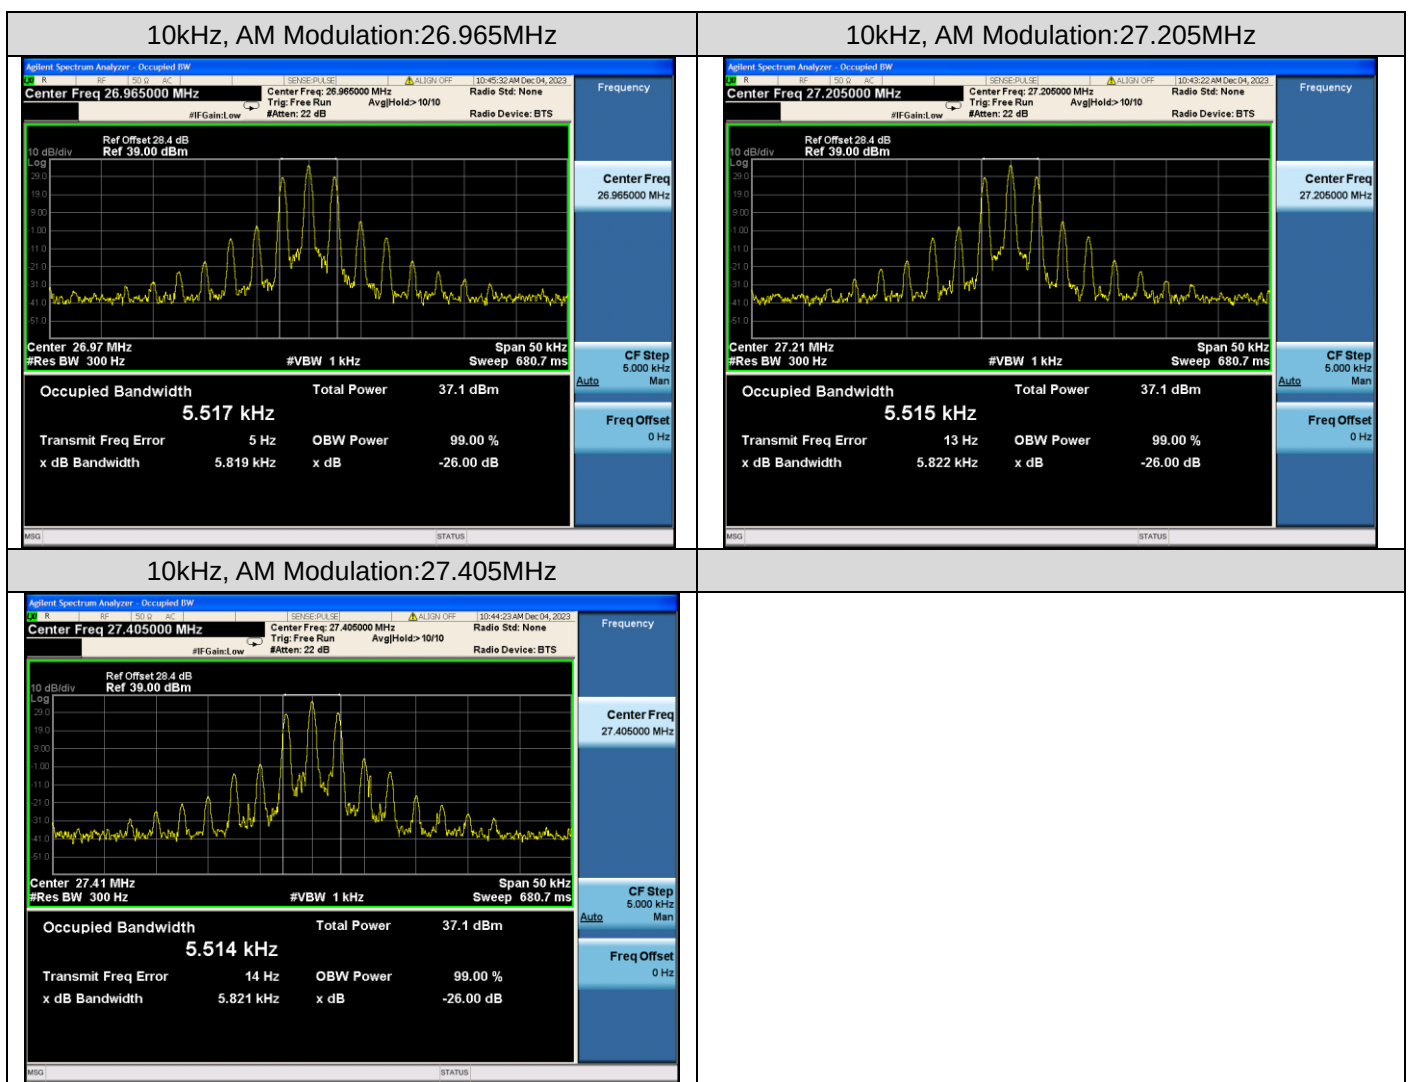

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Emission Bandwidth Measurement Result-CBRS				
Operating Frequency	10 kHz Channel Separation			
	Occupied Bandwidth	Emission Bandwidth	Limits	Result
26.965 MHz	5.474 kHz	5.747 kHz	8.0 kHz	Pass
27.205 MHz	5.474 kHz	5.743 kHz	8.0 kHz	Pass
27.405 MHz	5.472 kHz	5.741 kHz	8.0 kHz	Pass

Test plot as follows:

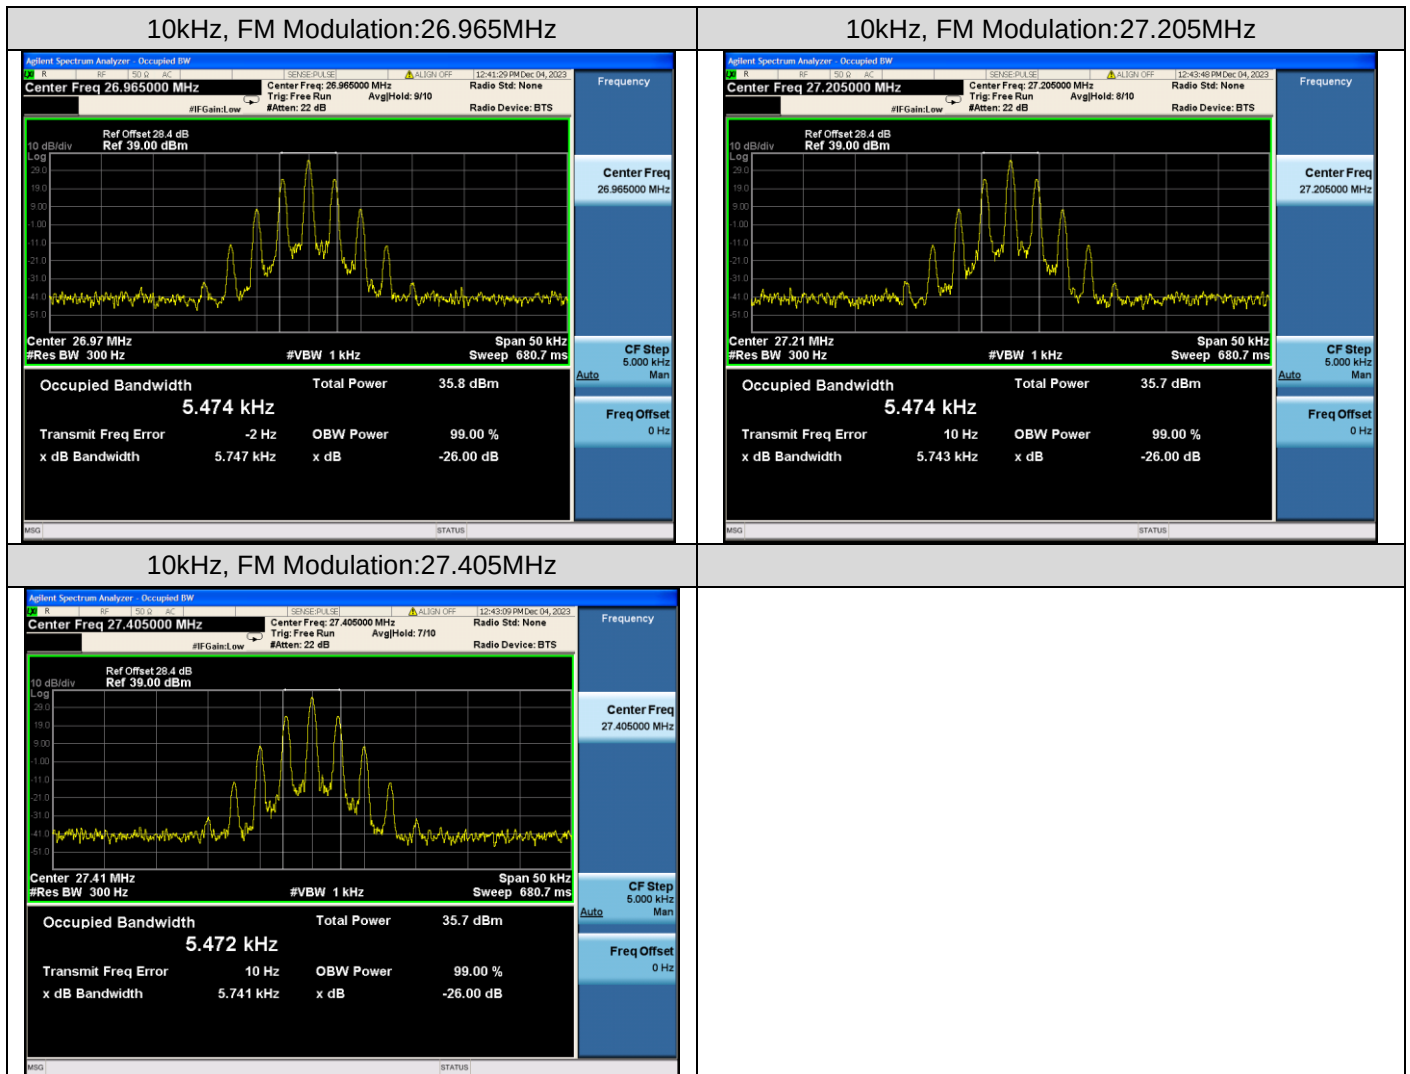

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

8. Radiated Spurious Emission

8.1 Provisions Applicable

FCC Part 95.979(a), FCC Part 2.1049

Each CBRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) as specified in the applicable paragraphs listed in the following table:

Emission type	Paragraph
A3E,F3E	(1), (3), (5), (6)
H3E, J3E, R3E	(2), (4), (5), (6)

- (1) 25 dB (decibels) in the frequency band 4 kHz to 8 kHz removed from the channel center frequency;
- (2) 25 dB in the frequency band 2 kHz to 6 kHz removed from the channel center frequency;
- (3) 35 dB in the frequency band 8 kHz to 20 kHz removed from the channel center frequency;
- (4) 35 dB in the frequency band 6 kHz to 10 kHz removed from the channel center frequency;
- (5) $53 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 250% of the authorized bandwidth.
- (6) 60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.

8.2 Measurement Procedure



1. EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
6. The measurement results are obtained as described below: $\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} - \text{Ga}$ The measurement results are amend as described below: $\text{Power(EIRP)} = \text{PMea} - \text{Pcl} - \text{Ga}$
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.
9. Test the EUT in the lowest channel, the middle channel the Highest channel

8.3 Measurement Setup

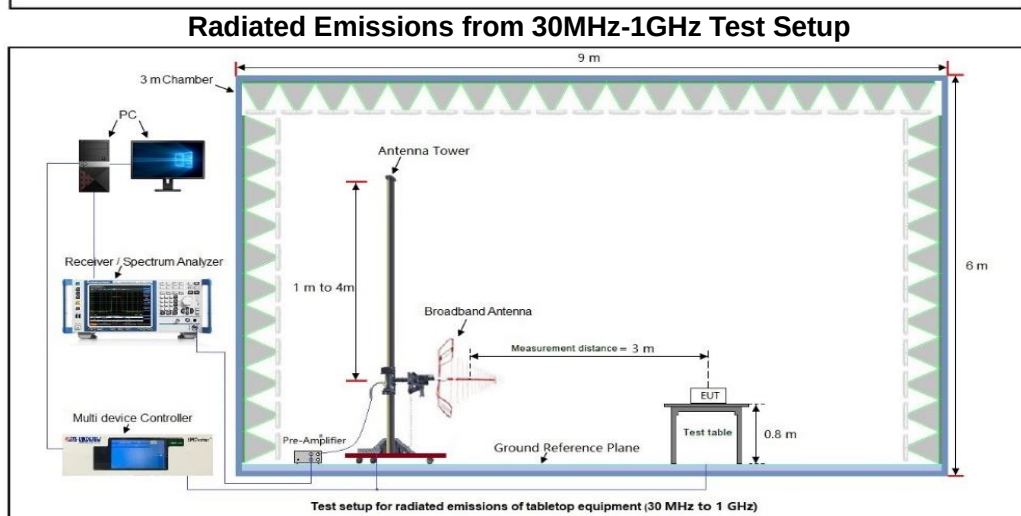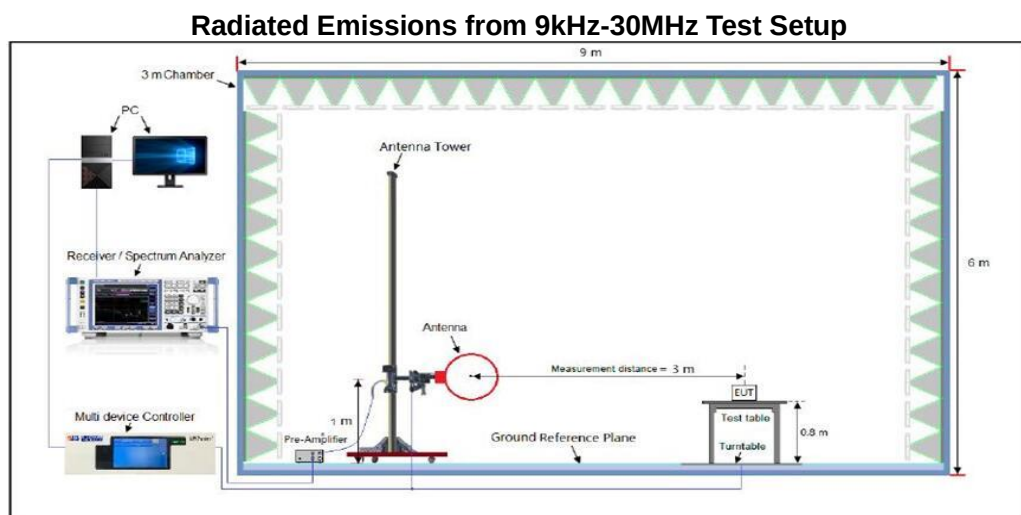

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


8.4 Measurement Results

Preliminary calculation	Final Result
$P(\text{dBm})=30+10\log【P(W)】=36.02\text{dBm}$	Limit= Preliminary calculation-60dB=-24dBm

1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
2. Factor=Antenna Factor+ Cable loss -Pre-amplifier. (Above 1 GHz)
3. Margin=Limit- Level
4. the unwanted emission should be attenuated below TP by at least 60 dB.
5. In the frequency range of 9KHz-30MHz, in addition to displaying the Fundamental level, the radiated spurious emission level is much less than 60dB of the carrier power, so it is ignored.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Mode:	TX-CH1-AM	Polarity:	Horizontal
------------	-----------	-----------	------------

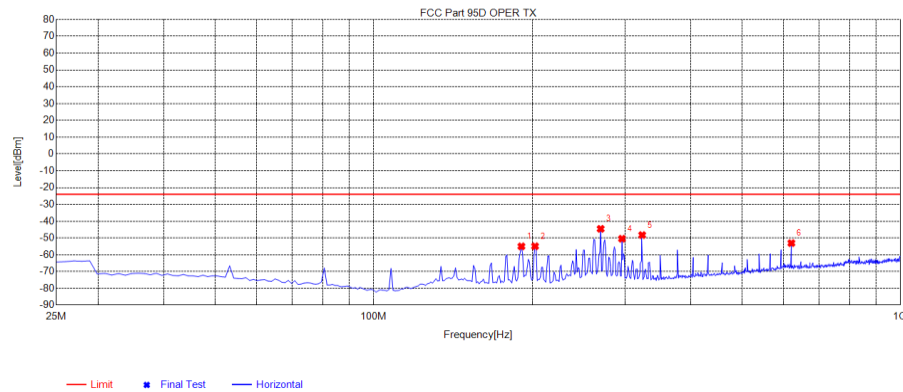

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	190.75	-78.14	-54.98	-24.00	30.98	23.16	256	Horizontal
2	202.45	-78.49	-54.91	-24.00	30.91	23.58	100	Horizontal
3	269.725	-72.95	-44.54	-24.00	20.54	28.41	256	Horizontal
4	296.05	-78.47	-50.43	-24.00	26.43	28.04	126	Horizontal
5	323.35	-76.40	-48.25	-24.00	24.25	28.15	135	Horizontal
6	620.725	-87.85	-53.05	-24.00	29.05	34.80	273	Horizontal

Test Mode:	TX-CH1-AM	Polarity:	Vertical
------------	-----------	-----------	----------

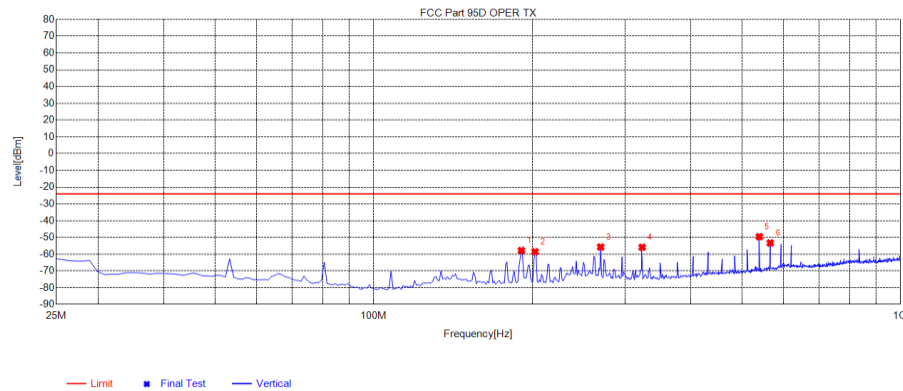

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	190.75	-80.95	-57.79	-24.00	33.79	23.16	1	Vertical
2	202.45	-82.10	-58.52	-24.00	34.52	23.58	1	Vertical
3	269.725	-84.12	-55.71	-24.00	31.71	28.41	217	Vertical
4	323.35	-84.02	-55.87	-24.00	31.87	28.15	260	Vertical
5	539.8	-82.17	-49.56	-24.00	25.56	32.61	182	Vertical
6	566.125	-86.78	-53.31	-24.00	29.31	33.47	182	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

Test Mode:	TX-CH20-AM	Polarity:	Horizontal
------------	------------	-----------	------------

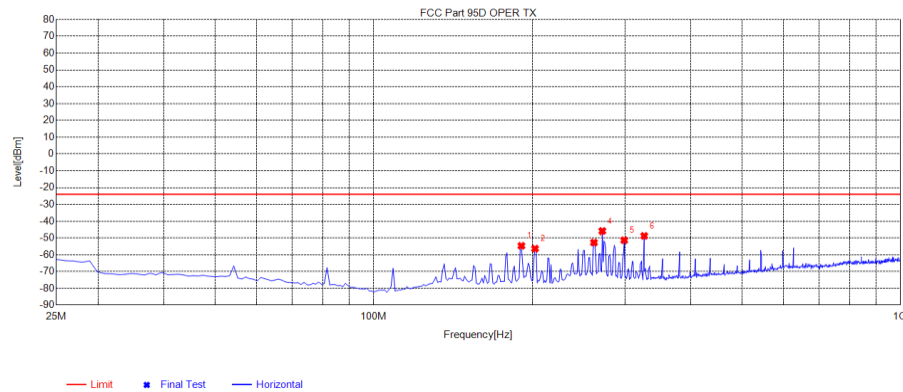

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	190.75	-77.82	-54.66	-24.00	30.66	23.16	261	Horizontal
2	202.45	-79.91	-56.33	-24.00	32.33	23.58	271	Horizontal
3	261.925	-81.23	-52.71	-24.00	28.71	28.52	271	Horizontal
4	271.675	-74.19	-45.81	-24.00	21.81	28.38	261	Horizontal
5	298.975	-79.33	-51.33	-24.00	27.33	28.00	251	Horizontal
6	326.275	-76.92	-48.75	-24.00	24.75	28.17	251	Horizontal

Test Mode:	TX-CH20-AM	Polarity:	Vertical
------------	------------	-----------	----------

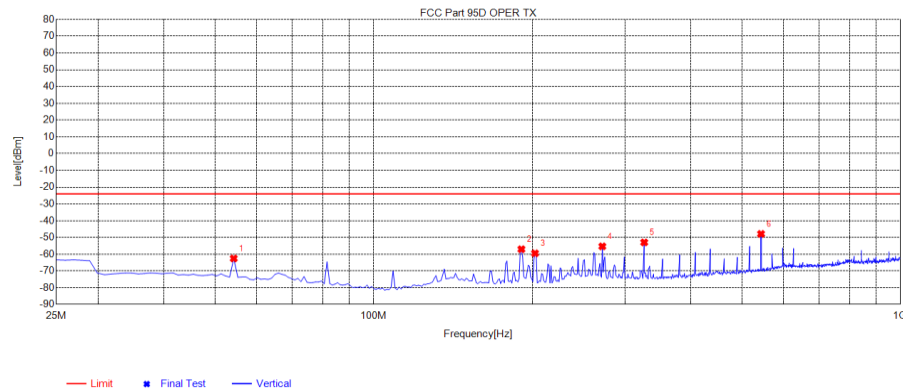

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	54.25	-90.24	-62.54	-24.00	38.54	27.70	286	Vertical
2	190.75	-80.18	-57.02	-24.00	33.02	23.16	1	Vertical
3	202.45	-83.04	-59.46	-24.00	35.46	23.58	10	Vertical
4	271.675	-83.68	-55.30	-24.00	31.30	28.38	234	Vertical
5	326.275	-81.12	-52.95	-24.00	28.95	28.17	269	Vertical
6	543.7	-80.59	-47.90	-24.00	23.90	32.69	209	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

Test Mode:	TX-CH40-AM	Polarity:	Horizontal
------------	------------	-----------	------------

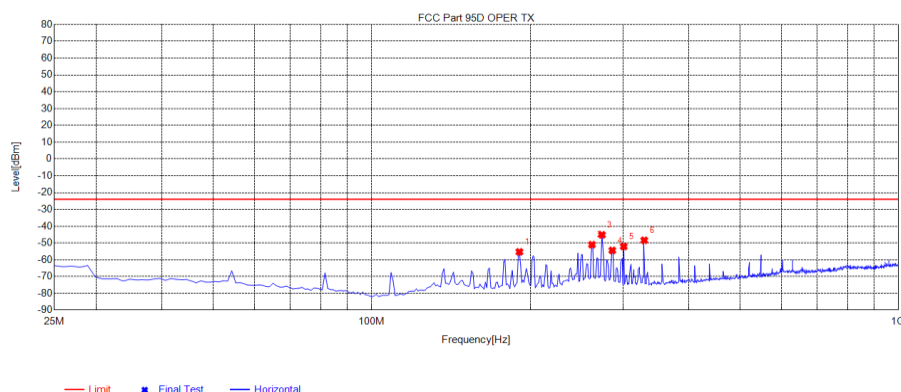

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	190.75	-78.44	-55.28	-24.00	31.28	23.16	260	Horizontal
2	261.925	-79.51	-50.99	-24.00	26.99	28.52	243	Horizontal
3	273.625	-73.51	-45.16	-24.00	21.16	28.35	279	Horizontal
4	286.3	-82.58	-54.40	-24.00	30.40	28.18	251	Horizontal
5	300.925	-80.08	-52.08	-24.00	28.08	28.00	251	Horizontal
6	329.2	-76.57	-48.38	-24.00	24.38	28.19	251	Horizontal


Test Mode:	TX-CH40-AM	Polarity:	Vertical
------------	------------	-----------	----------

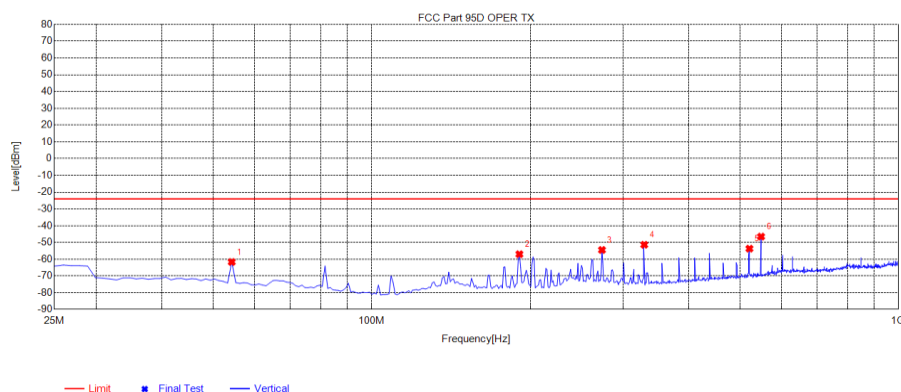

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	54.25	-89.36	-61.66	-24.00	37.66	27.70	268	Vertical
2	190.75	-80.16	-57.00	-24.00	33.00	23.16	1	Vertical
3	273.625	-82.83	-54.48	-24.00	30.48	28.35	217	Vertical
4	329.2	-79.57	-51.38	-24.00	27.38	28.19	277	Vertical
5	521.275	-85.95	-53.69	-24.00	29.69	32.26	199	Vertical
6	548.575	-79.29	-46.51	-24.00	22.51	32.78	208	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Mode:	TX-CH1-FM	Polarity:	Horizontal
------------	-----------	-----------	------------

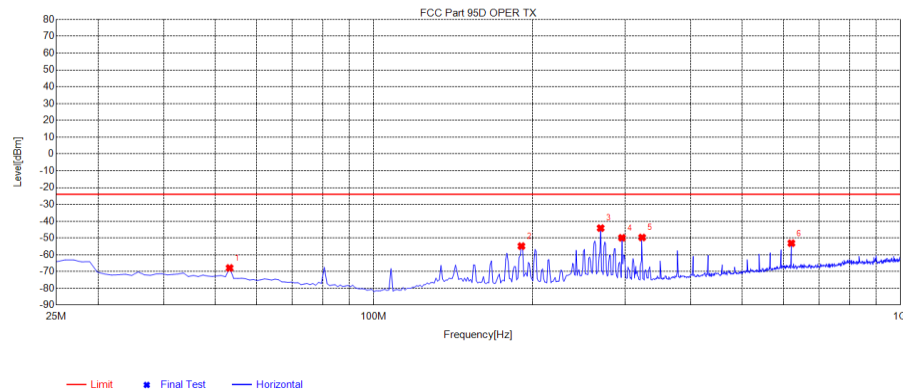

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	53.275	-95.77	-67.84	-24.00	43.84	27.93	0	Horizontal
2	190.75	-78.00	-54.84	-24.00	30.84	23.16	264	Horizontal
3	269.725	-72.53	-44.12	-24.00	20.12	28.41	256	Horizontal
4	296.05	-77.92	-49.88	-24.00	25.88	28.04	264	Horizontal
5	323.35	-77.84	-49.69	-24.00	25.69	28.15	256	Horizontal
6	620.725	-87.91	-53.11	-24.00	29.11	34.80	273	Horizontal


Test Mode:	TX-CH1-FM	Polarity:	Vertical
------------	-----------	-----------	----------

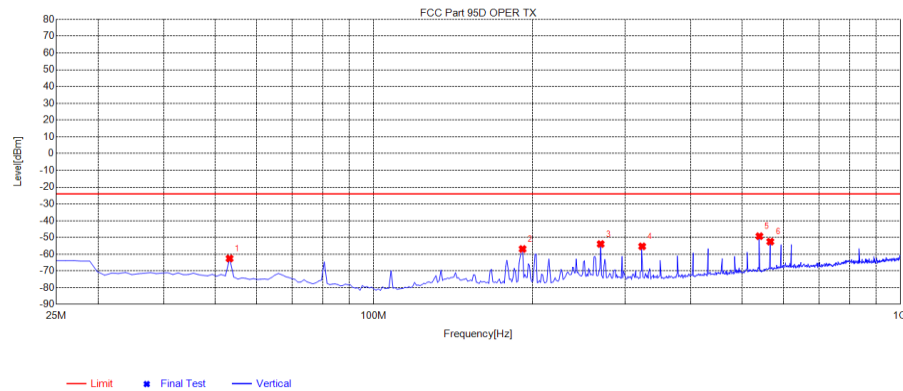

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	53.275	-90.49	-62.56	-24.00	38.56	27.93	260	Vertical
2	191.725	-80.05	-56.87	-24.00	32.87	23.18	360	Vertical
3	269.725	-82.32	-53.91	-24.00	29.91	28.41	217	Vertical
4	323.35	-83.46	-55.31	-24.00	31.31	28.15	268	Vertical
5	539.8	-81.88	-49.27	-24.00	25.27	32.61	208	Vertical
6	566.125	-85.96	-52.49	-24.00	28.49	33.47	173	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Mode:	TX-CH20-FM	Polarity:	Horizontal
------------	------------	-----------	------------

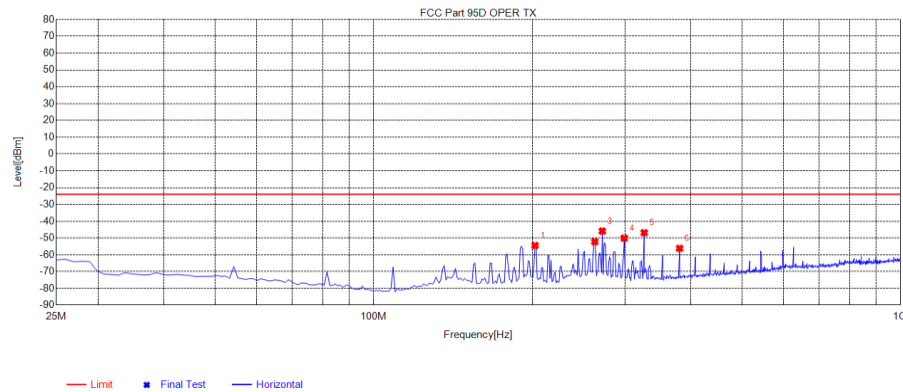

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	202.45	-78.03	-54.45	-24.00	30.45	23.58	90	Horizontal
2	262.9	-80.68	-52.18	-24.00	28.18	28.50	246	Horizontal
3	271.675	-74.29	-45.91	-24.00	21.91	28.38	254	Horizontal
4	298.975	-78.07	-50.07	-24.00	26.07	28.00	246	Horizontal
5	326.275	-75.01	-46.84	-24.00	22.84	28.17	134	Horizontal
6	380.875	-85.29	-56.14	-24.00	32.14	29.15	82	Horizontal


Test Mode:	TX-CH20-FM	Polarity:	Vertical
------------	------------	-----------	----------

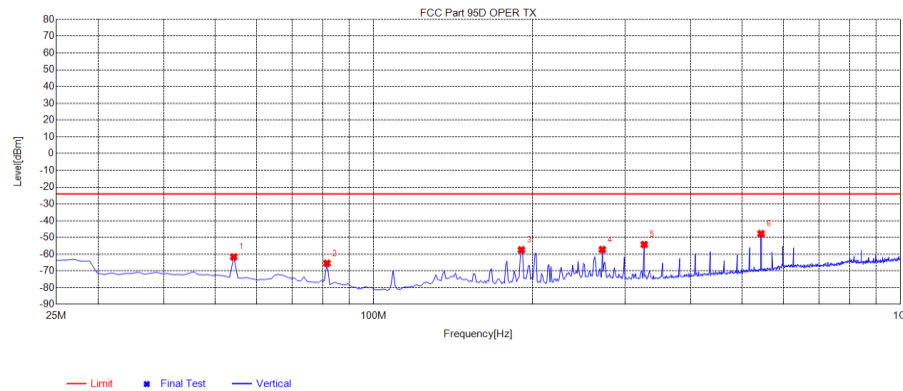

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	54.25	-89.29	-61.59	-24.00	37.59	27.70	265	Vertical
2	81.55	-89.40	-65.41	-24.00	41.41	23.99	1	Vertical
3	190.75	-80.55	-57.39	-24.00	33.39	23.16	10	Vertical
4	271.675	-85.62	-57.24	-24.00	33.24	28.38	212	Vertical
5	326.275	-82.39	-54.22	-24.00	30.22	28.17	273	Vertical
6	543.7	-80.44	-47.75	-24.00	23.75	32.69	204	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Mode:	TX-CH40-FM	Polarity:	Horizontal
------------	------------	-----------	------------

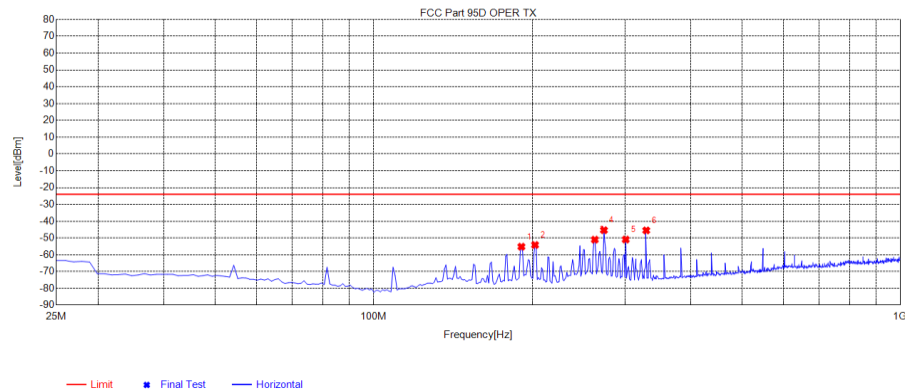

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	190.75	-78.34	-55.18	-24.00	31.18	23.16	247	Horizontal
2	202.45	-77.73	-54.15	-24.00	30.15	23.58	281	Horizontal
3	262.9	-79.49	-50.99	-24.00	26.99	28.50	117	Horizontal
4	273.625	-73.71	-45.36	-24.00	21.36	28.35	109	Horizontal
5	300.925	-78.92	-50.92	-24.00	26.92	28.00	126	Horizontal
6	329.2	-73.67	-45.48	-24.00	21.48	28.19	134	Horizontal

Test Mode:	TX-CH40-FM	Polarity:	Vertical
------------	------------	-----------	----------

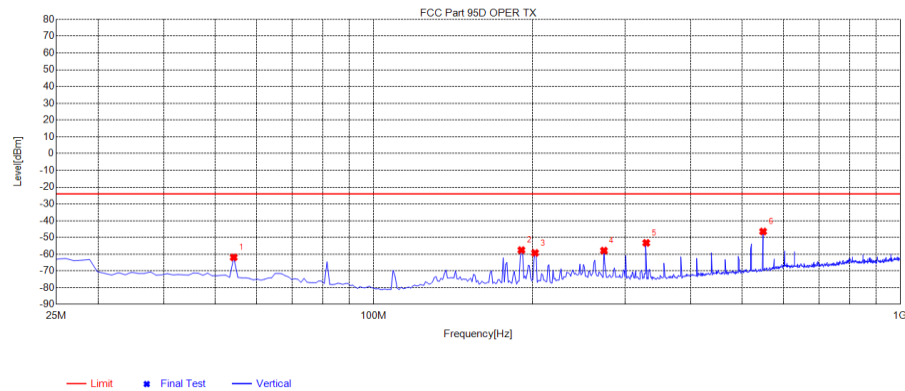

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	54.25	-89.59	-61.89	-24.00	37.89	27.70	257	Vertical
2	190.75	-80.71	-57.55	-24.00	33.55	23.16	10	Vertical
3	202.45	-82.81	-59.23	-24.00	35.23	23.58	357	Vertical
4	273.625	-86.20	-57.85	-24.00	33.85	28.35	203	Vertical
5	329.2	-81.45	-53.26	-24.00	29.26	28.19	141	Vertical
6	548.575	-79.26	-46.48	-24.00	22.48	32.78	185	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

8.5 Emission Mask Plot

The detailed procedure employed for Emission Mask measurements are specified as following:


-Connect the equipment as illustrated.

-Spectrum set as follow:

1. Centre frequency = fundamental frequency, Span=50kHz for 10kHz , RBW=300Hz, VBW=1000Hz ;
2. Sweep = auto, Detector function = peak, Trace = max hold
3. Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
4. Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation


The input level shall be established at the frequency of maximum response of the audio modulating circuit.

5. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
6. Measure and record the results in the test report.

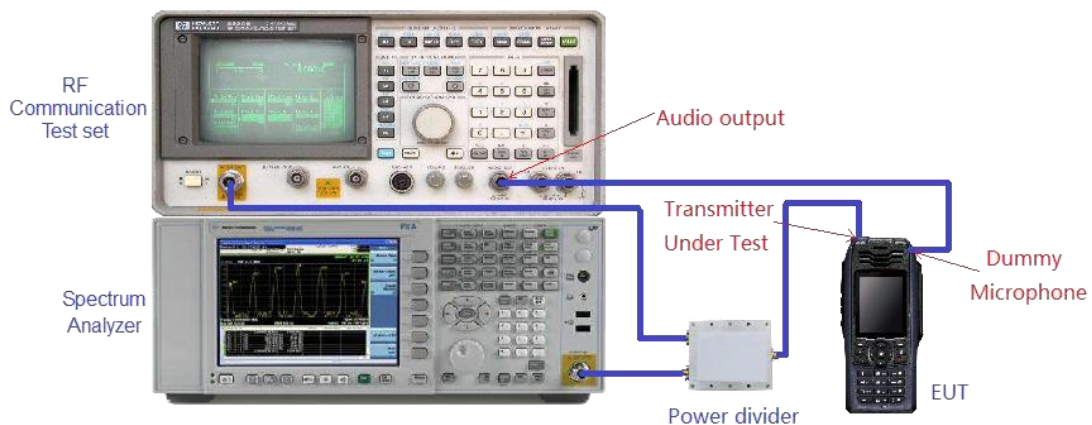

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test plot as follows:

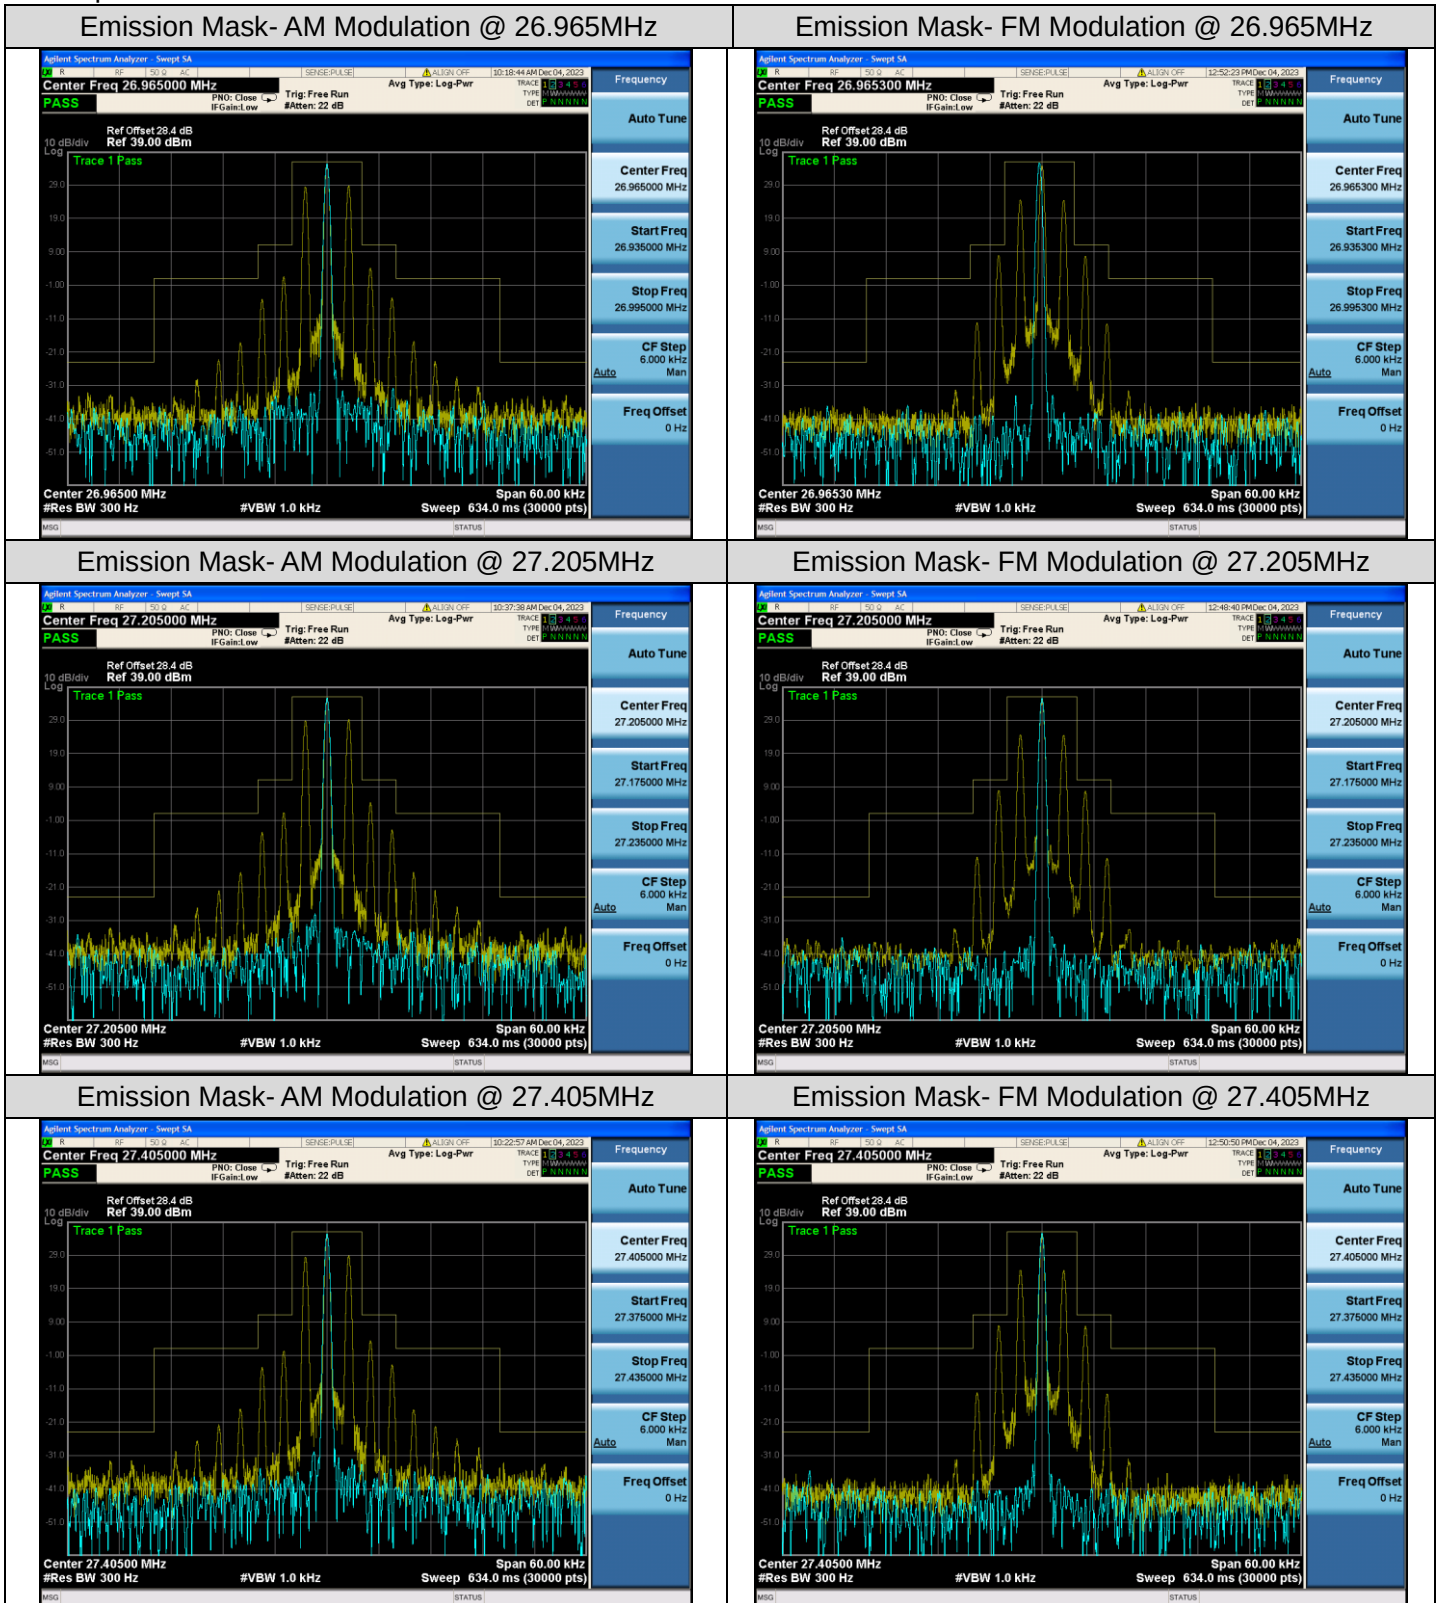

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

9. Spurious Emission on Antenna Port

9.1 Provisions Applicable

Please refer to FCC 47 CFR 2.1051, 2.1057 & 95.979 for specification details.

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Attenuation Limit (dBc)
§ 95.979	At least $53 + 10 \log (P)$ dB
§ 95.979	60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.

$53 + 10 \log (P_{\text{watts}})$

Calculation: Limit (dBm) = EL - 53 - 10 log₁₀ (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,

In this application, the EL is P (dBm).


Limit (dBm) = P (dBm) - 53 - 10 log (Pwatts) = -23 dBm

Note: Unwanted spurious limit is -23dBm, and the main wave frequency multiplication limit is -24dBm. After evaluation, a stricter limit of -24dBm is used to evaluate unwanted spurious and main wave frequency multiplication.

9.2 Measurement Method

1. The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to
3. show any out of band emission up to 10th . Harmonic for the lower and the highest frequency range.
4. Set RBW 1 kHz, VBW 3 kHz in the frequency band 9KHz to 150KHz;
Set RBW 10 kHz, VBW 30 kHz in the frequency band 150KHz to 20MHz;
Set RBW 100 kHz, VBW 300 kHz in the frequency band 20MHz to 1GHz;
While set RBW=1MHz.VBW=3MHz from the 1GHz to 10th Harmonic.
5. The audio input was set the unmodulated carrier, the resulting picture is print out for each channel separation.

9.3 Measurement Setup

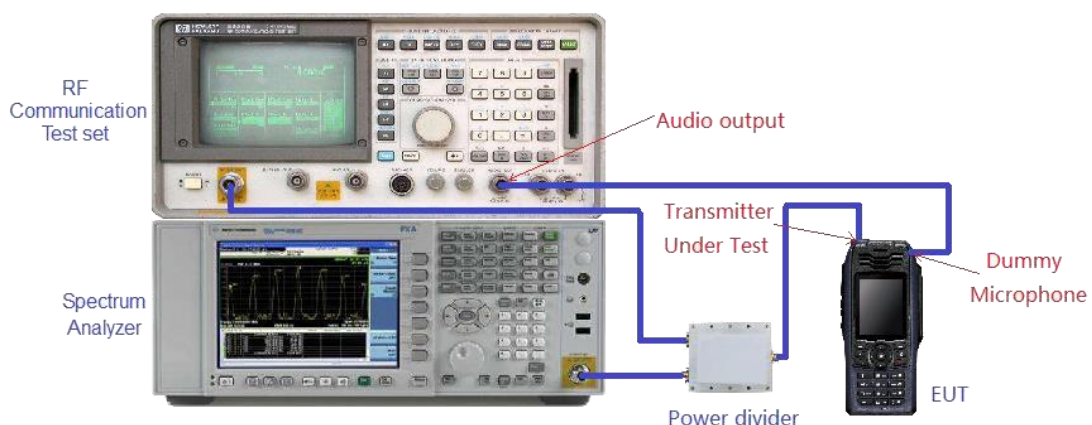

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

9.4 Measurement Results


Test plot as follows:

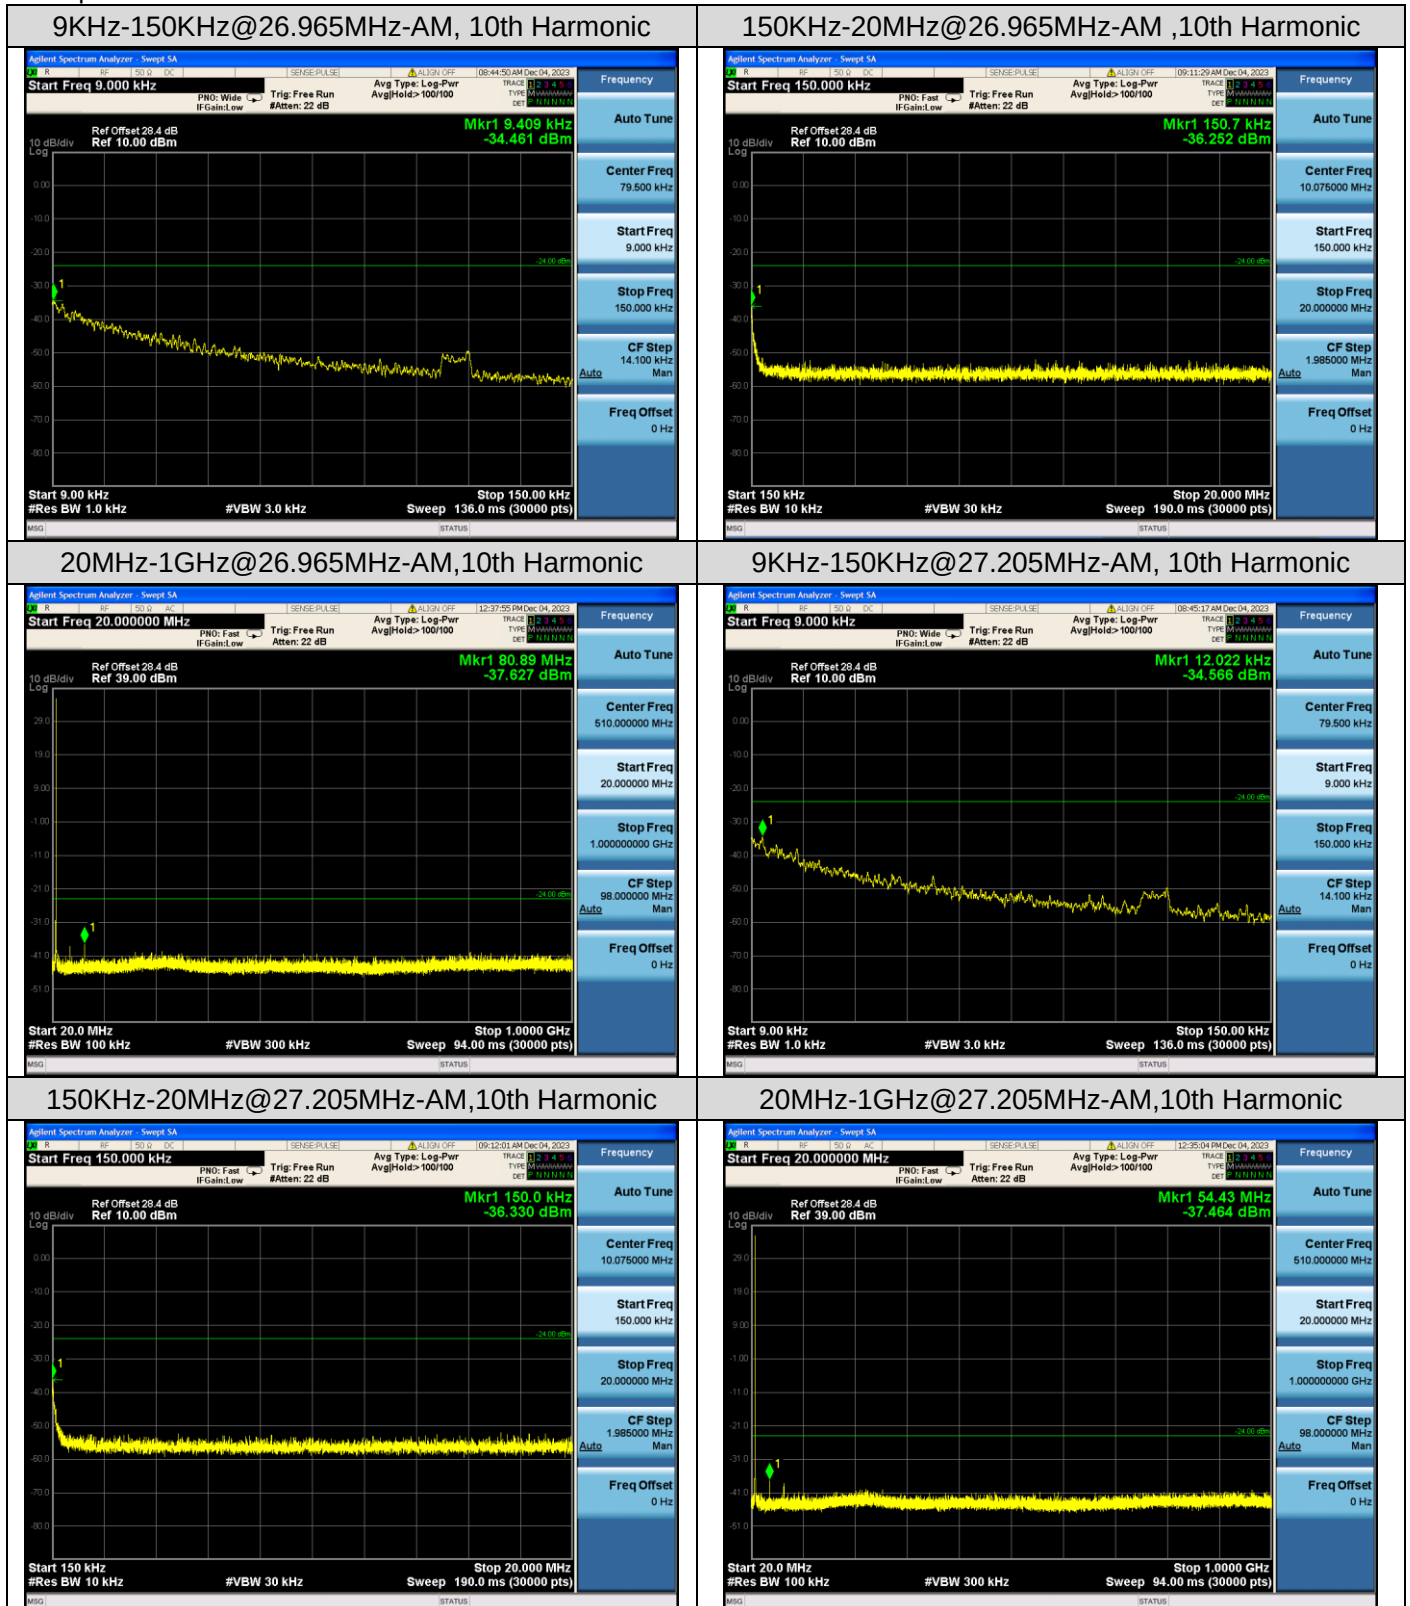

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

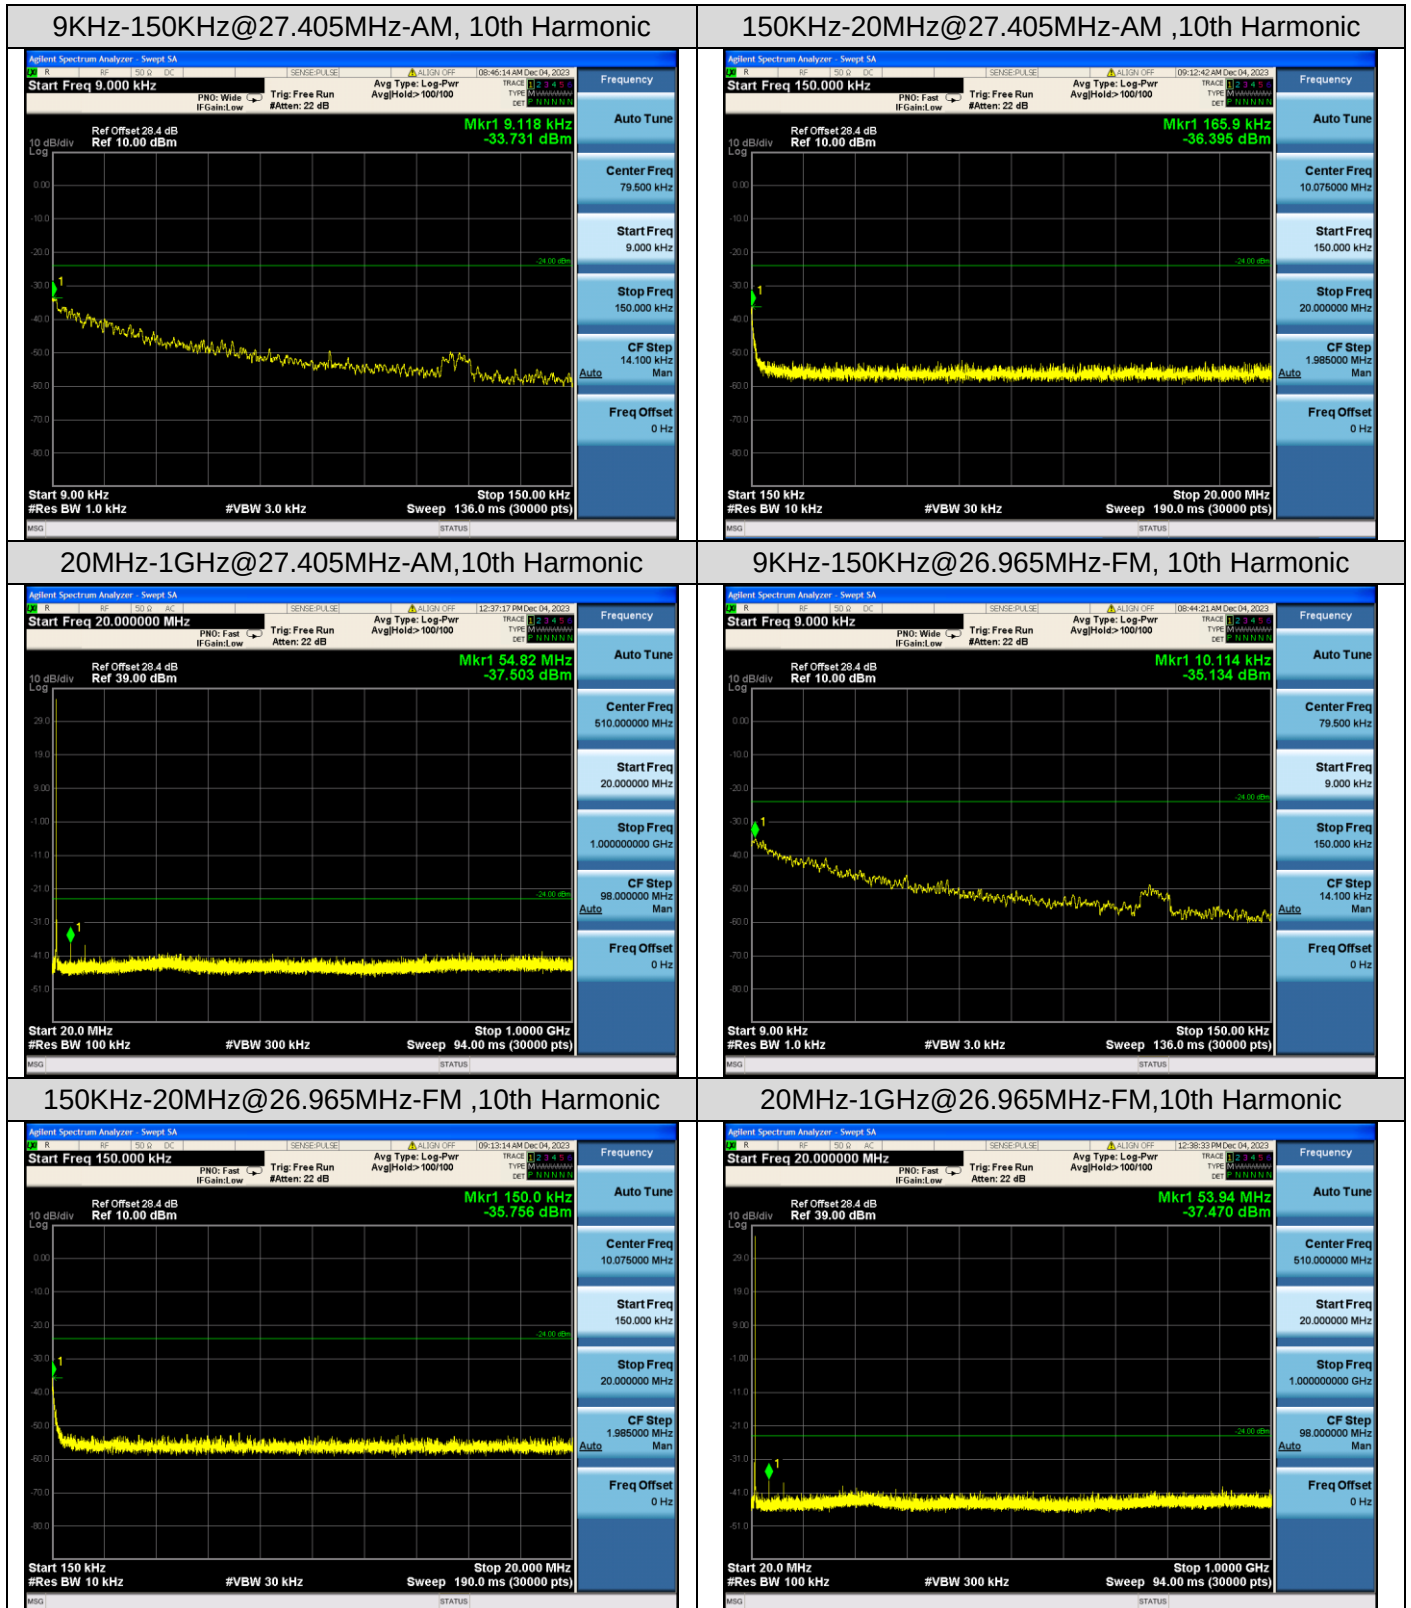

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

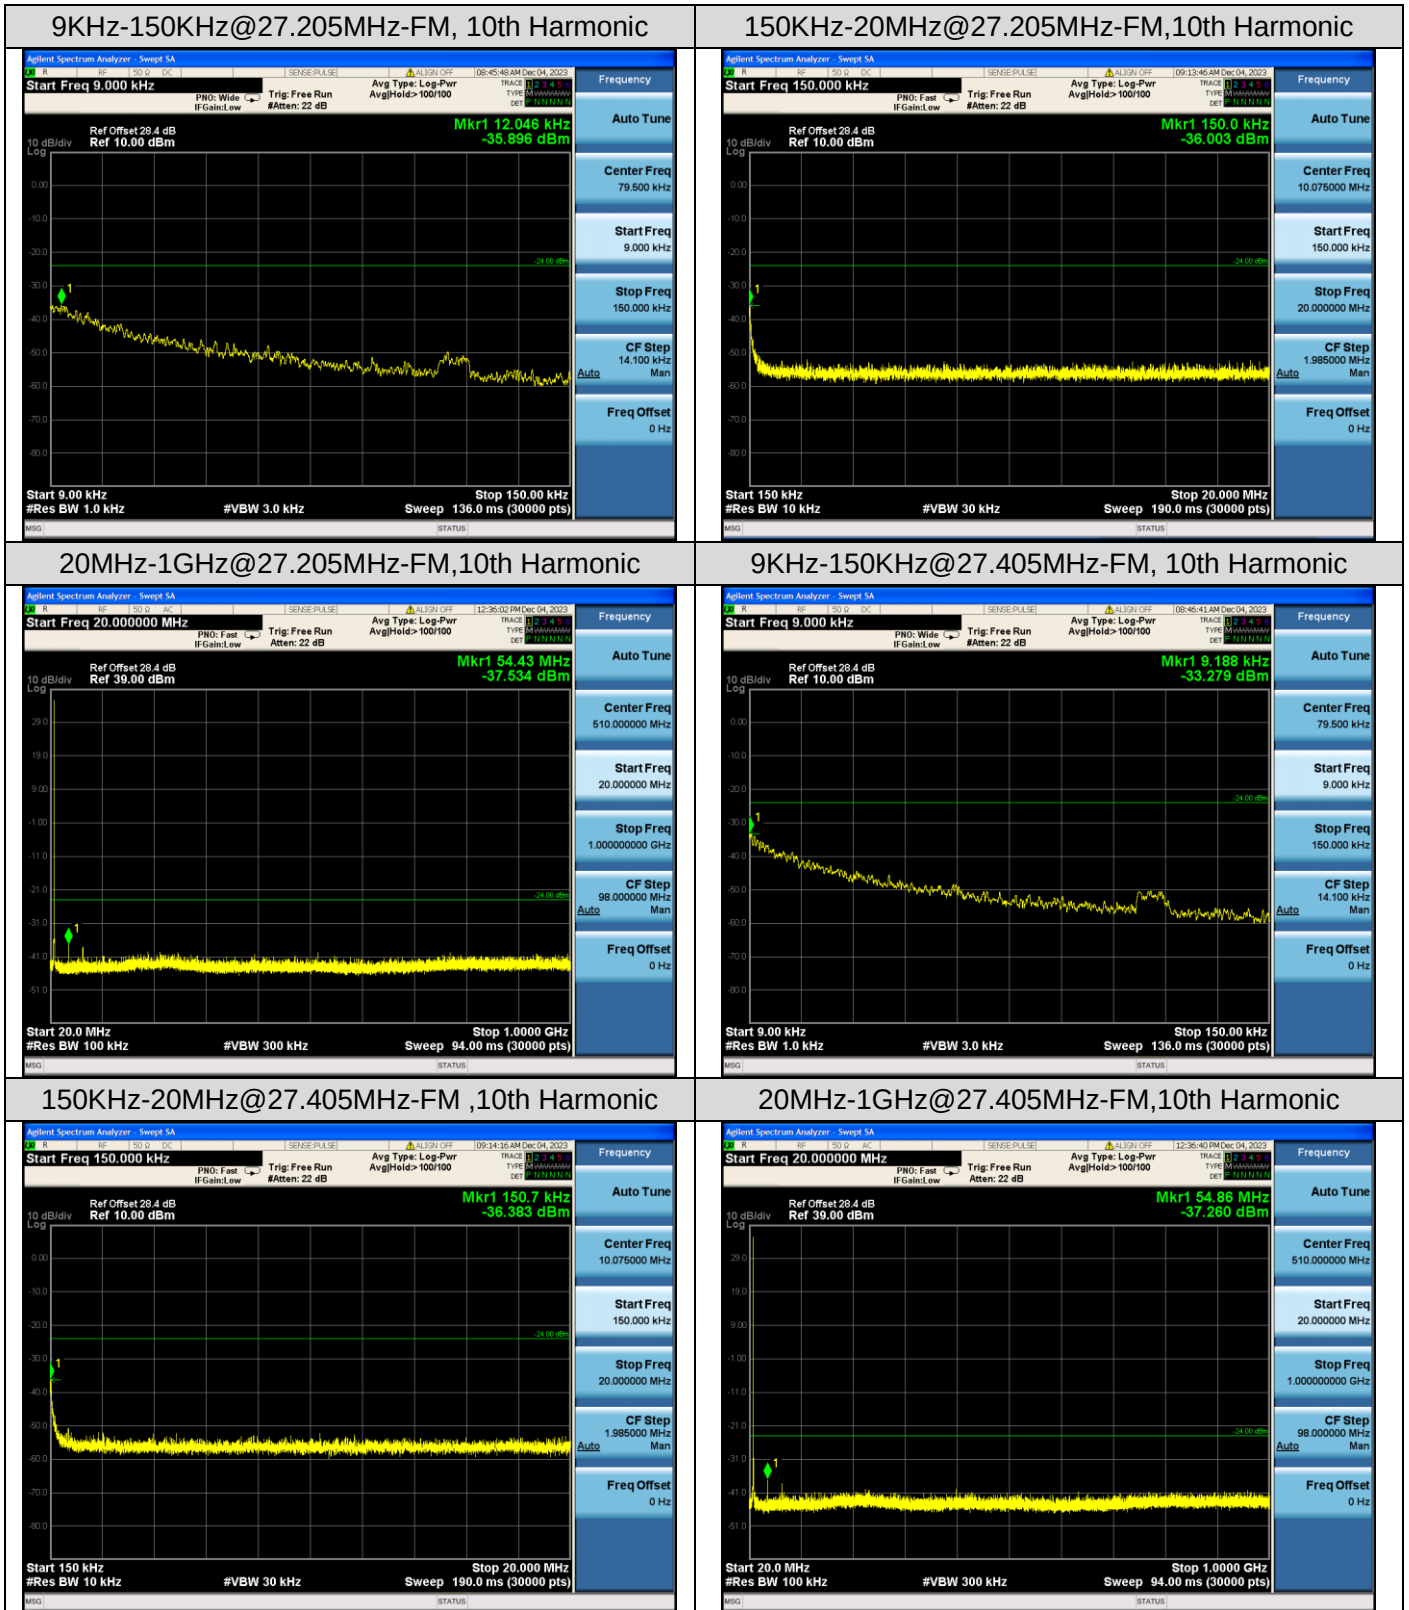

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

10. Maximum Transmitter Power

10.1 Provisions Applicable

FCC Part 95.967, FCC Part 2.1046(a)

Each CBRS transmitter type must be designed such that the transmitter power can not exceed the following limits:


- (a) When transmitting amplitude modulated (AM) voice signals or frequency modulated (FM) voice signals, the mean carrier power must not exceed 4 Watts
- (b) When transmitting single sideband (SSB) voice signals, the peak envelope power must not exceed 12 Watts.

10.2 Measurement Method

Conducted RF Output Power:

1. The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
2. The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as above using the Automatic 6dB Cursor Bandwidth measurement. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at its maximum Duty Cycle.
3. Spectrum set as follow:
4. Centre frequency = fundamental frequency, Span=150 kHz, RBW=30 kHz, VBW=30 kHz
Sweep = auto, Detector function = peak, Trace = max hold

10.3 Measurement Setup

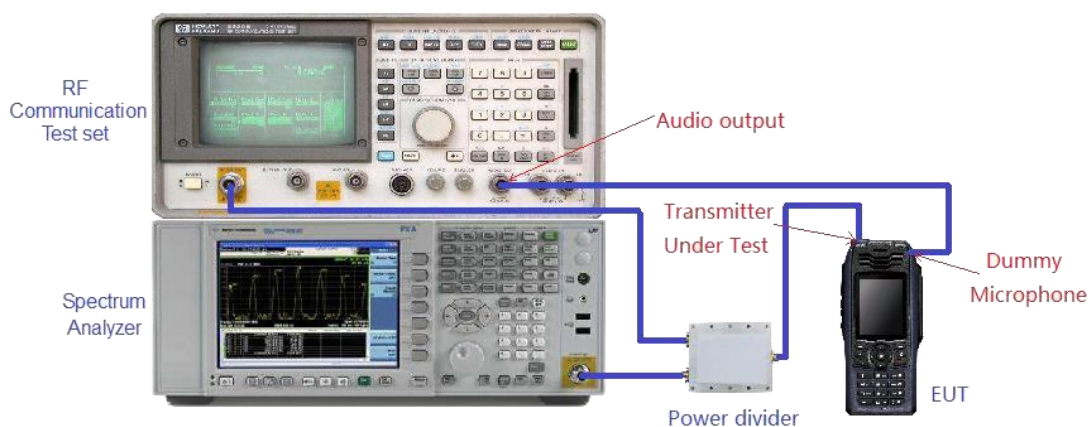


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

10.4 Measurement Results

Conducted Power Measurement Results			
Mode	Channel Separation	Test Channel	Measurement Result (dBm)
CBRS TX	10 kHz	26.965 MHz	35.809
		27.205 MHz	35.726
		27.405 MHz	35.635

Test plot as follows:

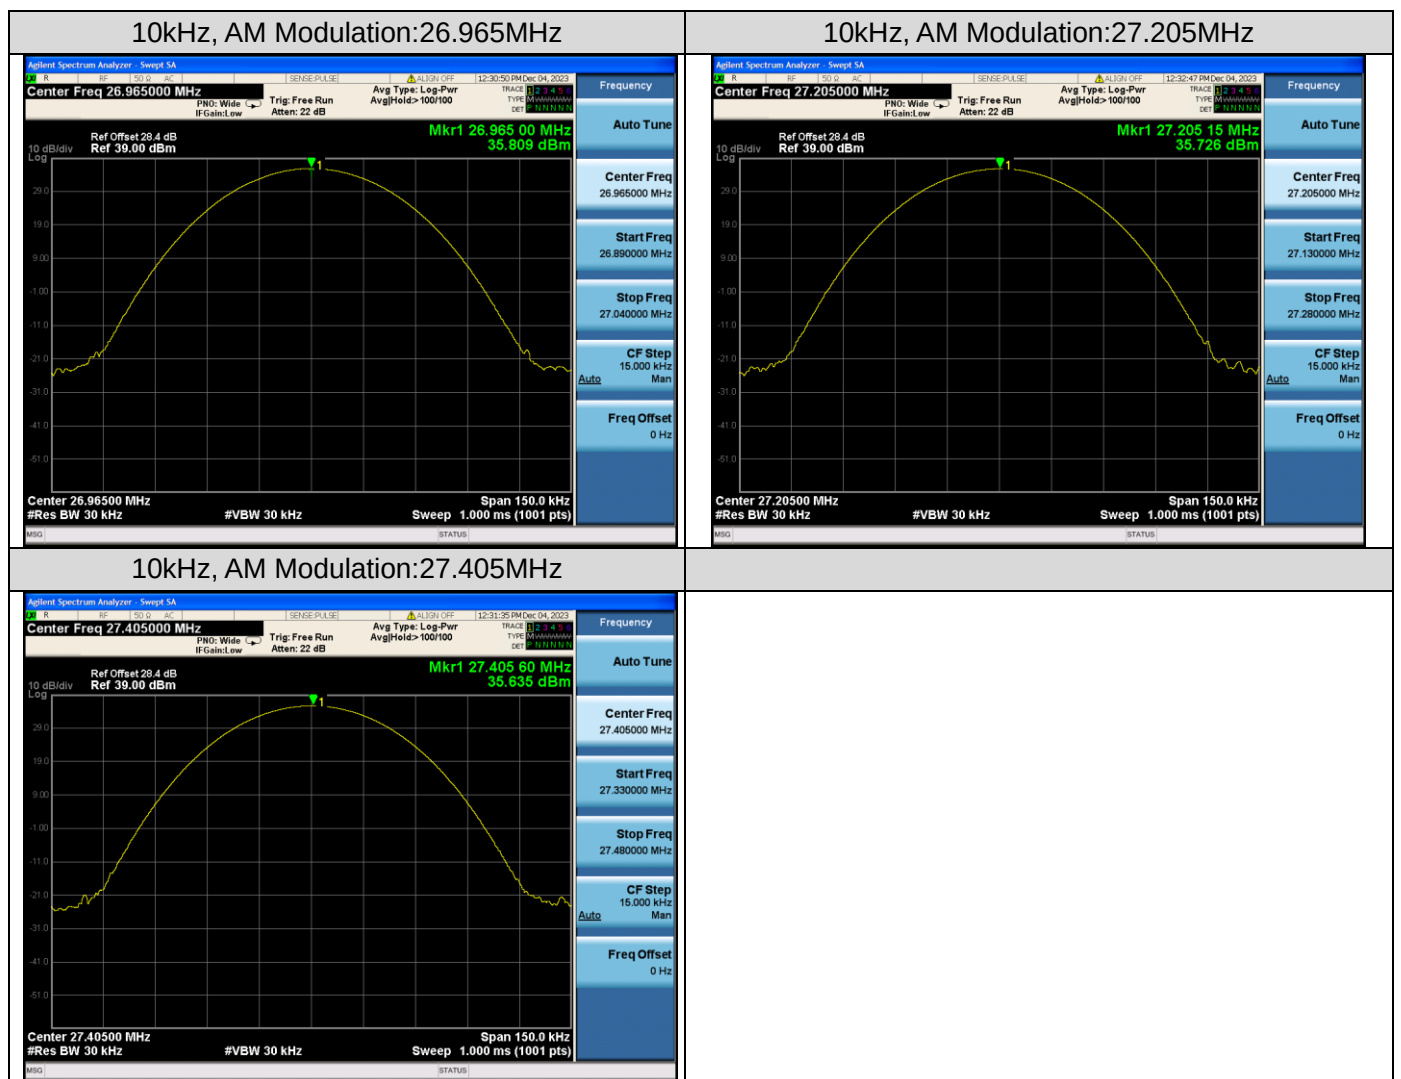


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Conducted Power Measurement Results

Mode	Channel Separation	Test Channel	Measurement Result (dBm)
CBRS TX	10 kHz	26.965 MHz	35.495
		27.205 MHz	35.470
		27.405 MHz	35.419

Test plot as follows:

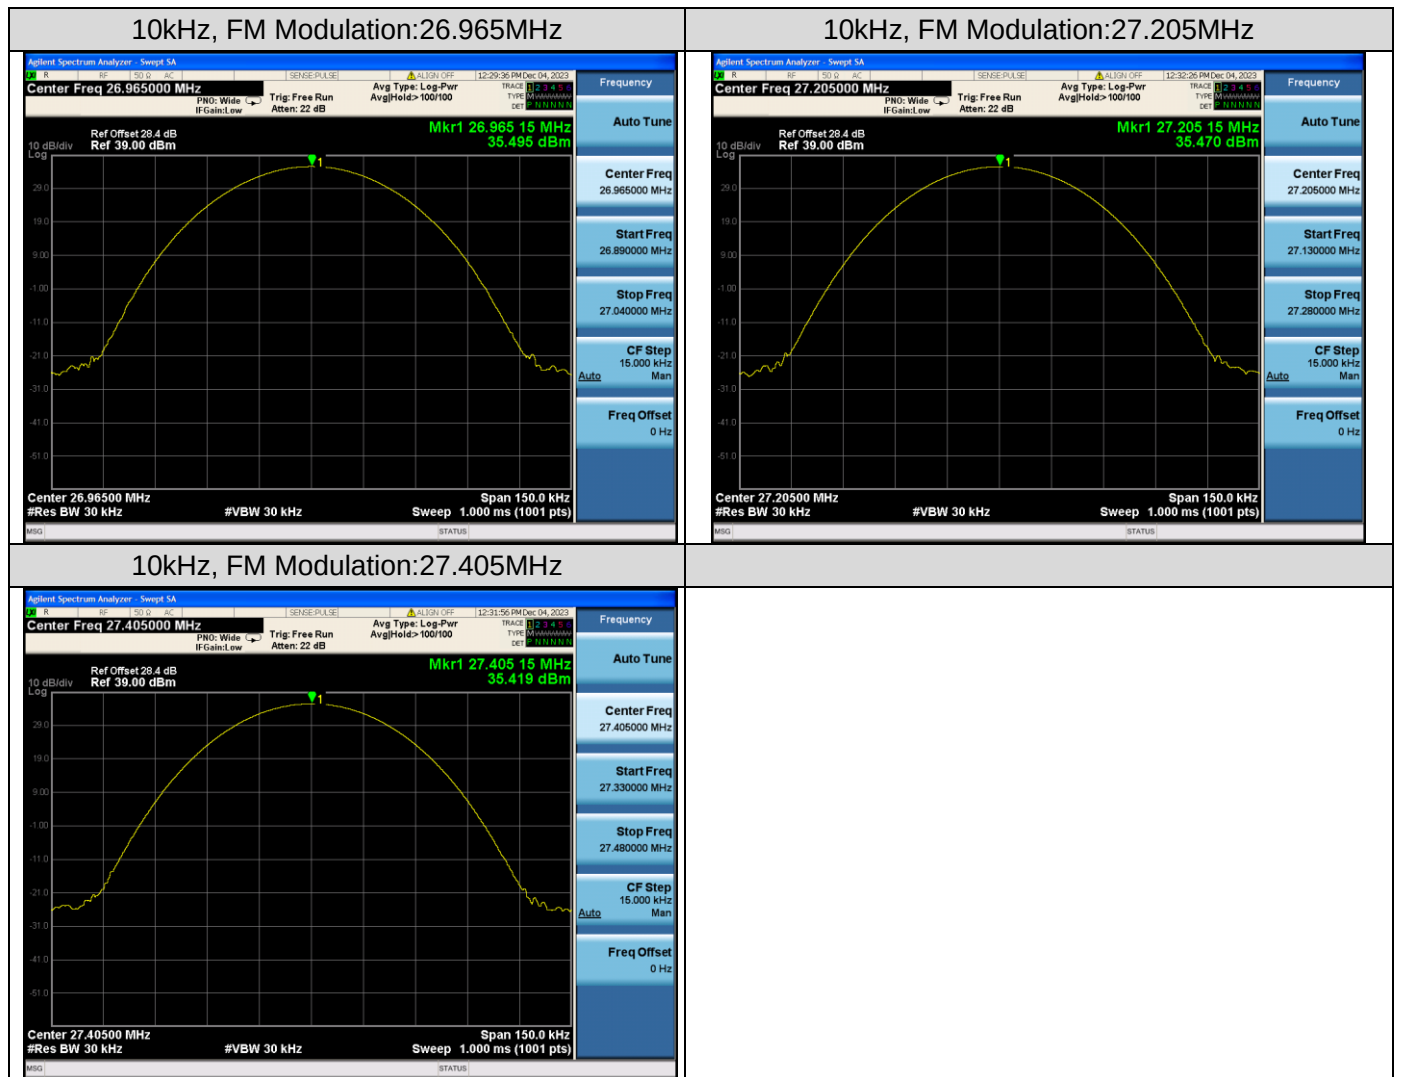

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

11. Modulation Characteristics

11.1 Provisions Applicable

FCC Part 95.975, FCC Part 2.1047(b)

Each CBRS transmitter type must be designed such that the modulation characteristics are in compliance with the rules in this section.

- a) When emission type A3E is transmitted with voice modulation, the modulation percentage must be at least 85%, but not more than 100%.
- b) When emission type A3E is transmitted by a CBRS transmitter having a transmitter output power of more than 2.5 W, the transmitter must contain a circuit that automatically prevents the modulation percentage from exceeding 100%.
- c) When emission type F3E is transmitted the peak frequency deviation shall not exceed ± 2 kHz.

11.2 Measurement Method_(Am)

(A) Audio frequency response

Connect the equipment as illustrated.

Adjust to deliver 50% modulation at the audio frequency that produces the maximum modulation level

Record the modulation input level (mV) and use this level as 0dB for plotting modulation limiting.

Vary the modulating frequency from 100Hz to 10000Hz and record the input levels necessary to maintain a constant 50% modulation.

Graph the audio level in dB relative to the 0dB reference level as a function of the modulating frequency. Record audio frequency where it is impossible to perform the measurement.

(B) Modulation limiting

Connect the equipment as illustrated.

Adjust to deliver 50% modulation at the audio frequency that produces the maximum modulation level

Record the modulation input level (mV) and use this level as 0dB for plotting modulation limiting.

Increment the audio signal level to 40dB above the reference level. Record the modulation level (%).

Repeat the measurements using a 400Hz and a 2500Hz sinusoidal audio signal, record the modulation level (%), perform for both positive and negative modulation.

11.3 Measurement Method_(Fm)

(C) Modulation limiting

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1kHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.

- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

(D) Audio frequency response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 kHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 kHz and record the frequency deviation.
- (4). Audio Frequency Response = $20\log_{10}$ (Deviation of test frequency/Deviation of 1 kHz reference).

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>