


REV.	DESCRIPTION OF CHANGE	DATE
A	更新按键高度和新增后壳铭牌凹槽	2023/11/22
B		
C		




Barcode Area

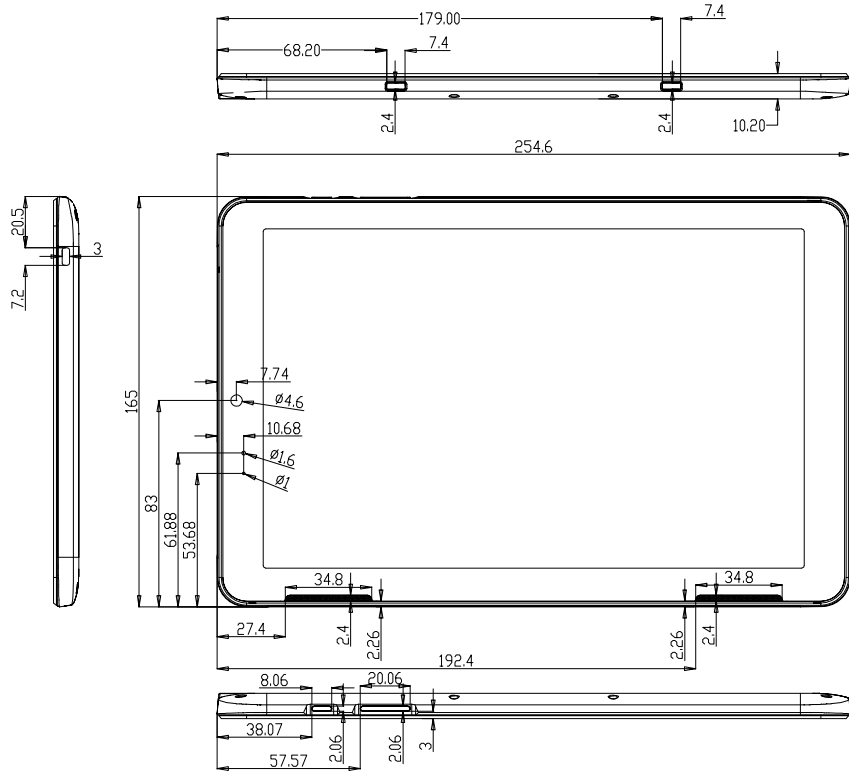

W46×H26mm
3-R:1.2mm
C:3mm

- 环保要求
- ☒ ROHS 指令
 - ☒ REACH 法规
 - ☐ GS-PAHs
 - ☐ 无卤
 - ☐ 加州65 法案

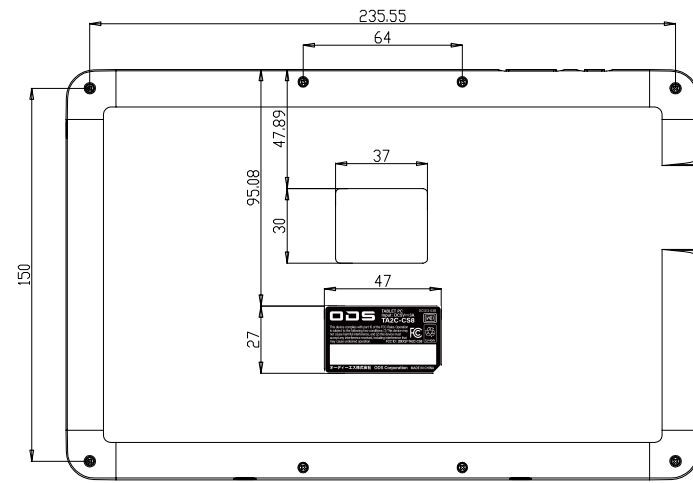

TOLERANCE UNLESS OTHERWISE SPECIFIED					
Dim./Tol.	○	○	○	○	○
xx	± 0.10	± 0.15	± 0.50	± 1.00	± 2.00
Ang./Tol.	○	○	○	○	○
xx.X	± 0.05	± 0.10	± 0.20	± 0.50	± 1.00
xx.XX	± 0.02	± 0.05	± 0.10	± 0.20	± 0.50

TITLE	SMB-P1006 六面图	VERSION	V2.0
DWG.BY		Model No.	SMB-P1006
CHK.BY		Part No.	SMB-P1006
APP.BY		SCALE	1:1 SHEET 1/1 PRO(1)
DATE		UNITS:	mm

漳州万利达科技有限公司 A4

DC1213-03B_ LABEL RATING %TA2C-CS8

Barcode Area



W46×H26mm

3-R:1.2mm

C:3mm

When printing, add color outside the cutting line.



Barcord : Size=W35 x H3 mm, Format=Code128

“S/N” : Font=Arial Regular, Size=6pt,

LetterSpace=100,

Barcode-head alignment

“No.” : Font=Arial Regular, Size=6pt,

LetterSpace=300,

Barcode-end alignment

2023/11/30

MODEL NO.	DESCRIPTION	DWG NO.	SRL NO.	ART NO.
TA2C-CS8	LABEL RATING	DC1213-03B		01
ODS Corporation			K.Sano	A.Ichikawa
			T.Oike	N.Iwamoto
			CHKD	DGNR
			CHKD	G.DWN