

TEST REPORT

Product : Projector
Trade mark : N/A
Model: : Gimbal N4
Additional Model : Gimbal A4, A4, N4, Gimbal A4 Pro, Gimbal N4 Pro, A4 Pro, N4 Pro, Gimbal A4 Cine, Gimbal N4 Cine, Gimbal A4 GO, Gimbal N4 GO
Serial Number : N/A
Report Number : EED32S819255
FCC ID : 2BDRG-GIMBALN4
Date of Issue : October 8, 2026
Test Standards : FCC Part 15 C
Test result : PASS

Prepared for:

SHEN ZHEN XIN SHENG SHANG TECHNOLOGY CO., LTD
Room 303, Building 9, No. 54-6, Guanlan Avenue, Xinhe Community,
Fucheng Street, Longhua District, Shenzhen City, Guangdong Province,
China

Prepared by:

Centre Testing International Group Co., Ltd.
Building C, Hongwei Industrial Park Block 70, Bao'an District,
Shenzhen, China

TEL: +86-755-3368 3668**FAX: +86-755-3368 3385**

Compiled by:

Frazer Li

Frazer Li

Approved by:

Aaron Ma

Aaron Ma

Reviewed by:

Tom Chen

Tom Chen

Date:

October 8, 2026

Check No.: 1355110826

1 Content

1 CONTENT	2
2 TEST SUMMARY	3
3 GENERAL INFORMATION	4
3.1 CLIENT INFORMATION	4
3.2 GENERAL DESCRIPTION OF EUT	4
3.3 TEST CONFIGURATION	7
3.4 TEST ENVIRONMENT	8
3.5 DESCRIPTION OF SUPPORT UNITS	8
3.6 TEST LOCATION	8
3.7 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, $K=2$)	9
4 EQUIPMENT LIST	10
5 TEST RESULTS AND MEASUREMENT DATA	14
5.1 ANTENNA REQUIREMENT	14
5.2 AC POWER LINE CONDUCTED EMISSIONS #CE_TEST_TABLE	15
5.3 MAXIMUM CONDUCTED OUTPUT POWER	19
5.4 DTS BANDWIDTH	20
5.5 MAXIMUM POWER SPECTRAL DENSITY	21
5.6 BAND EDGE MEASUREMENTS AND CONDUCTED SPURIOUS EMISSION	22
5.7 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	23
6 APPENDIX A	68
7 PHOTOGRAPHS	69

2 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	PASS
DTS Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	PASS
Band edge measurements	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Radiated Spurious Emission & Restricted bands	47 CFR Part 15 Subpart C Section 15.205/15.209	PASS

3 General Information

3.1 Client Information

Applicant:	SHEN ZHEN XIN SHENG SHANG TECHNOLOGY CO., LTD
Address of Applicant:	Room 303, Building 9, No. 54-6, Guanlan Avenue, Xinhe Community, Fucheng Street, Longhua District, Shenzhen City, Guangdong Province, China
Manufacturer:	SHEN ZHEN XIN SHENG SHANG TECHNOLOGY CO., LTD
Address of Manufacturer:	Room 303, Building 9, No. 54-6, Guanlan Avenue, Xinhe Community, Fucheng Street, Longhua District, Shenzhen City, Guangdong Province, China
Factory:	SHEN ZHEN XIN SHENG SHANG TECHNOLOGY CO., LTD
Address of Factory:	Room 303, Building 9, No. 54-6, Guanlan Avenue, Xinhe Community, Fucheng Street, Longhua District, Shenzhen City, Guangdong Province, China

3.2 General Description of EUT

Product Name:	Projector							
Model:	Gimbal N4							
Additional Model	Gimbal A4, A4, N4, Gimbal A4 Pro, Gimbal N4 Pro, A4 Pro, N4 Pro, Gimbal A4 Cine, Gimbal N4 Cine, Gimbal A4 GO, Gimbal N4 GO							
Model difference:	All model numbers have same appearance, electrical parameters (current/voltage/power, etc.), internal structure, electrical principles, PCB and layout. Only the model name and color are different for marketing requirements. For detailed information, please refer to the table below. Based on the differences among the models, the test model was selected as Gimbal N4, which can represent the series of models, and the test results apply to other models. The test results for the primary model can cover the risks associated with non-tested models.							
Category	Model	Appearance	Current	Voltage	Power	Internal structure	Electrical principles	PCB and Layout
Test Model	Gimbal N4	Identical	Identical	Identical	Identical	Identical	Identical	Identical
Series Models	Gimbal A4	Identical	Identical	Identical	Identical	Identical	Identical	Identical
	A4	Identical	Identical	Identical	Identical	Identical	Identical	Identical
	N4	Identical	Identical	Identical	Identical	Identical	Identical	Identical
	Gimbal A4 Pro	Identical	Identical	Identical	Identical	Identical	Identical	Identical
	Gimbal N4 Pro	Identical	Identical	Identical	Identical	Identical	Identical	Identical
	A4 Pro	Identical	Identical	Identical	Identical	Identical	Identical	Identical
	N4 Pro	Identical	Identical	Identical	Identical	Identical	Identical	Identical
	Gimbal A4 Cine	Identical	Identical	Identical	Identical	Identical	Identical	Identical
	Gimbal N4 Cine	Identical	Identical	Identical	Identical	Identical	Identical	Identical

	Gimbal A4 GO	Identical	Identical	Identical	Identical	Identical	Identical	Identical
	Gimbal N4 GO	Identical	Identical	Identical	Identical	Identical	Identical	Identical
Trade mark:		N/A						
Product Type:		☒ Mobile ☐ Portable ☐ Fix Location						
Operation Frequency:		IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz						
Modulation Type:		IEEE for 802.11b:DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g:OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40): OFDM (64QAM, 16QAM,QPSK,BPSK)						
Number of Channel:		IEEE 802.11b/g/n(HT20): 11 Channels IEEE 802.11n(HT40): 7 Channels						
Channel Separation:		5MHz						
Function		☒ SISO ☐ 2x2 MIMO ☐ 3x3 MIMO ☐ 4x4MIMO						
Antenna Type:		FPC Antenna						
Antenna Gain:		2.47 dBi						
Power Supply:		100VAC-240VAC, 50/60Hz, 1.5A						
Test Voltage:		AC 120V						
Sample Received Date:		Sep. 05, 2026						
Sample tested Date:		Sep. 05, 2026 to Sep. 14, 2026						

Operation Frequency each of channel (802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel (802.11n HT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz
4	2427MHz	7	2442MHz		
5	2432MHz	8	2447MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/g/n (HT20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The highest channel	2462MHz

802.11n (HT40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The highest channel	2452MHz

3.3 Test Configuration

EUT Test Software Settings:

Test Software: adb.exe

EUT Power Grade: Default

Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

Test Mode:

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0

According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, MCS0 for 802.11n(HT20), MCS0 for 802.11n(HT40).

3.4 Test Environment

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

3.5 Description of Support Units

No.	Device Type	Brand	Series No.	Model	Data Cable	Power Cord
1.	Netbook	Dell	P77F	FCC&CE	--	--
2.	Router	Asus	GT-AXE11000	FCC&CE	--	--

3.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Hongwei Industrial Park, Zone 70, Bao'an District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164, Test Firm Registration No.: 260439

3.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

4 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
Spectrum Analyzer	Keysight	N9020B	MY57110194	2026/4/25	2027/4/24
DC Power	Keysight	E3634A	MY58186018	2026/4/25	2027/4/24
Signal Generator	R&S	SMBV100B	103596	2026/4/25	2027/4/24
Signal Generator	Keysight	N5171B	MY53051074	2026/4/25	2027/4/24
Communication test set	R&S	CMW500	159004	2026/4/25	2027/4/24
Wi-Fi 7GHz Band Extender	TSTPASS	TSTCMWSG EXT7	SN4522048	2026/4/25	2027/4/24
RF control unit(power unit)	TSTPASS	TSCB562R2	SN2949184	2026/4/25	2027/4/24
high-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	2025/11/13	2026/11/12
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	2026/05/22	2027/05/21
BT&WI-FI Automatic test system	TSTPASS	---	V2.0.2	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-07-2026	04-06-2027
Temperature/ Humidity Indicator	Defu	TH128	/	03-24-2026	03-23-2027
LISN	R&S	ENV216	100098	09-13-2025 09-04-2026	09-12-2026 09-03-2027
Barometer	changchun	DYM3	1188	---	---
Test software	Fara	EZ-EMC	EMC-CON 3A1.1	---	---
Capacitive voltage probe	Schwarzbeck	CVP 9222C	00124	06-10-2026	06-09-2027
ISN	TESEQ	ISN T800	30297	11-24-2025	11-23-2026

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	01/13/2024	01/12/2027
Receiver	R&S	ESCI7	100938-003	08-31-2026	08-30-2027
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/11/2026	05/10/2027
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	03/29/2026	03/28/2027
Microwave Preamplifier	Tonscend	EMC051845SE	980380	11/25/2025	11/24/2026
Horn Antenna	A.H.SYSTEMS	SAS-574	374	05-16-2026	05-15-2027
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	03/31/2026	03/30/2027
Preamplifier	Agilent	11909A	12-1	02/06/2026	02/05/2027
Preamplifier	CD	PAP-1840-60	6041.6042	05/16/2026	05/15/2027
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	---	---
Cable line	Fulai(7M)	SF106	5219/6A	01/13/2024	01/12/2027
Cable line	Fulai(6M)	SF106	5220/6A	01/13/2024	01/12/2027
Cable line	Fulai(3M)	SF106	5216/6A	01/13/2024	01/12/2027
Cable line	Fulai(3M)	SF106	5217/6A	01/13/2024	01/12/2027


3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Fully Anechoic Chamber	TDK	FAC-3	---	01-29-2024	01-28-2027
Receiver	Keysight	N9038A	MY57290136	12-22-2025	12-21-2026
Spectrum Analyzer	Keysight	N9020B	MY57111112	12-21-2025	12-20-2026
Spectrum Analyzer	Keysight	N9030B	MY57140871	12-21-2025	12-20-2026
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	03-29-2026	03-28-2027
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-03-2026	04-02-2027
Horn Antenna	ETS-LINDGREN	3117	57407	05-10-2026	05-09-2027
Preamplifier	EMCI	EMC001330	980563	02-06-2026	02-05-2027
Preamplifier	EMCI	EMC051845SE	980380	11-25-2025	11-24-2026
Preamplifier	Tonscend	TAP-011858	AP21B806112	06-22-2026	06-21-2027
Communication test set	R&S	CMW500	104466	11-25-2025	11-24-2026
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	03-24-2026	03-23-2027
RSE Automatic test software	JS Tonscend	JS36-RSE	V5.0.0.1	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-29-2024	01-28-2027
Cable line	Times	EMC104-NMNM-1000	SN160710	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-29-2024	01-28-2027
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-29-2024	01-28-2027

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	Please see Internal photos
The antenna is FPC Antenna. The best case gain of the antenna is 2.47 dBi.	

5.2 AC Power Line Conducted Emissions #CE_Test_Table

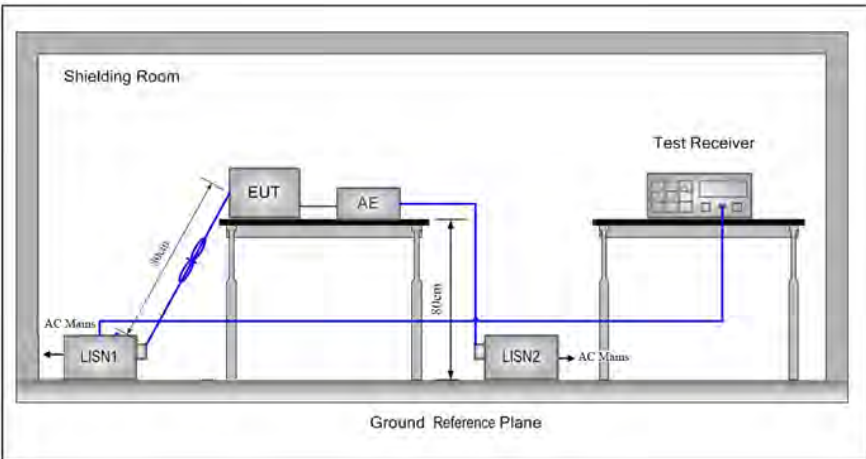
Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10-2020		
Test Frequency Range:	150kHz to 30MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Setup:			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10-2020 on conducted measurement.		
Test Mode:	All modes were tested, only the worse case lowest channel of 1Mbps for 802.11b was recorded in the report.		

Test Results: Pass

Measurement Data

Live line:

80.0 dBuV

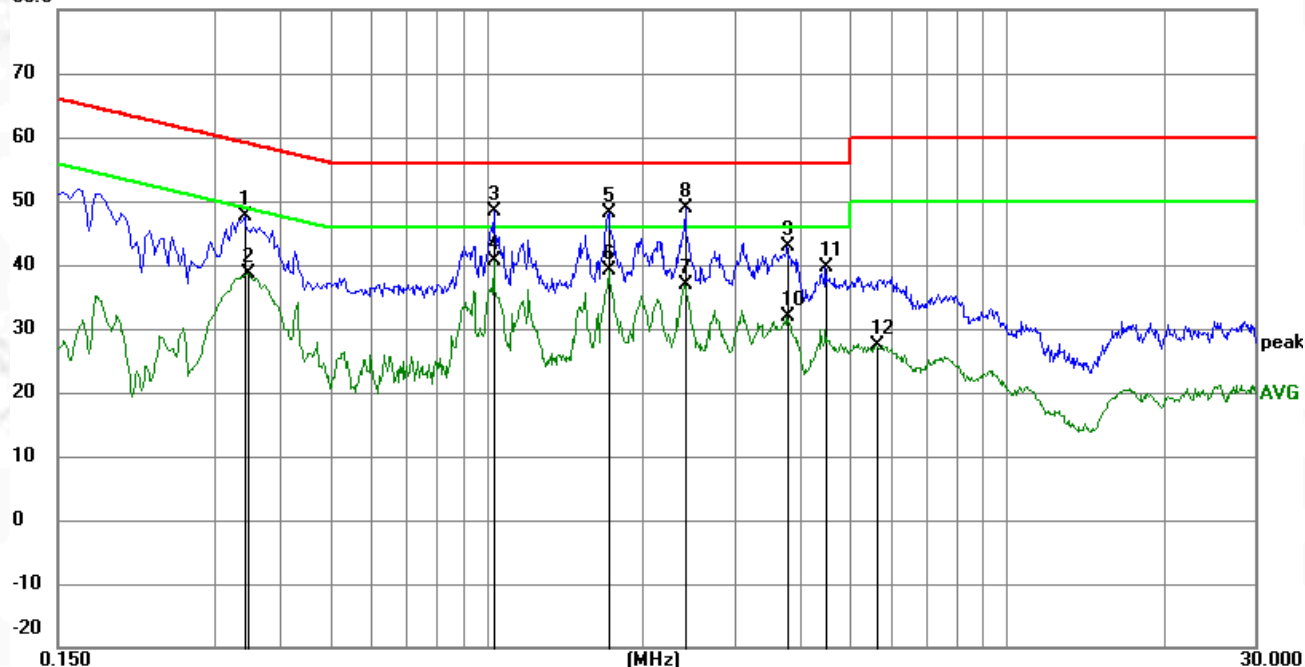

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.3435	37.44	10.11	47.55	59.12	-11.57	QP	
2		0.3480	28.43	10.12	38.55	49.01	-10.46	AVG	
3		1.0365	38.15	10.23	48.38	56.00	-7.62	QP	
4	*	1.0365	30.43	10.23	40.66	46.00	-5.34	AVG	
5		1.7250	38.02	10.16	48.18	56.00	-7.82	QP	
6		1.7250	28.90	10.16	39.06	46.00	-6.94	AVG	
7		2.4045	26.66	10.12	36.78	46.00	-9.22	AVG	
8		2.4135	38.70	10.12	48.82	56.00	-7.18	QP	
9		3.7860	32.82	10.04	42.86	56.00	-13.14	QP	
10		3.7860	21.74	10.04	31.78	46.00	-14.22	AVG	
11		4.4835	29.56	10.01	39.57	56.00	-16.43	QP	
12		5.6085	17.53	9.94	27.47	50.00	-22.53	AVG	


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. Margin = Measurement - Limit.
4. Measurement = Reading Level + Correct Factor.
5. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit.

6. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

80.0 dBuV

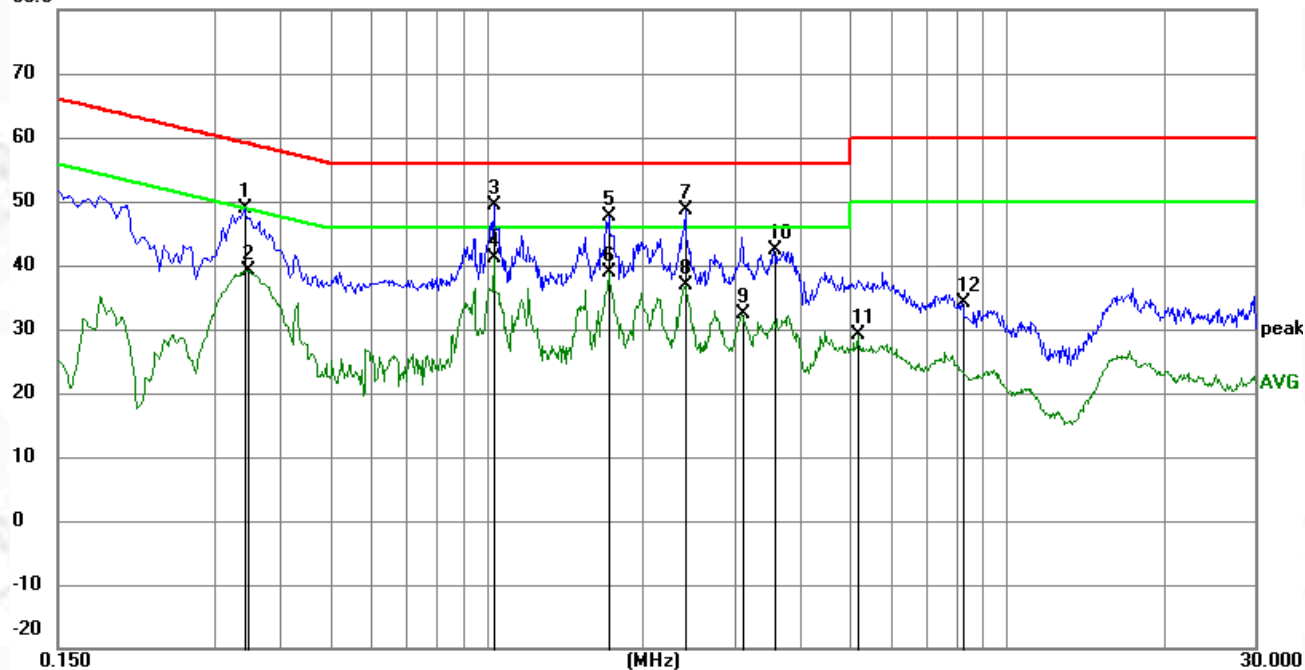


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.3435	38.70	10.11	48.81	59.12	-10.31	QP	
2		0.3480	29.11	10.12	39.23	49.01	-9.78	AVG	
3		1.0365	39.12	10.23	49.35	56.00	-6.65	QP	
4	*	1.0365	30.80	10.23	41.03	46.00	-4.97	AVG	
5		1.7250	37.53	10.16	47.69	56.00	-8.31	QP	
6		1.7250	28.65	10.16	38.81	46.00	-7.19	AVG	
7		2.4135	38.61	10.12	48.73	56.00	-7.27	QP	
8		2.4135	26.71	10.12	36.83	46.00	-9.17	AVG	
9		3.1065	22.34	10.08	32.42	46.00	-13.58	AVG	
10		3.5700	32.24	10.06	42.30	56.00	-13.70	QP	
11		5.1765	19.04	9.97	29.01	50.00	-20.99	AVG	
12		8.2094	24.40	9.85	34.25	60.00	-25.75	QP	


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. Margin = Measurement - Limit.
4. Measurement = Reading Level + Correct Factor.
5. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit.
6. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Maximum Conducted Output Power

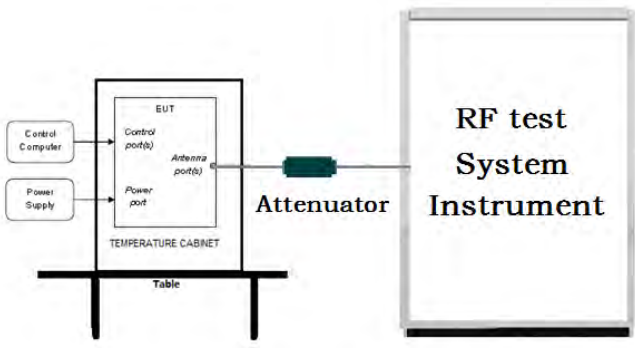Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10-2020
Test Setup:	 The diagram illustrates the test setup. On the left, a 'Control Computer' and a 'Power Supply' are connected to an 'EUT' (Equipment Under Test) which is housed within a 'TEMPERATURE CABINET'. The EUT has a 'Control port(s)' and a 'Power port'. The EUT is connected via an 'Antenna port(s)' to an 'Attenuator', which is then connected to an 'RF test System Instrument'.
Test Procedure:	1. PKPM1 Peak power meter measurement The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.
Limit:	30dBm
Test Mode:	Refer to clause 3.3
Test Results:	Refer to Appendix A


5.4 DTS Bandwidth

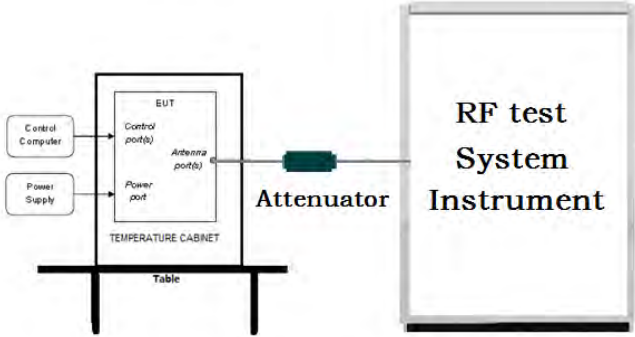Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10-2020
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Limit:	$\geq 500 \text{ kHz}$
Test Mode:	Refer to clause 3.3
Test Results:	Refer to Appendix A

5.5 Maximum Power Spectral Density

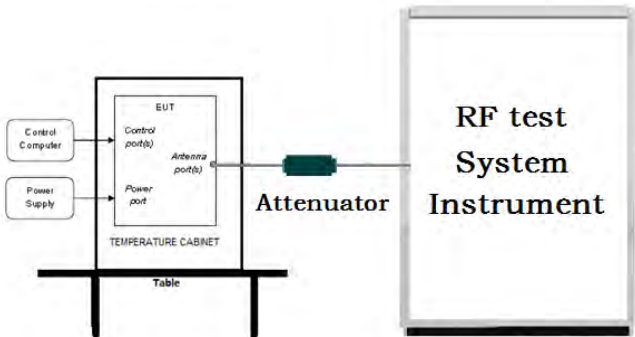Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10-2020
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set analyzer center frequency to DTS channel center frequency. b) Set the span to 1.5 times the DTS bandwidth. c) Set the RBW to $3 \text{ kHz} < \text{RBW} < 100 \text{ kHz}$. d) Set the VBW $> [3 \times \text{RBW}]$. e) Detector = power averaging (rms) or sample detector (when rms not available). f) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$. g) Sweep time = auto couple. h) Employ trace averaging (rms) mode over a minimum of 100 traces.. i) Use the peak marker function to determine the maximum amplitude level. j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).
Limit:	$\leq 8.00 \text{ dBm}/3 \text{ kHz}$
Test Mode:	Refer to clause 3.3
Test Results:	Refer to Appendix A

5.6 Band Edge Measurements and Conducted Spurious Emission

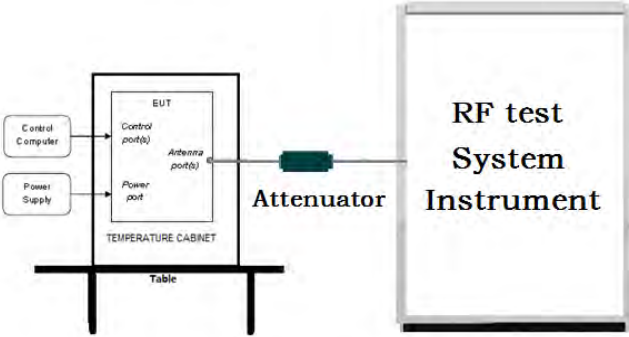Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10-2020
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW = 100KHz. b) Set VBW = 300KHz. c) Sweep time = auto couple. d) Detector = peak. e) Trace mode = max hold. f) Allow trace to fully stabilize. g) Use peak marker function to determine the peak amplitude level.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Refer to clause 3.3
Test Results:	Refer to Appendix A

5.7 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10-2020				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

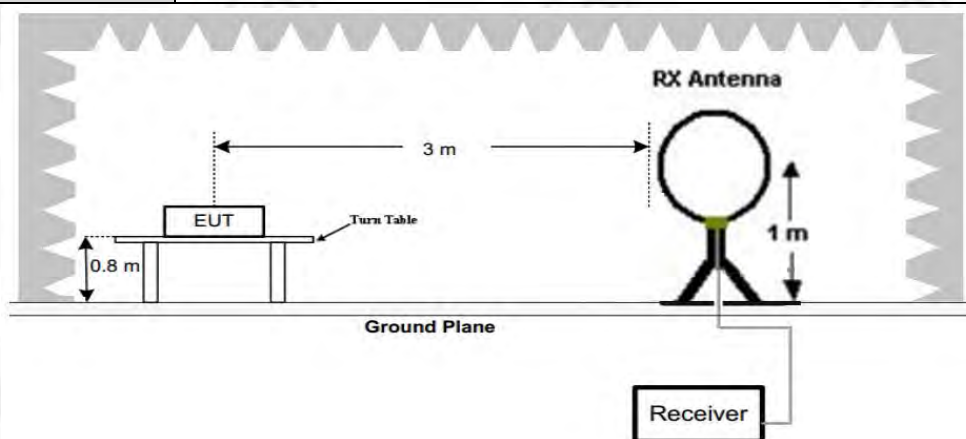


Figure 1. Below 30MHz

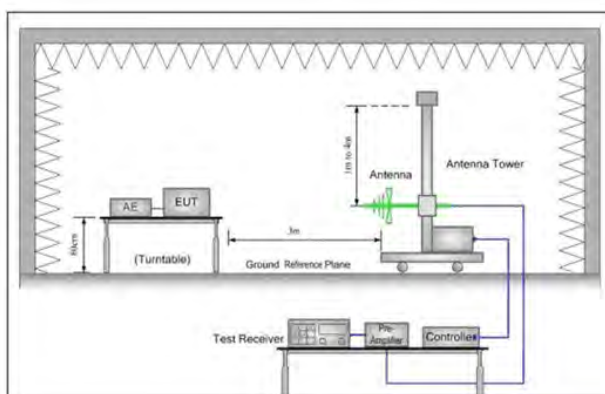


Figure 2. 30MHz to 1GHz

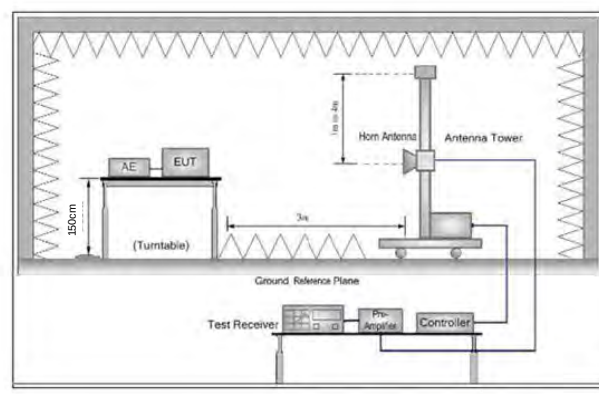


Figure 3. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case

	and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Refer to clause 3.3
Test Results:	Pass


Radiated Spurious Emission below 1GHz:

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel of 1Mbps for 802.11b was recorded in the report.

Test Graph

Horizontal:

72.0 dBuV/m

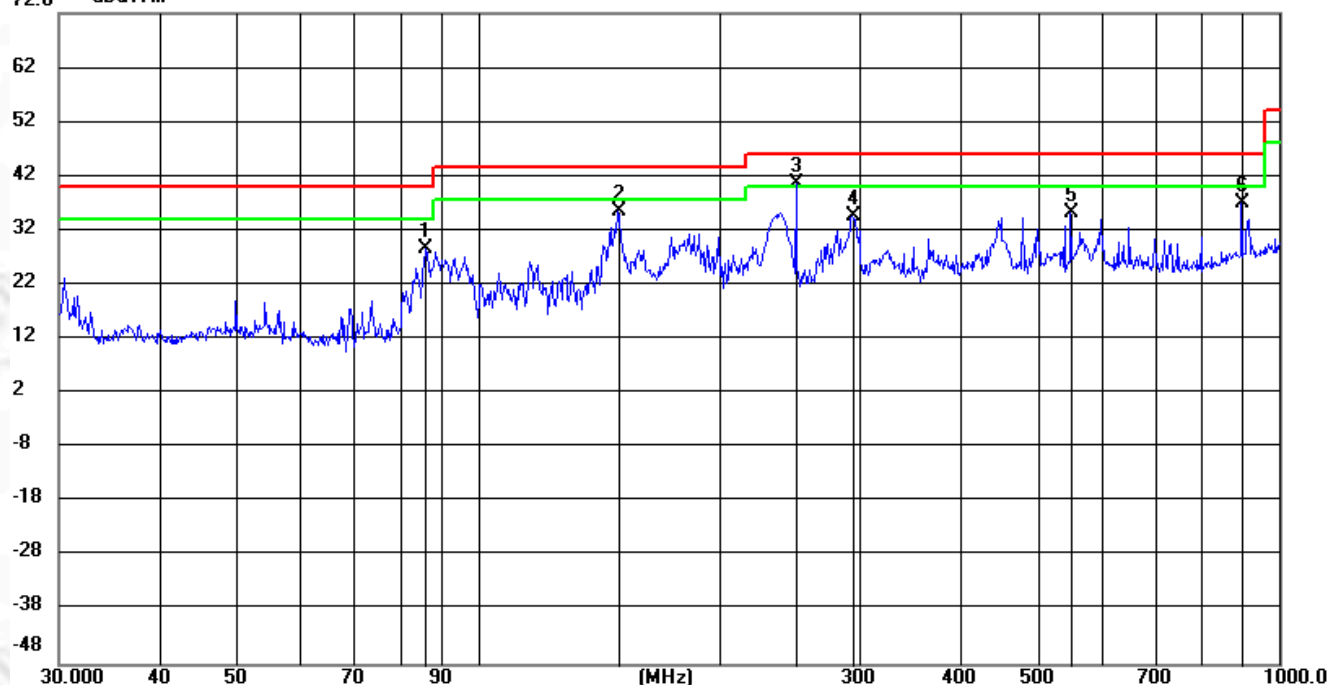


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		86.2000	17.77	10.74	28.51	40.00	-11.49	QP	199	119
2		149.9845	25.19	10.34	35.53	43.50	-7.97	QP	199	310
3	*	249.9941	25.89	14.68	40.57	46.00	-5.43	QP	100	322
4		293.2384	18.24	16.33	34.57	46.00	-11.43	QP	199	352
5		550.0793	13.03	22.08	35.11	46.00	-10.89	QP	100	216
6		900.1474	9.73	27.31	37.04	46.00	-8.96	QP	100	69

Remark:

1. Margin=Measurement(Level)-Limit.
2. Measurement(Level)=Reading Level+Correct Factor.
3. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.

Vertical:

72.0 dBuV/m

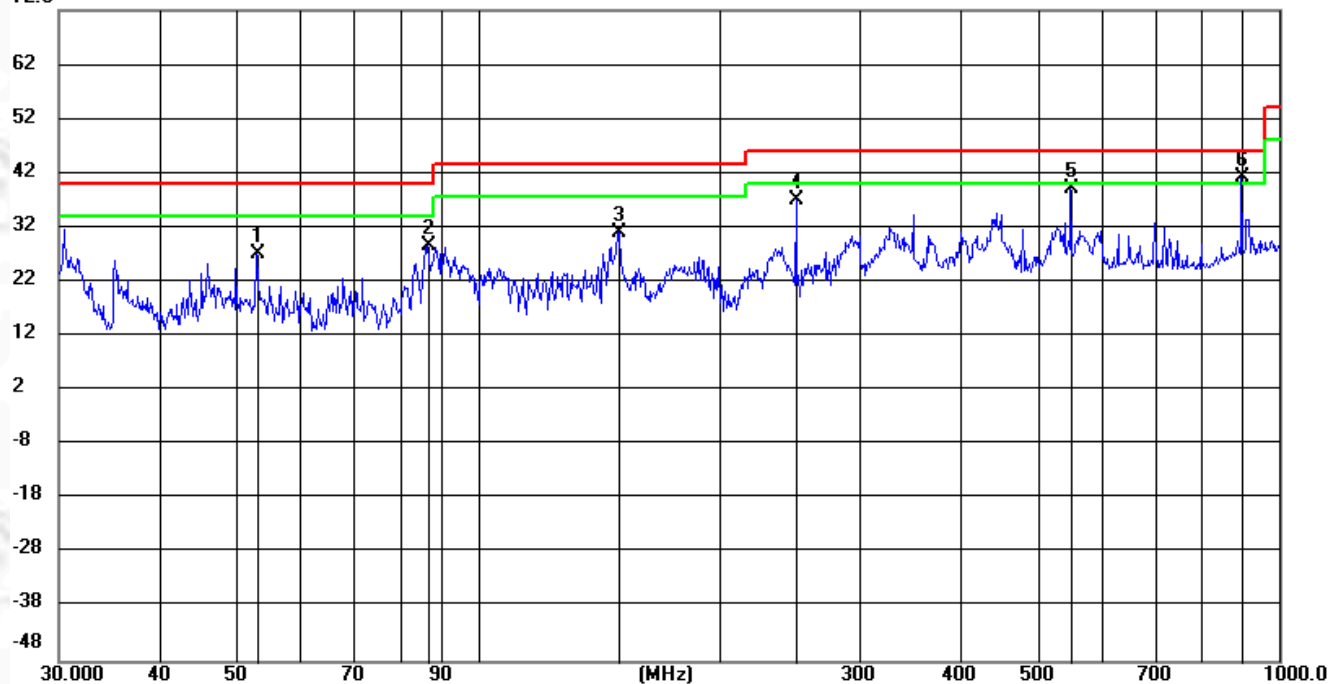

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		53.0568	13.04	14.19	27.23	40.00	-12.77	QP	100	220
2		86.5635	17.72	10.82	28.54	40.00	-11.46	QP	200	125
3		149.9845	20.67	10.34	31.01	43.50	-12.49	QP	200	200
4		249.9942	22.48	14.68	37.16	46.00	-8.84	QP	100	81
5		549.9829	17.02	22.08	39.10	46.00	-6.90	QP	200	190
6	*	900.1474	14.02	27.31	41.33	46.00	-4.67	QP	100	198

Remark:


1. Margin=Measurement(Level)-Limit.
2. Measurement(Level)=Reading Level+Correct Factor.
3. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.

Radiated Spurious Emission above 1GHz:

Remark: Through Pre-scan, for 20MHz Occupied Bandwidth, 802.11 n(HT20) mode was the worst case; for 40MHz Occupied Bandwidth, 802.11 n(HT40) mode was the worst case; only the worst case of was recorded in the report.

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/11


Test Graph

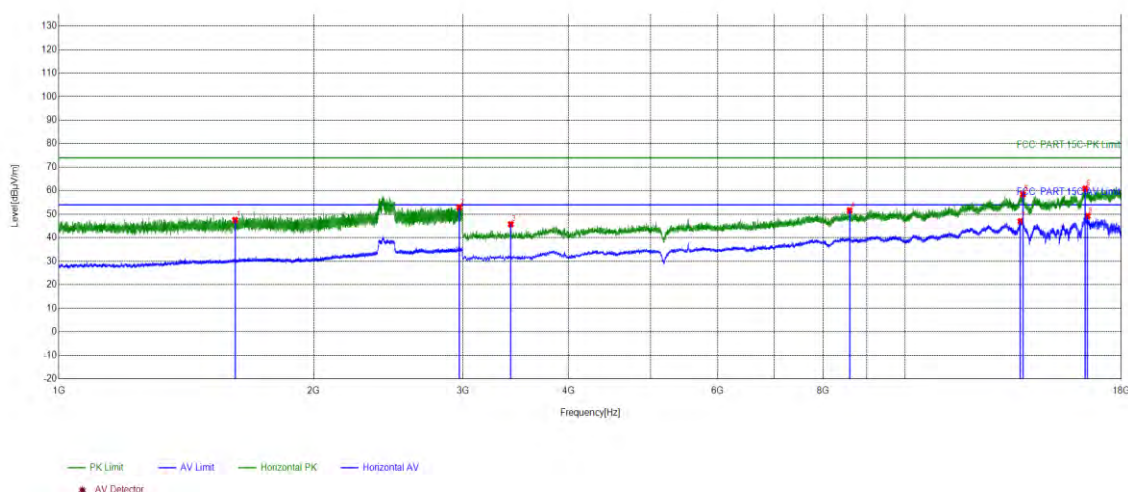

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1615.1077	13.71	33.84	47.55	74.00	26.45	PASS	Horizontal	PK
2	2971.7314	17.92	34.95	52.87	74.00	21.13	PASS	Horizontal	PK
3	3419.0279	-13.93	59.71	45.78	74.00	28.22	PASS	Horizontal	PK
4	8593.3729	-0.52	52.15	51.63	74.00	22.37	PASS	Horizontal	PK
5	13768.7179	7.38	51.07	58.45	74.00	15.55	PASS	Horizontal	PK
6	16317.8879	11.19	49.67	60.86	74.00	13.14	PASS	Horizontal	PK
7	13676.7118	7.35	39.63	46.98	54.00	7.02	PASS	Horizontal	AV
8	16418.8946	10.35	38.89	49.24	54.00	4.76	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

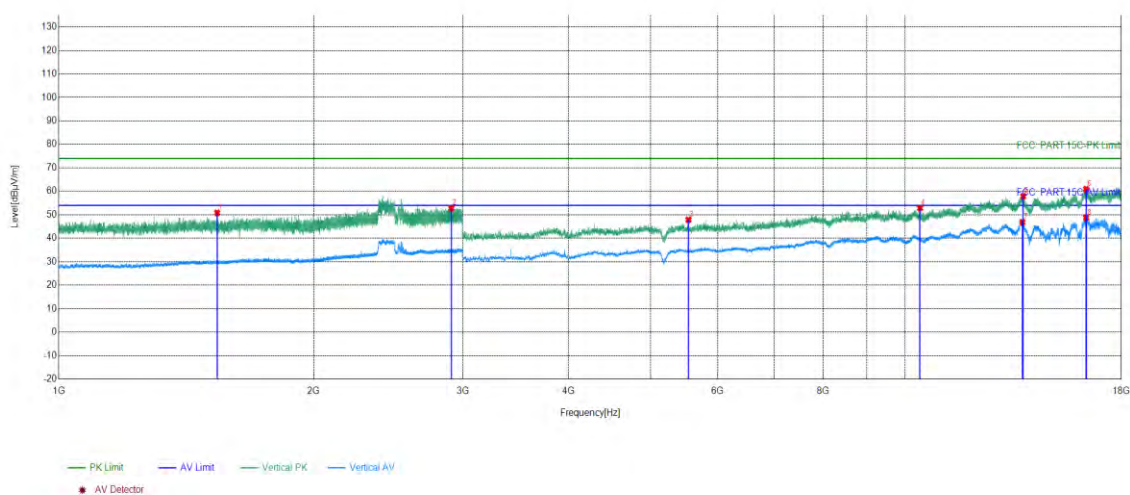


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1538.3026	13.49	37.36	50.85	74.00	23.15	PASS	Vertical	PK
2	2908.7939	17.77	34.97	52.74	74.00	21.26	PASS	Vertical	PK
3	5544.1696	-6.30	54.19	47.89	74.00	26.11	PASS	Vertical	PK
4	10409.494	1.96	50.87	52.83	74.00	21.17	PASS	Vertical	PK
5	13782.7188	7.55	50.39	57.94	74.00	16.06	PASS	Vertical	PK
6	16354.8903	11.43	49.49	60.92	74.00	13.08	PASS	Vertical	PK
7	13752.7168	7.19	39.64	46.83	54.00	7.17	PASS	Vertical	AV
8	16350.8901	11.56	37.18	48.74	54.00	5.26	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/11


Test Graph

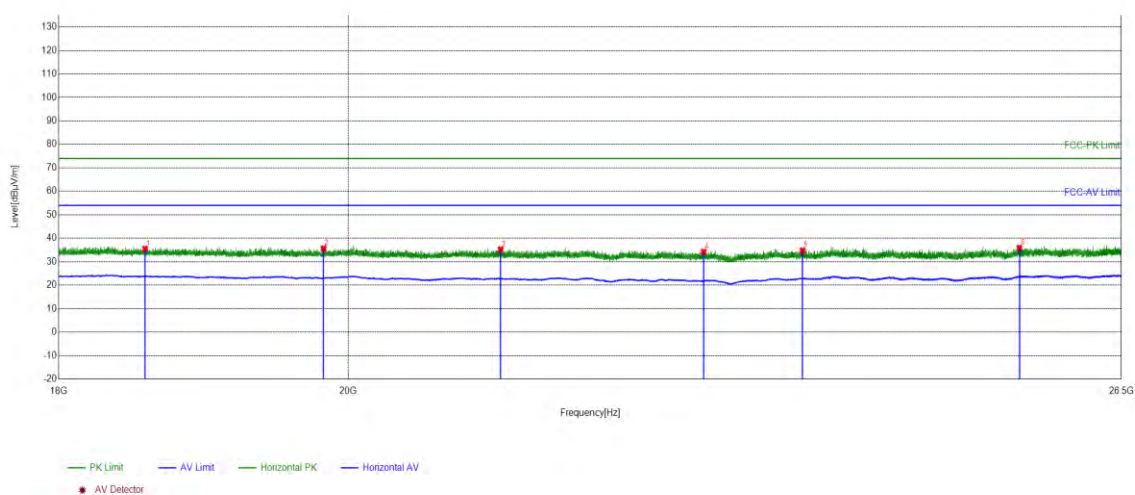

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18573.6029	-26.69	62.20	35.51	74.00	38.49	PASS	Horizontal	PK
2	19820.7728	-25.17	60.79	35.62	74.00	38.38	PASS	Horizontal	PK
3	21140.3656	-25.82	61.06	35.24	74.00	38.76	PASS	Horizontal	PK
4	22761.5505	-25.04	59.22	34.18	74.00	39.82	PASS	Horizontal	PK
5	23595.9438	-23.07	57.85	34.78	74.00	39.22	PASS	Horizontal	PK
6	25535.0414	-20.94	56.82	35.88	74.00	38.12	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

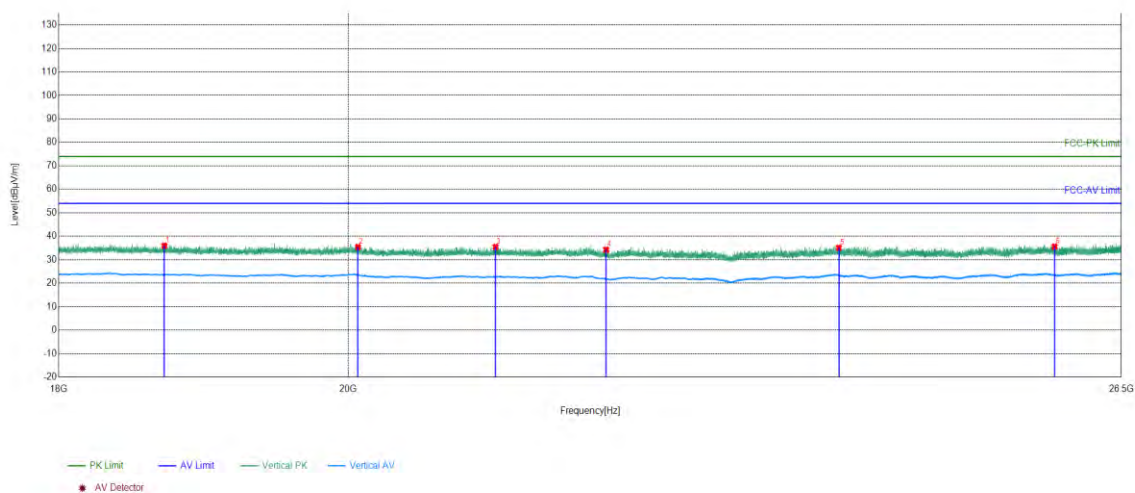


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18705.1882	-26.48	62.46	35.98	74.00	38.02	PASS	Vertical	PK
2	20070.6828	-24.93	60.33	35.40	74.00	38.60	PASS	Vertical	PK
3	21101.2641	-25.87	61.35	35.48	74.00	38.52	PASS	Vertical	PK
4	21968.6387	-25.77	60.05	34.28	74.00	39.72	PASS	Vertical	PK
5	23910.4564	-22.12	57.24	35.12	74.00	38.88	PASS	Vertical	PK
6	25863.8346	-20.85	56.46	35.61	74.00	38.39	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2437MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

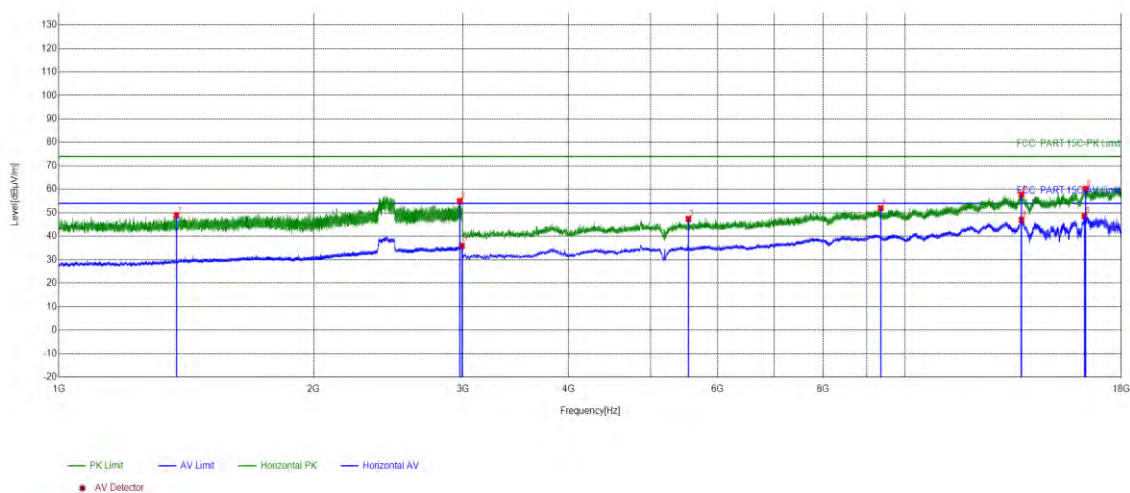


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1376.5584	12.73	36.27	49.00	74.00	25.00	PASS	Horizontal	PK
2	2975.1983	17.90	37.08	54.98	74.00	19.02	PASS	Horizontal	PK
3	5544.1696	-6.30	53.75	47.45	74.00	26.55	PASS	Horizontal	PK
4	9351.4234	1.07	50.89	51.96	74.00	22.04	PASS	Horizontal	PK
5	13719.7146	7.22	50.59	57.81	74.00	16.19	PASS	Horizontal	PK
6	16325.8884	11.29	48.89	60.18	74.00	13.82	PASS	Horizontal	PK
7	2993.5996	17.88	18.04	35.92	54.00	18.08	PASS	Horizontal	AV
8	13718.7146	7.22	39.76	46.98	54.00	7.02	PASS	Horizontal	AV
9	16275.8851	10.71	37.87	48.58	54.00	5.42	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2437MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

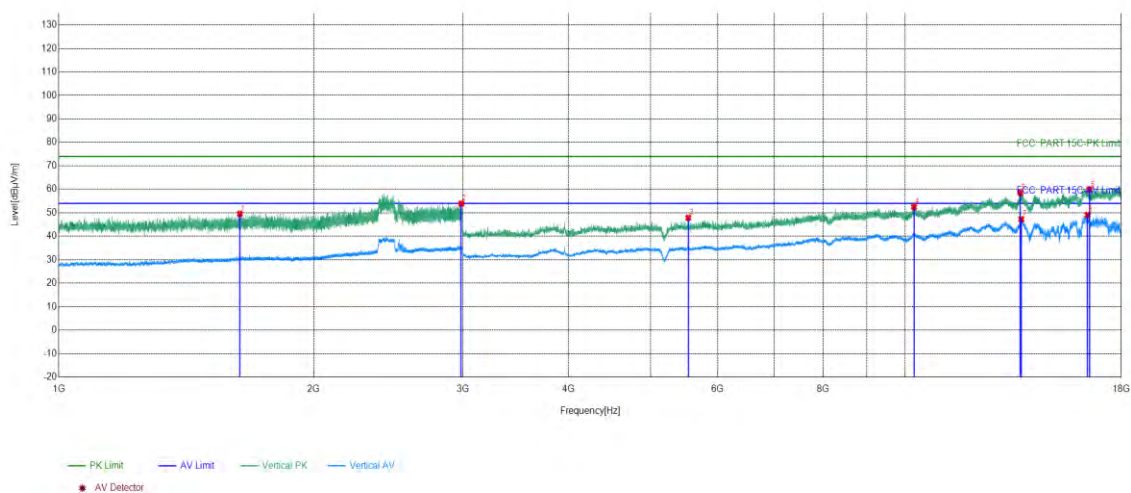


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1636.4424	13.97	35.58	49.55	74.00	24.45	PASS	Vertical	PK
2	2988.3992	17.91	35.99	53.90	74.00	20.10	PASS	Vertical	PK
3	5541.1694	-6.32	54.21	47.89	74.00	26.11	PASS	Vertical	PK
4	10238.4826	1.88	50.65	52.53	74.00	21.47	PASS	Vertical	PK
5	13676.7118	7.35	51.12	58.47	74.00	15.53	PASS	Vertical	PK
6	16500.9001	11.94	47.98	59.92	74.00	14.08	PASS	Vertical	PK
7	13709.714	7.24	40.00	47.24	54.00	6.76	PASS	Vertical	AV
8	16418.8946	10.35	38.71	49.06	54.00	4.94	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2437MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

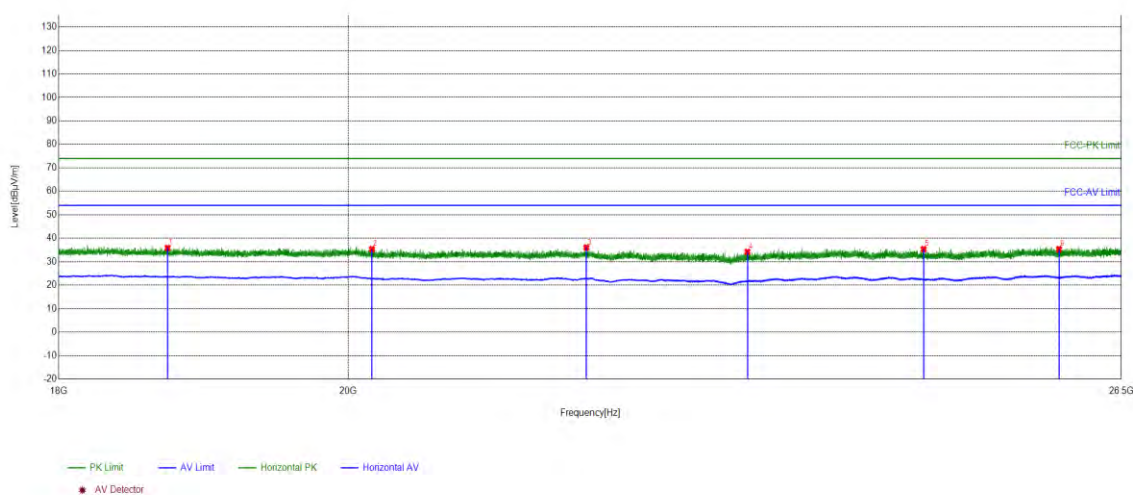


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18726.6091	-26.44	62.30	35.86	74.00	38.14	PASS	Horizontal	PK
2	20173.0269	-25.39	60.72	35.33	74.00	38.67	PASS	Horizontal	PK
3	21810.1924	-25.55	61.59	36.04	74.00	37.96	PASS	Horizontal	PK
4	23127.4051	-24.78	59.00	34.22	74.00	39.78	PASS	Horizontal	PK
5	24659.5064	-21.89	57.26	35.37	74.00	38.63	PASS	Horizontal	PK
6	25904.9762	-20.86	56.21	35.35	74.00	38.65	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2437MHz
Tset_Engineer	\	Test_Date	2026/9/11


Test Graph

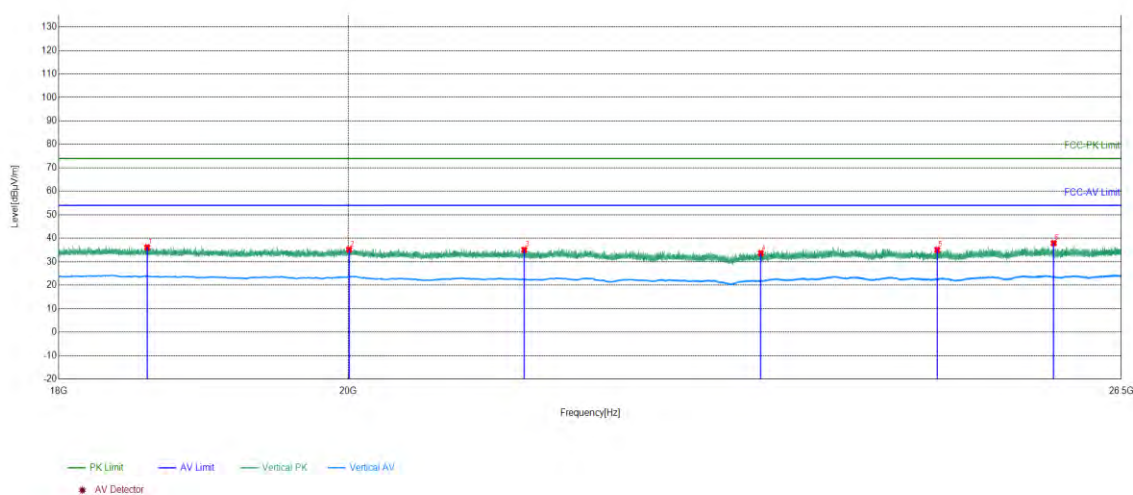

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18588.2235	-26.69	62.81	36.12	74.00	37.88	PASS	Vertical	PK
2	20006.0802	-24.65	59.86	35.21	74.00	38.79	PASS	Vertical	PK
3	21322.9529	-25.83	60.90	35.07	74.00	38.93	PASS	Vertical	PK
4	23240.9696	-24.12	57.77	33.65	74.00	40.35	PASS	Vertical	PK
5	24782.2513	-21.96	56.99	35.03	74.00	38.97	PASS	Vertical	PK
6	25855.3342	-20.84	58.76	37.92	74.00	36.08	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

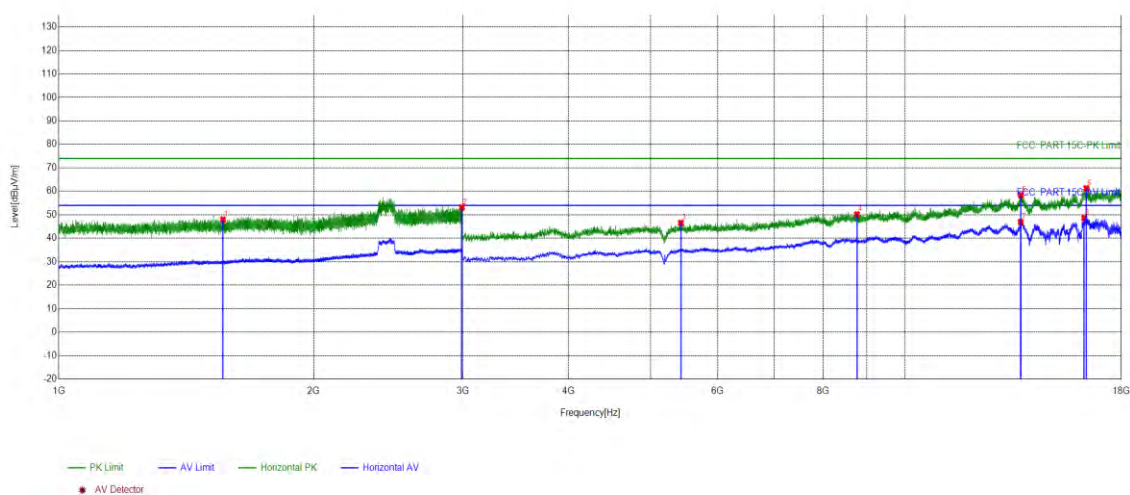


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1562.5708	13.50	34.46	47.96	74.00	26.04	PASS	Horizontal	PK
2	2992.9329	17.89	35.29	53.18	74.00	20.82	PASS	Horizontal	PK
3	5430.162	-6.55	53.11	46.56	74.00	27.44	PASS	Horizontal	PK
4	8767.3845	-0.15	50.33	50.18	74.00	23.82	PASS	Horizontal	PK
5	13694.713	7.28	51.06	58.34	74.00	15.66	PASS	Horizontal	PK
6	16364.891	11.10	50.15	61.25	74.00	12.75	PASS	Horizontal	PK
7	13688.7126	7.30	39.62	46.92	54.00	7.08	PASS	Horizontal	AV
8	16269.8847	10.64	37.98	48.62	54.00	5.38	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

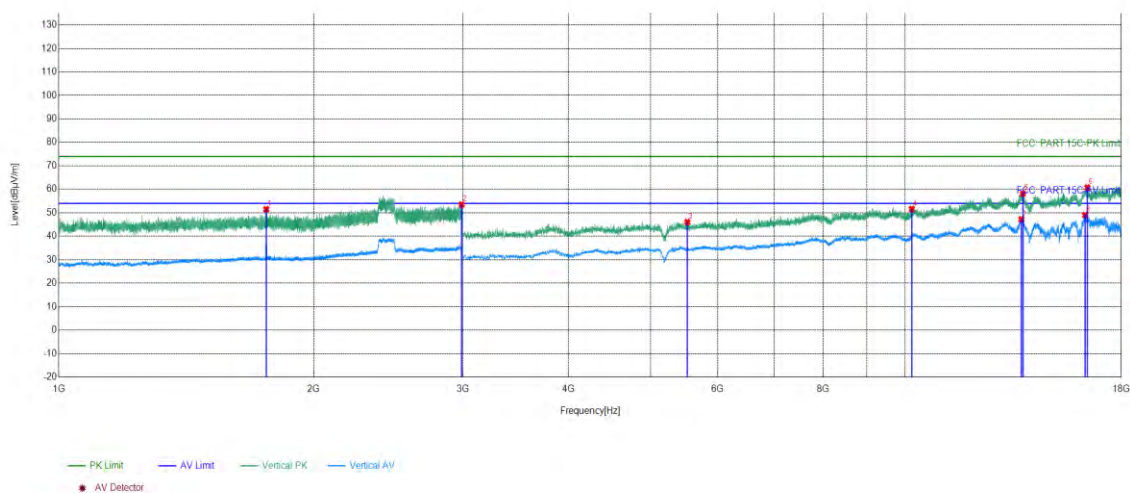


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1758.0505	14.20	37.31	51.51	74.00	22.49	PASS	Vertical	PK
2	2991.0661	17.91	35.56	53.47	74.00	20.53	PASS	Vertical	PK
3	5527.1685	-6.39	52.43	46.04	74.00	27.96	PASS	Vertical	PK
4	10179.4786	1.53	50.10	51.63	74.00	22.37	PASS	Vertical	PK
5	13766.7178	7.36	50.82	58.18	74.00	15.82	PASS	Vertical	PK
6	16408.8939	10.14	50.62	60.76	74.00	13.24	PASS	Vertical	PK
7	13714.7143	7.24	39.98	47.22	54.00	6.78	PASS	Vertical	AV
8	16307.8872	11.06	38.00	49.06	54.00	4.94	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

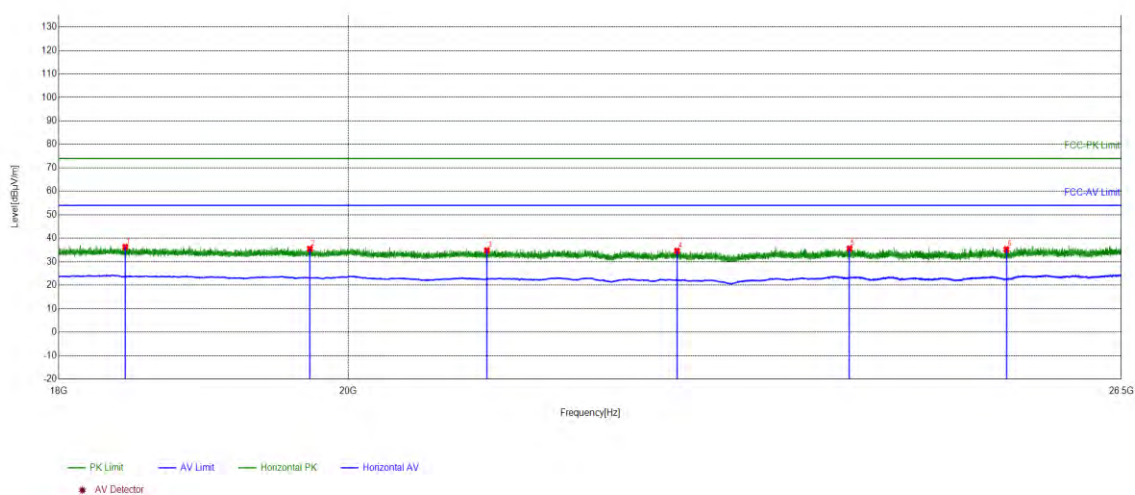


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18440.3176	-26.70	62.97	36.27	74.00	37.73	PASS	Horizontal	PK
2	19722.1689	-25.37	60.88	35.51	74.00	38.49	PASS	Horizontal	PK
3	21035.3014	-25.95	60.76	34.81	74.00	39.19	PASS	Horizontal	PK
4	22542.2417	-25.02	59.66	34.64	74.00	39.36	PASS	Horizontal	PK
5	24002.9401	-21.95	57.55	35.60	74.00	38.40	PASS	Horizontal	PK
6	25414.3366	-21.39	56.67	35.28	74.00	38.72	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/11


Test Graph

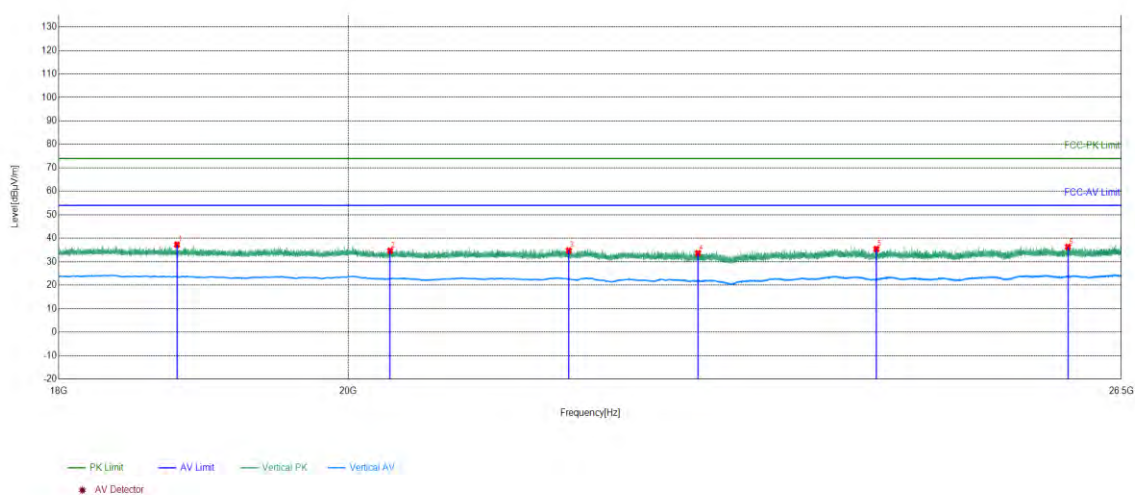

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18790.5316	-26.31	63.59	37.28	74.00	36.72	PASS	Vertical	PK
2	20306.9923	-25.49	60.17	34.68	74.00	39.32	PASS	Vertical	PK
3	21670.7868	-25.67	60.43	34.76	74.00	39.24	PASS	Vertical	PK
4	22714.9686	-25.03	58.70	33.67	74.00	40.33	PASS	Vertical	PK
5	24238.9096	-22.46	57.88	35.42	74.00	38.58	PASS	Vertical	PK
6	25989.2996	-20.89	57.20	36.31	74.00	37.69	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

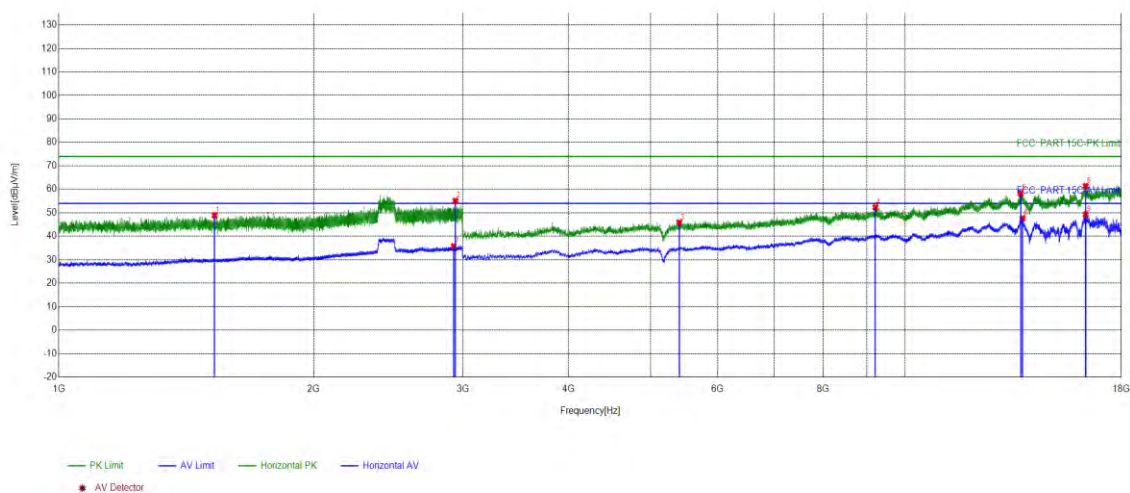


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1527.6352	13.42	35.51	48.93	74.00	25.07	PASS	Horizontal	PK
2	2941.1961	17.65	37.41	55.06	74.00	18.94	PASS	Horizontal	PK
3	5407.1605	-6.68	52.59	45.91	74.00	28.09	PASS	Horizontal	PK
4	9220.4147	0.39	51.93	52.32	74.00	21.68	PASS	Horizontal	PK
5	13683.7122	7.32	50.95	58.27	74.00	15.73	PASS	Horizontal	PK
6	16332.8889	11.38	50.00	61.38	74.00	12.62	PASS	Horizontal	PK
7	2927.3285	17.69	18.01	35.70	54.00	18.30	PASS	Horizontal	AV
8	13757.7172	7.25	40.37	47.62	54.00	6.38	PASS	Horizontal	AV
9	16335.8891	11.41	37.87	49.28	54.00	4.72	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

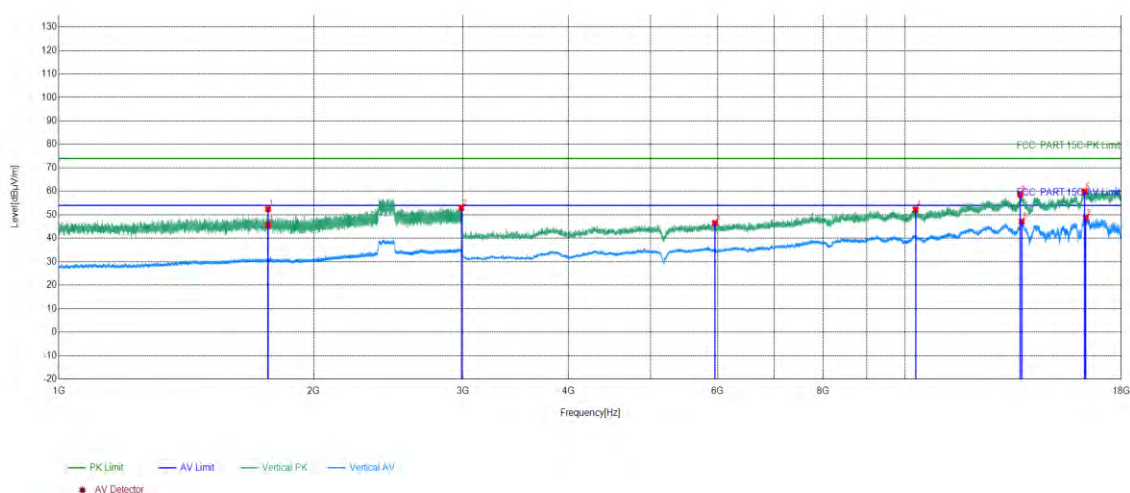


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1766.7178	14.34	38.12	52.46	74.00	21.54	PASS	Vertical	PK
2	2988.5326	17.91	35.03	52.94	74.00	21.06	PASS	Vertical	PK
3	5955.197	-5.49	51.93	46.44	74.00	27.56	PASS	Vertical	PK
4	10284.4856	1.92	50.30	52.22	74.00	21.78	PASS	Vertical	PK
5	13672.7115	7.36	51.20	58.56	74.00	15.44	PASS	Vertical	PK
6	16285.8857	10.82	49.14	59.96	74.00	14.04	PASS	Vertical	PK
7	1766.8511	14.35	31.17	45.52	54.00	8.48	PASS	Vertical	AV
8	13726.7151	7.21	39.96	47.17	54.00	6.83	PASS	Vertical	AV
9	16339.8893	11.46	37.21	48.67	54.00	5.33	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

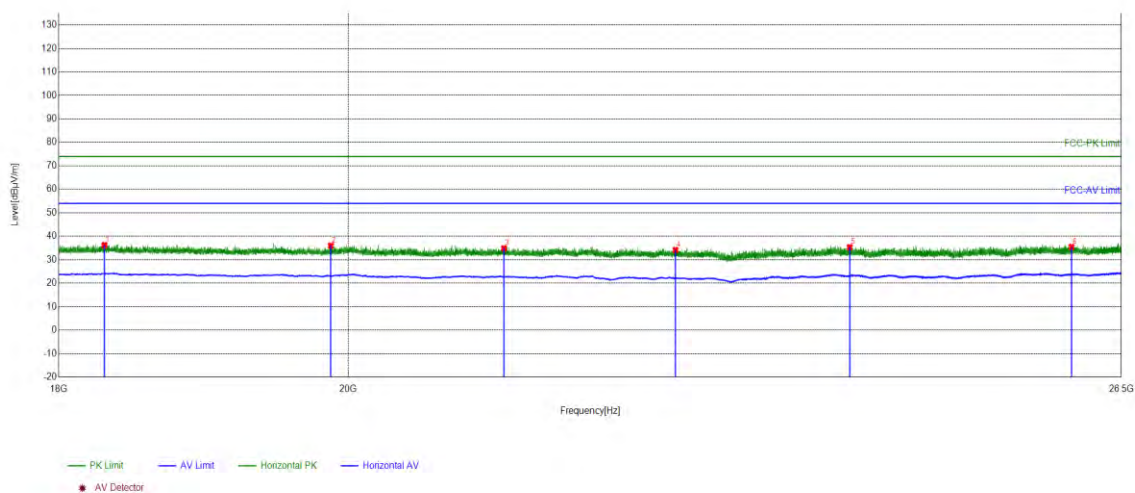


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18300.912	-26.83	63.06	36.23	74.00	37.77	PASS	Horizontal	PK
2	19872.7949	-25.01	61.00	35.99	74.00	38.01	PASS	Horizontal	PK
3	21166.2066	-25.80	60.64	34.84	74.00	39.16	PASS	Horizontal	PK
4	22529.6612	-25.03	59.15	34.12	74.00	39.88	PASS	Horizontal	PK
5	24004.3002	-21.95	57.29	35.34	74.00	38.66	PASS	Horizontal	PK
6	26023.981	-20.96	56.45	35.49	74.00	38.51	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	\	Test_Date	2026/9/11


Test Graph

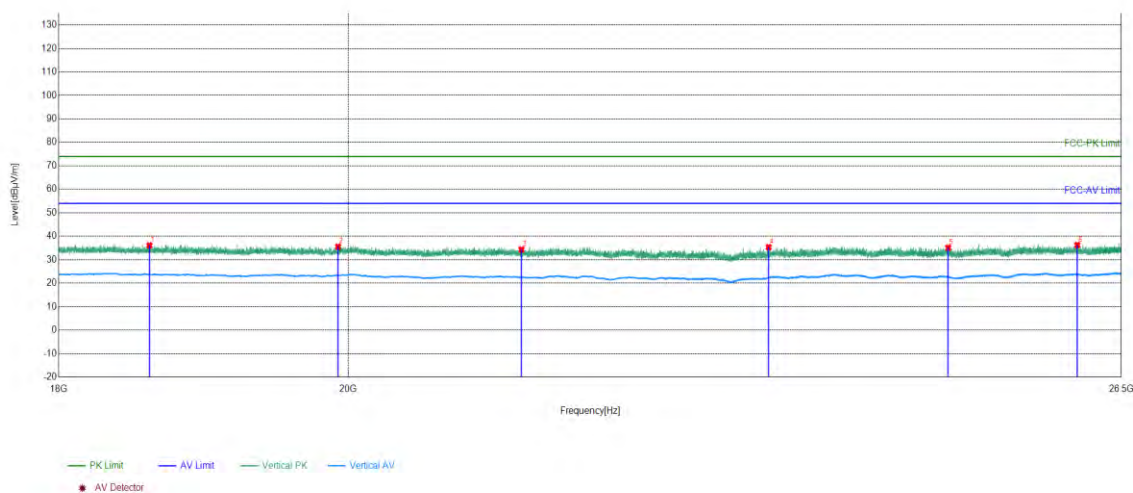

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18602.8441	-26.68	62.80	36.12	74.00	37.88	PASS	Vertical	PK
2	19925.497	-24.84	60.41	35.57	74.00	38.43	PASS	Vertical	PK
3	21300.852	-25.82	60.17	34.35	74.00	39.65	PASS	Vertical	PK
4	23306.5923	-23.89	59.23	35.34	74.00	38.66	PASS	Vertical	PK
5	24881.5353	-22.04	57.16	35.12	74.00	38.88	PASS	Vertical	PK
6	26078.7231	-21.08	57.32	36.24	74.00	37.76	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2437MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

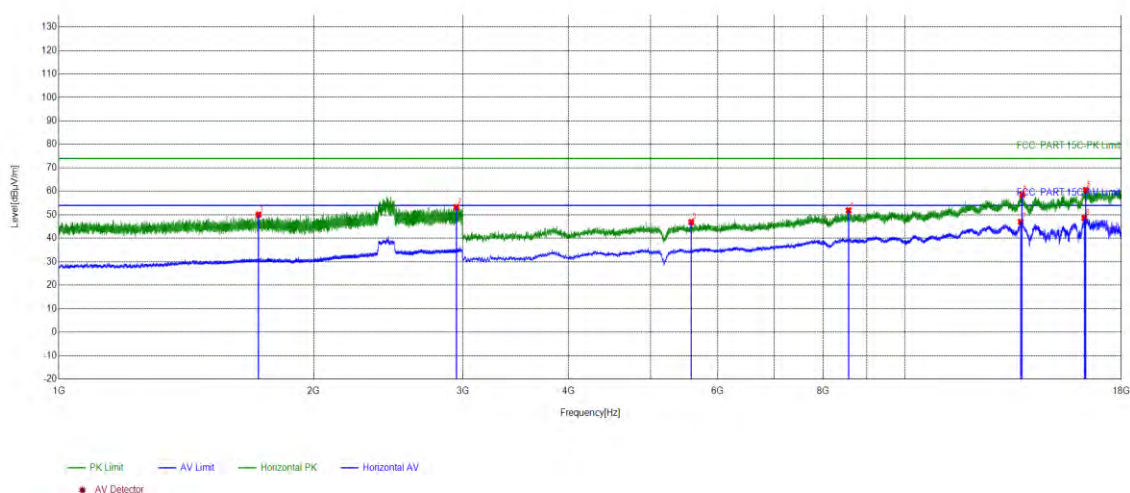


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1721.6481	14.21	35.85	50.06	74.00	23.94	PASS	Horizontal	PK
2	2948.2632	17.62	35.60	53.22	74.00	20.78	PASS	Horizontal	PK
3	5586.1724	-6.29	53.16	46.87	74.00	27.13	PASS	Horizontal	PK
4	8570.3714	-0.48	52.33	51.85	74.00	22.15	PASS	Horizontal	PK
5	13742.7162	7.18	51.30	58.48	74.00	15.52	PASS	Horizontal	PK
6	16342.8895	11.50	49.06	60.56	74.00	13.44	PASS	Horizontal	PK
7	13688.7126	7.30	39.72	47.02	54.00	6.98	PASS	Horizontal	AV
8	16272.8849	10.68	37.91	48.59	54.00	5.41	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2437MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

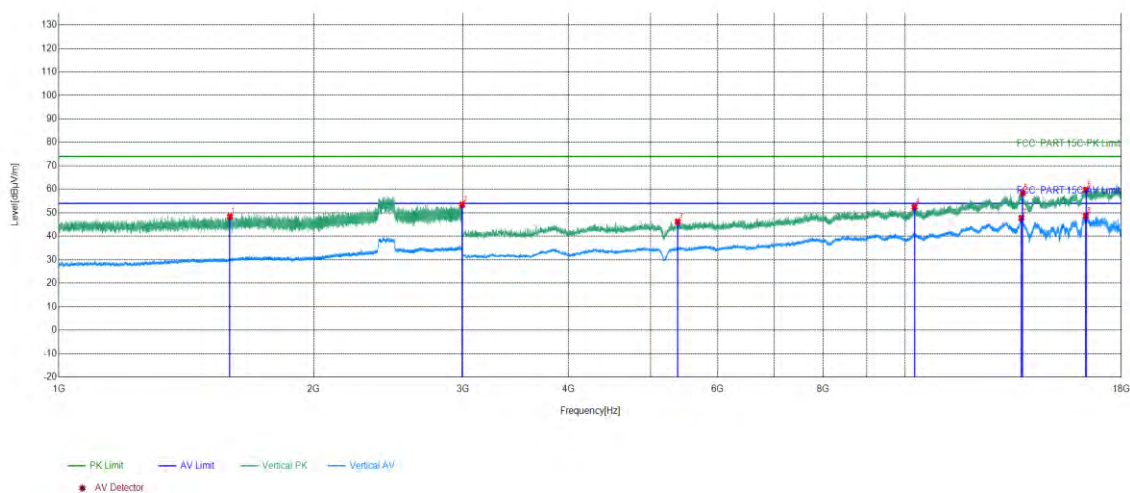


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1592.5728	13.69	34.70	48.39	74.00	25.61	PASS	Vertical	PK
2	2995.333	17.86	35.58	53.44	74.00	20.56	PASS	Vertical	PK
3	5384.1589	-6.79	53.00	46.21	74.00	27.79	PASS	Vertical	PK
4	10252.4835	1.98	50.50	52.48	74.00	21.52	PASS	Vertical	PK
5	13760.7174	7.29	51.13	58.42	74.00	15.58	PASS	Vertical	PK
6	16350.8901	11.56	48.25	59.81	74.00	14.19	PASS	Vertical	PK
7	13714.7143	7.24	40.56	47.80	54.00	6.20	PASS	Vertical	AV
8	16340.8894	11.47	37.17	48.64	54.00	5.36	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2437MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

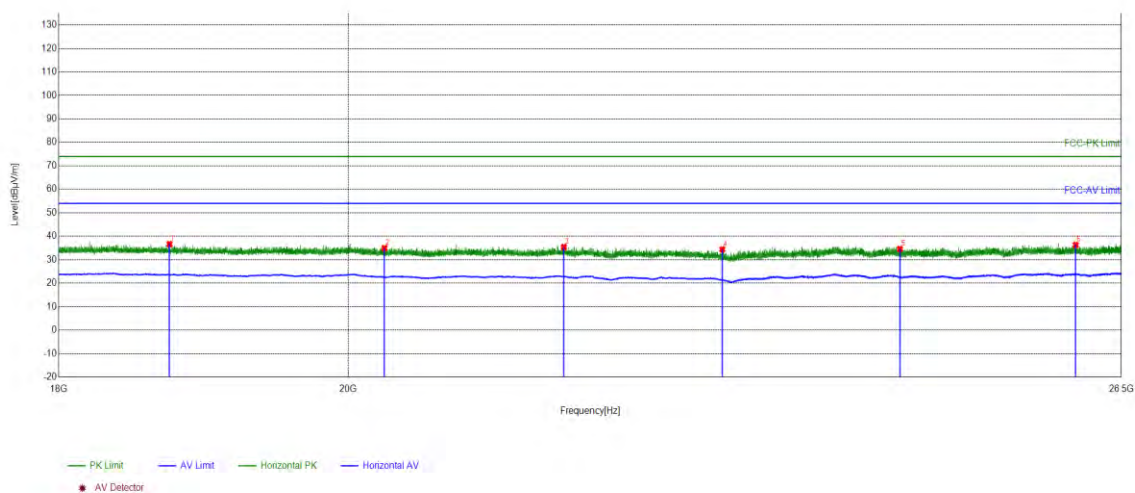


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18739.5296	-26.41	63.05	36.64	74.00	37.36	PASS	Horizontal	PK
2	20264.4906	-25.50	60.41	34.91	74.00	39.09	PASS	Horizontal	PK
3	21632.7053	-25.70	61.13	35.43	74.00	38.57	PASS	Horizontal	PK
4	22916.5967	-25.42	59.85	34.43	74.00	39.57	PASS	Horizontal	PK
5	24447.6779	-21.73	56.33	34.60	74.00	39.40	PASS	Horizontal	PK
6	26063.0825	-21.04	57.37	36.33	74.00	37.67	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2437MHz
Tset_Engineer	\	Test_Date	2026/9/11


Test Graph

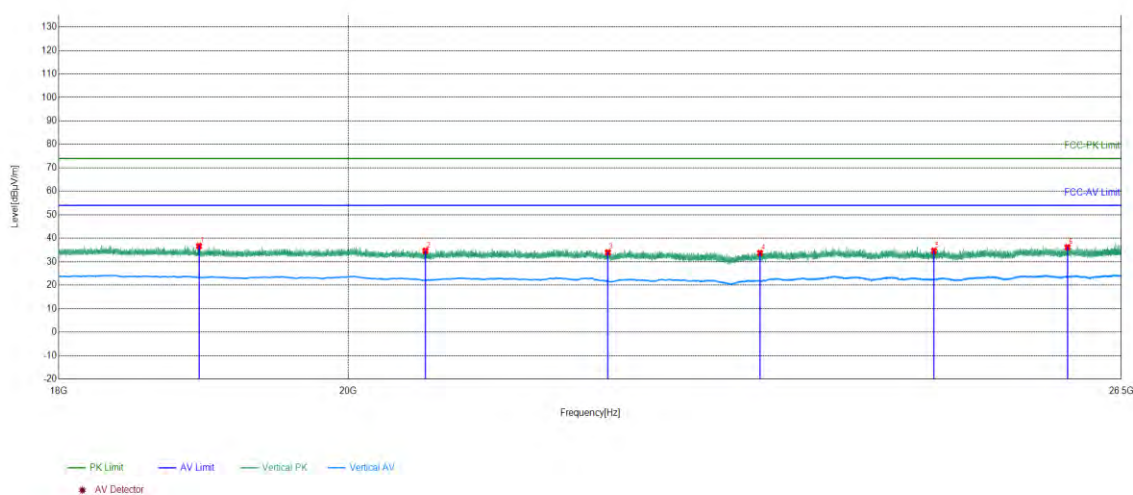

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18942.5177	-26.28	62.94	36.66	74.00	37.34	PASS	Vertical	PK
2	20569.4828	-25.98	60.64	34.66	74.00	39.34	PASS	Vertical	PK
3	21982.2393	-25.78	59.76	33.98	74.00	40.02	PASS	Vertical	PK
4	23233.4893	-24.15	57.89	33.74	74.00	40.26	PASS	Vertical	PK
5	24752.3301	-21.94	56.63	34.69	74.00	39.31	PASS	Vertical	PK
6	25985.5594	-20.89	57.06	36.17	74.00	37.83	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

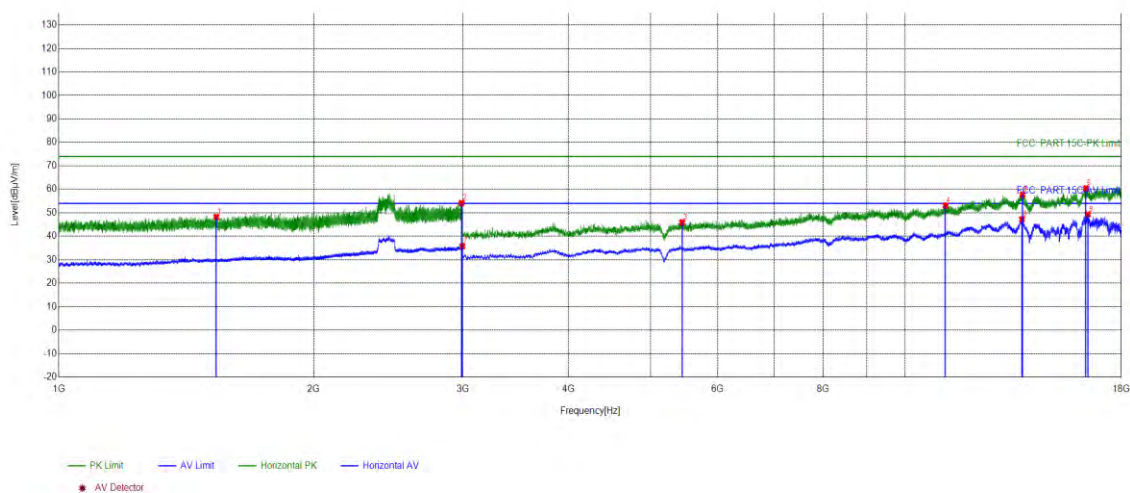


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1534.969	13.47	34.78	48.25	74.00	25.75	PASS	Horizontal	PK
2	2990.266	17.91	36.23	54.14	74.00	19.86	PASS	Horizontal	PK
3	5449.1633	-6.43	52.35	45.92	74.00	28.08	PASS	Horizontal	PK
4	11153.5436	2.03	51.10	53.13	74.00	20.87	PASS	Horizontal	PK
5	13752.7168	7.19	50.56	57.75	74.00	16.25	PASS	Horizontal	PK
6	16346.8898	11.54	48.85	60.39	74.00	13.61	PASS	Horizontal	PK
7	2997.0665	17.85	17.90	35.75	54.00	18.25	PASS	Horizontal	AV
8	13734.7156	7.19	40.01	47.20	54.00	6.80	PASS	Horizontal	AV
9	16429.8953	10.57	38.73	49.30	54.00	4.70	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

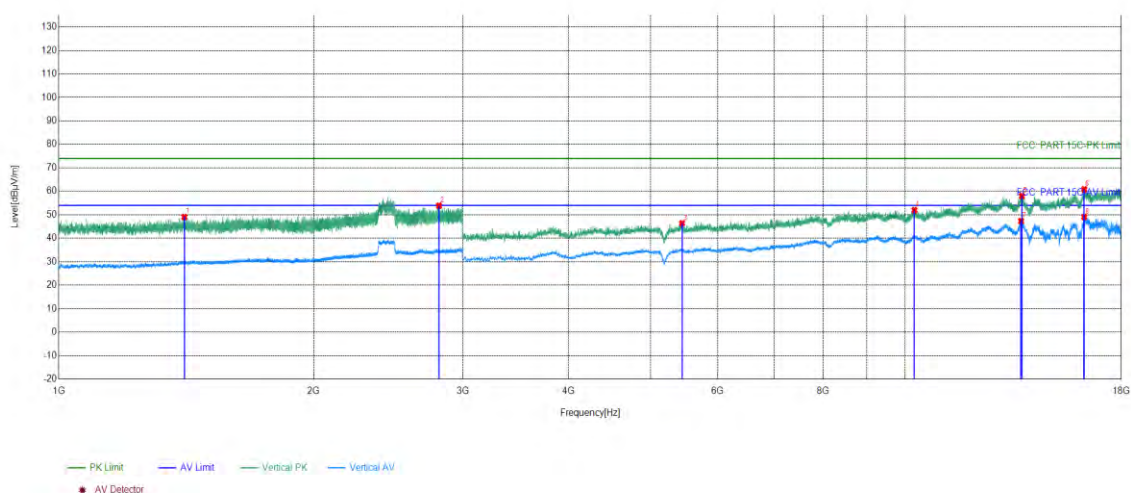


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1406.6938	12.88	36.18	49.06	74.00	24.94	PASS	Vertical	PK
2	2812.7875	17.23	36.64	53.87	74.00	20.13	PASS	Vertical	PK
3	5448.1632	-6.44	52.82	46.38	74.00	27.62	PASS	Vertical	PK
4	10249.4833	1.98	50.00	51.98	74.00	22.02	PASS	Vertical	PK
5	13730.7154	7.20	50.84	58.04	74.00	15.96	PASS	Vertical	PK
6	16269.8847	10.64	50.22	60.86	74.00	13.14	PASS	Vertical	PK
7	13700.7134	7.26	40.11	47.37	54.00	6.63	PASS	Vertical	AV
8	16271.8848	10.67	38.36	49.03	54.00	4.97	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

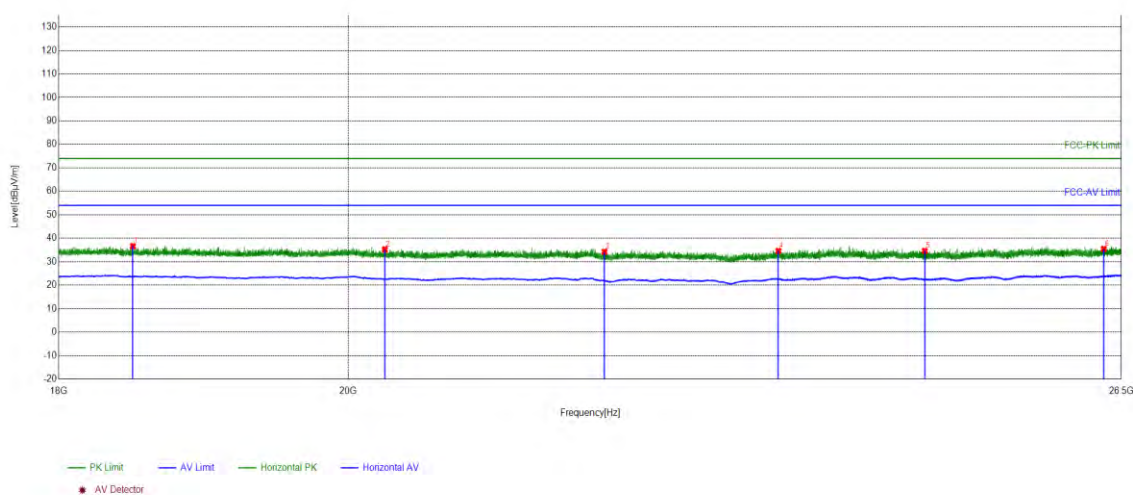


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18491.3197	-26.70	63.32	36.62	74.00	37.38	PASS	Horizontal	PK
2	20266.8707	-25.50	60.76	35.26	74.00	38.74	PASS	Horizontal	PK
3	21954.6982	-25.75	59.98	34.23	74.00	39.77	PASS	Horizontal	PK
4	23389.8956	-23.59	58.20	34.61	74.00	39.39	PASS	Horizontal	PK
5	24669.3668	-21.90	56.52	34.62	74.00	39.38	PASS	Horizontal	PK
6	26330.6732	-21.24	56.72	35.48	74.00	38.52	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

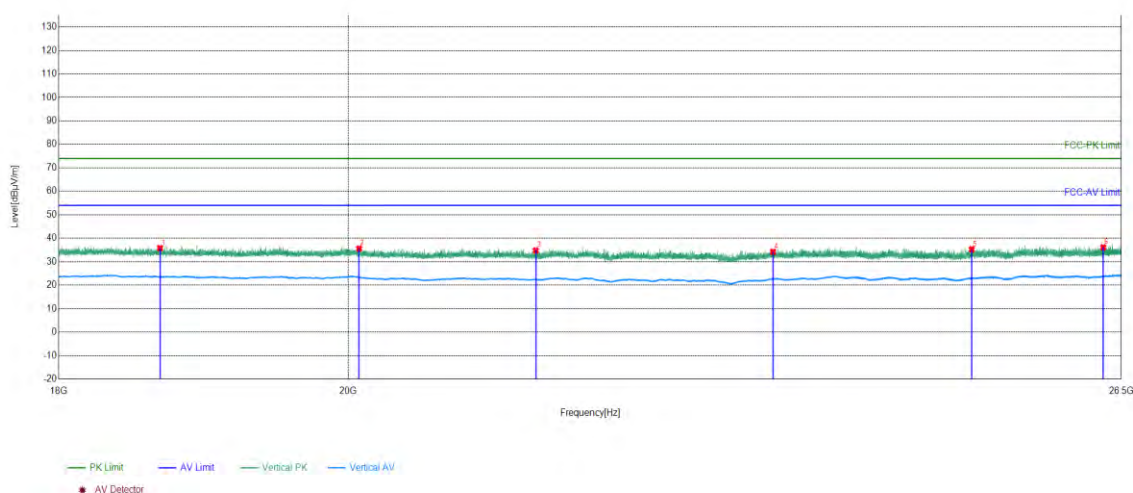

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18674.927	-26.54	62.33	35.79	74.00	38.21	PASS	Vertical	PK
2	20079.1832	-24.97	60.55	35.58	74.00	38.42	PASS	Vertical	PK
3	21412.7165	-25.87	60.68	34.81	74.00	39.19	PASS	Vertical	PK
4	23343.3137	-23.76	57.98	34.22	74.00	39.78	PASS	Vertical	PK
5	25095.0638	-21.62	56.88	35.26	74.00	38.74	PASS	Vertical	PK
6	26325.573	-21.24	57.34	36.10	74.00	37.90	PASS	Vertical	PK


Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. As the PK values are all below 54dBμV/m. So, only the peak measurements were shown in the report.

Restricted bands:

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/11


Test Graph

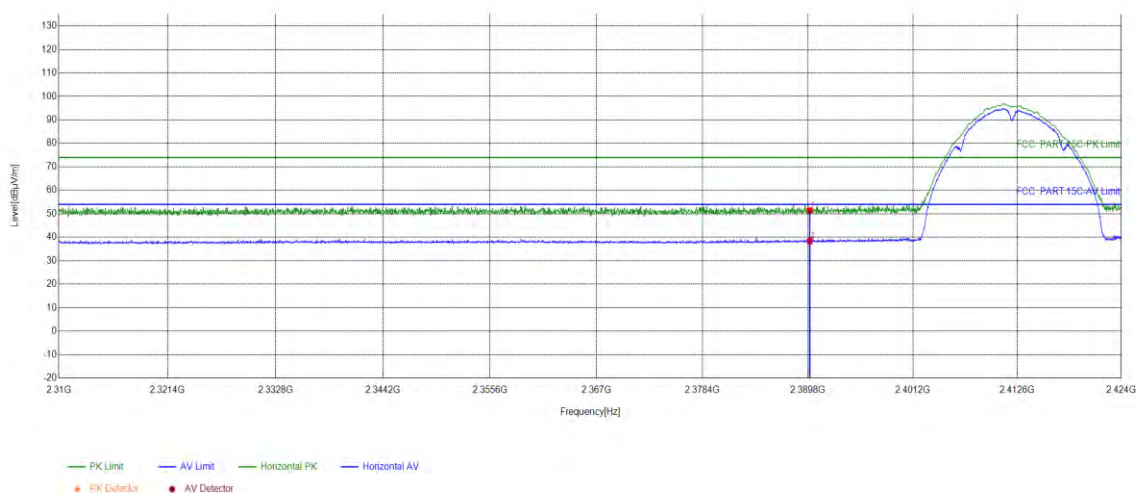

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.57	51.53	74.00	22.47	PASS	Horizontal	PK
2	2390	15.96	22.42	38.38	54.00	15.62	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

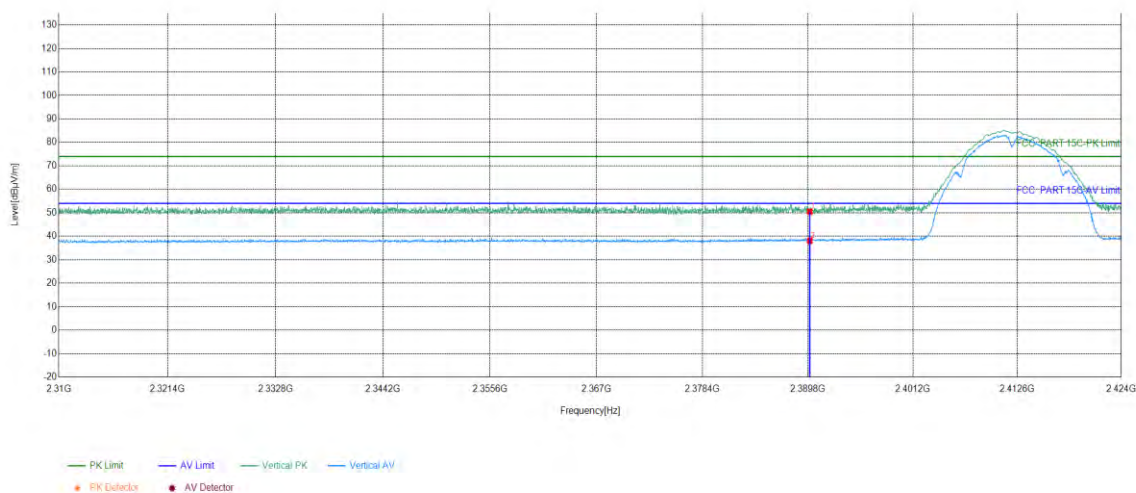


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.52	50.48	74.00	23.52	PASS	Vertical	PK
2	2390	15.96	22.11	38.07	54.00	15.93	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/11


Test Graph

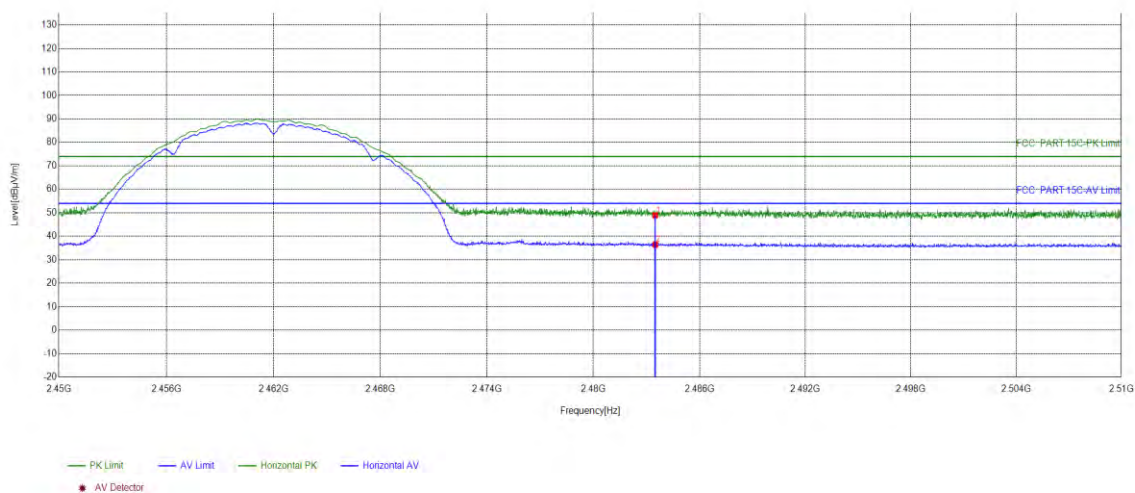

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.61	48.90	74.00	25.10	PASS	Horizontal	PK
2	2483.5	16.29	20.15	36.44	54.00	17.56	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

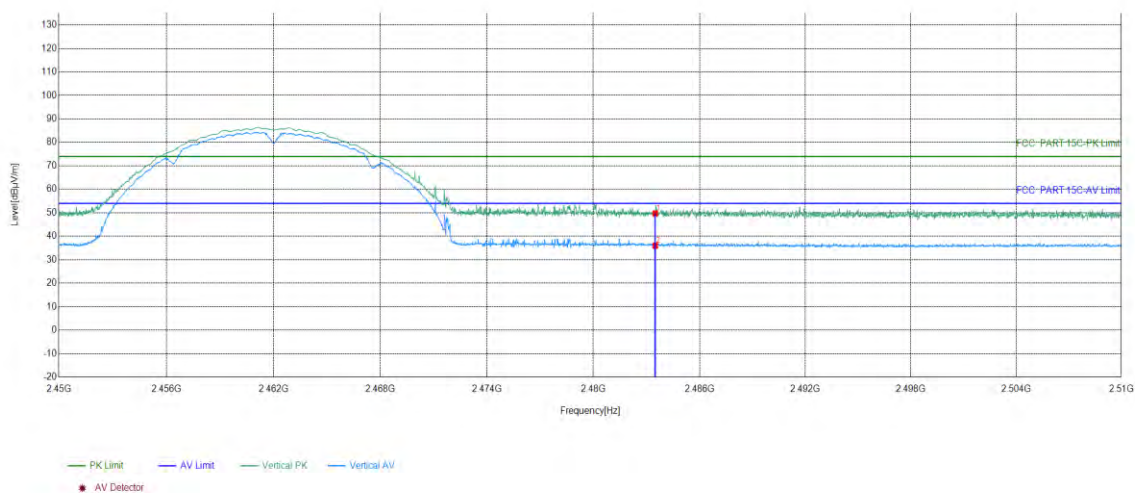


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	33.40	49.69	74.00	24.31	PASS	Vertical	PK
2	2483.5	16.29	19.72	36.01	54.00	17.99	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

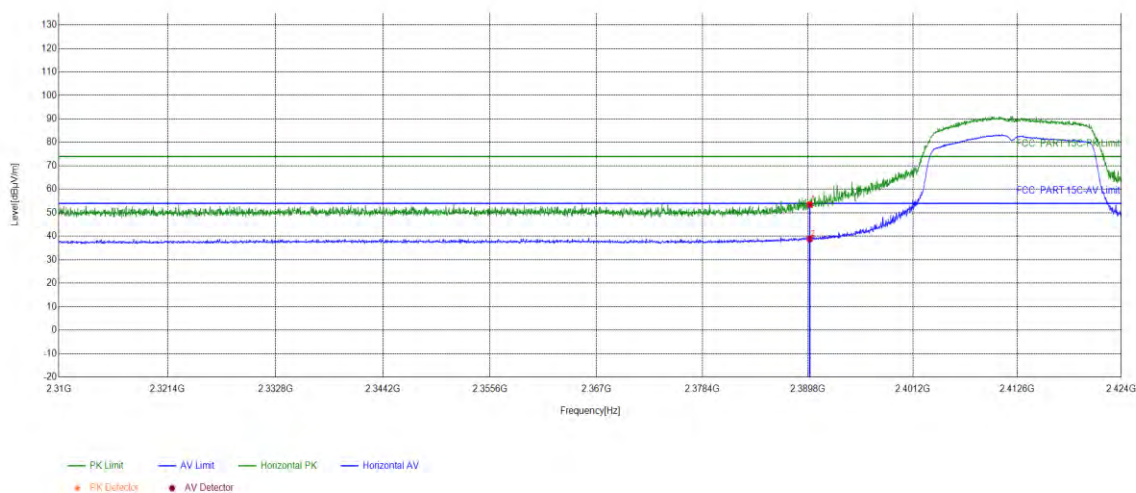


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	37.54	53.50	74.00	20.50	PASS	Horizontal	PK
2	2390	15.96	22.91	38.87	54.00	15.13	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

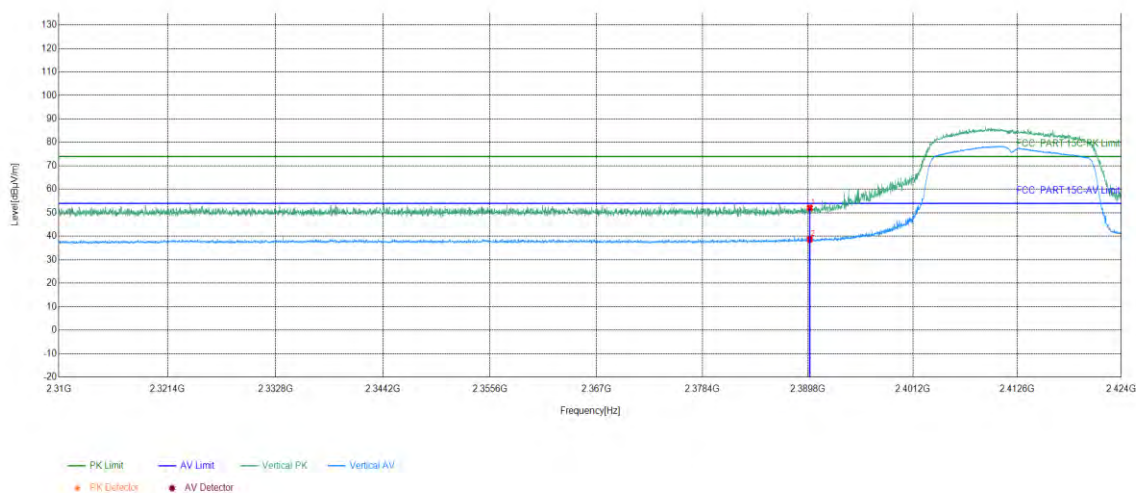


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.13	52.09	74.00	21.91	PASS	Vertical	PK
2	2390	15.96	22.70	38.66	54.00	15.34	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

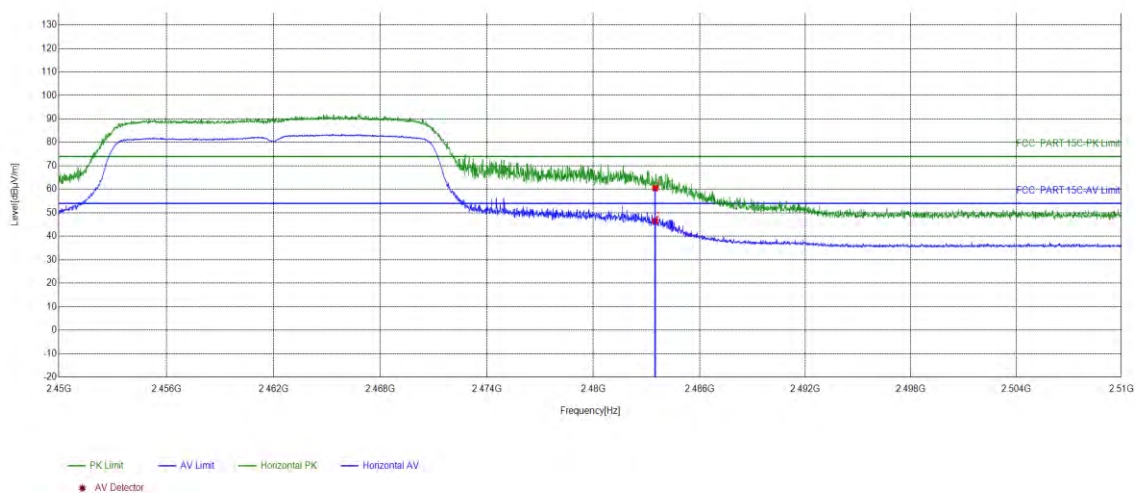


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	44.18	60.47	74.00	13.53	PASS	Horizontal	PK
2	2483.5	16.29	30.21	46.50	54.00	7.50	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

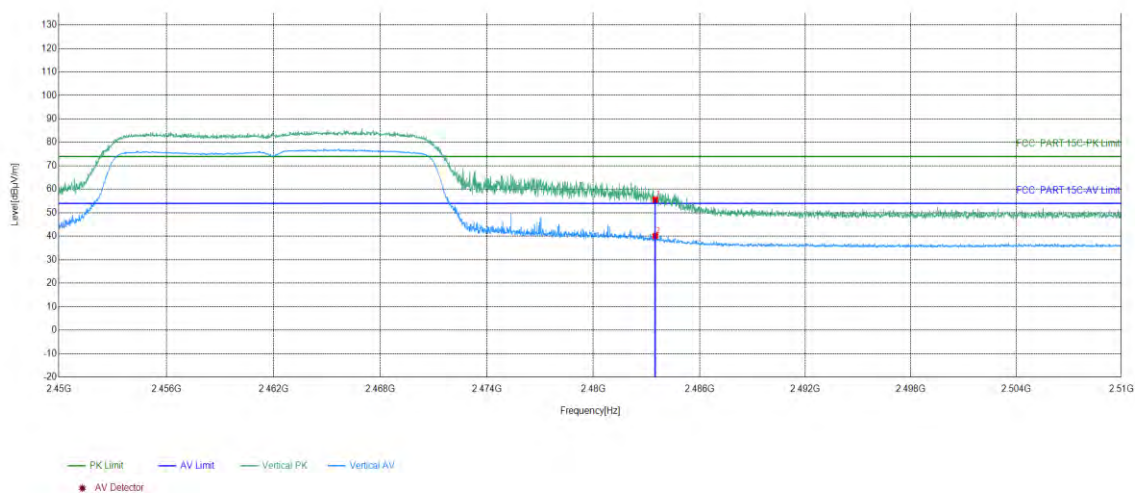


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	39.32	55.61	74.00	18.39	PASS	Vertical	PK
2	2483.5	16.29	23.86	40.15	54.00	13.85	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

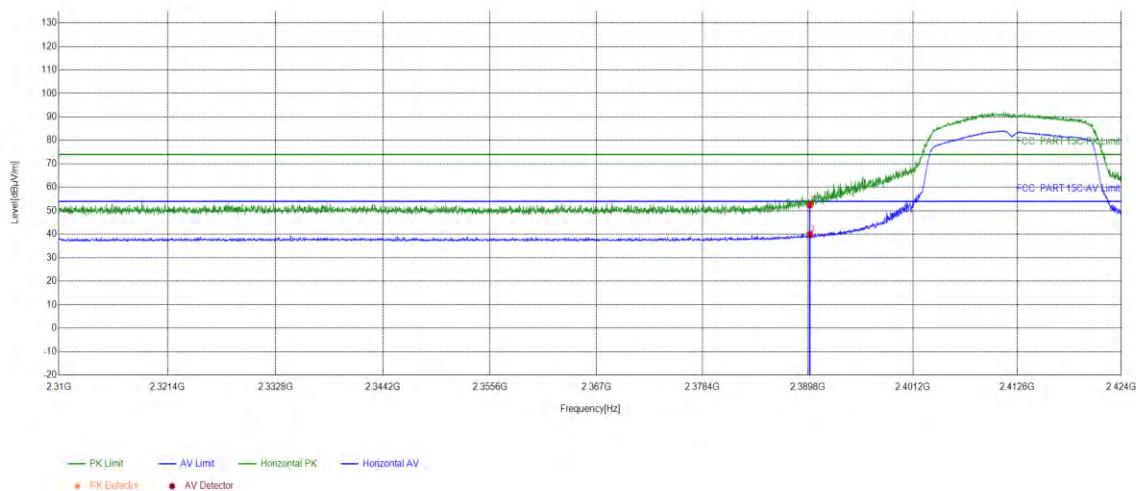


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.51	52.47	74.00	21.53	PASS	Horizontal	PK
2	2390	15.96	23.91	39.87	54.00	14.13	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

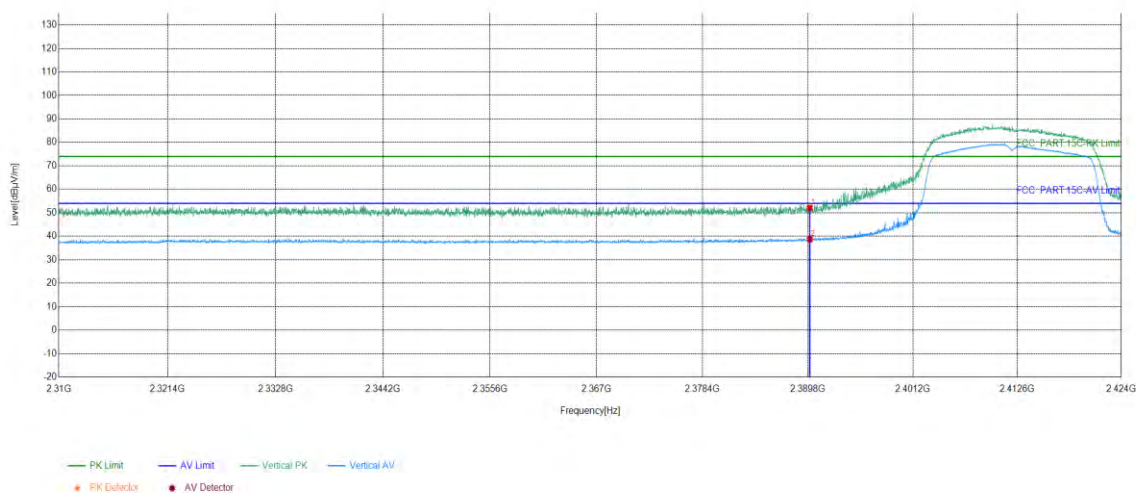


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.09	52.05	74.00	21.95	PASS	Vertical	PK
2	2390	15.96	22.78	38.74	54.00	15.26	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

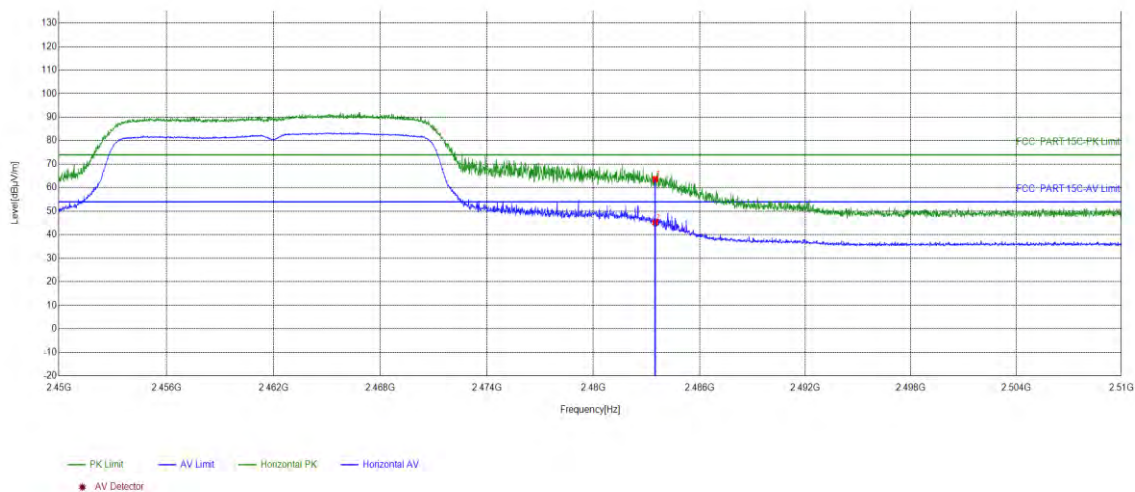


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	47.27	63.56	74.00	10.44	PASS	Horizontal	PK
2	2483.5	16.29	28.81	45.10	54.00	8.90	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

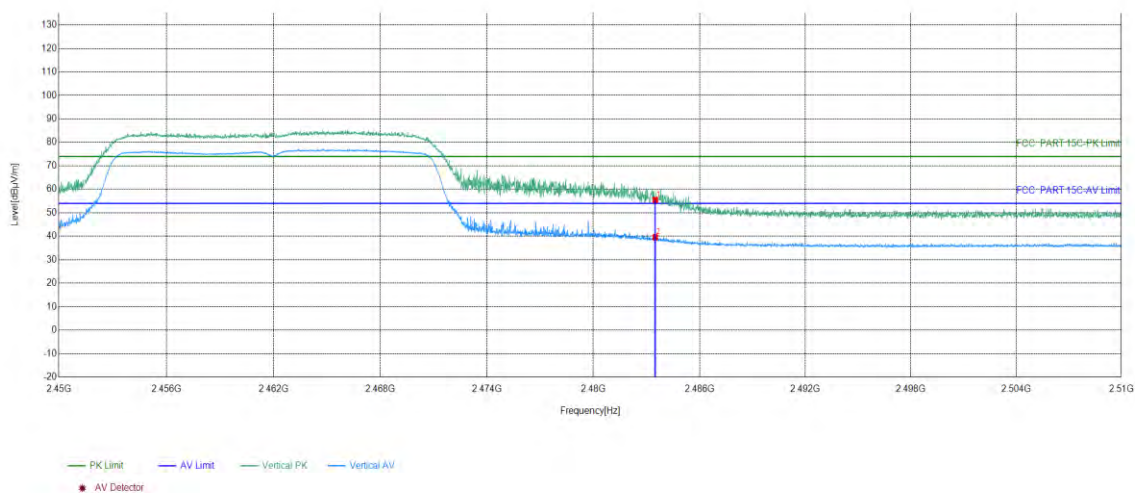


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	39.20	55.49	74.00	18.51	PASS	Vertical	PK
2	2483.5	16.29	23.29	39.58	54.00	14.42	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

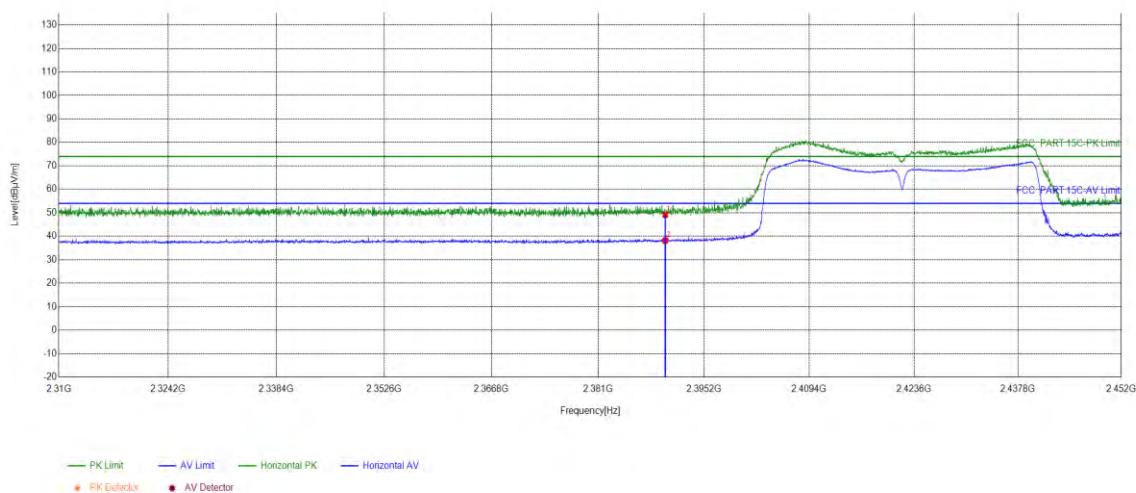


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	33.22	49.18	74.00	24.82	PASS	Horizontal	PK
2	2390	15.96	22.21	38.17	54.00	15.83	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

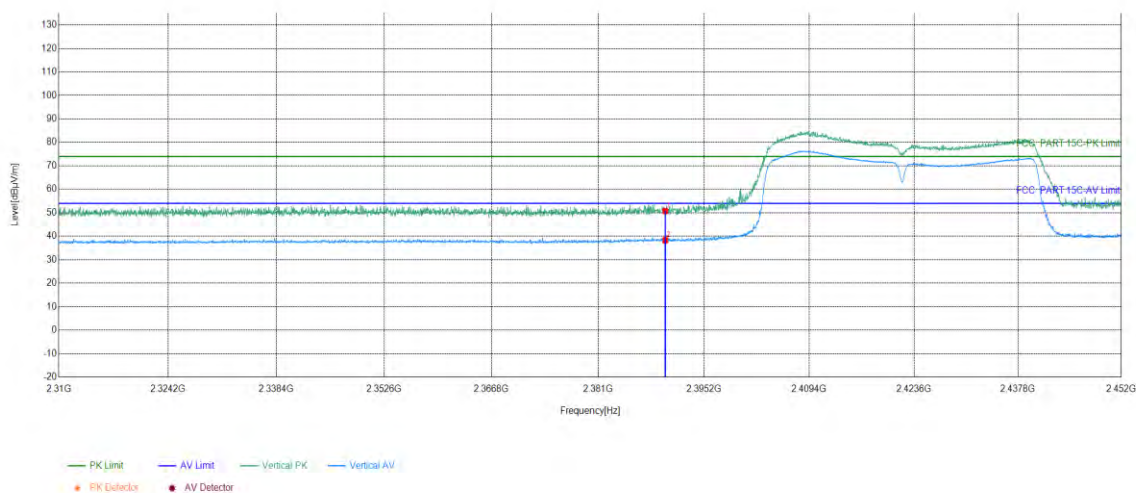


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.84	50.80	74.00	23.20	PASS	Vertical	PK
2	2390	15.96	22.34	38.30	54.00	15.70	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

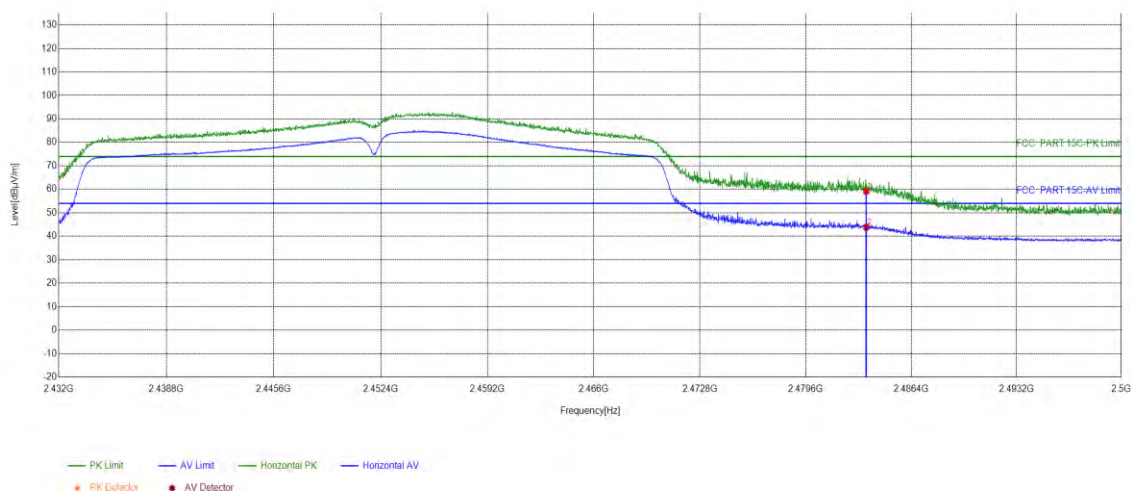


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	42.83	59.12	74.00	14.88	PASS	Horizontal	PK
2	2483.5	16.29	27.53	43.82	54.00	10.18	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/9/11

Test Graph

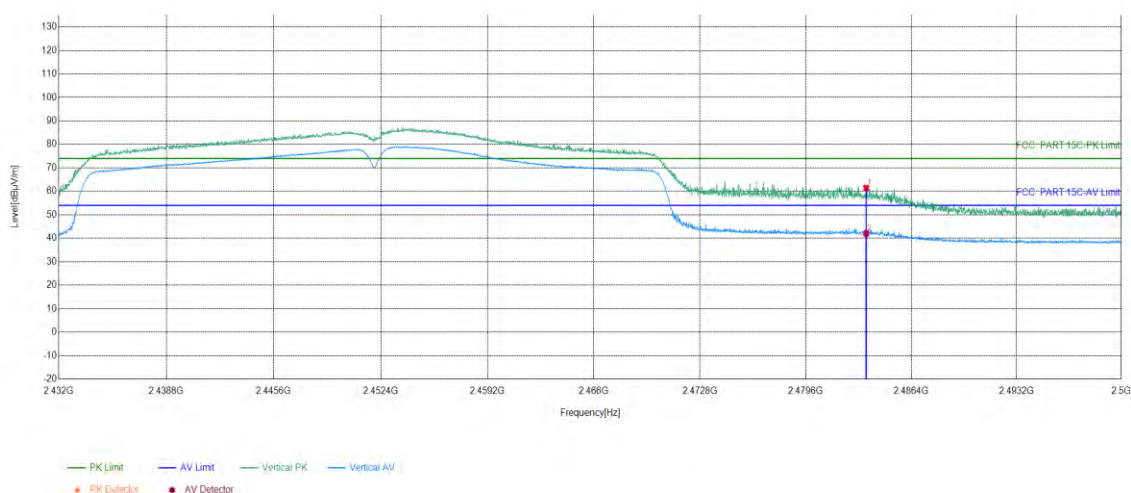

Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	45.15	61.44	74.00	12.56	PASS	Vertical	PK
2	2483.5	16.29	25.71	42.00	54.00	12.00	PASS	Vertical	AV

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32S819255

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S819254.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***