

Test Plot 1#:**DUT: N02 Pro; Type: Tablet; Serial: 2ODH-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:14718

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.831$ S/m; $\epsilon_r = 40.484$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 802.11b Mid/Area Scan (16x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.416 W/kg


Body Back/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.354 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.476 W/kg

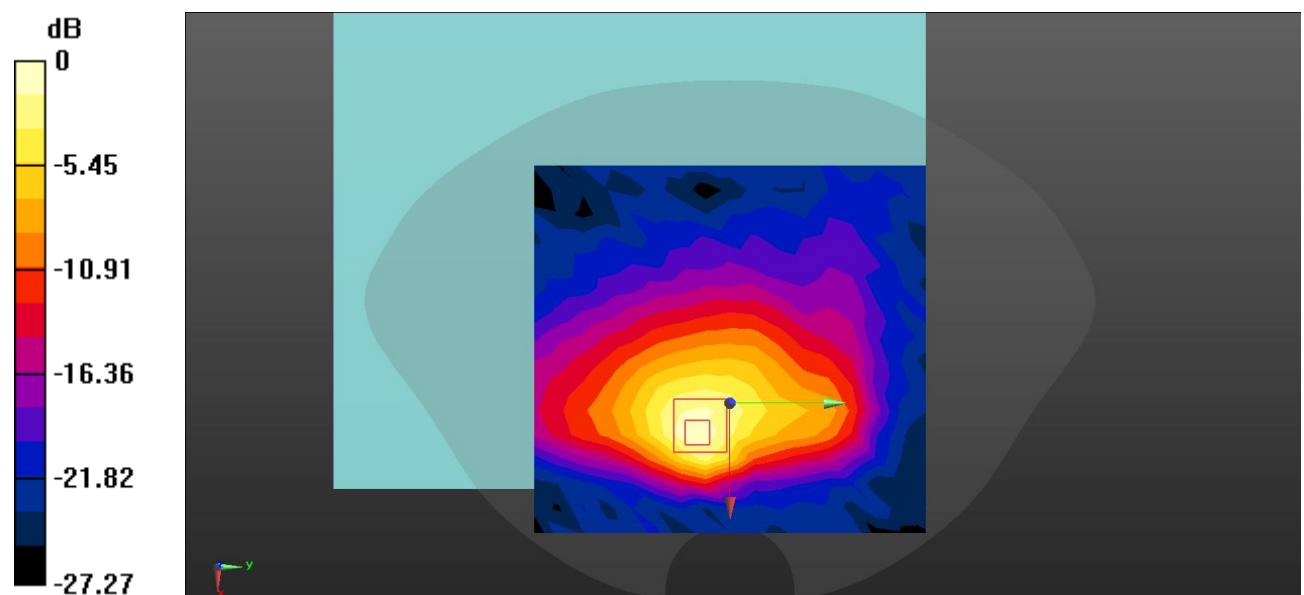

0 dB = 0.476 W/kg = -3.22 dBW/kg

Test Plot 2#:**DUT: N02 Pro; Type: Tablet; Serial: 2ODH-1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz;Duty Cycle: 1:14718

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.831$ S/m; $\epsilon_r = 40.484$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Top/WLAN 802.11b Mid/Area Scan (9x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.245 W/kg


Body Top/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.418 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.556 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.249 W/kg

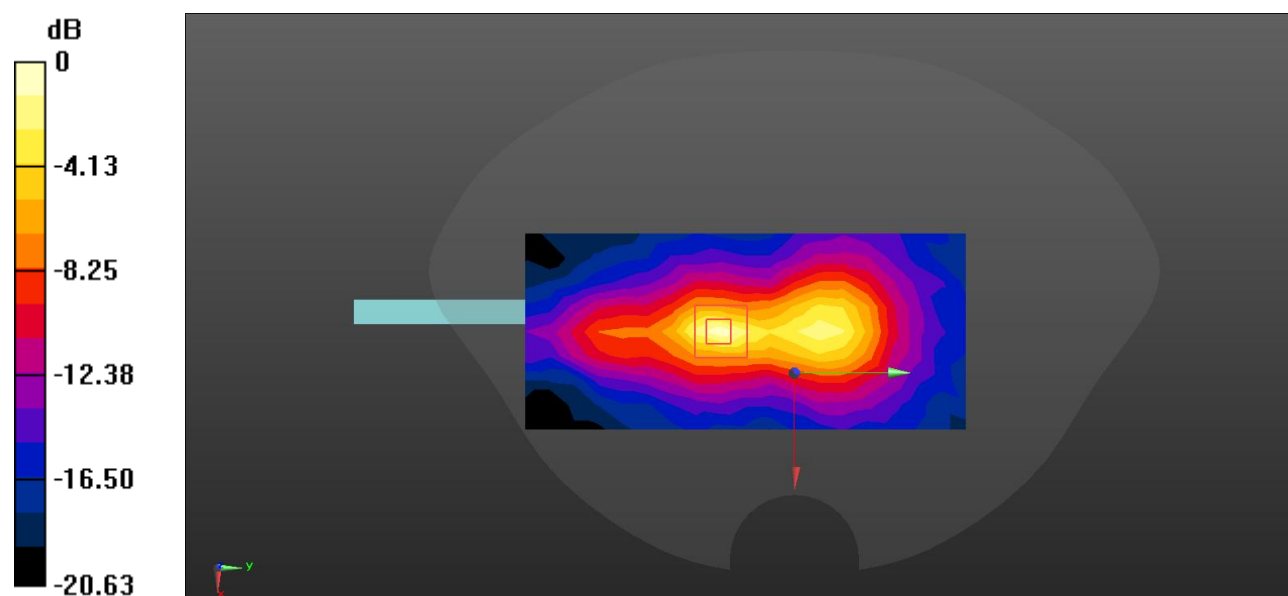

0 dB = 0.249 W/kg = -6.04 dBW/kg

Test Plot 3#:**DUT: N02 Pro; Type: Tablet; Serial: 2ODH-1;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz;Duty Cycle: 1:1.17398

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.786 \text{ S/m}$; $\epsilon_r = 37.529$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

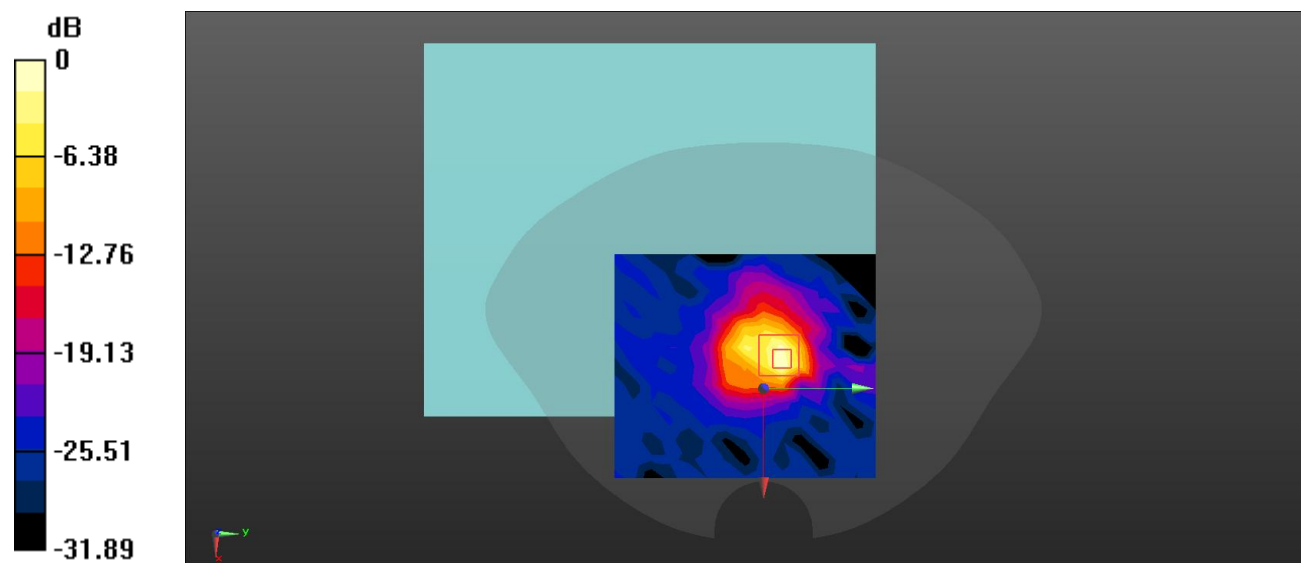Body Back/WLAN 5.2G 802.11a Low/Area Scan (13x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.954 W/kg **Body Back/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 9.45 V/m ; Power Drift = -0.07 dB Peak SAR (extrapolated) = 1.43 W/kg **SAR(1 g) = 0.408 W/kg ; SAR(10 g) = 0.119 W/kg** Maximum value of SAR (measured) = 0.914 W/kg 

Test Plot 4#:**DUT: N02 Pro; Type: Tablet; Serial: 2ODH-1;**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz;Duty Cycle: 1:1.17398

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.786 \text{ S/m}$; $\epsilon_r = 37.529$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

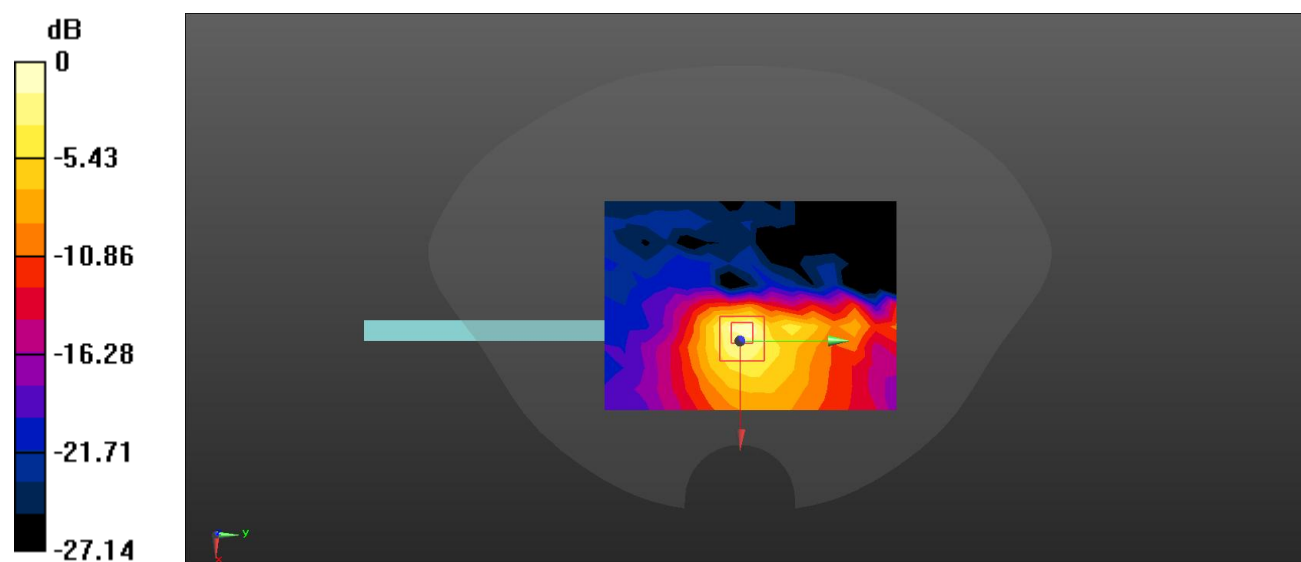Body Top/WLAN 5.2G 802.11a Low/Area Scan (11x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.424 W/kg **Body Top/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 4.340 V/m ; Power Drift = -0.18 dB Peak SAR (extrapolated) = 0.859 W/kg **SAR(1 g) = 0.225 W/kg ; SAR(10 g) = 0.066 W/kg** Maximum value of SAR (measured) = 0.424 W/kg  $0 \text{ dB} = 0.424 \text{ W/kg} = -3.73 \text{ dBW/kg}$