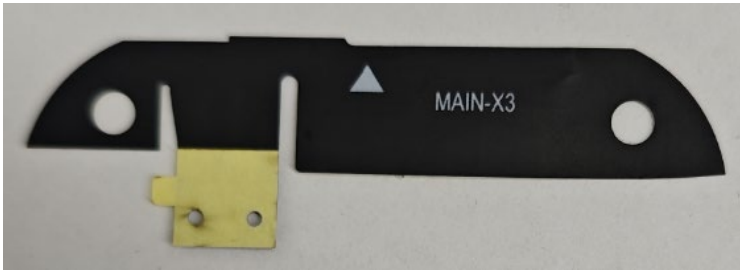


VLG TECHNOLOGY

ShenZhen VLG Wireless TECHNOLOGY CO.,LTD

Shenzhen VLG Wireless Technology Co., LTD

Acknowledgment

Customer/project name	RuxTek RTM-103	Frequency band	LTE		
VLG P/N	V1842-008-A-01	Version	R:A		
RF	HeJunSun	Quality	YuHong	Confirmation	
Structure	ShaoBing	PM	ZengCong		
Date	2023-12-6				
Customer project name and P/N	Customer project name:				
	Customer project P/N:				
Customer Confirmation					
VLG Communication Technology					
R&D Customer satisfaction survey of R&D projects (Customers please comment on the work of our R & D or PM management staff and urge us to better serve you)					
RF technician	☐ satisfaction	☐ be basically satisfied	☐ Dissatisfaction		
Structural technician	☐ satisfaction	☐ be basically satisfied	☐ Dissatisfaction		
Project Management (PM Manager)	☐ satisfaction	☐ be basically satisfied	☐ Dissatisfaction		
Description of suggested items:					
ANT Picture:					
					

www.vlg.com.cn

VLG has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

Design Specifications	Typical	Units
Antenna form	FPC	
working Frequency	824-960,1710-2690	MHz
Gain	≤ 5	DBi
Antenna efficiency	30-50	%
VSWR	≤ 3	
Ploriaztion	Line polarization	
Axial Ratio	/	N/A
Radiation pattern	all-around	
impedance	50 ohm	
Power handling	33	
Interface	Shrapnel contact	
Overall dimensions	See drawing section	
Weight	No requirement	
Operatin Temp	-30 ~ 85	
Storing Temp	-30 ~ 70	

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

SEO

1. Specification.....	3
2. electrical properties	3
2.1 specification standard.....	3
2.2 The matching circuit of the antenna.....	3
2.3 ANT VSWR	5
2.4 Passive test data.....	5
2.5 Active test data.....	6
2.6 Directions.....	7
3. Recommendations and conclusions.....	9
4. Product 2D Drawing.....	9
5. size report.....	10
6. Product production engineering drawing	11
7. reliability testing.....	12
8. packaging	15

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

1、Specifications: The report mainly provides the test status of the electrical performance parameters of 4G antenna. 4G antennas are in the 700~960MHz/1710~2690MHz band.

2、Electrical Specification

2.1 specification standard

The working frequency band of 4G antenna is in 700 ~ 960 MHz / 1710 ~ 2690 MHz frequency band. The following table is the passive performance test index of the antenna

2.2 Antenna matching circuit:

E1	8.2nH
E2	0Ω
E3	N/A



2.3 ANT VSWR

2.3.1 Test setup

□ VSWR The test device is successively connected as: 8714ET:network analyzer→50 Ω coaxial


Cable→→**Test Fixture**

Treatment of test fixture: a cable is used to lead out the SMA connector at the 50 ohm test point of the antenna, which is connected with the copper tube with a choke, and then connected to other devices in turn.

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

2.3.2 ANT VSWR:

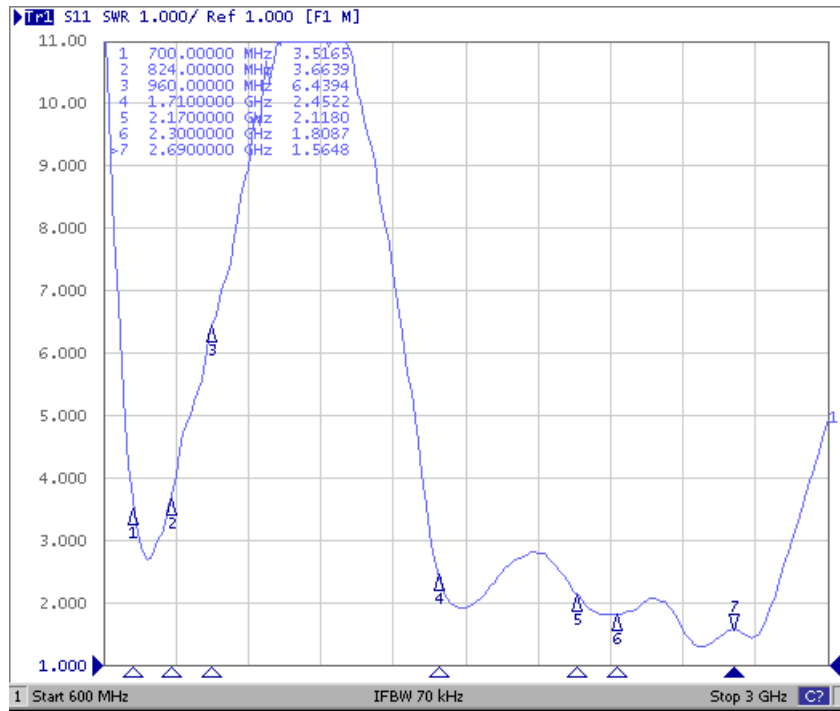

2.4 Passive test data:

Frequency	Efficiency	Efficiency . dB	Gain . dB	Frequency	Efficiency	Efficiency . dB	Gain . dB
700	25%	-6.0	-2.5	1710	38%	-4.2	1.6
710	27%	-5.8	-1.9	1745	39%	-4.1	1.4
720	28%	-5.5	-1.6	1780	39%	-4.1	0.9
730	29%	-5.4	-1.3	1815	40%	-4.0	0.8
740	30%	-5.2	-0.9	1850	39%	-4.1	0.2
750	31%	-5.1	-0.7	1885	37%	-4.3	0.0
760	31%	-5.1	-0.6	1920	36%	-4.4	-0.4
770	34%	-4.7	-0.4	1955	35%	-4.5	-0.1
780	34%	-4.7	-0.3	1990	36%	-4.4	0.4
790	33%	-4.8	-0.3	2025	39%	-4.1	0.6
800	35%	-4.6	-0.2	2060	45%	-3.4	0.7
810	35%	-4.6	-0.1	2095	48%	-3.2	1.1
820	36%	-4.5	-0.4	2130	51%	-2.9	1.4
830	35%	-4.5	-0.4	2165	51%	-2.9	1.1
840	36%	-4.5	-0.2	2200	46%	-3.3	0.4
850	34%	-4.7	-0.4	2235	47%	-3.3	0.2
860	32%	-5.0	-0.7	2270	48%	-3.2	0.9
870	32%	-5.0	-0.7	2305	50%	-3.0	1.7
880	30%	-5.3	-1.0	2340	49%	-3.1	1.4
890	27%	-5.7	-1.6	2375	49%	-3.1	1.9
900	26%	-5.9	-2.0	2410	46%	-3.4	2.3
910	25%	-6.0	-2.5	2445	45%	-3.5	2.0
920	23%	-6.4	-2.8	2480	45%	-3.5	2.0
930	22%	-6.6	-3.1	2515	46%	-3.4	2.5
940	22%	-6.6	-2.8	2550	39%	-4.1	2.3
950	21%	-6.7	-3.0	2585	42%	-3.7	2.1
960	20%	-7.0	-3.2	2620	38%	-4.2	1.1
				2655	36%	-4.4	0.5
				2690	30%	-5.2	0.0

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

Gain . dB(B4)			
1.6			
1.4			
0.9	Gain . dB(B28)		
0.8	-2.5		
0.2	-1.9		Gain . dB(W8)
0.0	-1.6		-1.0
-0.4	-1.3		-1.6
-0.1	-0.9	Gain . dB(W2)	-2.0
0.4	-0.7	0.8	-2.5
0.6	-0.6	0.2	-2.8
0.7	-0.4	0.0	-3.1
1.1	-0.3	-0.4	-2.8
1.4	-0.3	-0.1	-3.0
1.1	-0.2	0.4	-3.2

2.5 Active test data


Band	BandWidth	Channel	TRP	Channel	TIS	Band	BandWidth	Channel	TRP	Channel	TIS
FDD B2	10M	18650	19.62	650		TDD B38	20M	37800	18.47	37800	
		18900	20.28	900				38000	18.92	38000	
		19150	19.63	1150	-96.02			38200	19.57	38200	-91.31
FDD B4	10M	20000	19.21	2000		TDD B40	20M	38700	19.48	38700	
		20175	18.54	2175				39150	19.5	39150	
		20350	20.37	2350	-96.49			39600	19.13	39600	-92.6
FDD B7	10M	20800	18.46	2800		TDD B41	20M	40340	18.89	40340	
		21100	17.89	3100				40740	19.17	40740	
		21400	17.56	3400	-94.54			41140	18.71	41140	-92.81
FDD B5	10M	20450	16.19	2450		WCDMA 2	/	9262	19.3	9662	
		20525	17.31	2525				9400	20.29	9800	
		20600	17.83	2600	-88.04			9538	19.08	9938	-107.47
FDD B8	10M	21500	17.46	3500		WCDMA 4	/	1312	19.1	1537	
		21625	16.65	3625				1412	18.55	1638	
		21750	16.46	3750	-88.41			1513	19.44	1738	-105.45
FDD B28	10M	27260	15.89	9260		WCDMA 5	/	4132	16.08	4357	
		27435	17.19	9435				4182	17.6	4408	
		27610	15.97	9610	-87.31			4233	17.49	4458	-101.83
						WCDMA 8	/	2712	17.66	2937	
								2788	16.41	3012	
								2863	16.09	3088	-102.08

www.vlg.com.cn


VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

2.6 Directions


700MHz (B28)

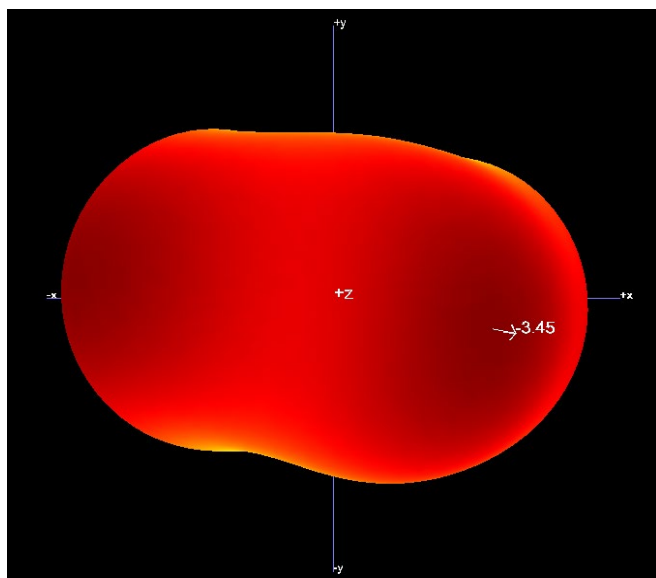


900MHz(W8)

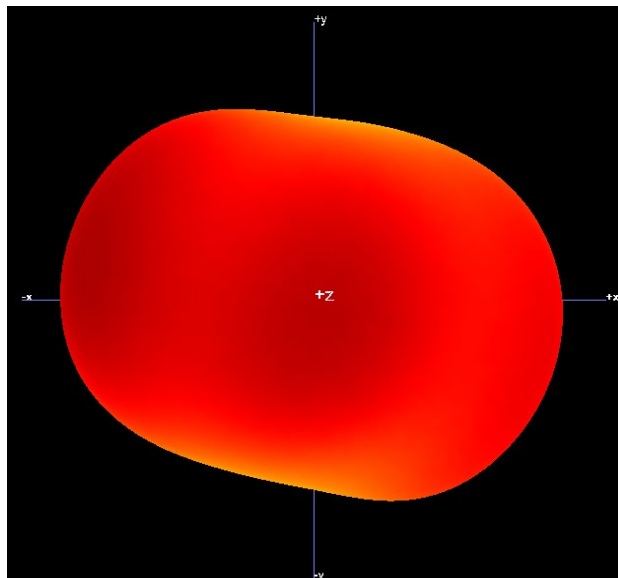

1750MHz(B4)



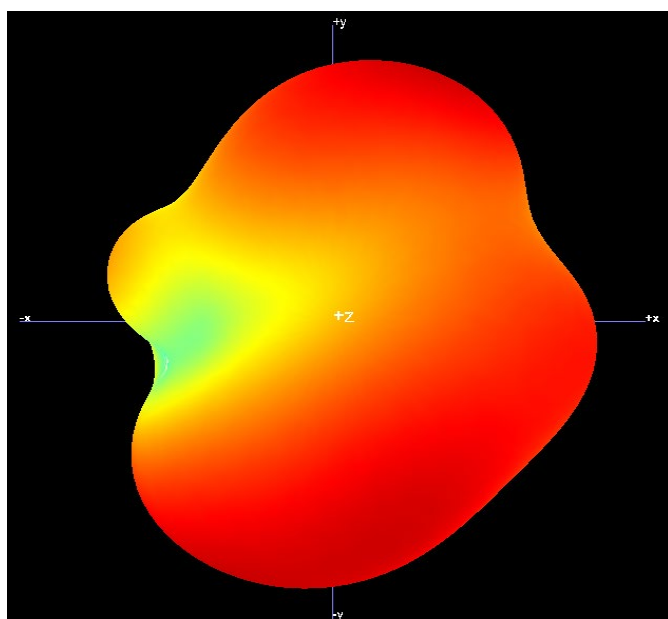


1950MHz(W2)

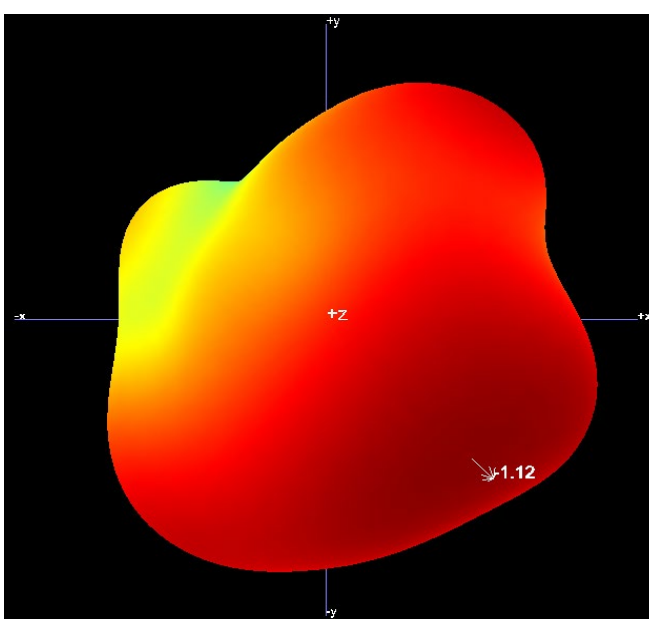

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

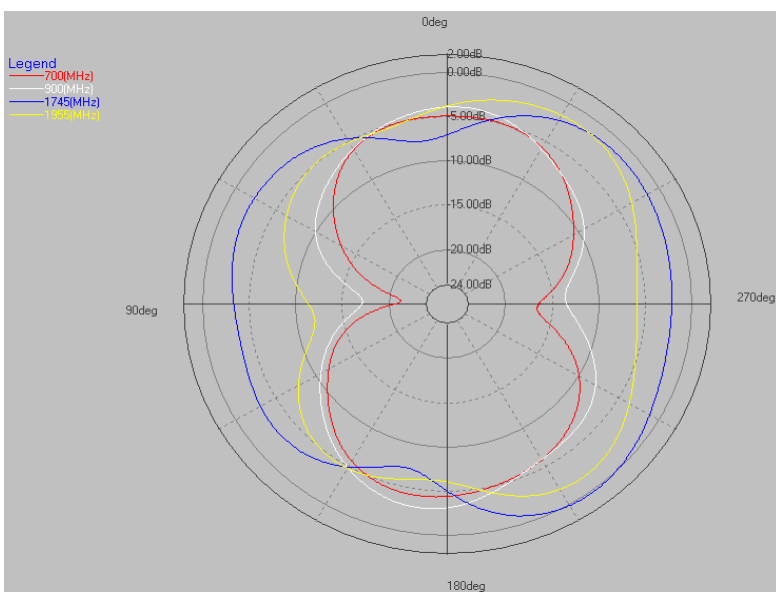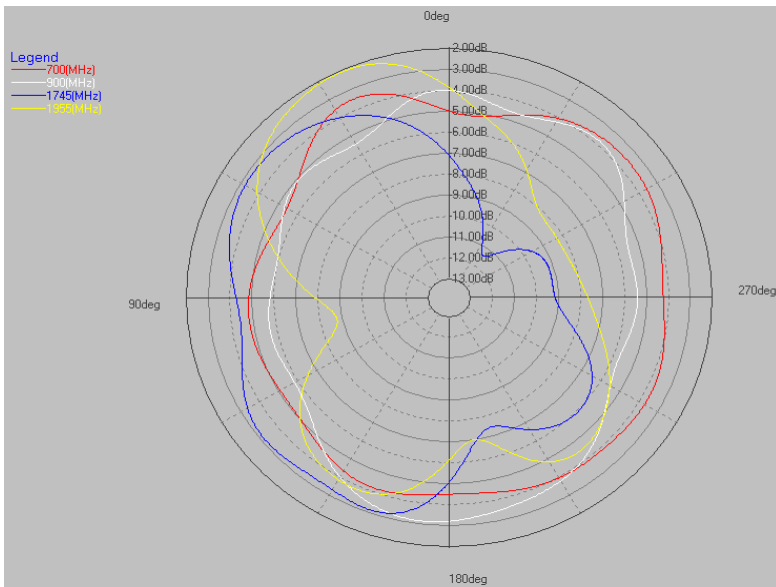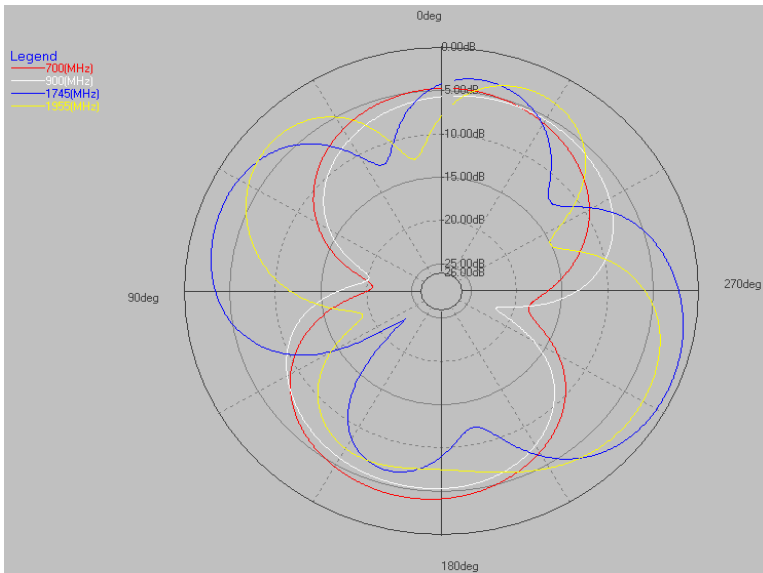


www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

3、Recommendations and conclusions

This report is based on the electrical performance of the final version of the R18784G antenna supplied by the customer. As can be seen from the above test data, this antenna provides better electrical performance. VLG R & D staff look forward to your confirmation, thank you for your cooperation!

4、Product 2D Drawing:

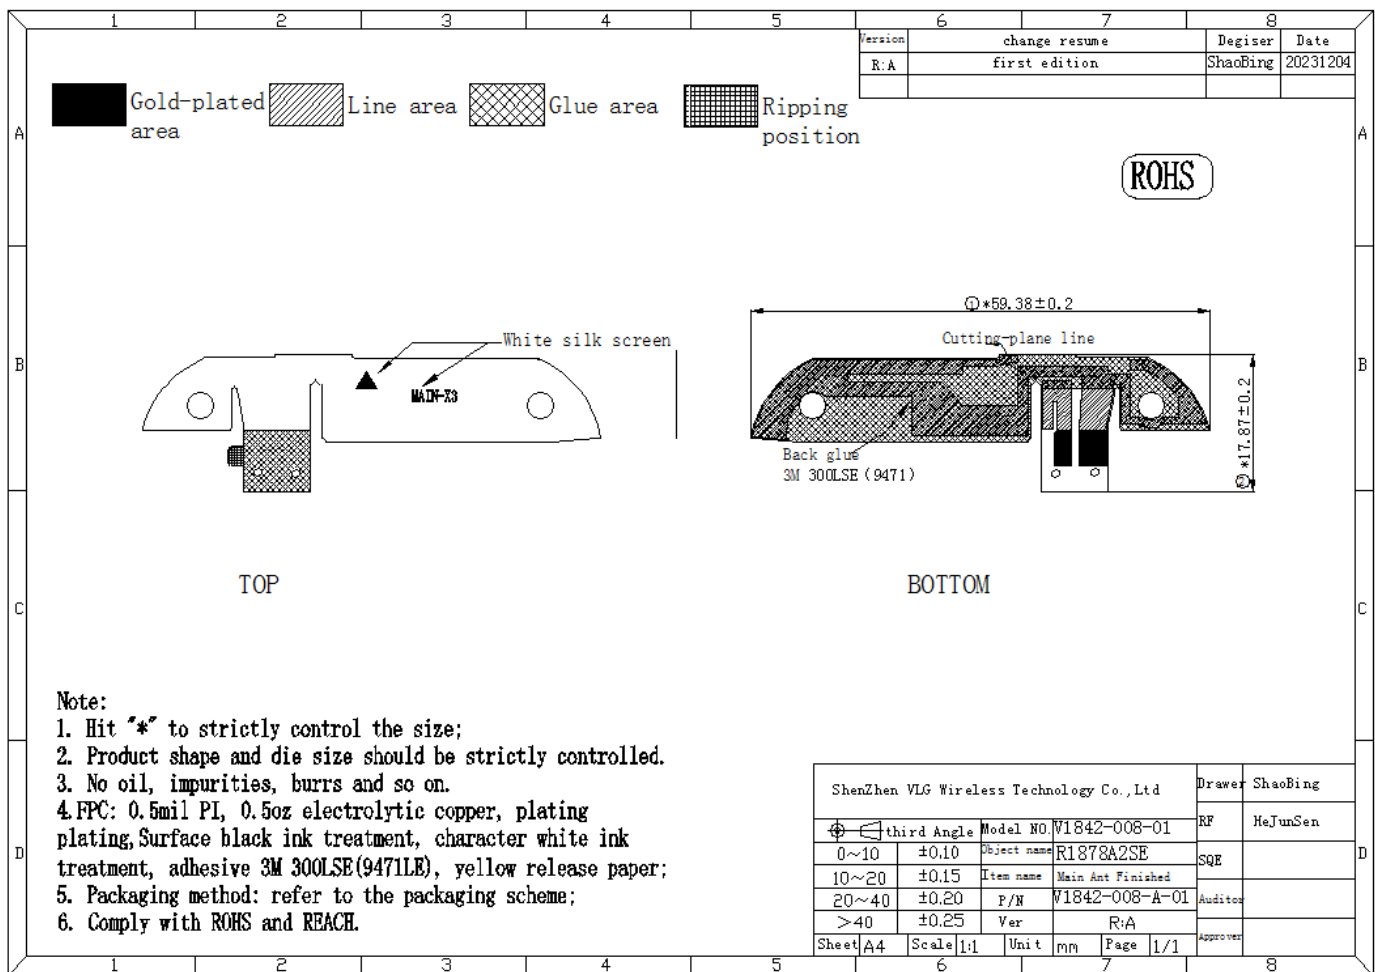

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

ShenZhen VLG Wireless Technology Co.,Ltd

Sample size test report (FAI)

customer name		RuxTek RTM-103				product name					type		LTE	
supplier		/				P/N		V1842-008-A-01			Tester		YuHong	
Drawing version		A				Unit		mm			Survey Date		11/19	
NO.	test item	test standard				measurement					r e s u l t	i n s t r u m e n t		rem ark
												1	2	
1	aspect	Brief description of bad appearance				OK	OK	OK	OK	OK	OK	t e s t		
	drawing size	★	59.38	±	0.20	59.37	59.37	59.38	59.31	59.39	OK	PM		
		★	17.87	±	0.20	17.85	17.89	17.88	17.80	17.82	OK	PM		
		blank below												
final judgment : OK ☒ NG ☐														

Testing instrument for short: PG - plug (round hole) gauge, RG - R gauge, SG - block gauge, LG - ring gauge DC-digital caliper PM - quadratic coordinate projector

Version :A.0 Form Number :VLG/QRF8.2-28/A.0

Inspection: Jiang Tao Audit: Approved: Yu Hong

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

R1878A2SE-FPC product raw material list

name	Raw material type	Raw material brand
base material	Half and half gel single side electrolytic	CAI Lungetti
gum	3M9471 adhesive paper	3M
printing ink	Matte black oil (PSM-800)	Youli
characte	wrongly written or mispronounced	Chuanyu
release liner	Yellow release paper	Ze Xingyu
gold plating	0.03um	ZhiFu

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

ShenZhen VLG Wireless Technology Co.,Ltd

Salt spray test report

customer name	RuxTek RTM-103		quantity of test	3pcs																			
product name	MAIN ANT		P/N	/																			
date of survey	2023/11/28		testing standard	ANSI/IEEE Std 149-2008																			
test time: 2023.8.26-2023.8.28																							
test Object	Standard	Actual Value	judge	test Object	Standard	Actual Value	judge																
instrument specification	KD-60	KD-60	OK	test time	24H	24H	OK																
Salt spray test type	NSS PH	NSS PH	OK	Salt spray tank temperature	$35\pm 2^{\circ}\text{C}$	35°C	OK																
saline water PH	6.5-7.2	6.8	OK	The amount of salt spray settling (H. 80C)	1-2ml	1.6	OK																
Spraying mode	continuous spray	continuous spray	OK	Salt spray humidity	$>85\%$	95%	OK																
Brine composition	$5\pm 1\%$ /NaCL	5%/NaCL	OK	Compressed air node pressure	$1\pm 0.1\text{KG}/\text{CM}^2$	1KG/CM ²	OK																
saturation temperature	34°C	34°C	OK	Sample horizontal direction placement Angle	$70-75^{\circ}$	75°	OK																
<table border="1"> <tr> <td>No.</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> <td>result</td> <td>remark</td> </tr> <tr> <td>No surface corrosion, coating peeling, foaming and other bad phenomena</td> <td>OK</td> <td>OK</td> <td>OK</td> <td>OK</td> <td></td> <td>OK</td> <td></td> </tr> </table>								No.	1	2	3	4	5	result	remark	No surface corrosion, coating peeling, foaming and other bad phenomena	OK	OK	OK	OK		OK	
No.	1	2	3	4	5	result	remark																
No surface corrosion, coating peeling, foaming and other bad phenomena	OK	OK	OK	OK		OK																	
judgeStandard: According to the national standard 5944-86 rating method judge, grade 9 or above is qualified																							
Final judge	Pass ☒			NO Pass ☐																			
tester	jiangtao		check	/	approve	Yuhong																	
remark: Common salt spray test methods are: NSS neutral salt spray test, AASS Acetic acid salt spray test, CASSA ccelerated copper acetic acid test.																							

versions: A.0

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

VLG ShenZhen VLG Wireless Technology Co.,.Ltd**Low temperature storage test report**

customer name	RuxTek RTM-103		production batch	N			
product name	MAIN ANT		quantity of test	3			
P/N	V1842-008-A-01		testing standard	ANSI/IEEE Std 149-2008			
date of survey	2023/11/25		Goods material				
test time: 2023.8.8-2023.8.10							
testing standard	Stand ard	Actual Value	jud ge	testing standard	Standard	Actual Value	jud ge
instrument specification	80L	80L	OK	State testing standard	GB/T 2423.1-2001	GB/T 2423.1-2001	OK
Cal High Fusing	. -40 ℃	. -40℃	OK	Temperature	5° C-30° C	28℃	OK
HUMI SV	0%	0%	OK	humidity	25%-85%	40%	OK
test time	48 H	48 H	OK	open air compressor below 61℃	open	open	OK
Recovery time	2 H	2 H	OK				
Test observation time	Low temperature observation						
24H	No abnormal products (no deformation, no bubbles)						
48H	No abnormal products (no deformation, no bubbles)						
Final judge	Pass ☒ ✓				NO Pass ☐		
tester	jiangtao	che ck	Zhangwang	approve	Yuhong		

remark: After the test, it is necessary to check whether the electrical performance meets the original test requirements。

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

Shenzhen Weiligu Wireless Technology Co., Ltd.

High temperature storage test report


customer name	RuxTek RTM-103			production batch	N		
product name	MAIN ANT			quantity of test	3		
P/N	V1842-008-A-01			testing standard	ANSI/IEEE Std 149-2008		
date of survey	2023/11/23			Goods material			
testing standard	Stand ard	Actual Value	jud ge	testing standard	Standard	Actual Value	jud ge
instrument specification	80L	80L	OK	State testing standard	GB/T 2423.1-200 1	GB/T 2423.1-200 1	OK
Cal High Fusing	85℃	85℃	OK	Temperature	5° C-30° C	28℃	OK
HUMI SV	65%	65%	OK	humidity	25%-85%	40%	OK
test time	24 H	24 H	OK	open air compressor below 61℃	open	open	OK
Recovery time	2 H	2 H	OK				
Test observation time	High temperature observation						
24H	No abnormal products (no deformation, no bubbles)						
48H	No abnormal products (no deformation, no bubbles)						
Final judge	Pass ☒				NO Pass ☐		
tester	jiangtao	che ck	wanghailing	approve	Yuhong		

remark: After the test, it is necessary to check whether the electrical performance meets the original test requirements.

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

Packing

Step	project	Note
1		Full page (packaging) inspect ok
2		Full page take into PE bag
3		Label PE bag
4		carton
5		seal the box
6		label of the outer carton

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.