




For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

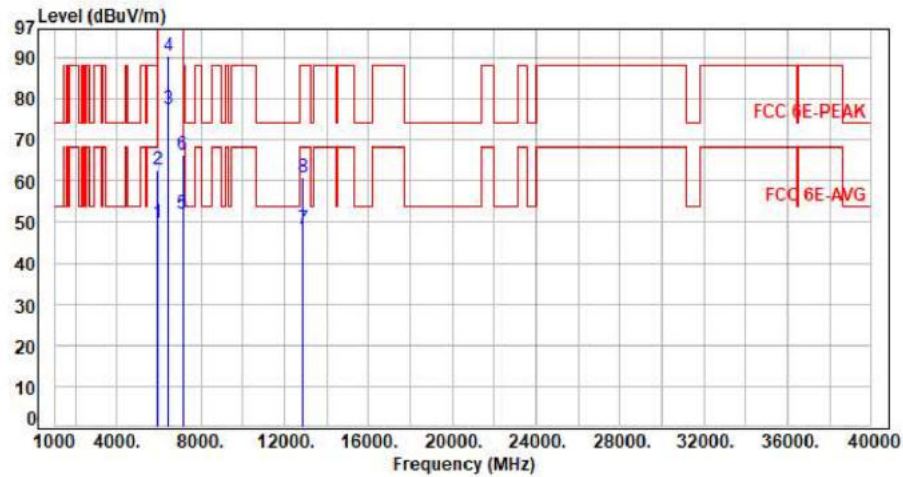


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.07	49.73	68.20	-18.47	Average	381	308	P
2	5925.00	7.66	54.94	62.60	88.20	-25.60	Peak	381	308	P
3	6435.00	8.32	69.21	77.53	200.00	-122.47	Average	381	308	P
4	6435.00	8.32	81.86	90.18	200.00	-109.82	Peak	381	308	P
5	7125.00	10.05	41.88	51.93	68.20	-16.27	Average	381	308	P
6	7125.00	10.05	56.21	66.26	88.20	-21.94	Peak	381	308	P
7	12870.00	19.02	29.16	48.18	68.20	-20.02	Average	100	42	P
8	12870.00	19.02	41.66	60.68	88.20	-27.52	Peak	100	42	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

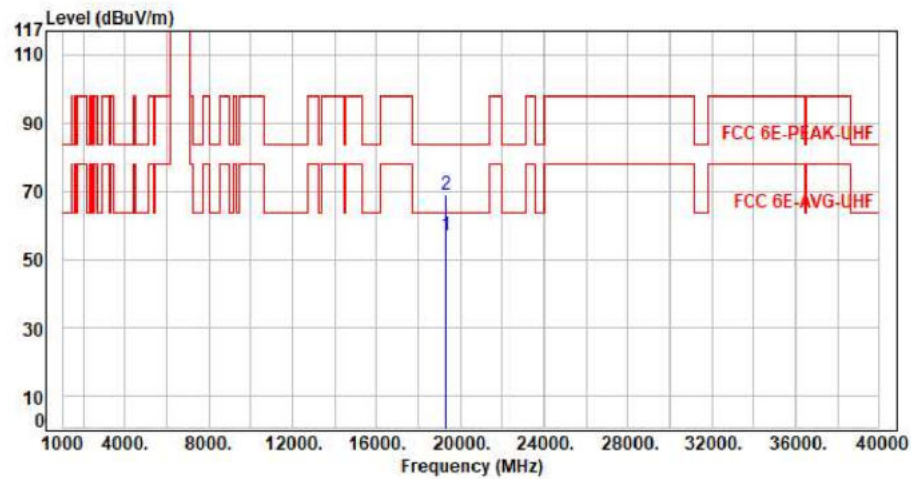


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	45.36	56.97	63.54	-6.57	Average	150	360	P
2	19305.00	11.61	57.28	68.89	83.54	-14.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

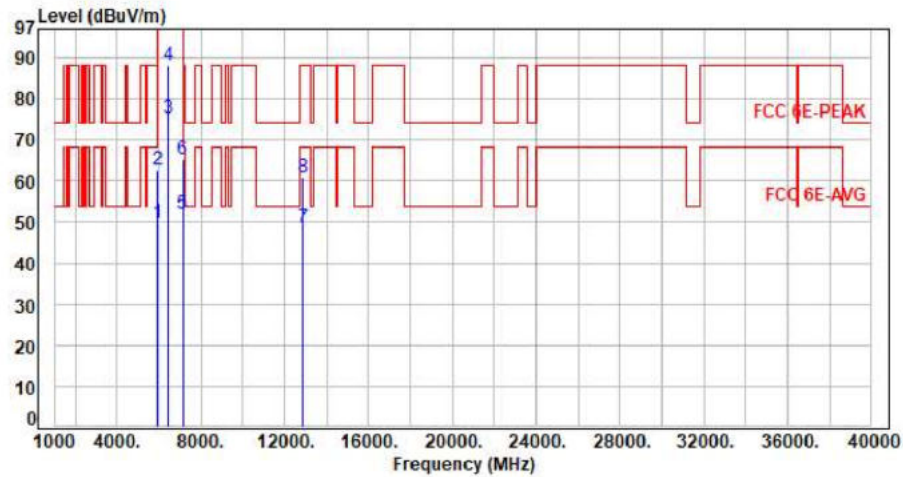

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.17	49.83	68.20	-18.37	Average	393	275	P
2	5925.00	7.66	55.05	62.71	88.20	-25.49	Peak	393	275	P
3	6435.00	8.32	66.75	75.07	200.00	-124.93	Average	393	275	P
4	6435.00	8.32	79.96	88.28	200.00	-111.72	Peak	393	275	P
5	7125.00	10.05	41.92	51.97	68.20	-16.23	Average	393	275	P
6	7125.00	10.05	55.18	65.23	88.20	-22.97	Peak	393	275	P
7	12870.00	19.02	29.65	48.67	68.20	-19.53	Average	100	145	P
8	12870.00	19.02	41.87	60.89	88.20	-27.31	Peak	100	145	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

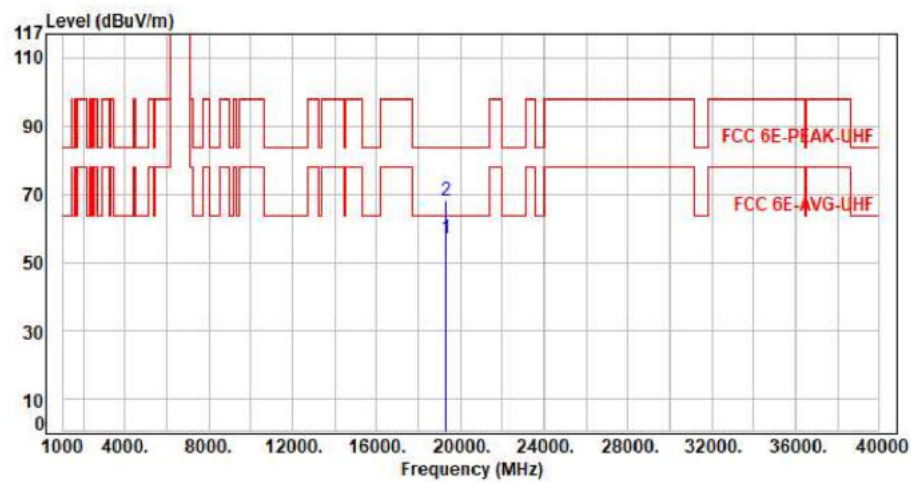

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	45.29	56.90	63.54	-6.64	Average	150	360	P
2	19305.00	11.61	56.36	67.97	83.54	-15.57	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

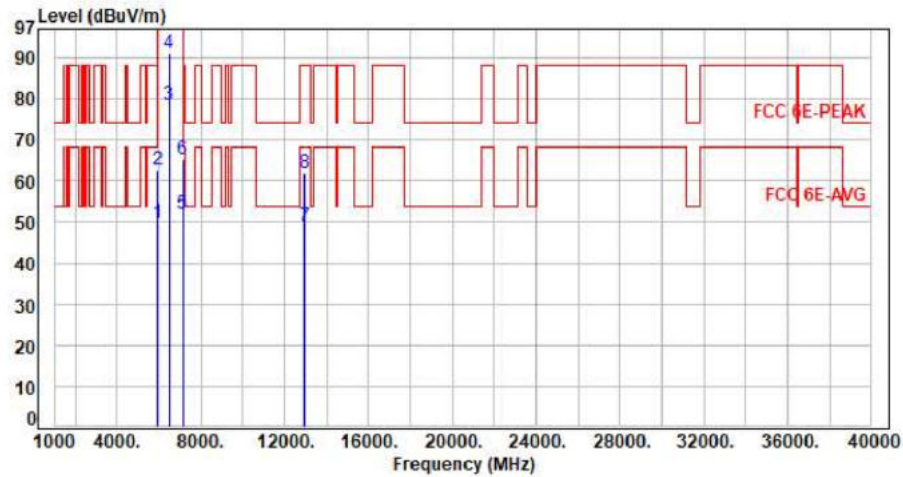


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.07	49.73	68.20	-18.47	Average	345	310	P
2	5925.00	7.66	55.19	62.85	88.20	-25.35	Peak	345	310	P
3	6475.00	8.33	70.36	78.69	200.00	-121.31	Average	345	310	P
4	6475.00	8.33	82.81	91.14	200.00	-108.86	Peak	345	310	P
5	7125.00	10.05	41.87	51.92	68.20	-16.28	Average	345	310	P
6	7125.00	10.05	55.34	65.39	88.20	-22.81	Peak	345	310	P
7	12950.00	19.39	29.74	49.13	68.20	-19.07	Average	100	228	P
8	12950.00	19.39	42.51	61.90	88.20	-26.30	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

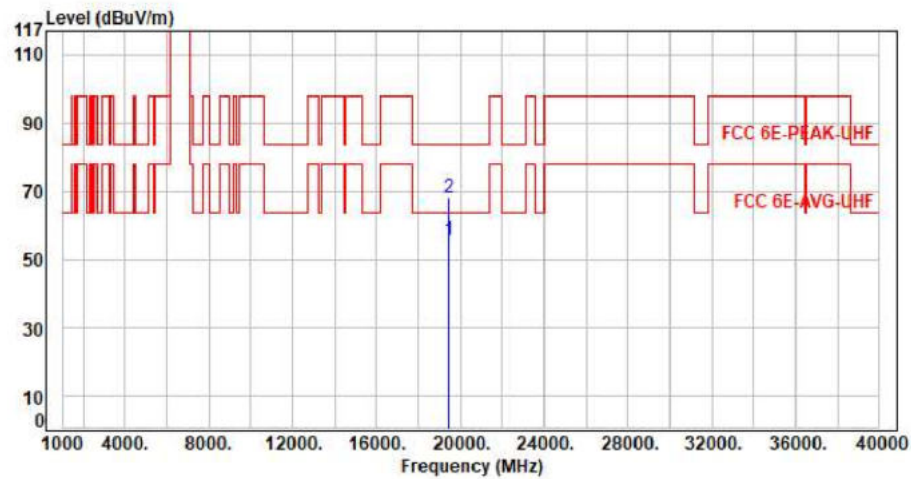


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	43.93	55.68	63.54	-7.86	Average	150	360	P
2	19425.00	11.75	56.12	67.87	83.54	-15.67	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

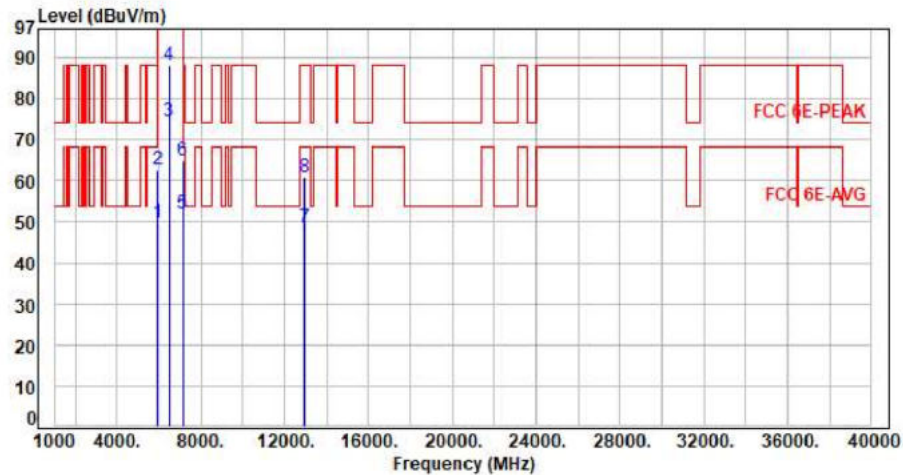

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.06	49.72	68.20	-18.48	Average	119	91	P
2	5925.00	7.66	54.86	62.52	88.20	-25.68	Peak	119	91	P
3	6475.00	8.33	66.23	74.56	200.00	-125.44	Average	119	91	P
4	6475.00	8.33	79.71	88.04	200.00	-111.96	Peak	119	91	P
5	7125.00	10.05	41.97	52.02	68.20	-16.18	Average	119	91	P
6	7125.00	10.05	54.89	64.94	88.20	-23.26	Peak	119	91	P
7	12950.00	19.39	29.18	48.57	68.20	-19.63	Average	100	159	P
8	12950.00	19.39	41.58	60.97	88.20	-27.23	Peak	100	159	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

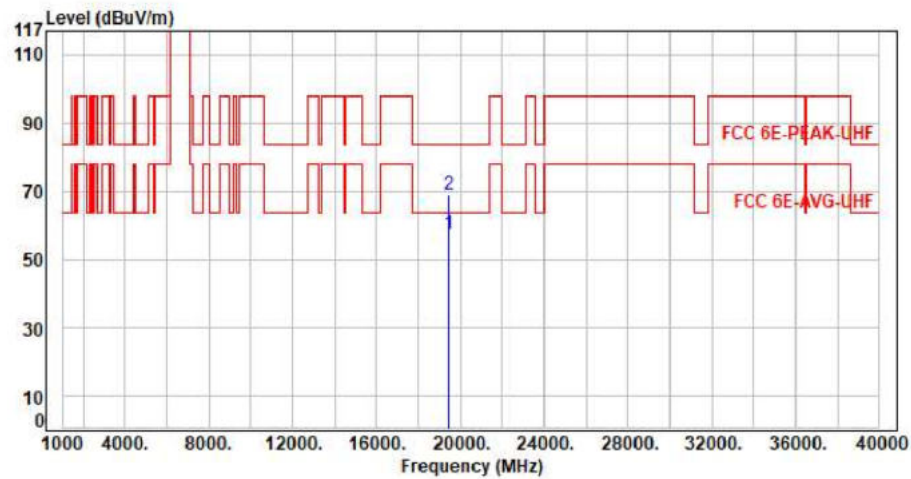


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	45.65	57.40	63.54	-6.14	Average	150	360	P
2	19425.00	11.75	57.18	68.93	83.54	-14.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

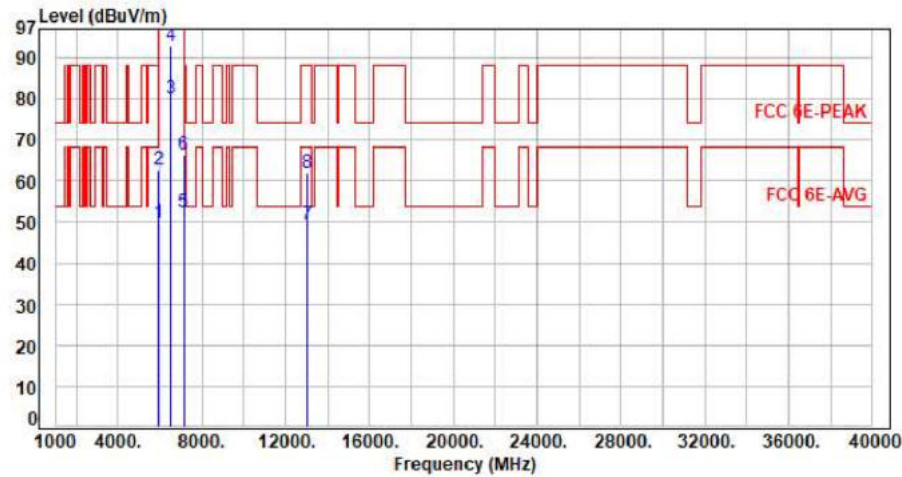

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.98	49.64	68.20	-18.56	Average	325	312	P
2	5925.00	7.66	54.95	62.61	88.20	-25.59	Peak	325	312	P
3	6515.00	8.42	71.47	79.89	200.00	-120.11	Average	325	312	P
4	6515.00	8.42	84.46	92.88	200.00	-107.12	Peak	325	312	P
5	7125.00	10.05	42.16	52.21	68.20	-15.99	Average	325	312	P
6	7125.00	10.05	56.22	66.27	88.20	-21.93	Peak	325	312	P
7	13030.00	19.86	29.55	49.41	68.20	-18.79	Average	100	218	P
8	13030.00	19.86	42.18	62.04	88.20	-26.16	Peak	100	218	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

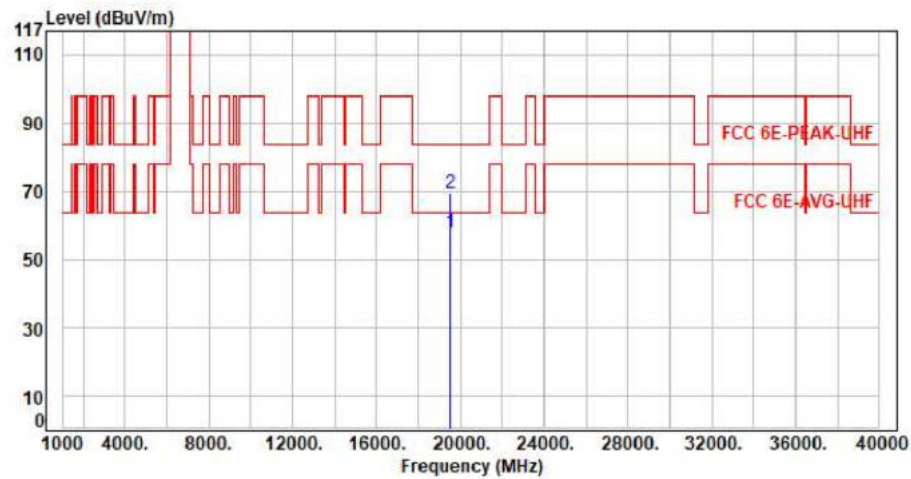


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	45.52	57.71	63.54	-5.83	Average	150	360	P
2	19545.00	12.19	57.00	69.19	83.54	-14.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

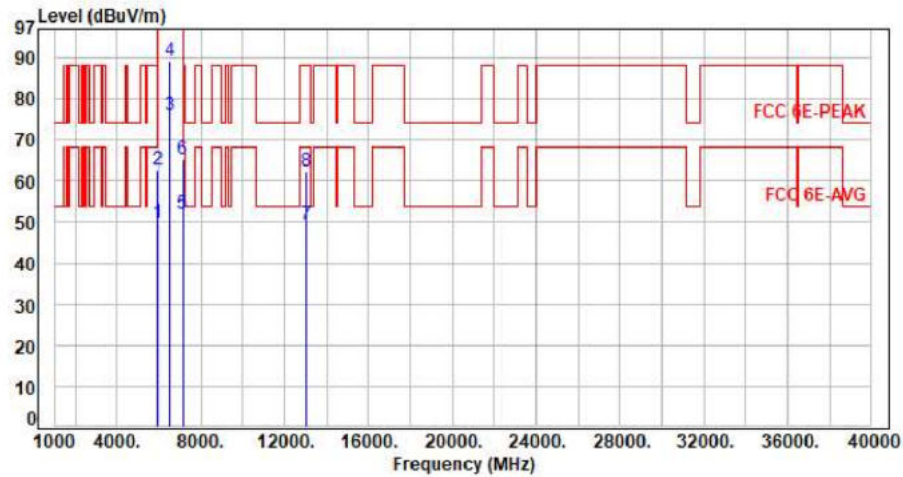

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.01	49.67	68.20	-18.53	Average	119	91	P
2	5925.00	7.66	55.07	62.73	88.20	-25.47	Peak	119	91	P
3	6515.00	8.42	67.64	76.06	200.00	-123.94	Average	119	91	P
4	6515.00	8.42	80.78	89.20	200.00	-110.80	Peak	119	91	P
5	7125.00	10.05	41.94	51.99	68.20	-16.21	Average	119	91	P
6	7125.00	10.05	55.07	65.12	88.20	-23.08	Peak	119	91	P
7	13030.00	19.86	29.63	49.49	68.20	-18.71	Average	100	227	P
8	13030.00	19.86	42.60	62.46	88.20	-25.74	Peak	100	227	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

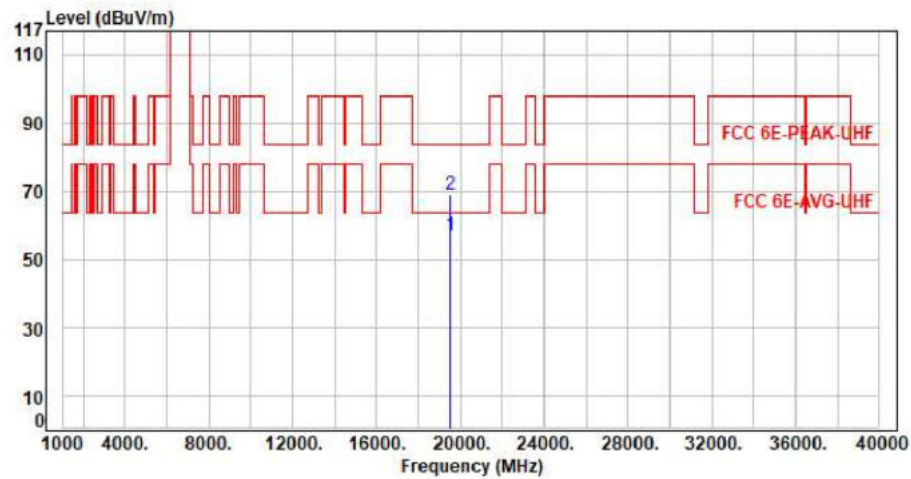


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	44.54	56.73	63.54	-6.81	Average	150	360	P
2	19545.00	12.19	56.73	68.92	83.54	-14.62	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

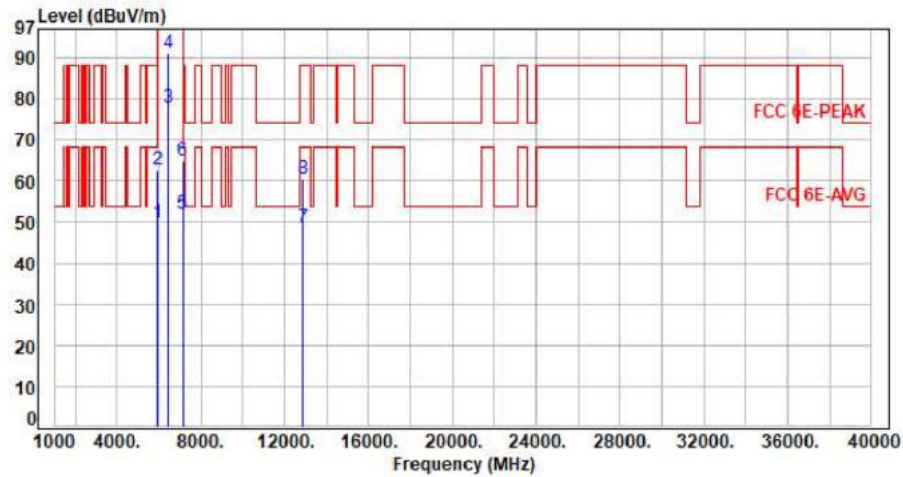

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.07	49.73	68.20	-18.47	Average	399	307	P
2	5925.00	7.66	55.13	62.79	88.20	-25.41	Peak	399	307	P
3	6445.00	8.31	69.38	77.69	200.00	-122.31	Average	399	307	P
4	6445.00	8.31	82.62	90.93	200.00	-109.07	Peak	399	307	P
5	7125.00	10.05	41.95	52.00	68.20	-16.20	Average	399	307	P
6	7125.00	10.05	54.86	64.91	88.20	-23.29	Peak	399	307	P
7	12890.00	19.05	29.65	48.70	68.20	-19.50	Average	100	149	P
8	12890.00	19.05	41.40	60.45	88.20	-27.75	Peak	100	149	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

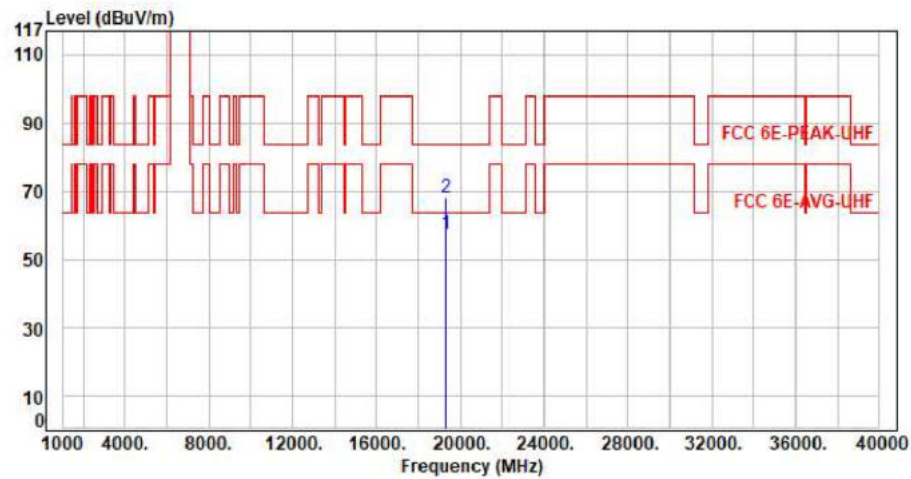


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	45.58	57.20	63.54	-6.34	Average	150	360	P
2	19335.00	11.62	56.56	68.18	83.54	-15.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

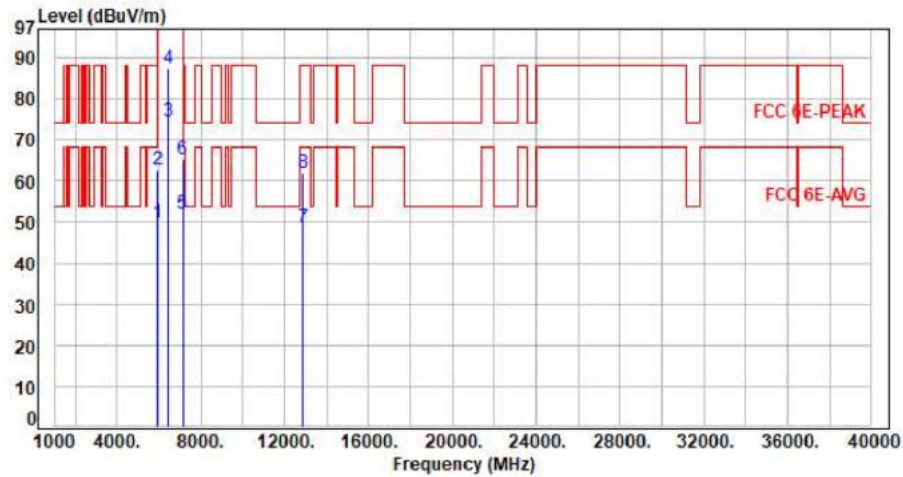

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.04	49.70	68.20	-18.50	Average	122	92	P
2	5925.00	7.66	55.05	62.71	88.20	-25.49	Peak	122	92	P
3	6445.00	8.31	66.27	74.58	200.00	-125.42	Average	122	92	P
4	6445.00	8.31	79.21	87.52	200.00	-112.48	Peak	122	92	P
5	7125.00	10.05	41.95	52.00	68.20	-16.20	Average	122	92	P
6	7125.00	10.05	55.24	65.29	88.20	-22.91	Peak	122	92	P
7	12890.00	19.05	29.62	48.67	68.20	-19.53	Average	100	138	P
8	12890.00	19.05	42.92	61.97	88.20	-26.23	Peak	100	138	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

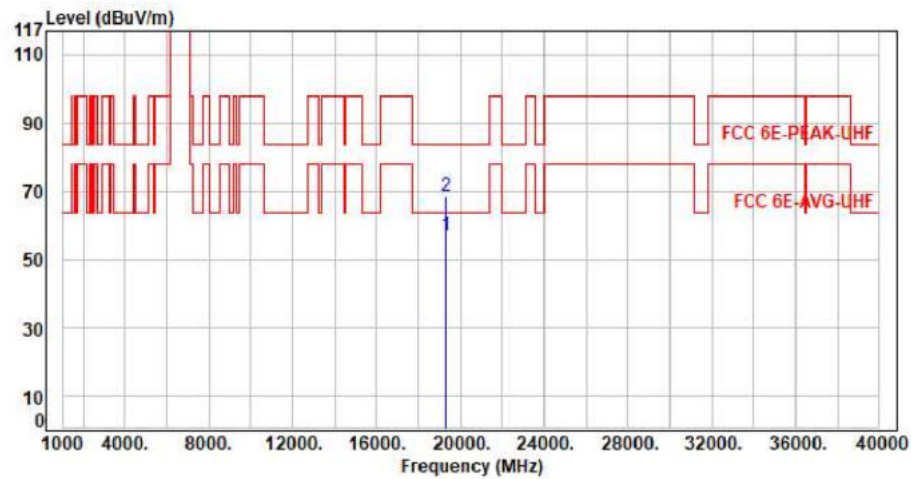


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	45.53	57.15	63.54	-6.39	Average	150	360	P
2	19335.00	11.62	56.82	68.44	83.54	-15.10	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

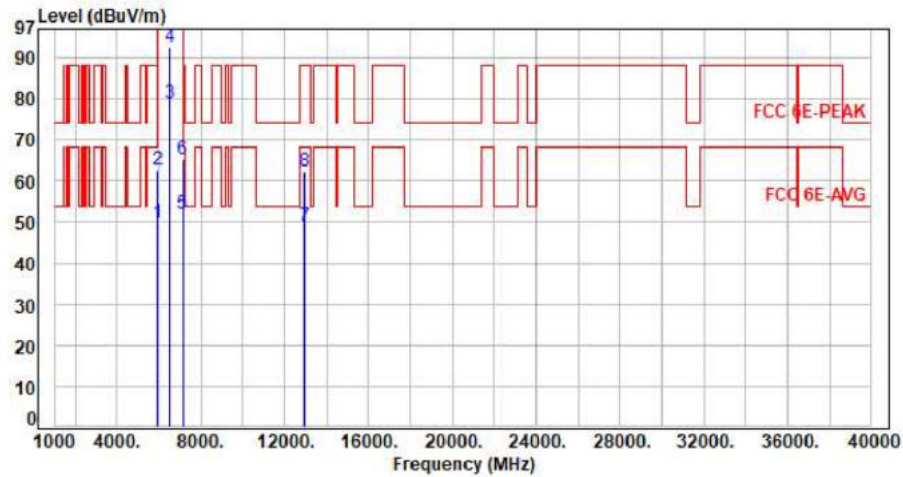

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.03	49.69	68.20	-18.51	Average	340	310	P
2	5925.00	7.66	55.22	62.88	88.20	-25.32	Peak	340	310	P
3	6485.00	8.34	70.65	78.99	200.00	-121.01	Average	340	310	P
4	6485.00	8.34	84.10	92.44	200.00	-107.56	Peak	340	310	P
5	7125.00	10.05	41.97	52.02	68.20	-16.18	Average	340	310	P
6	7125.00	10.05	55.34	65.39	88.20	-22.81	Peak	340	310	P
7	12970.00	19.47	29.57	49.04	68.20	-19.16	Average	100	309	P
8	12970.00	19.47	42.81	62.28	88.20	-25.92	Peak	100	309	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

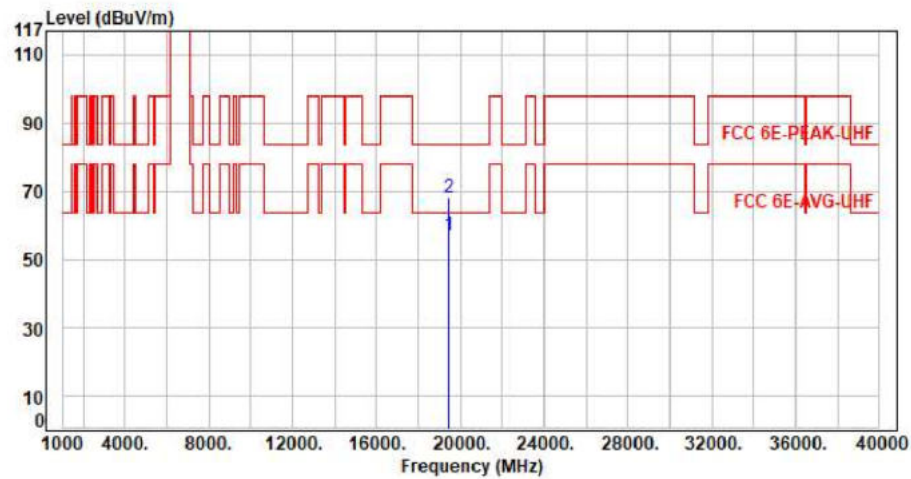


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	45.48	57.05	63.54	-6.49	Average	150	360	P
2	19455.00	11.57	56.55	68.12	83.54	-15.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

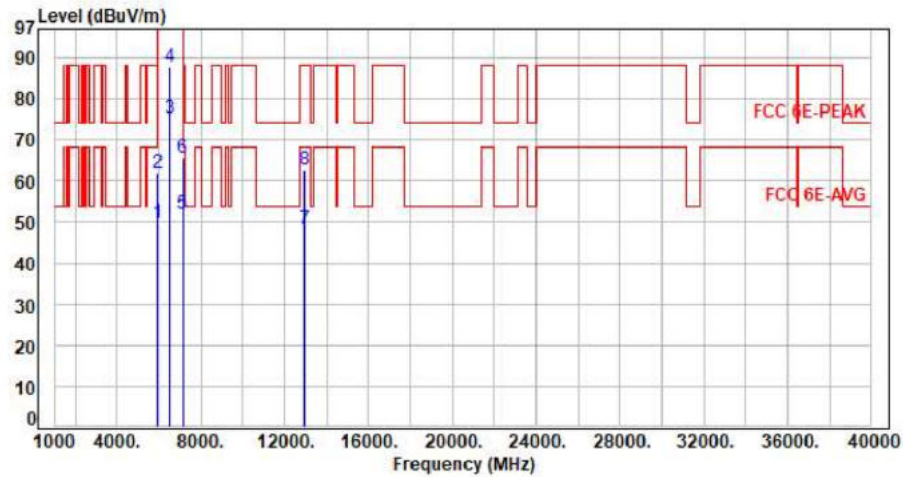

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.01	49.67	68.20	-18.53	Average	113	91	P
2	5925.00	7.66	54.45	62.11	88.20	-26.09	Peak	113	91	P
3	6485.00	8.34	67.03	75.37	200.00	-124.63	Average	113	91	P
4	6485.00	8.34	79.53	87.87	200.00	-112.13	Peak	113	91	P
5	7125.00	10.05	41.91	51.96	68.20	-16.24	Average	113	91	P
6	7125.00	10.05	55.50	65.55	88.20	-22.65	Peak	113	91	P
7	12970.00	19.47	28.96	48.43	68.20	-19.77	Average	100	112	P
8	12970.00	19.47	43.08	62.55	88.20	-25.65	Peak	100	112	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

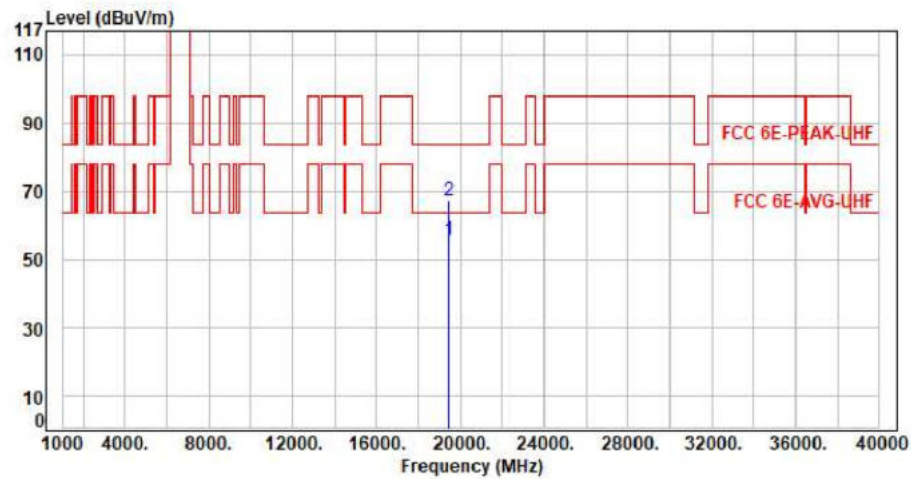


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	44.17	55.74	63.54	-7.80	Average	150	360	P
2	19455.00	11.57	55.83	67.40	83.54	-16.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

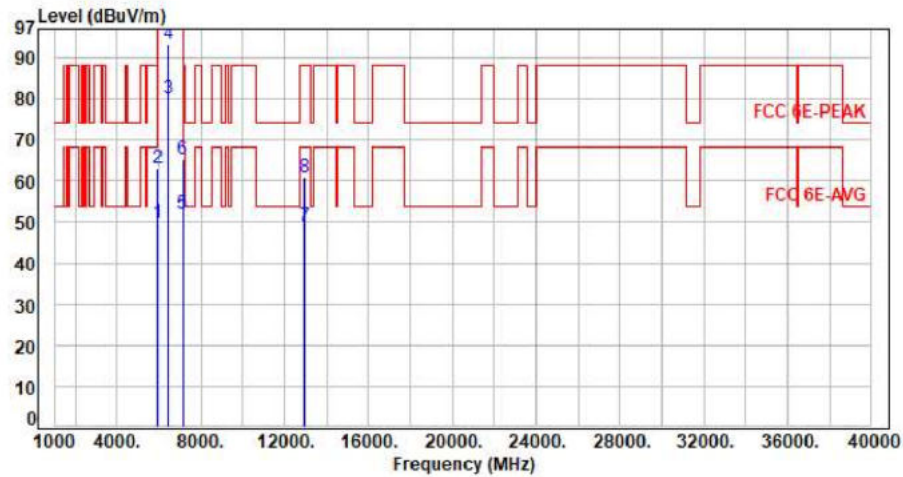

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.08	49.74	68.20	-18.46	Average	329	310	P
2	5925.00	7.66	55.28	62.94	88.20	-25.26	Peak	329	310	P
3	6465.00	8.32	71.71	80.03	200.00	-119.97	Average	329	310	P
4	6465.00	8.32	84.96	93.28	200.00	-106.72	Peak	329	310	P
5	7125.00	10.05	41.84	51.89	68.20	-16.31	Average	329	310	P
6	7125.00	10.05	55.30	65.35	88.20	-22.85	Peak	329	310	P
7	12930.00	19.27	29.67	48.94	68.20	-19.26	Average	100	225	P
8	12930.00	19.27	41.60	60.87	88.20	-27.33	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

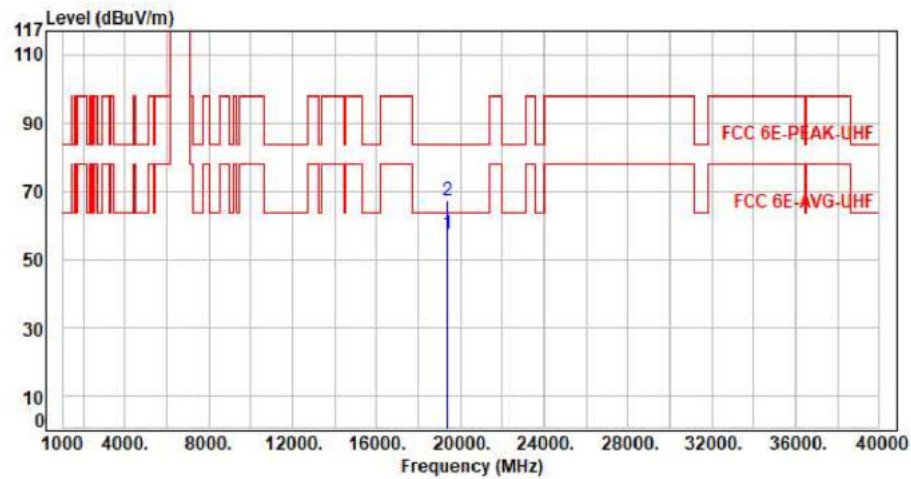


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	45.67	57.58	63.54	-5.96	Average	150	360	P
2	19395.00	11.91	55.08	66.99	83.54	-16.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

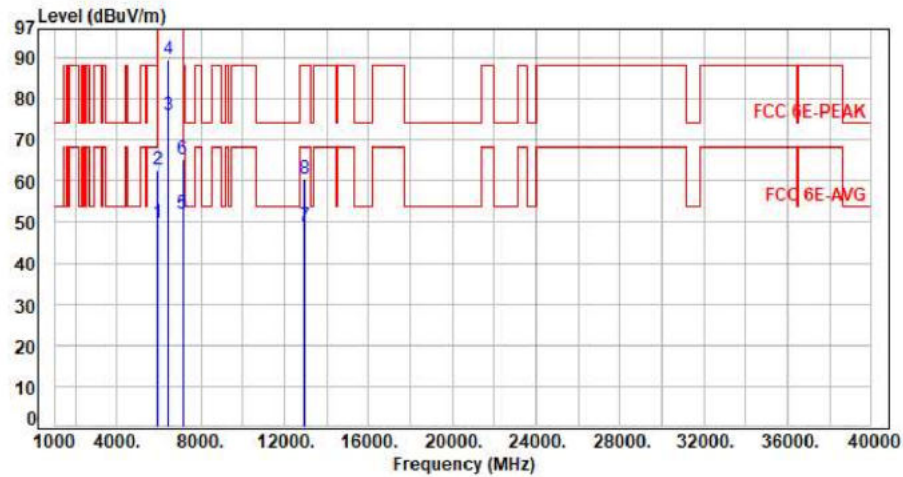

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.08	49.74	68.20	-18.46	Average	120	91	P
2	5925.00	7.66	54.94	62.60	88.20	-25.60	Peak	120	91	P
3	6465.00	8.32	67.75	76.07	200.00	-123.93	Average	120	91	P
4	6465.00	8.32	81.36	89.68	200.00	-110.32	Peak	120	91	P
5	7125.00	10.05	41.90	51.95	68.20	-16.25	Average	120	91	P
6	7125.00	10.05	55.09	65.14	88.20	-23.06	Peak	120	91	P
7	12930.00	19.27	29.86	49.13	68.20	-19.07	Average	100	146	P
8	12930.00	19.27	41.27	60.54	88.20	-27.66	Peak	100	146	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

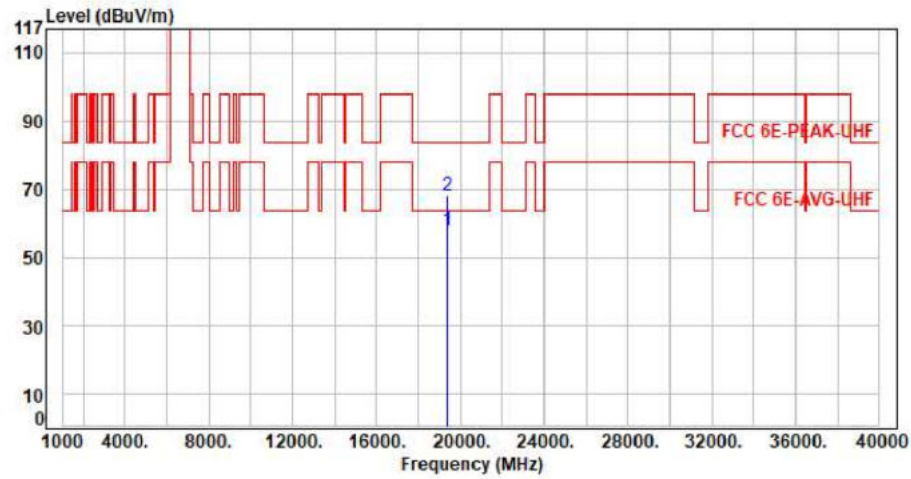


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	45.72	57.63	63.54	-5.91	Average	150	360	P
2	19395.00	11.91	56.27	68.18	83.54	-15.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

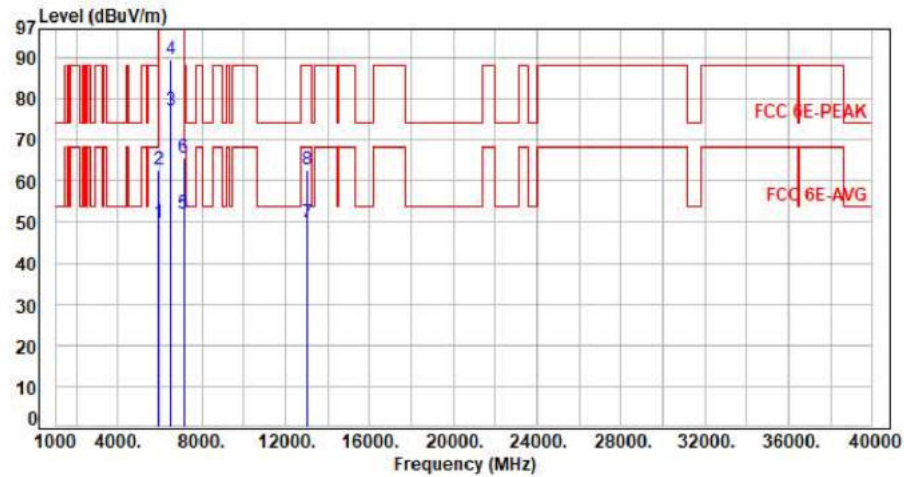

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.98	49.64	68.20	-18.56	Average	100	67	P
2	5925.00	7.66	54.89	62.55	88.20	-25.65	Peak	100	67	P
3	6525.00	8.45	68.77	77.22	200.00	-122.78	Average	100	67	P
4	6525.00	8.45	81.17	89.62	200.00	-110.38	Peak	100	67	P
5	7125.00	10.05	41.83	51.88	68.20	-16.32	Average	100	67	P
6	7125.00	10.05	55.65	65.70	88.20	-22.50	Peak	100	67	P
7	13050.00	20.02	29.65	49.67	68.20	-18.53	Average	100	158	P
8	13050.00	20.02	42.68	62.70	88.20	-25.50	Peak	100	158	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

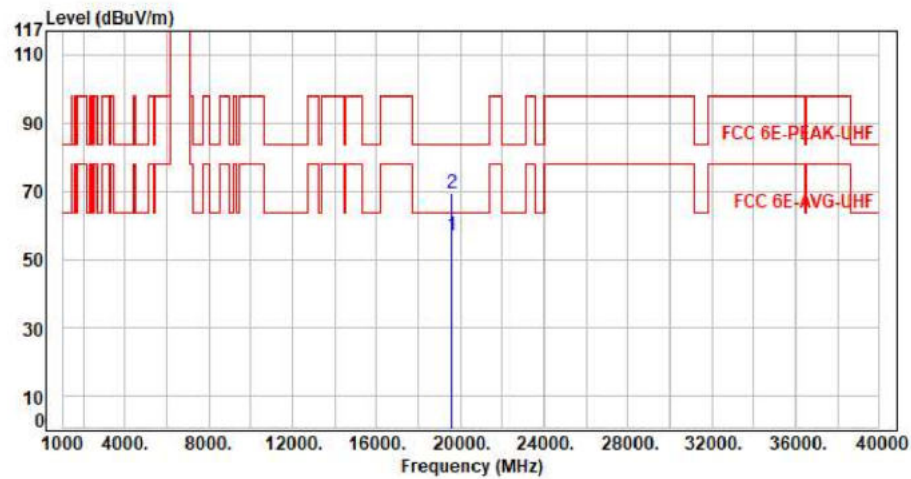


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	45.09	57.11	63.54	-6.43	Average	150	360	P
2	19575.00	12.02	57.27	69.29	83.54	-14.25	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

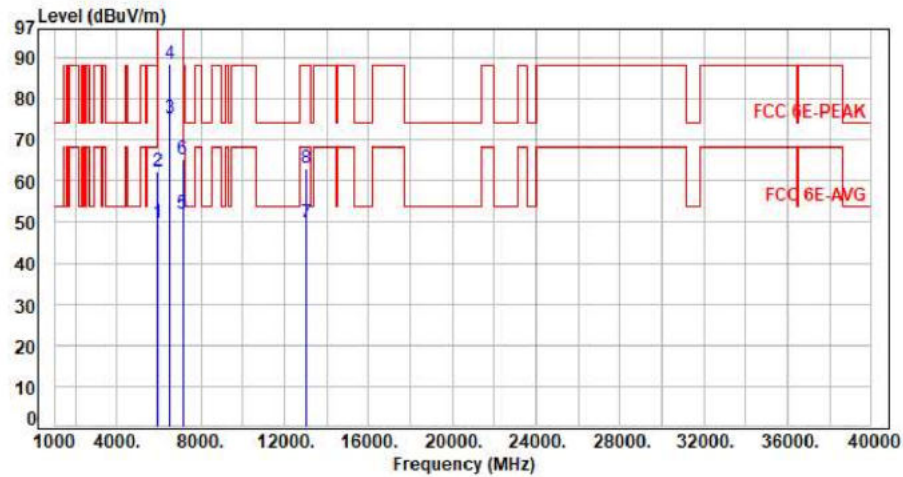


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.02	49.68	68.20	-18.52	Average	125	91	P
2	5925.00	7.66	54.84	62.50	88.20	-25.70	Peak	125	91	P
3	6525.00	8.45	66.64	75.09	200.00	-124.91	Average	125	91	P
4	6525.00	8.45	80.13	88.58	200.00	-111.42	Peak	125	91	P
5	7125.00	10.05	41.92	51.97	68.20	-16.23	Average	125	91	P
6	7125.00	10.05	55.18	65.23	88.20	-22.97	Peak	125	91	P
7	13050.00	20.02	29.81	49.83	68.20	-18.37	Average	100	154	P
8	13050.00	20.02	42.88	62.90	88.20	-25.30	Peak	100	154	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

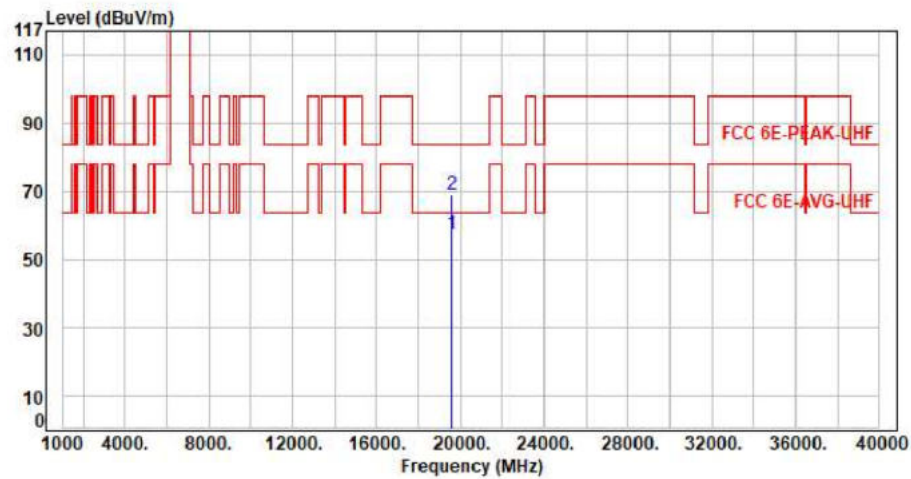


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	45.42	57.44	63.54	-6.10	Average	150	360	P
2	19575.00	12.02	56.72	68.74	83.54	-14.80	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

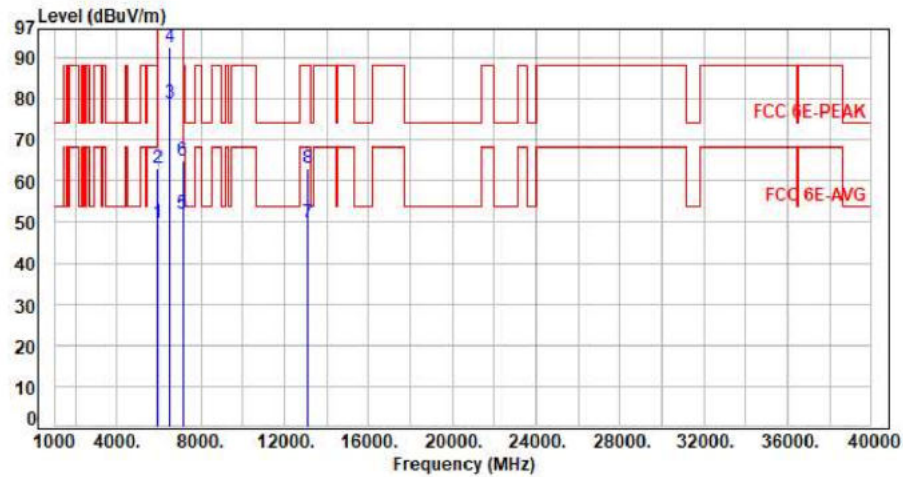


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.03	49.69	68.20	-18.51	Average	100	315	P
2	5925.00	7.66	55.43	63.09	88.20	-25.11	Peak	100	315	P
3	6545.00	8.55	70.51	79.06	200.00	-120.94	Average	100	315	P
4	6545.00	8.55	83.89	92.44	200.00	-107.56	Peak	100	315	P
5	7125.00	10.05	41.93	51.98	68.20	-16.22	Average	100	315	P
6	7125.00	10.05	54.97	65.02	88.20	-23.18	Peak	100	315	P
7	13090.00	20.20	29.66	49.86	68.20	-18.34	Average	100	162	P
8	13090.00	20.20	42.81	63.01	88.20	-25.19	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

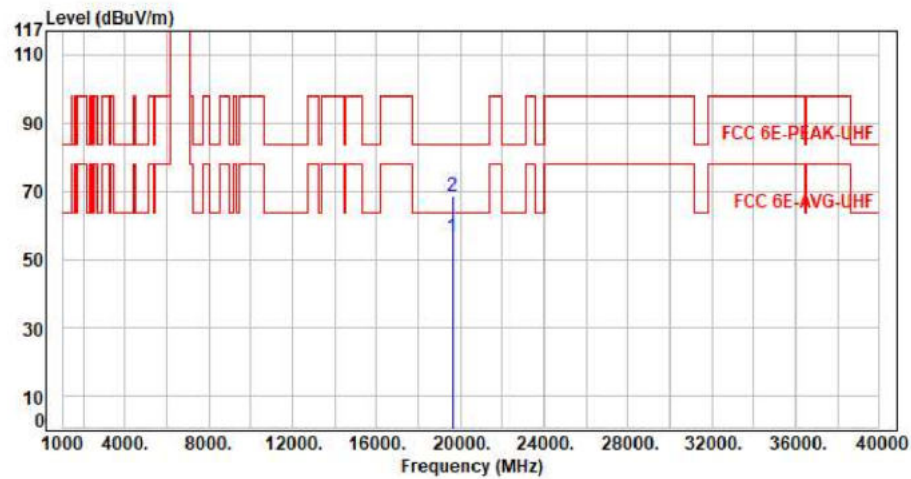


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	45.12	56.70	63.54	-6.84	Average	150	360	P
2	19635.00	11.58	56.99	68.57	83.54	-14.97	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

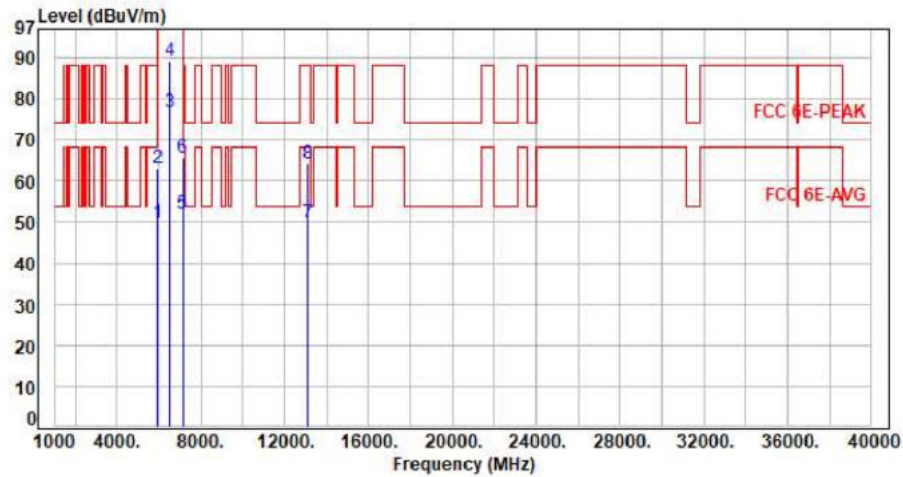


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.01	49.67	68.20	-18.53	Average	144	92	P
2	5925.00	7.66	55.36	63.02	88.20	-25.18	Peak	144	92	P
3	6545.00	8.55	67.99	76.54	200.00	-123.46	Average	144	92	P
4	6545.00	8.55	80.73	89.28	200.00	-110.72	Peak	144	92	P
5	7125.00	10.05	41.87	51.92	68.20	-16.28	Average	144	92	P
6	7125.00	10.05	55.60	65.65	88.20	-22.55	Peak	144	92	P
7	13090.00	20.20	29.62	49.82	68.20	-18.38	Average	100	264	P
8	13090.00	20.20	43.81	64.01	88.20	-24.19	Peak	100	264	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

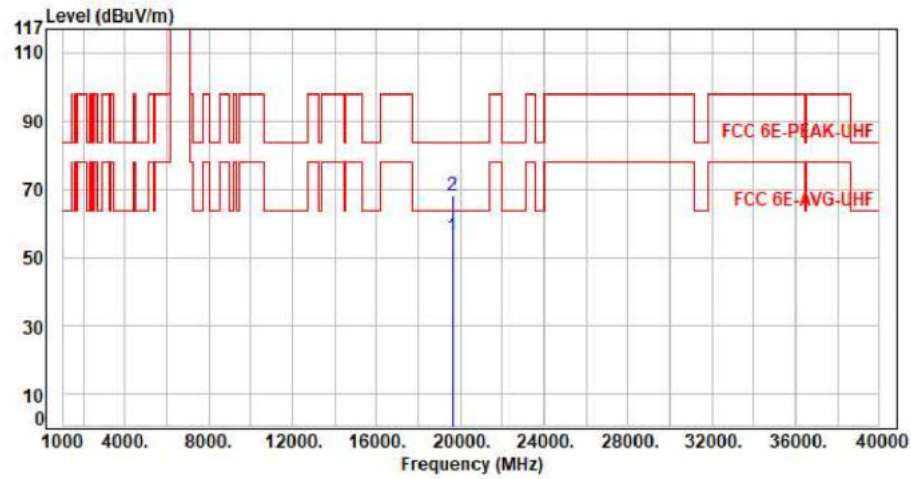


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	44.30	55.88	63.54	-7.66	Average	150	360	P
2	19635.00	11.58	56.29	67.87	83.54	-15.67	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

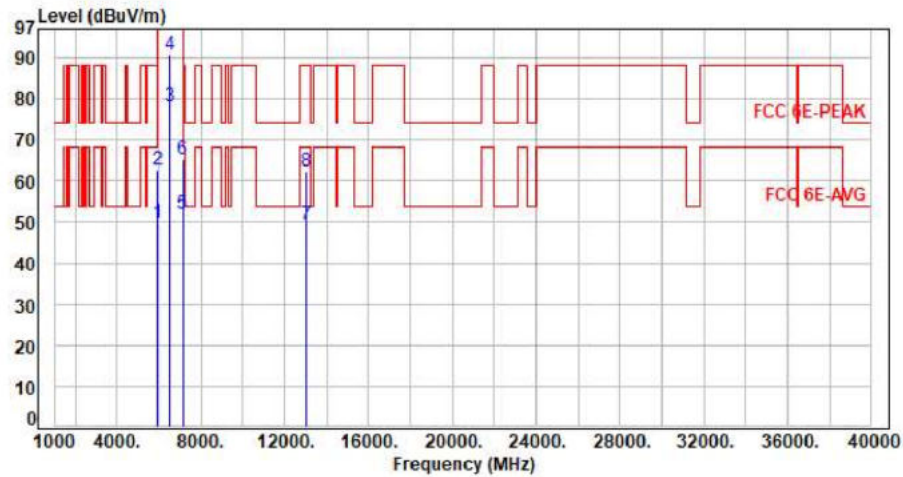


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.01	49.67	68.20	-18.53	Average	100	313	P
2	5925.00	7.66	55.08	62.74	88.20	-25.46	Peak	100	313	P
3	6505.00	8.37	69.83	78.20	200.00	-121.80	Average	100	313	P
4	6505.00	8.37	82.31	90.68	200.00	-109.32	Peak	100	313	P
5	7125.00	10.05	41.80	51.85	68.20	-16.35	Average	100	313	P
6	7125.00	10.05	55.36	65.41	88.20	-22.79	Peak	100	313	P
7	13010.00	19.69	29.87	49.56	68.20	-18.64	Average	100	166	P
8	13010.00	19.69	42.78	62.47	88.20	-25.73	Peak	100	166	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

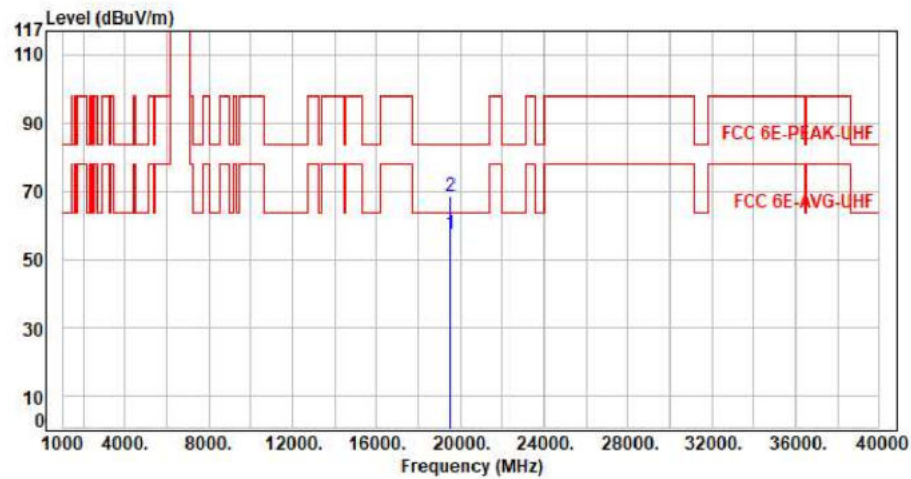


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.28	57.19	63.54	-6.35	Average	150	360	P
2	19515.00	11.91	56.81	68.72	83.54	-14.82	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

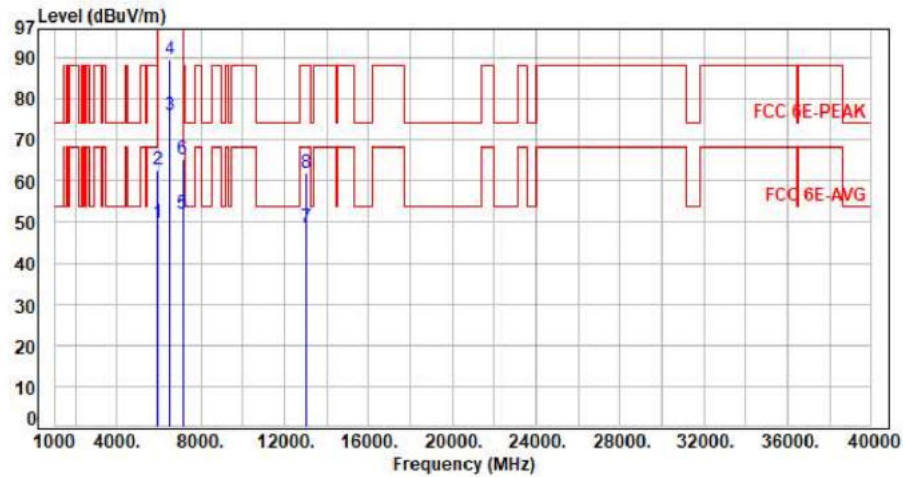

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.03	49.69	68.20	-18.51	Average	112	90	P
2	5925.00	7.66	55.14	62.80	88.20	-25.40	Peak	112	90	P
3	6505.00	8.37	67.57	75.94	200.00	-124.06	Average	112	90	P
4	6505.00	8.37	81.36	89.73	200.00	-110.27	Peak	112	90	P
5	7125.00	10.05	41.84	51.89	68.20	-16.31	Average	112	90	P
6	7125.00	10.05	55.16	65.21	88.20	-22.99	Peak	112	90	P
7	13010.00	19.69	29.09	48.78	68.20	-19.42	Average	100	198	P
8	13010.00	19.69	42.17	61.86	88.20	-26.34	Peak	100	198	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

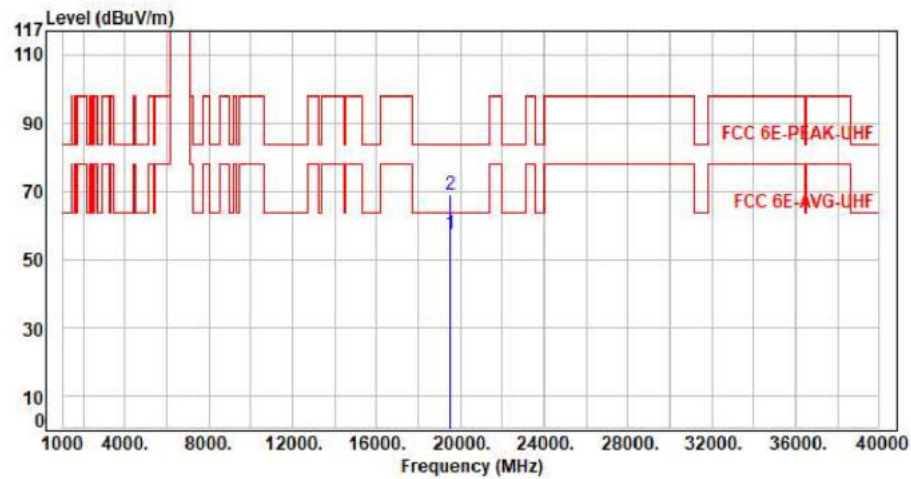


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.28	57.19	63.54	-6.35	Average	150	360	P
2	19515.00	11.91	56.92	68.83	83.54	-14.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

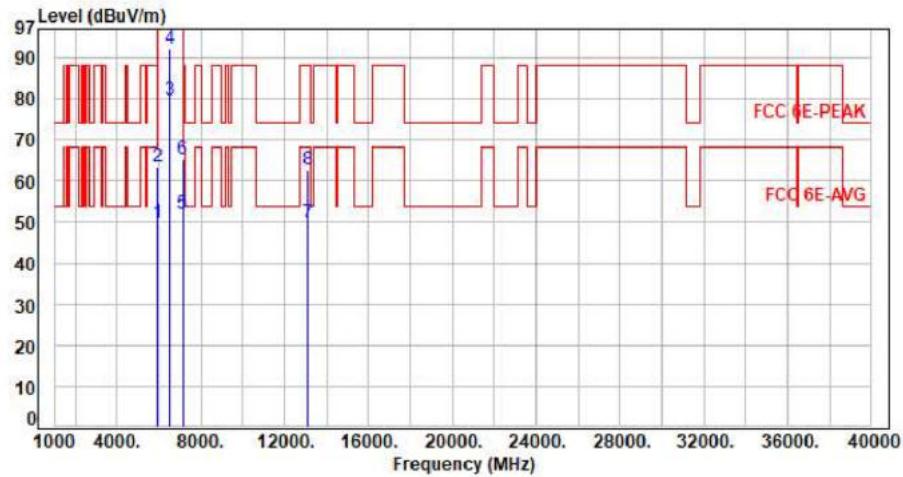

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.23	49.89	68.20	-18.31	Average	325	312	P
2	5925.00	7.66	55.74	63.40	88.20	-24.80	Peak	325	312	P
3	6535.00	8.50	71.04	79.54	200.00	-120.46	Average	325	312	P
4	6535.00	8.50	83.80	92.30	200.00	-107.70	Peak	325	312	P
5	7125.00	10.05	41.84	51.89	68.20	-16.31	Average	325	312	P
6	7125.00	10.05	55.29	65.34	88.20	-22.86	Peak	325	312	P
7	13070.00	20.11	29.61	49.72	68.20	-18.48	Average	100	123	P
8	13070.00	20.11	42.68	62.79	88.20	-25.41	Peak	100	123	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

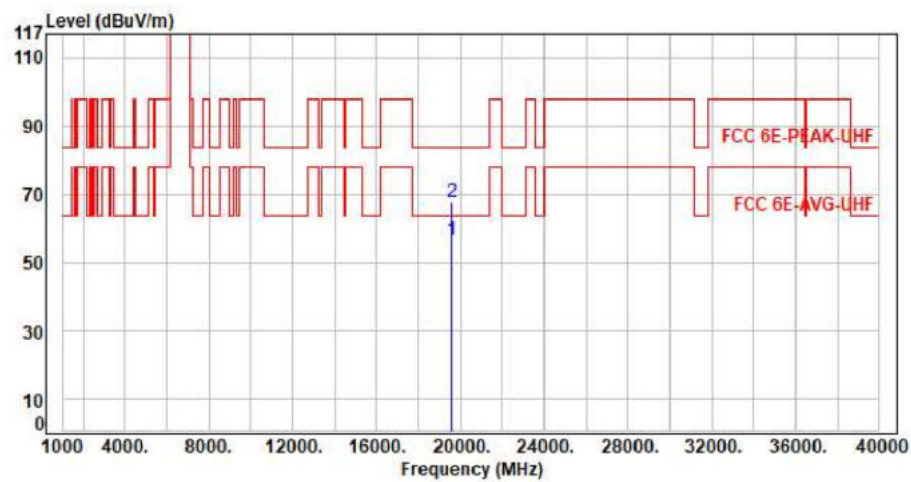

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	44.75	56.53	63.54	-7.01	Average	150	360	P
2	19605.00	11.78	55.85	67.63	83.54	-15.91	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

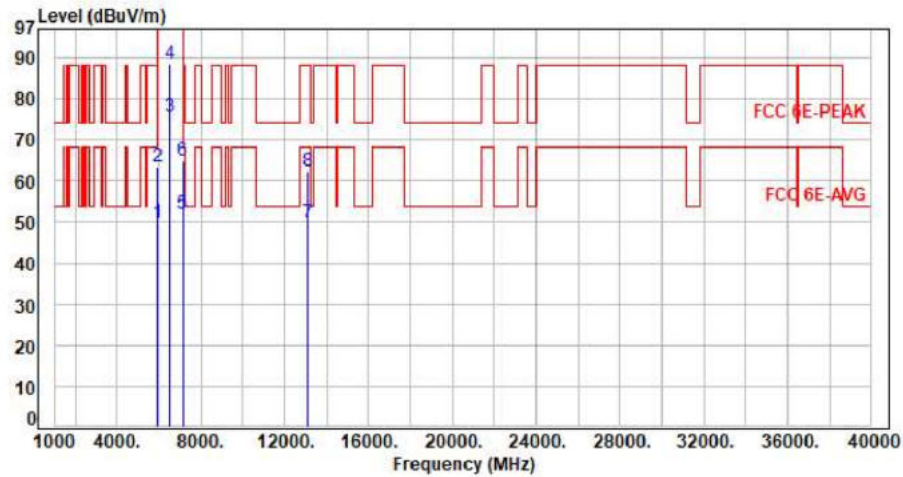


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.09	49.75	68.20	-18.45	Average	130	91	P
2	5925.00	7.66	55.63	63.29	88.20	-24.91	Peak	130	91	P
3	6535.00	8.50	67.24	75.74	200.00	-124.26	Average	130	91	P
4	6535.00	8.50	79.92	88.42	200.00	-111.58	Peak	130	91	P
5	7125.00	10.05	41.87	51.92	68.20	-16.28	Average	130	91	P
6	7125.00	10.05	55.00	65.05	88.20	-23.15	Peak	130	91	P
7	13070.00	20.11	29.66	49.77	68.20	-18.43	Average	100	152	P
8	13070.00	20.11	42.17	62.28	88.20	-25.92	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

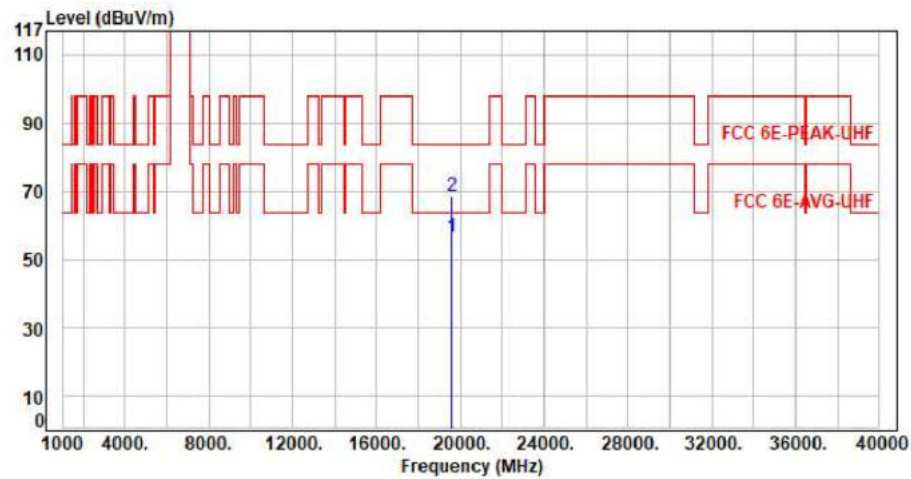


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	44.82	56.60	63.54	-6.94	Average	150	360	P
2	19605.00	11.78	56.69	68.47	83.54	-15.07	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

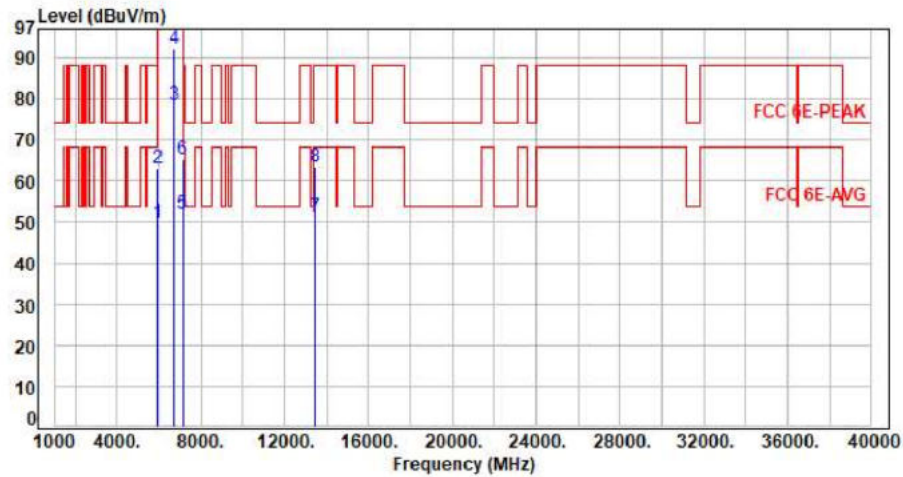

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.95	49.61	68.20	-18.59	Average	100	66	P
2	5925.00	7.66	55.23	62.89	88.20	-25.31	Peak	100	66	P
3	6715.00	9.29	69.41	78.70	200.00	-121.30	Average	100	66	P
4	6715.00	9.29	82.87	92.16	200.00	-107.84	Peak	100	66	P
5	7125.00	10.05	41.94	51.99	68.20	-16.21	Average	100	66	P
6	7125.00	10.05	55.25	65.30	88.20	-22.90	Peak	100	66	P
7	13430.00	21.71	29.64	51.35	68.20	-16.85	Average	100	142	P
8	13430.00	21.71	41.69	63.40	88.20	-24.80	Peak	100	142	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

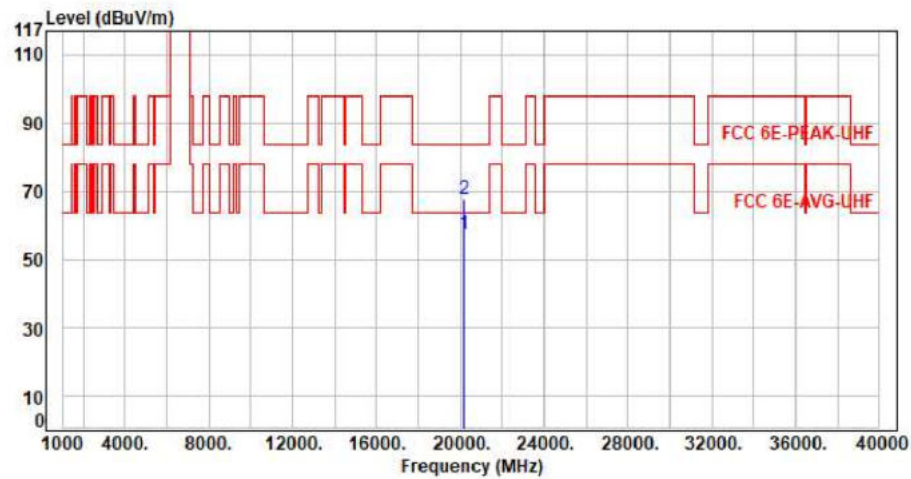


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	45.74	57.17	63.54	-6.37	Average	150	360	P
2	20145.00	11.43	56.30	67.73	83.54	-15.81	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

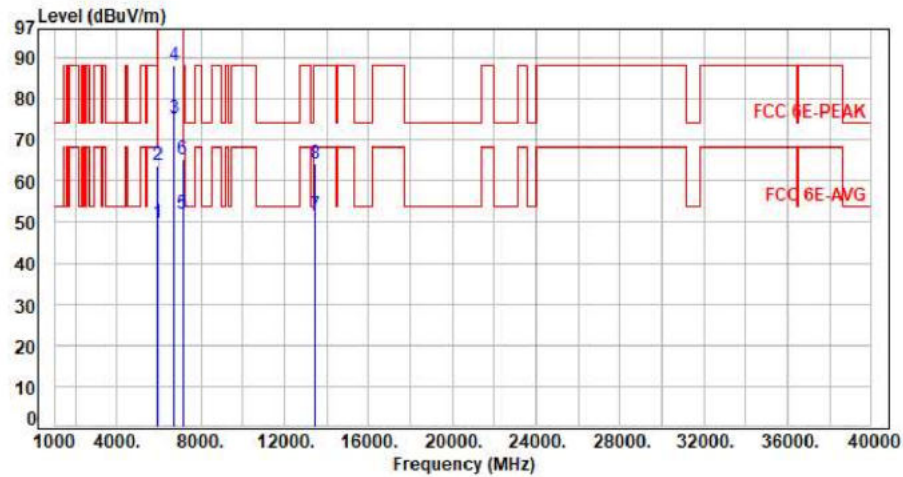

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.01	49.67	68.20	-18.53	Average	119	90	P
2	5925.00	7.66	56.27	63.93	88.20	-24.27	Peak	119	90	P
3	6715.00	9.29	65.86	75.15	200.00	-124.85	Average	119	90	P
4	6715.00	9.29	78.93	88.22	200.00	-111.78	Peak	119	90	P
5	7125.00	10.05	41.88	51.93	68.20	-16.27	Average	119	90	P
6	7125.00	10.05	55.10	65.15	88.20	-23.05	Peak	119	90	P
7	13430.00	21.71	29.88	51.59	68.20	-16.61	Average	100	146	P
8	13430.00	21.71	42.61	64.32	88.20	-23.88	Peak	100	146	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

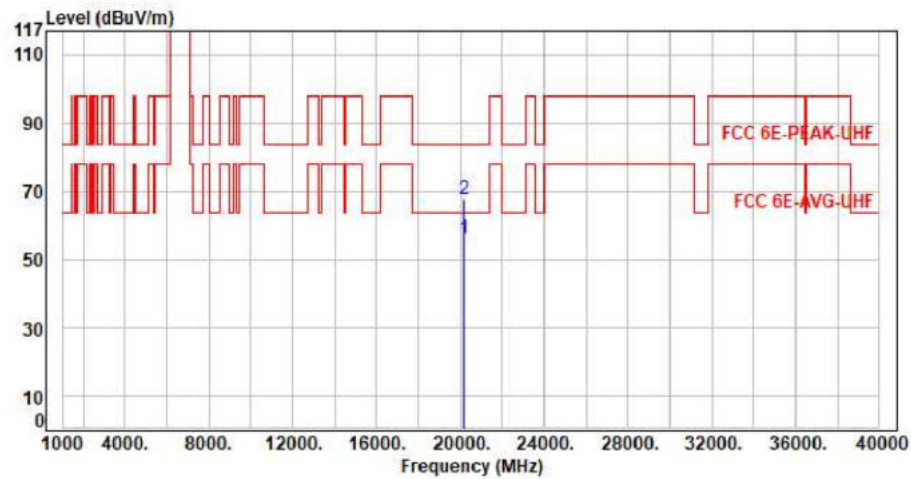


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	44.47	55.90	63.54	-7.64	Average	150	360	P
2	20145.00	11.43	56.21	67.64	83.54	-15.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

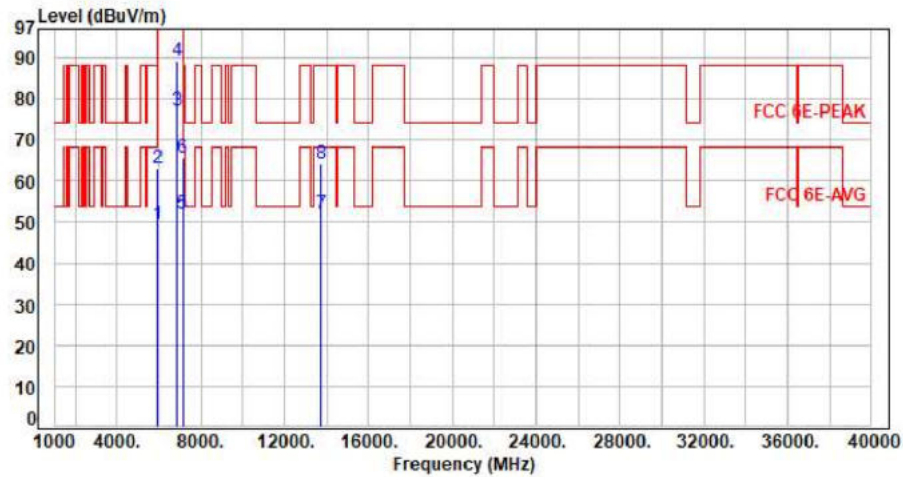

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.91	49.57	68.20	-18.63	Average	103	320	P
2	5925.00	7.66	55.57	63.23	88.20	-24.97	Peak	103	320	P
3	6855.00	9.50	67.70	77.20	200.00	-122.80	Average	103	320	P
4	6855.00	9.50	79.85	89.35	200.00	-110.65	Peak	103	320	P
5	7125.00	10.05	41.86	51.91	68.20	-16.29	Average	103	320	P
6	7125.00	10.05	55.71	65.76	88.20	-22.44	Peak	103	320	P
7	13710.00	22.48	29.67	52.15	68.20	-16.05	Average	100	231	P
8	13710.00	22.48	41.67	64.15	88.20	-24.05	Peak	100	231	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

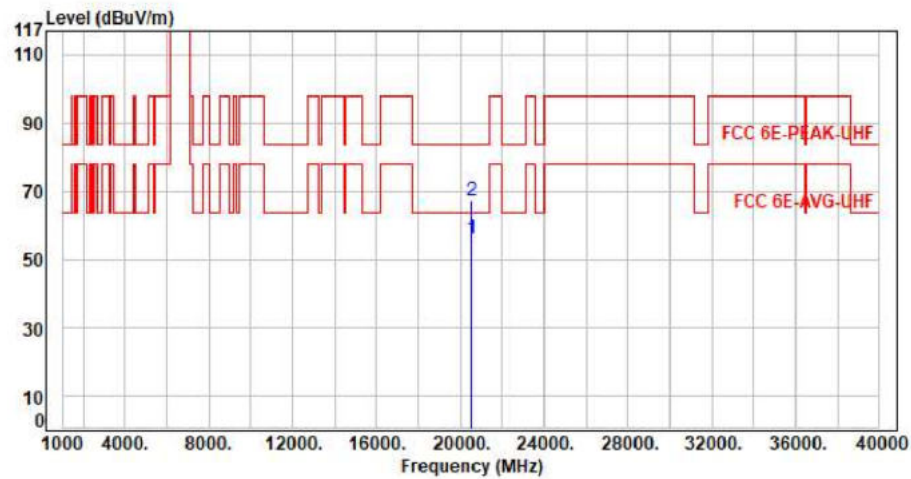


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	44.58	55.96	63.54	-7.58	Average	150	360	P
2	20565.00	11.38	55.79	67.17	83.54	-16.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

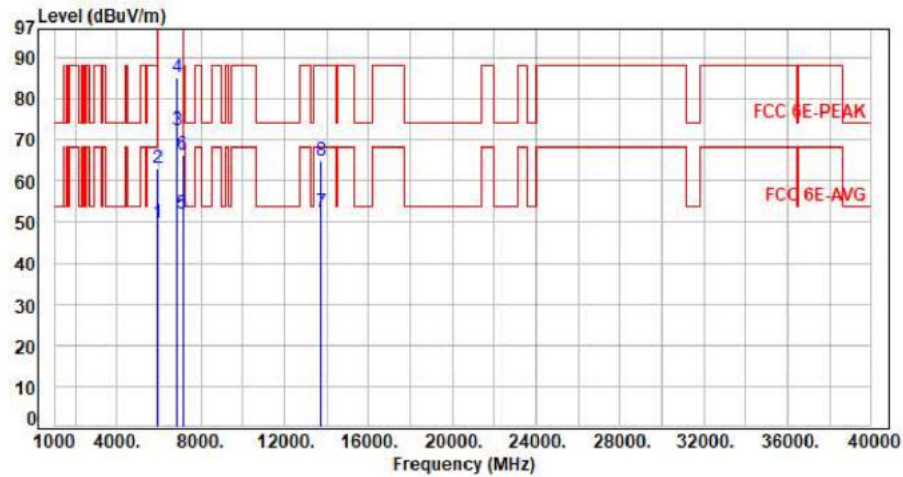


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.04	49.70	68.20	-18.50	Average	156	101	P
2	5925.00	7.66	55.23	62.89	88.20	-25.31	Peak	156	101	P
3	6855.00	9.50	62.61	72.11	200.00	-127.89	Average	156	101	P
4	6855.00	9.50	75.60	85.10	200.00	-114.90	Peak	156	101	P
5	7125.00	10.05	41.95	52.00	68.20	-16.20	Average	156	101	P
6	7125.00	10.05	56.43	66.48	88.20	-21.72	Peak	156	101	P
7	13710.00	22.48	29.79	52.27	68.20	-15.93	Average	100	260	P
8	13710.00	22.48	42.37	64.85	88.20	-23.35	Peak	100	260	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

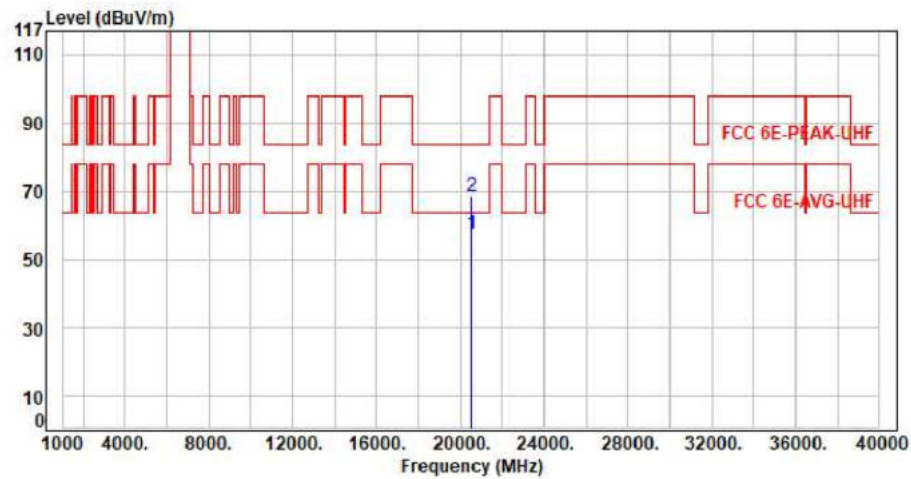


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	45.79	57.17	63.54	-6.37	Average	150	360	P
2	20565.00	11.38	57.21	68.59	83.54	-14.95	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

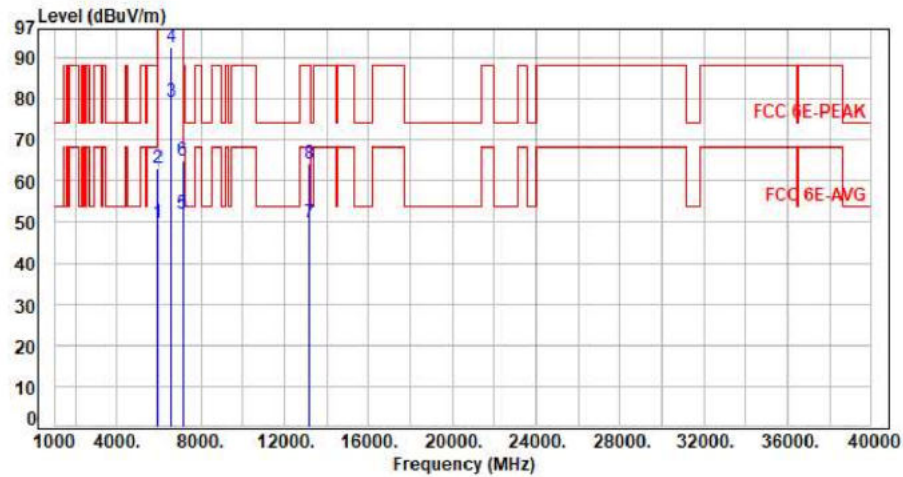

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.99	49.65	68.20	-18.55	Average	335	312	P
2	5925.00	7.66	55.34	63.00	88.20	-25.20	Peak	335	312	P
3	6565.00	8.67	70.71	79.38	200.00	-120.62	Average	335	312	P
4	6565.00	8.67	84.03	92.70	200.00	-107.30	Peak	335	312	P
5	7125.00	10.05	41.77	51.82	68.20	-16.38	Average	335	312	P
6	7125.00	10.05	54.83	64.88	88.20	-23.32	Peak	335	312	P
7	13130.00	20.32	29.44	49.76	68.20	-18.44	Average	100	143	P
8	13130.00	20.32	43.81	64.13	88.20	-24.07	Peak	100	143	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor