




For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

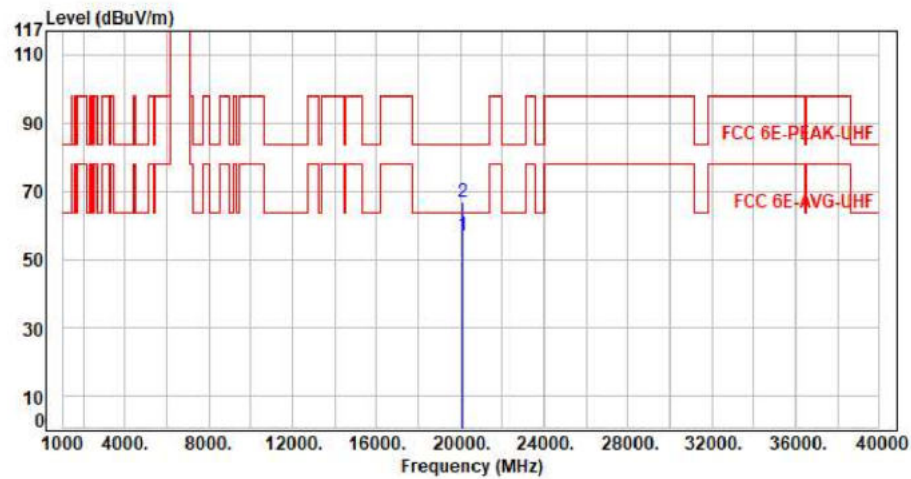

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	45.76	57.16	63.54	-6.38	Average	150	360	P
2	20115.00	11.40	55.46	66.86	83.54	-16.68	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

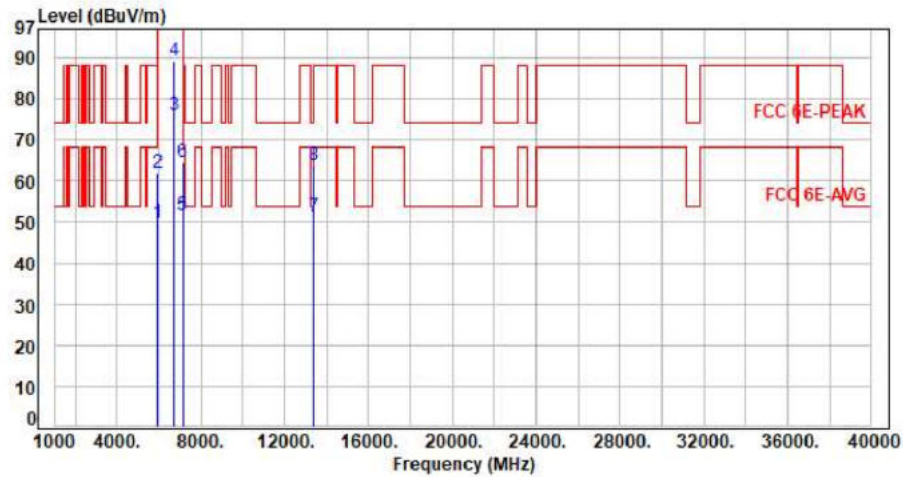


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.06	49.72	68.20	-18.48	Average	132	85	P
2	5925.00	7.66	54.25	61.91	88.20	-26.29	Peak	132	85	P
3	6705.00	9.25	66.58	75.83	200.00	-124.17	Average	132	85	P
4	6705.00	9.25	80.18	89.43	200.00	-110.57	Peak	132	85	P
5	7125.00	10.05	41.67	51.72	68.20	-16.48	Average	132	85	P
6	7125.00	10.05	54.60	64.65	88.20	-23.55	Peak	132	85	P
7	13410.00	21.62	29.58	51.20	68.20	-17.00	Average	100	135	P
8	13410.00	21.62	42.31	63.93	88.20	-24.27	Peak	100	135	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

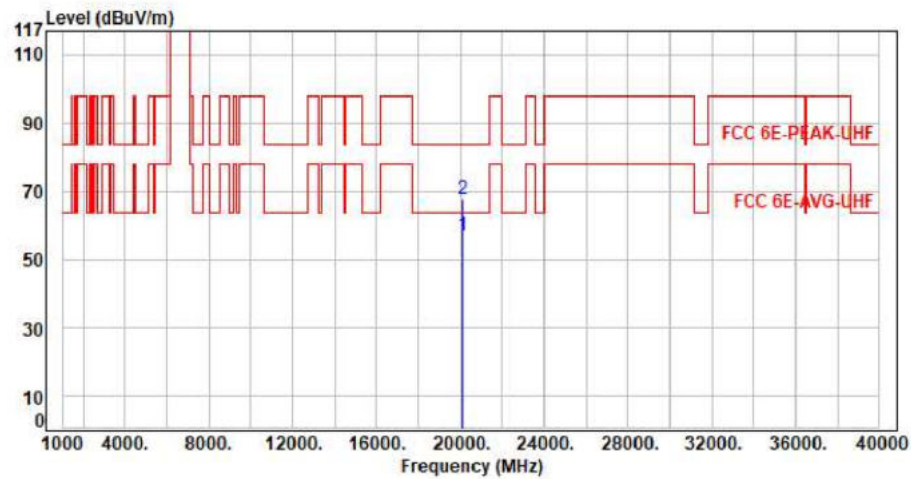


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	45.47	56.87	63.54	-6.67	Average	150	360	P
2	20115.00	11.40	56.13	67.53	83.54	-16.01	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

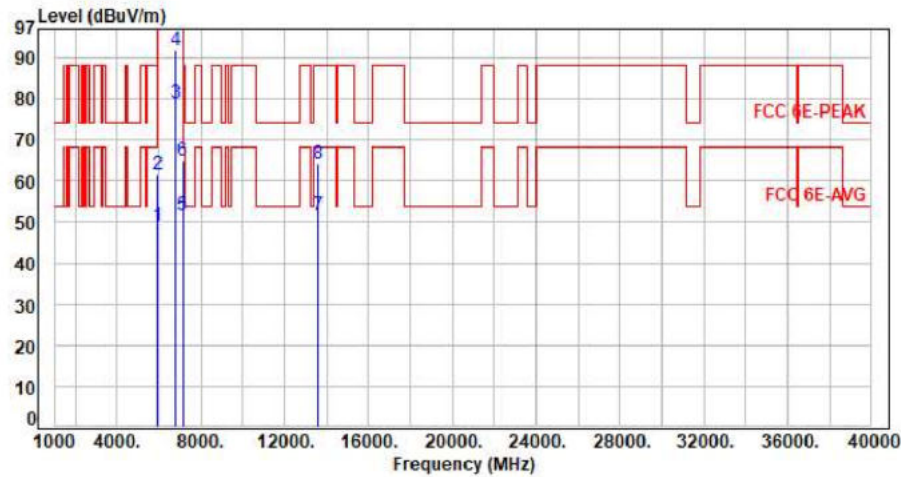

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.36	49.02	68.20	-19.18	Average	100	297	P
2	5925.00	7.66	54.09	61.75	88.20	-26.45	Peak	100	297	P
3	6785.00	9.46	69.33	78.79	200.00	-121.21	Average	100	297	P
4	6785.00	9.46	82.32	91.78	200.00	-108.22	Peak	100	297	P
5	7125.00	10.05	41.51	51.56	68.20	-16.64	Average	100	297	P
6	7125.00	10.05	54.91	64.96	88.20	-23.24	Peak	100	297	P
7	13570.00	22.06	29.55	51.61	68.20	-16.59	Average	100	166	P
8	13570.00	22.06	42.08	64.14	88.20	-24.06	Peak	100	166	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

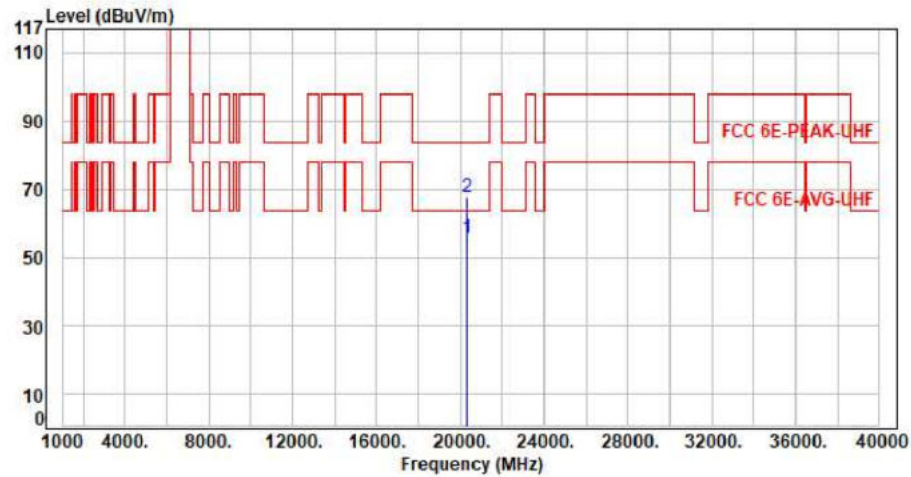


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	44.55	55.61	63.54	-7.93	Average	150	360	P
2	20355.00	11.06	56.75	67.81	83.54	-15.73	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

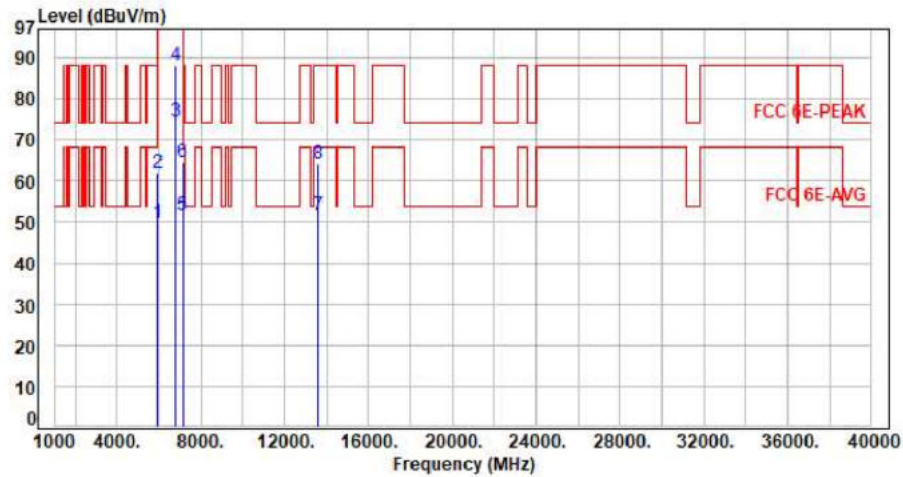

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.02	49.68	68.20	-18.52	Average	108	106	P
2	5925.00	7.66	54.36	62.02	88.20	-26.18	Peak	108	106	P
3	6785.00	9.46	65.08	74.54	200.00	-125.46	Average	108	106	P
4	6785.00	9.46	78.75	88.21	200.00	-111.79	Peak	108	106	P
5	7125.00	10.05	41.64	51.69	68.20	-16.51	Average	108	106	P
6	7125.00	10.05	54.65	64.70	88.20	-23.50	Peak	108	106	P
7	13570.00	22.06	29.47	51.53	68.20	-16.67	Average	100	261	P
8	13570.00	22.06	42.20	64.26	88.20	-23.94	Peak	100	261	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

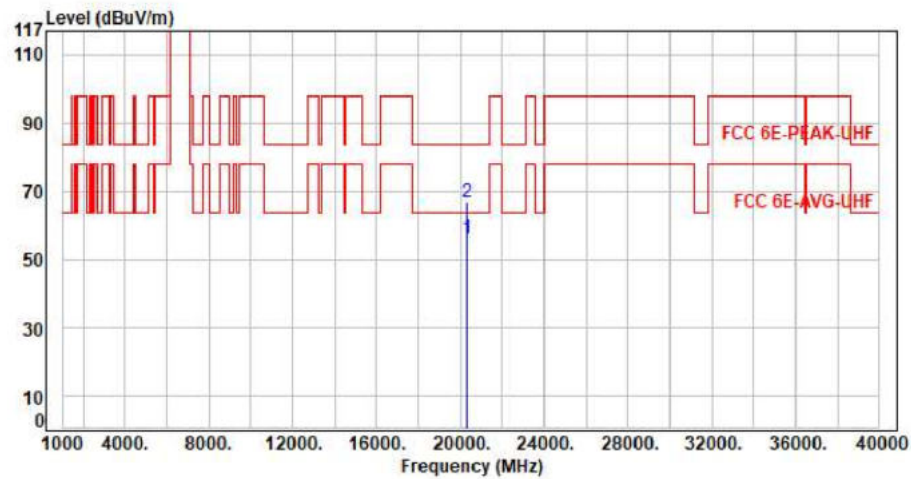


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	45.11	56.17	63.54	-7.37	Average	150	360	P
2	20355.00	11.06	55.55	66.61	83.54	-16.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

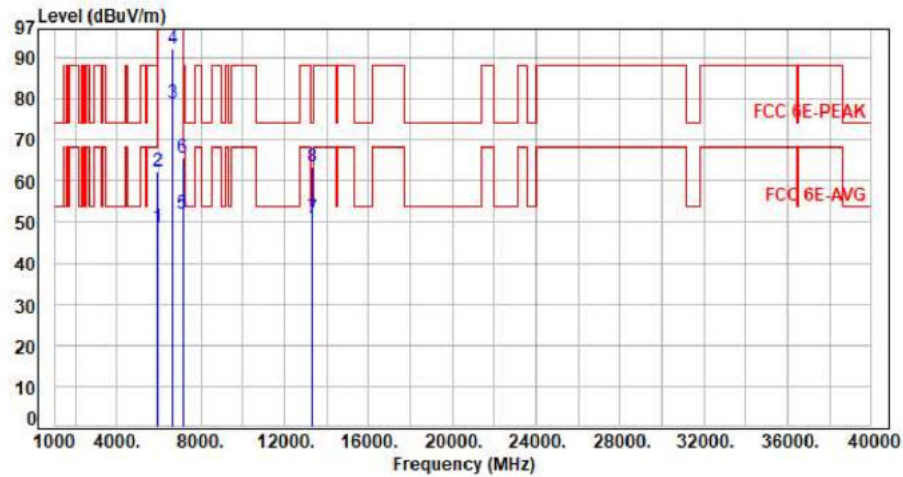

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.07	48.73	68.20	-19.47	Average	100	57	P
2	5925.00	7.66	54.62	62.28	88.20	-25.92	Peak	100	57	P
3	6665.00	9.08	69.85	78.93	200.00	-121.07	Average	100	57	P
4	6665.00	9.08	83.17	92.25	200.00	-107.75	Peak	100	57	P
5	7125.00	10.05	42.06	52.11	68.20	-16.09	Average	100	57	P
6	7125.00	10.05	55.61	65.66	88.20	-22.54	Peak	100	57	P
7	13330.00	21.30	29.63	50.93	54.00	-3.07	Average	100	133	P
8	13330.00	21.30	42.20	63.50	74.00	-10.50	Peak	100	133	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

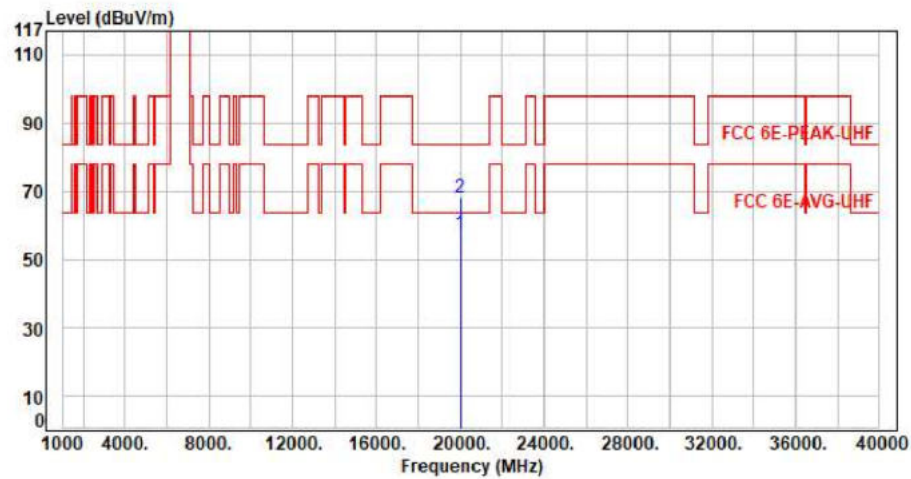


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	45.48	57.18	63.54	-6.36	Average	150	360	P
2	19995.00	11.70	56.19	67.89	83.54	-15.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

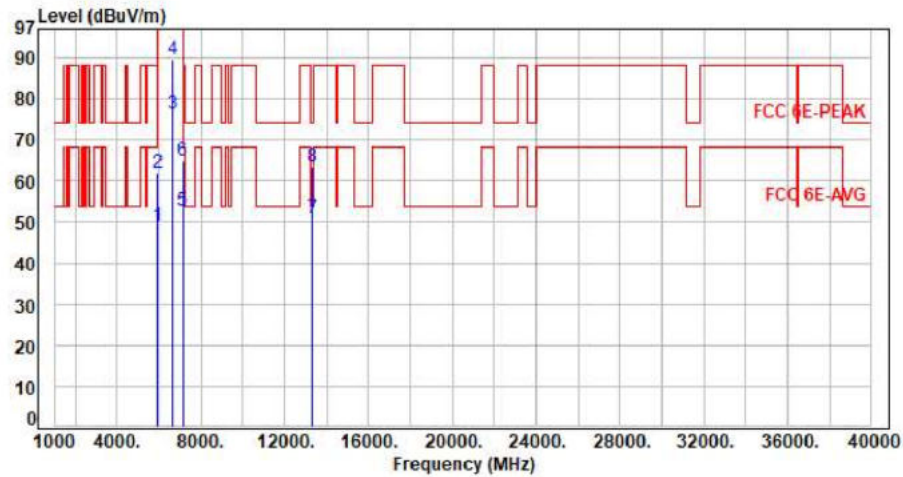


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.36	49.02	68.20	-19.18	Average	100	89	P
2	5925.00	7.66	54.23	61.89	88.20	-26.31	Peak	100	89	P
3	6665.00	9.08	67.39	76.47	200.00	-123.53	Average	100	89	P
4	6665.00	9.08	80.36	89.44	200.00	-110.56	Peak	100	89	P
5	7125.00	10.05	42.61	52.66	68.20	-15.54	Average	100	89	P
6	7125.00	10.05	54.68	64.73	88.20	-23.47	Peak	100	89	P
7	13330.00	21.30	29.49	50.79	54.00	-3.21	Average	100	195	P
8	13330.00	21.30	42.05	63.35	74.00	-10.65	Peak	100	195	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

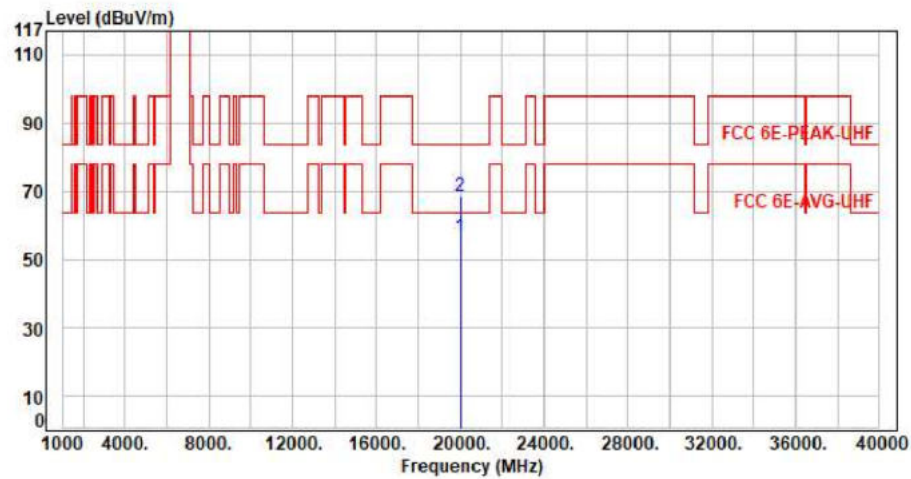


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	44.95	56.65	63.54	-6.89	Average	150	360	P
2	19995.00	11.70	56.91	68.61	83.54	-14.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

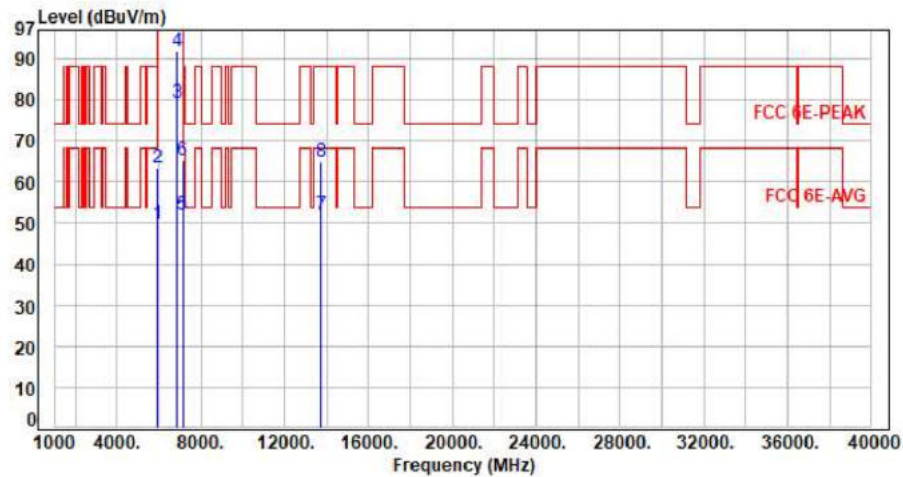

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.08	49.74	68.20	-18.46	Average	111	297	P
2	5925.00	7.66	55.93	63.59	88.20	-24.61	Peak	111	297	P
3	6875.00	9.55	69.56	79.11	200.00	-120.89	Average	111	297	P
4	6875.00	9.55	82.25	91.80	200.00	-108.20	Peak	111	297	P
5	7125.00	10.05	42.08	52.13	68.20	-16.07	Average	111	297	P
6	7125.00	10.05	55.13	65.18	88.20	-23.02	Peak	111	297	P
7	13750.00	22.65	29.44	52.09	68.20	-16.11	Average	100	124	P
8	13750.00	22.65	42.19	64.84	88.20	-23.36	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

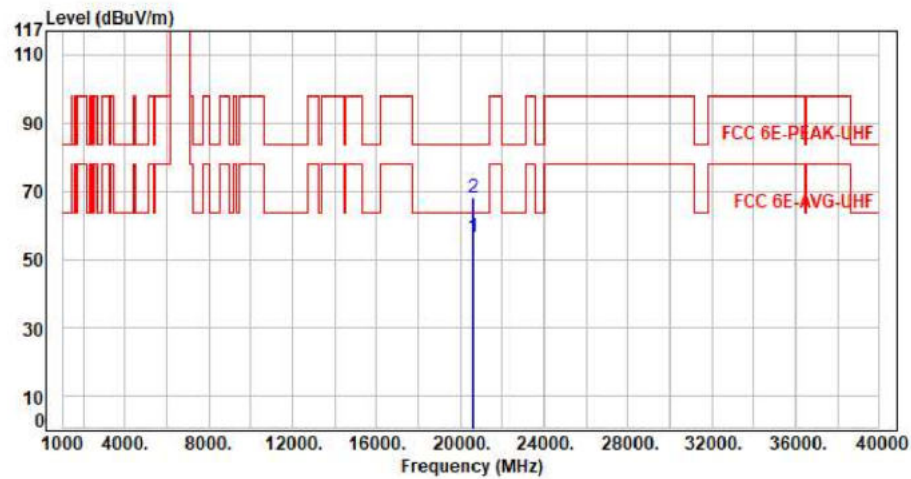

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	45.33	56.47	63.54	-7.07	Average	150	360	P
2	20625.00	11.14	56.99	68.13	83.54	-15.41	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

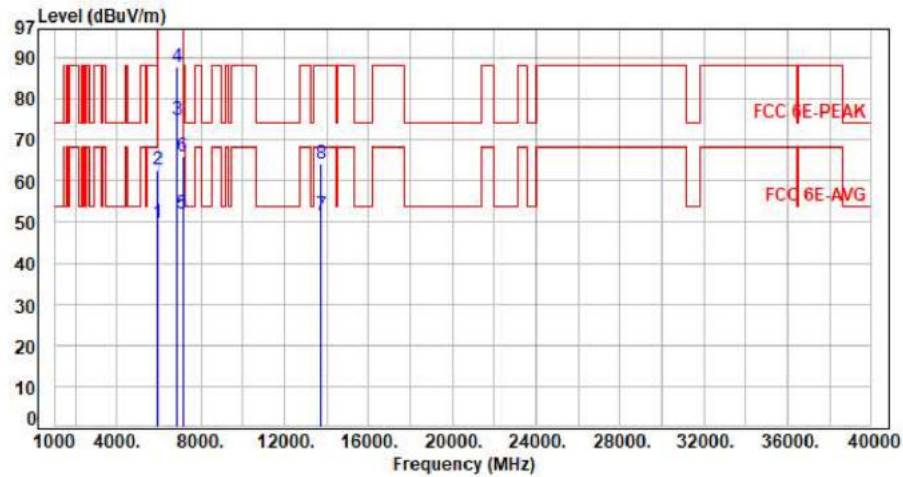

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.06	49.72	68.20	-18.48	Average	128	105	P
2	5925.00	7.66	55.12	62.78	88.20	-25.42	Peak	128	105	P
3	6875.00	9.55	65.26	74.81	200.00	-125.19	Average	128	105	P
4	6875.00	9.55	78.40	87.95	200.00	-112.05	Peak	128	105	P
5	7125.00	10.05	41.94	51.99	68.20	-16.21	Average	128	105	P
6	7125.00	10.05	55.82	65.87	88.20	-22.33	Peak	128	105	P
7	13750.00	22.65	29.16	51.81	68.20	-16.39	Average	100	258	P
8	13750.00	22.65	41.69	64.34	88.20	-23.86	Peak	100	258	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

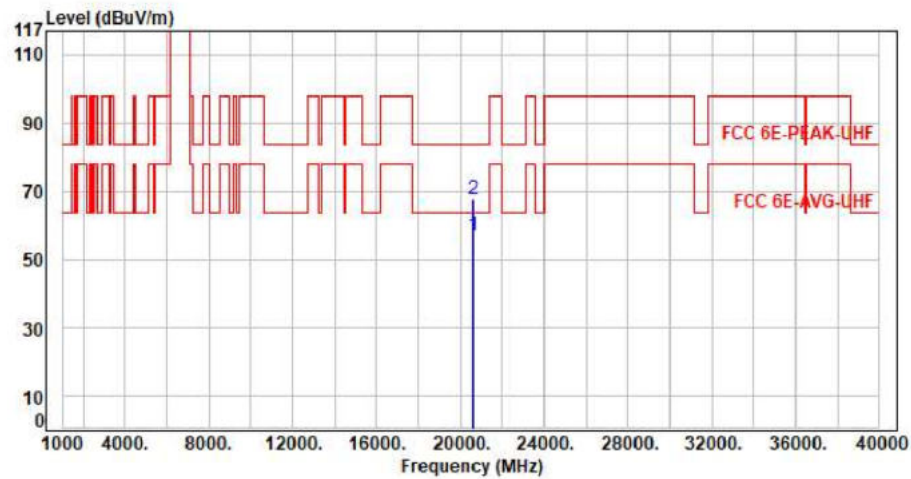


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	45.65	56.79	63.54	-6.75	Average	150	360	P
2	20625.00	11.14	56.28	67.42	83.54	-16.12	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

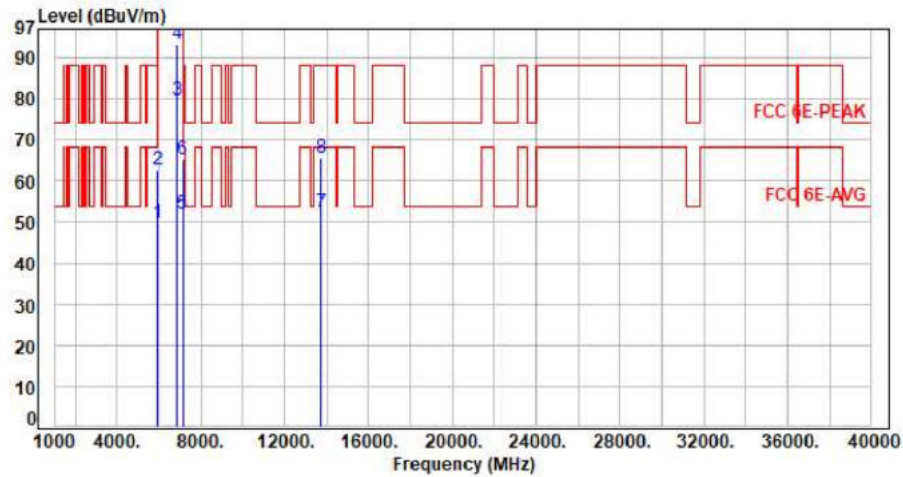


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.08	49.74	68.20	-18.46	Average	272	293	P
2	5925.00	7.66	55.18	62.84	88.20	-25.36	Peak	272	293	P
3	6885.00	9.56	70.15	79.71	200.00	-120.29	Average	272	293	P
4	6885.00	9.56	83.77	93.33	200.00	-106.67	Peak	272	293	P
5	7125.00	10.05	41.96	52.01	68.20	-16.19	Average	272	293	P
6	7125.00	10.05	55.32	65.37	88.20	-22.83	Peak	272	293	P
7	13770.00	22.69	29.61	52.30	68.20	-15.90	Average	100	132	P
8	13770.00	22.69	42.91	65.60	88.20	-22.60	Peak	100	132	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

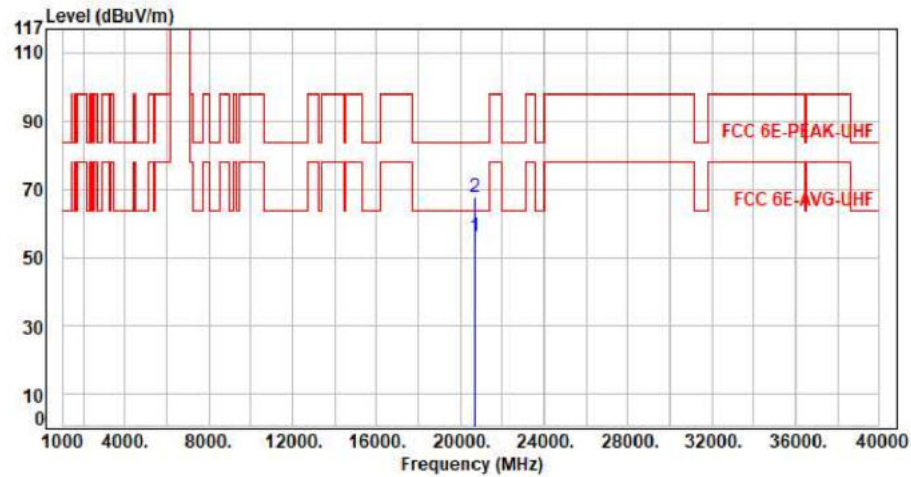


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.11	56.10	63.54	-7.44	Average	150	360	P
2	20655.00	10.99	56.42	67.41	83.54	-16.13	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

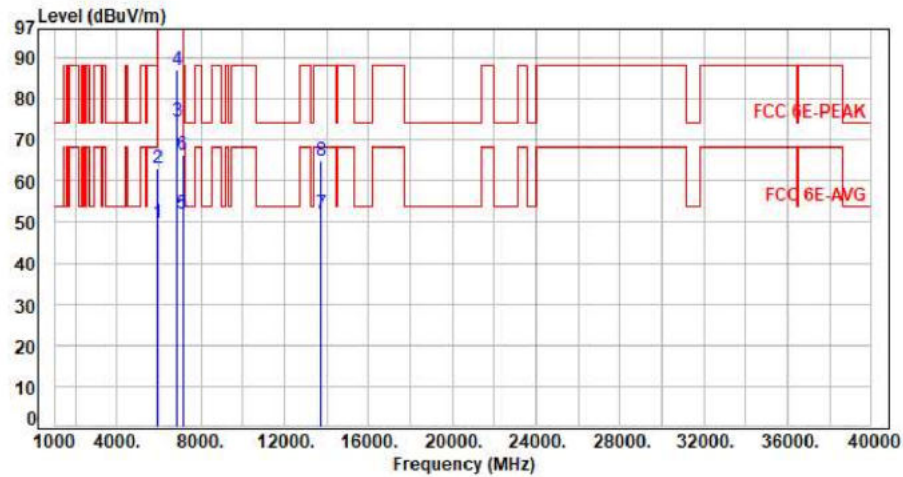

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.08	49.74	68.20	-18.46	Average	125	104	P
2	5925.00	7.66	55.55	63.21	88.20	-24.99	Peak	125	104	P
3	6885.00	9.56	65.13	74.69	200.00	-125.31	Average	125	104	P
4	6885.00	9.56	77.57	87.13	200.00	-112.87	Peak	125	104	P
5	7125.00	10.05	42.02	52.07	68.20	-16.13	Average	125	104	P
6	7125.00	10.05	56.20	66.25	88.20	-21.95	Peak	125	104	P
7	13770.00	22.69	29.42	52.11	68.20	-16.09	Average	100	193	P
8	13770.00	22.69	42.19	64.88	88.20	-23.32	Peak	100	193	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

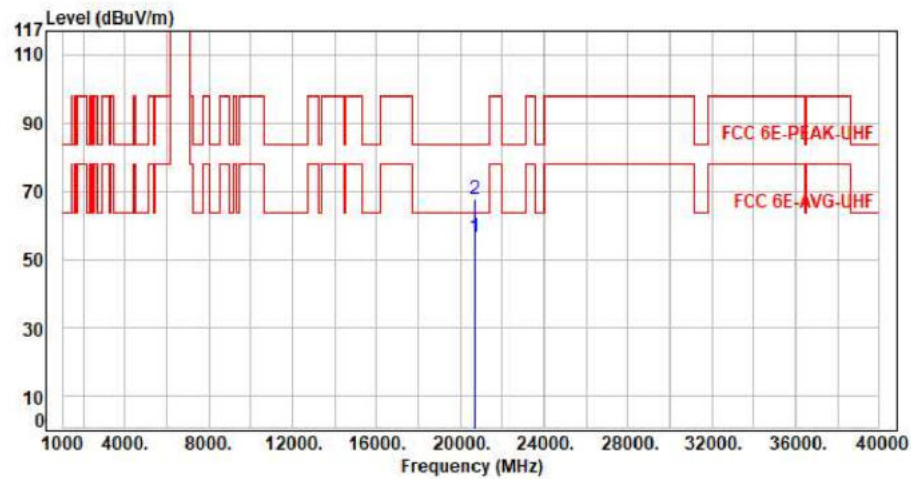


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.38	56.37	63.54	-7.17	Average	150	360	P
2	20655.00	10.99	56.71	67.70	83.54	-15.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

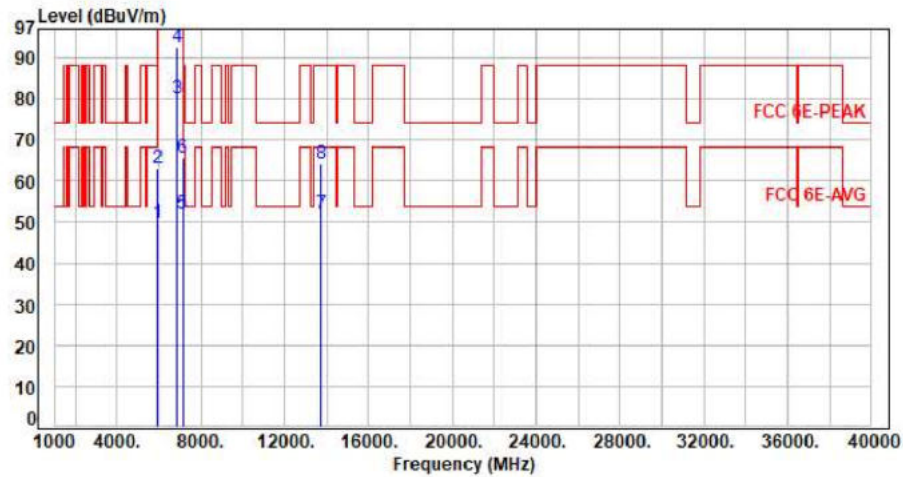


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.04	49.70	68.20	-18.50	Average	105	296	P
2	5925.00	7.66	55.48	63.14	88.20	-25.06	Peak	105	296	P
3	6865.00	9.52	70.36	79.88	200.00	-120.12	Average	105	296	P
4	6865.00	9.52	83.13	92.65	200.00	-107.35	Peak	105	296	P
5	7125.00	10.05	42.05	52.10	68.20	-16.10	Average	105	296	P
6	7125.00	10.05	55.45	65.50	88.20	-22.70	Peak	105	296	P
7	13730.00	22.57	29.41	51.98	68.20	-16.22	Average	100	247	P
8	13730.00	22.57	41.69	64.26	88.20	-23.94	Peak	100	247	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

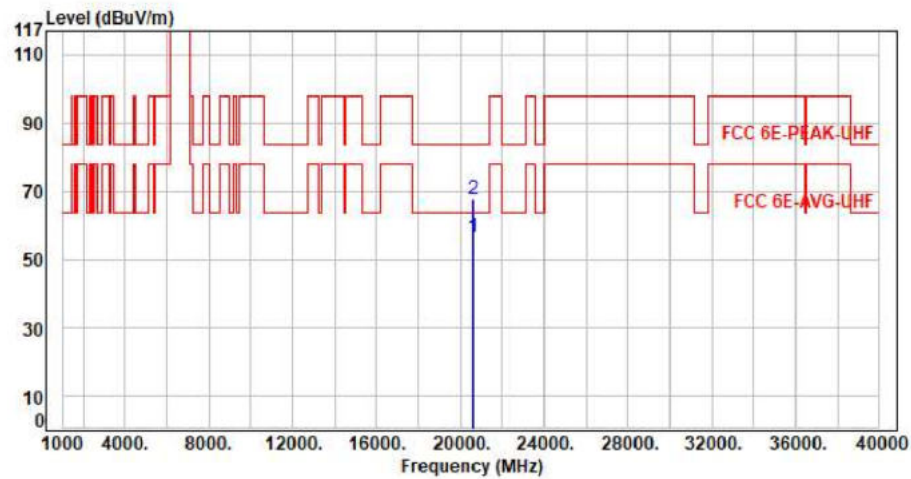

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	45.08	56.39	63.54	-7.15	Average	150	360	P
2	20595.00	11.31	56.49	67.80	83.54	-15.74	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

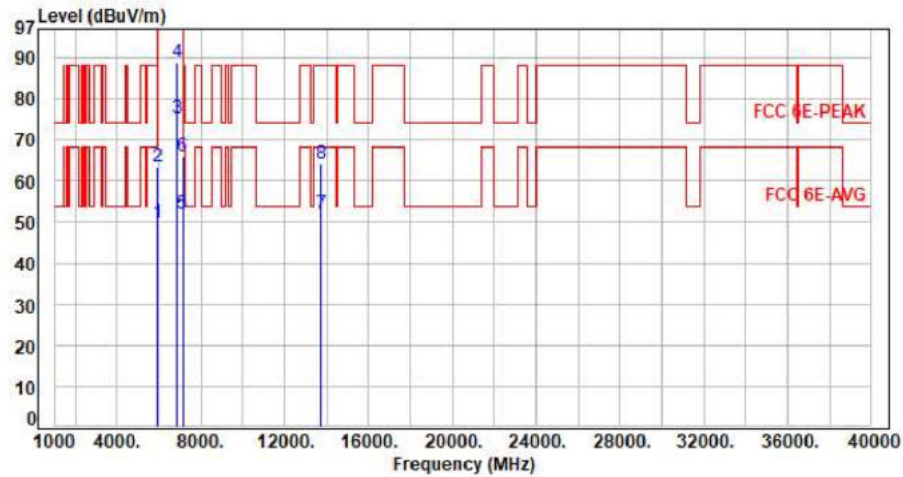

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.09	49.75	68.20	-18.45	Average	128	104	P
2	5925.00	7.66	55.93	63.59	88.20	-24.61	Peak	128	104	P
3	6865.00	9.52	65.89	75.41	200.00	-124.59	Average	128	104	P
4	6865.00	9.52	79.42	88.94	200.00	-111.06	Peak	128	104	P
5	7125.00	10.05	42.08	52.13	68.20	-16.07	Average	128	104	P
6	7125.00	10.05	55.86	65.91	88.20	-22.29	Peak	128	104	P
7	13730.00	22.57	29.48	52.05	68.20	-16.15	Average	100	324	P
8	13730.00	22.57	41.49	64.06	88.20	-24.14	Peak	100	324	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

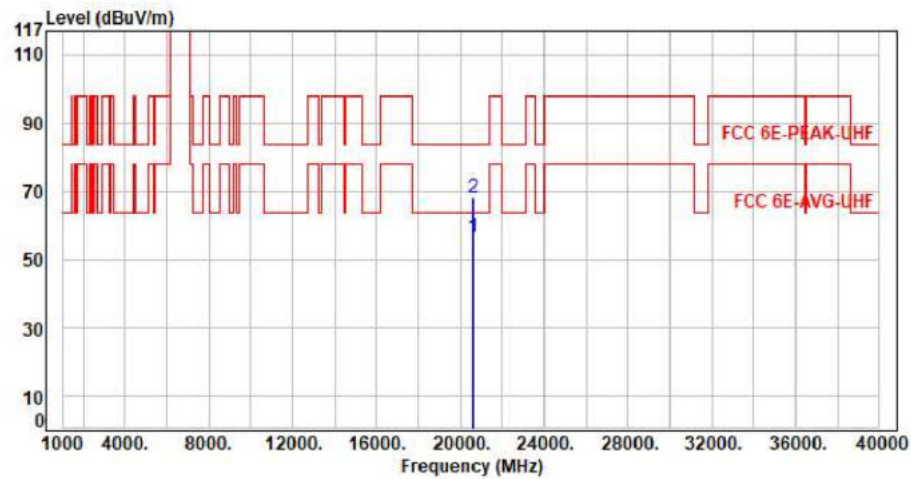


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	45.08	56.39	63.54	-7.15	Average	150	360	P
2	20595.00	11.31	56.87	68.18	83.54	-15.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

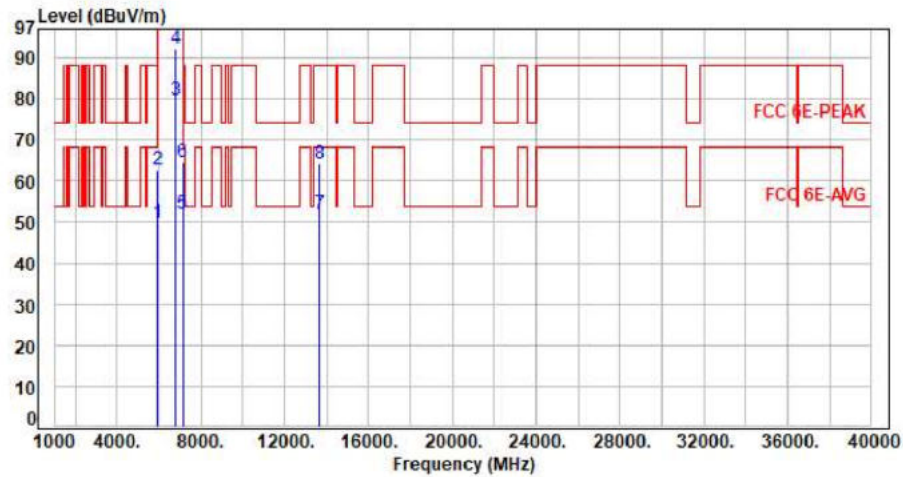


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.02	49.68	68.20	-18.52	Average	102	296	P
2	5925.00	7.66	55.17	62.83	88.20	-25.37	Peak	102	296	P
3	6825.00	9.47	70.07	79.54	200.00	-120.46	Average	102	296	P
4	6825.00	9.47	82.57	92.04	200.00	-107.96	Peak	102	296	P
5	7125.00	10.05	41.95	52.00	68.20	-16.20	Average	102	296	P
6	7125.00	10.05	54.61	64.66	88.20	-23.54	Peak	102	296	P
7	13650.00	22.24	29.66	51.90	68.20	-16.30	Average	100	314	P
8	13650.00	22.24	41.91	64.15	88.20	-24.05	Peak	100	314	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

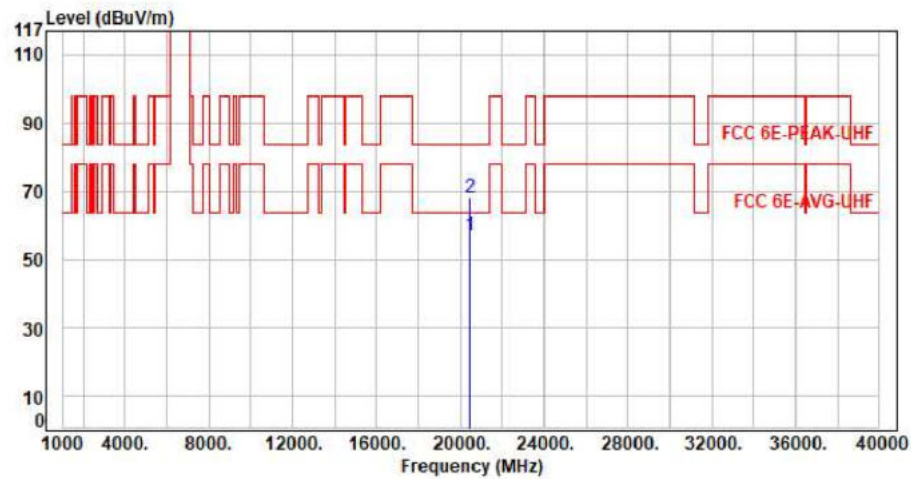


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	45.37	56.82	63.54	-6.72	Average	150	360	P
2	20475.00	11.45	56.47	67.92	83.54	-15.62	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

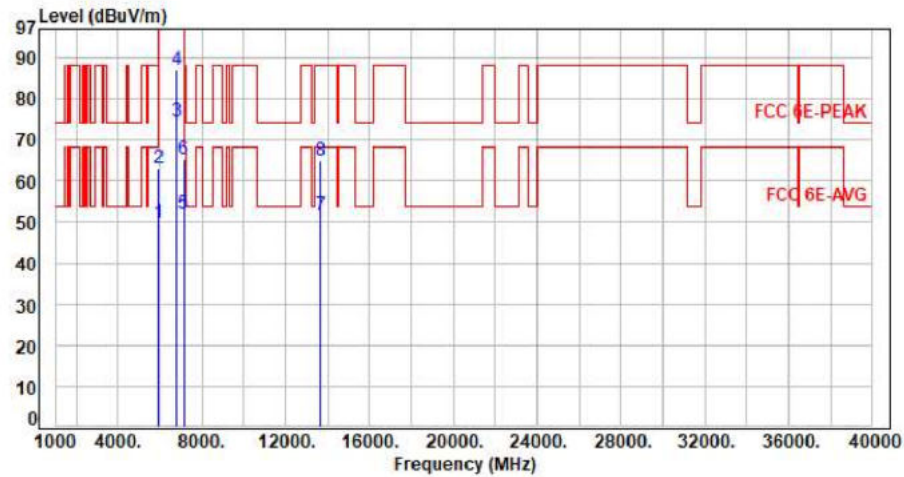

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.13	49.79	68.20	-18.41	Average	100	84	P
2	5925.00	7.66	55.27	62.93	88.20	-25.27	Peak	100	84	P
3	6825.00	9.47	65.02	74.49	200.00	-125.51	Average	100	84	P
4	6825.00	9.47	77.52	86.99	200.00	-113.01	Peak	100	84	P
5	7125.00	10.05	42.01	52.06	68.20	-16.14	Average	100	84	P
6	7125.00	10.05	55.30	65.35	88.20	-22.85	Peak	100	84	P
7	13650.00	22.24	29.55	51.79	68.20	-16.41	Average	100	314	P
8	13650.00	22.24	42.51	64.75	88.20	-23.45	Peak	100	314	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

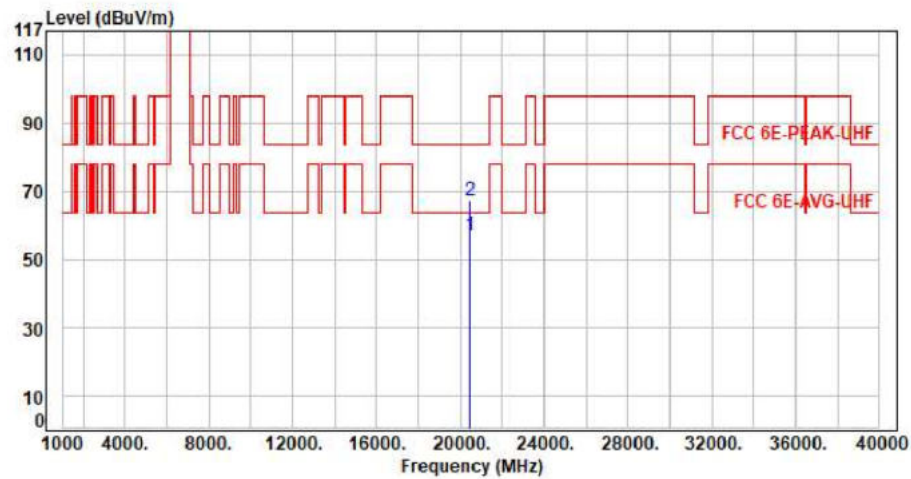


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	45.68	57.13	63.54	-6.41	Average	150	360	P
2	20475.00	11.45	55.67	67.12	83.54	-16.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

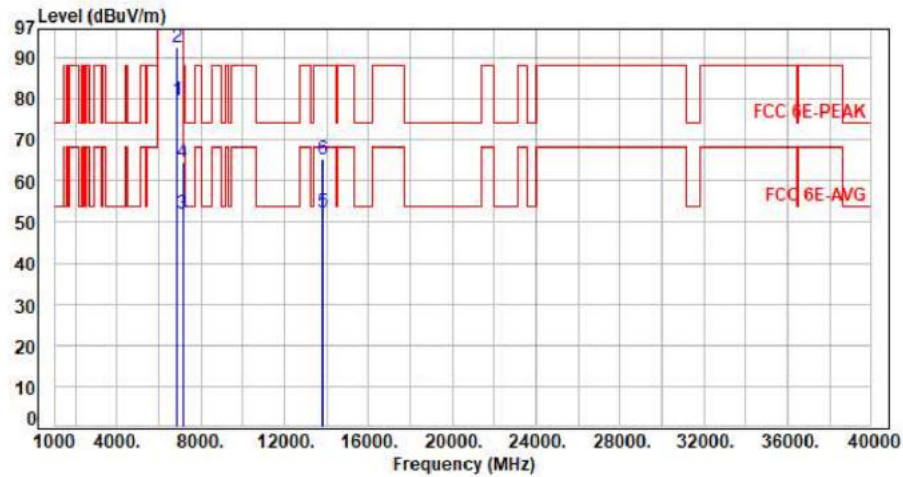


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	70.22	79.81	200.00	-120.19	Average	249	284	P
2	6895.00	9.59	82.94	92.53	200.00	-107.47	Peak	249	284	P
3	7125.00	10.05	42.07	52.12	68.20	-16.08	Average	249	284	P
4	7125.00	10.05	54.37	64.42	88.20	-23.78	Peak	249	284	P
5	13790.00	22.74	29.61	52.35	68.20	-15.85	Average	100	118	P
6	13790.00	22.74	42.60	65.34	88.20	-22.86	Peak	100	118	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

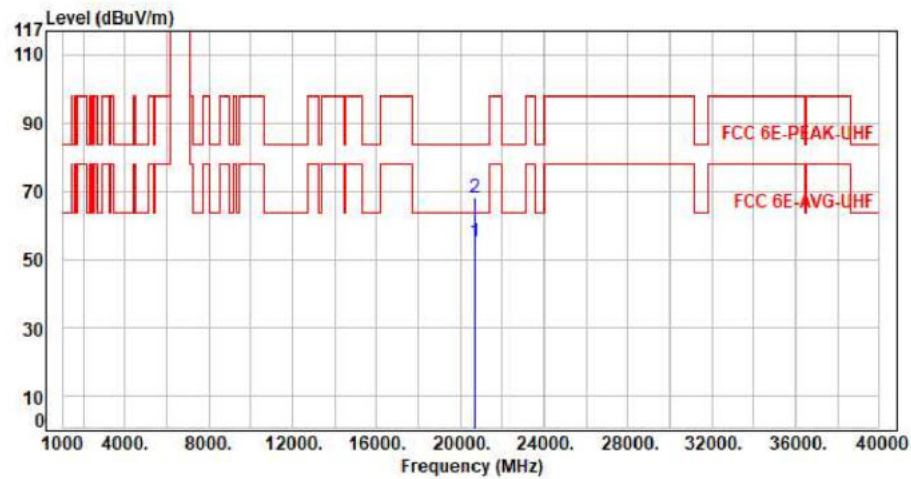

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	44.01	55.05	63.54	-8.49	Average	150	360	P
2	20685.00	11.04	57.06	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

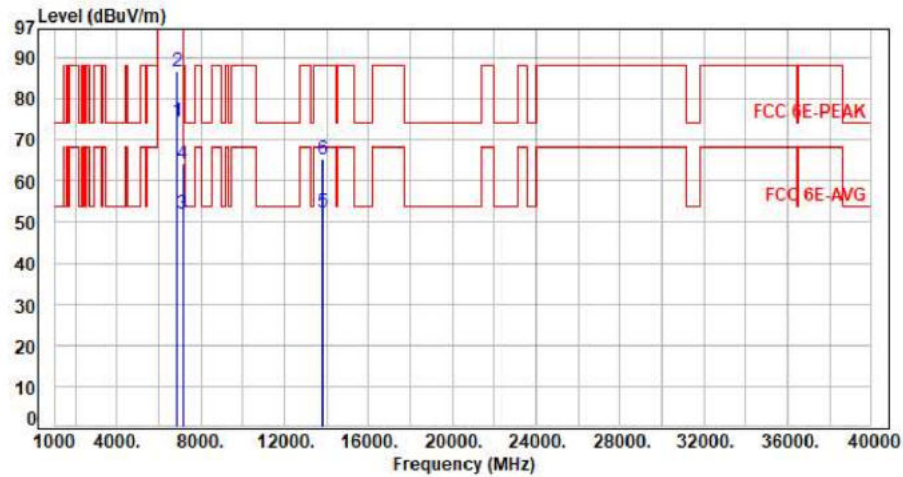


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	65.02	74.61	200.00	-125.39	Average	140	105	P
2	6895.00	9.59	77.14	86.73	200.00	-113.27	Peak	140	105	P
3	7125.00	10.05	41.94	51.99	68.20	-16.21	Average	140	105	P
4	7125.00	10.05	54.30	64.35	88.20	-23.85	Peak	140	105	P
5	13790.00	22.74	29.47	52.21	68.20	-15.99	Average	100	264	P
6	13790.00	22.74	42.60	65.34	88.20	-22.86	Peak	100	264	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

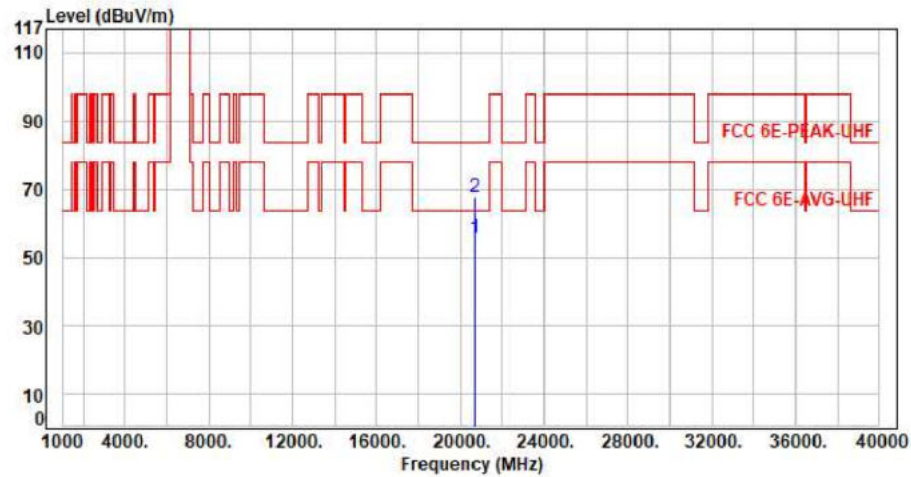


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	44.75	55.79	63.54	-7.75	Average	150	360	P
2	20685.00	11.04	56.56	67.60	83.54	-15.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

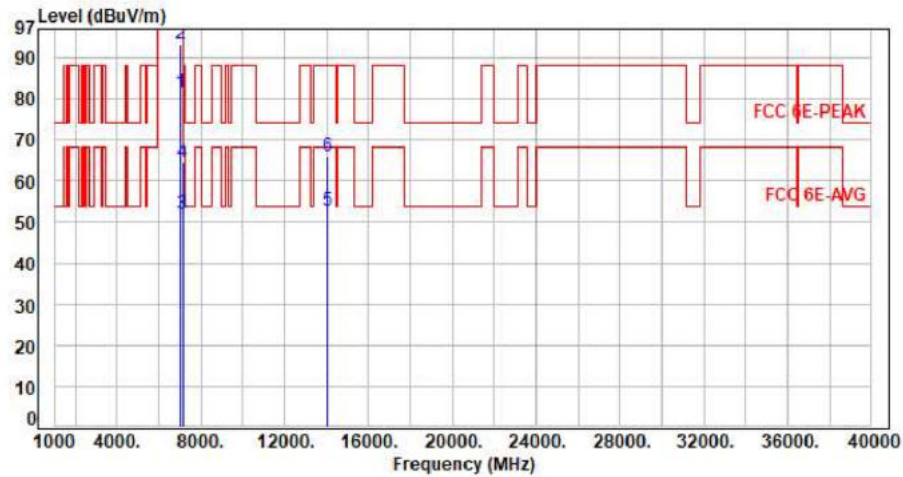


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	71.85	81.53	200.00	-118.47	Average	106	295	P
2	7015.00	9.68	83.79	93.47	200.00	-106.53	Peak	106	295	P
3	7125.00	10.05	42.10	52.15	68.20	-16.05	Average	106	295	P
4	7125.00	10.05	54.62	64.67	88.20	-23.53	Peak	106	295	P
5	14030.00	23.39	29.46	52.85	68.20	-15.35	Average	100	264	P
6	14030.00	23.39	42.66	66.05	88.20	-22.15	Peak	100	264	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

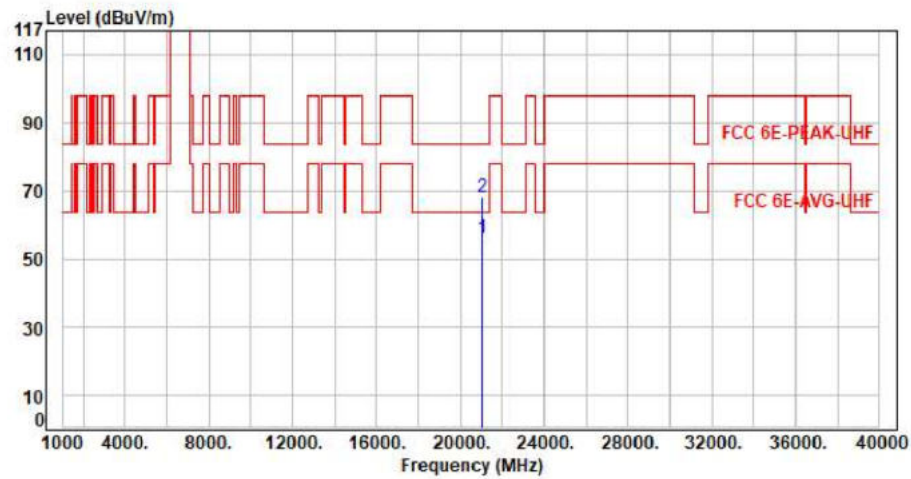


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	44.42	55.92	63.54	-7.62	Average	150	360	P
2	21045.00	11.50	56.78	68.28	83.54	-15.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

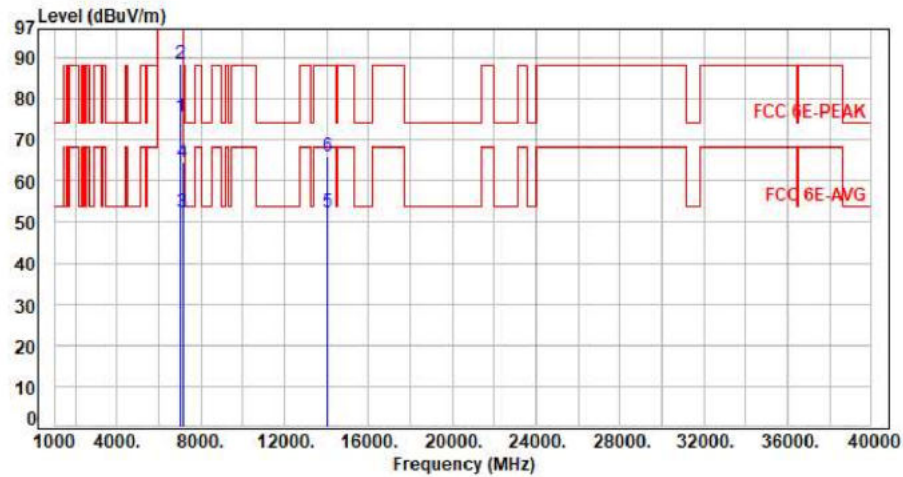


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	65.76	75.44	200.00	-124.56	Average	100	105	P
2	7015.00	9.68	78.71	88.39	200.00	-111.61	Peak	100	105	P
3	7125.00	10.05	42.17	52.22	68.20	-15.98	Average	100	105	P
4	7125.00	10.05	54.65	64.70	88.20	-23.50	Peak	100	105	P
5	14030.00	23.39	29.11	52.50	68.20	-15.70	Average	100	154	P
6	14030.00	23.39	42.61	66.00	88.20	-22.20	Peak	100	154	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

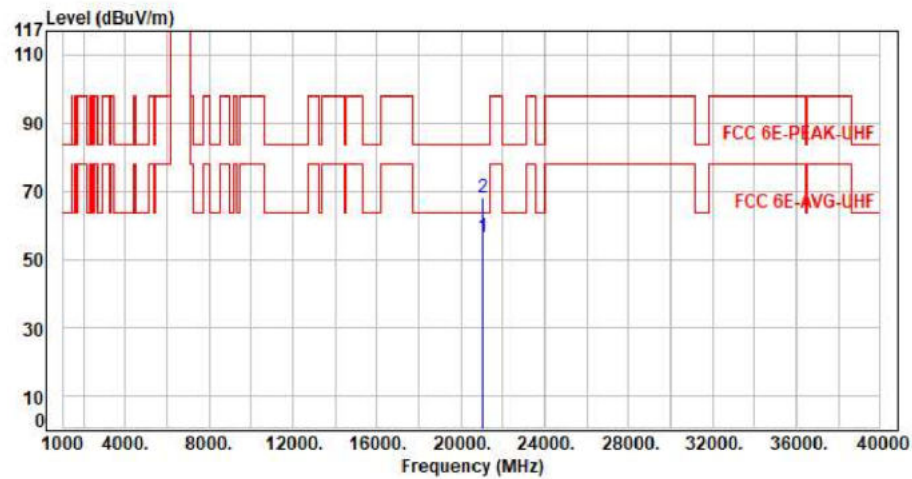


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	44.98	56.48	63.54	-7.06	Average	150	360	P
2	21045.00	11.50	56.48	67.98	83.54	-15.56	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

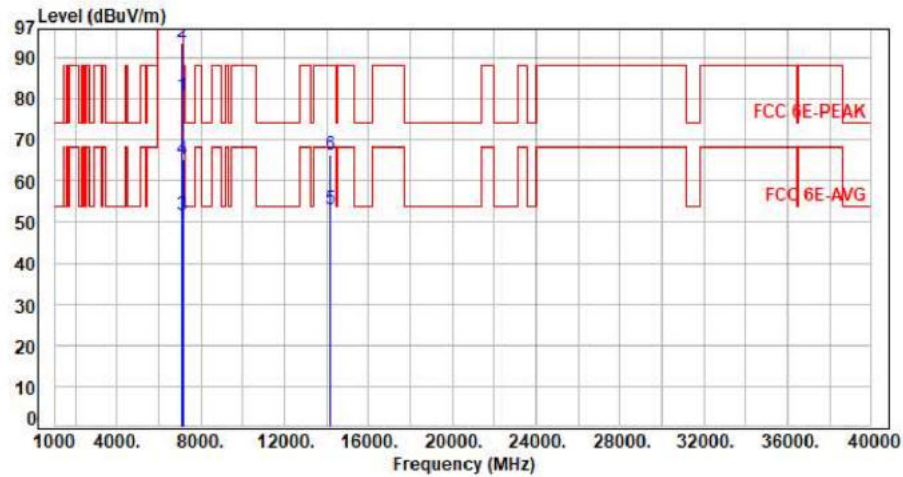


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	70.95	80.91	200.00	-119.09	Average	100	312	P
2	7095.00	9.96	83.87	93.83	200.00	-106.17	Peak	100	312	P
3	7125.00	10.05	41.69	51.74	68.20	-16.46	Average	100	312	P
4	7125.00	10.05	55.22	65.27	88.20	-22.93	Peak	100	312	P
5	14190.00	23.79	29.33	53.12	68.20	-15.08	Average	100	168	P
6	14190.00	23.79	42.61	66.40	88.20	-21.80	Peak	100	168	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

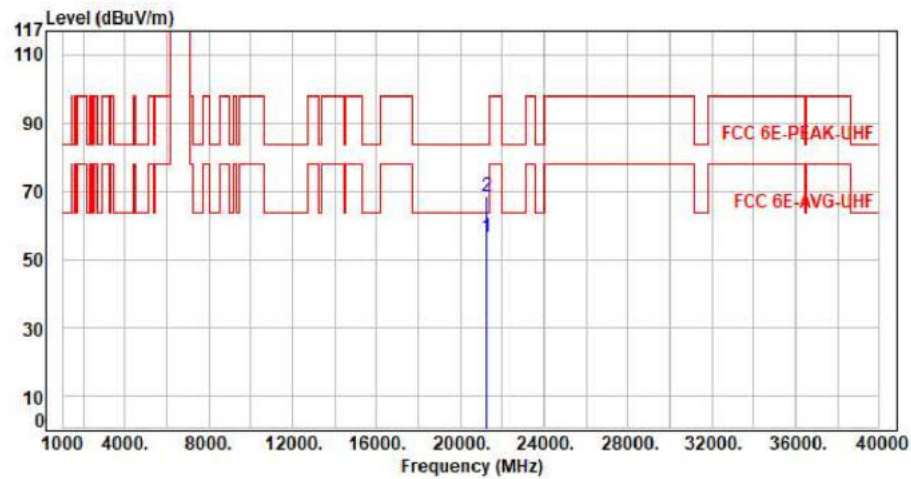

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	44.59	56.39	63.54	-7.15	Average	150	360	P
2	21285.00	11.80	56.93	68.73	83.54	-14.81	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

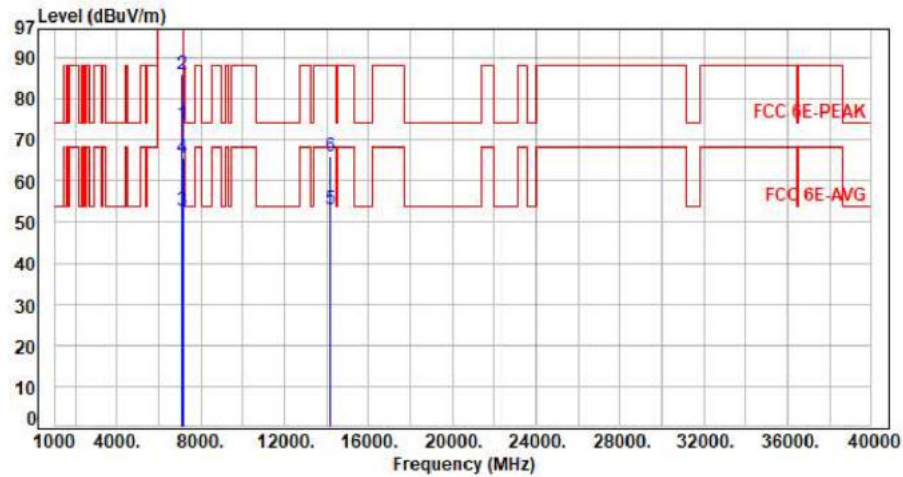


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	63.75	73.71	200.00	-126.29	Average	109	108	P
2	7095.00	9.96	75.95	85.91	200.00	-114.09	Peak	109	108	P
3	7125.00	10.05	42.67	52.72	68.20	-15.48	Average	109	108	P
4	7125.00	10.05	55.67	65.72	88.20	-22.48	Peak	109	108	P
5	14190.00	23.79	29.48	53.27	68.20	-14.93	Average	100	122	P
6	14190.00	23.79	42.18	65.97	88.20	-22.23	Peak	100	122	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

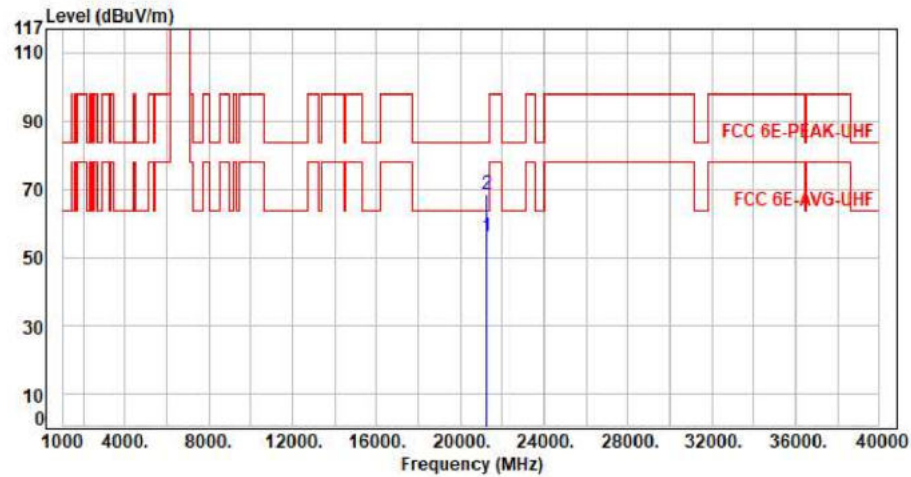


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	44.23	56.03	63.54	-7.51	Average	150	360	P
2	21285.00	11.80	56.75	68.55	83.54	-14.99	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

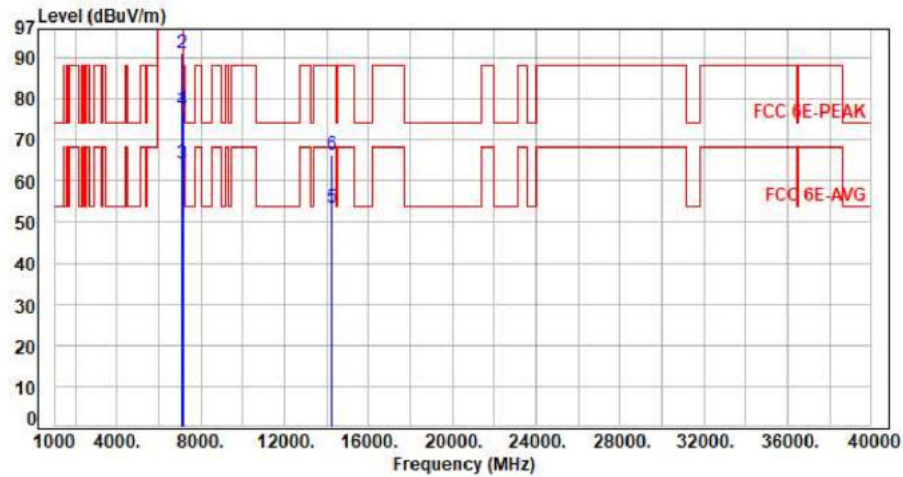


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	67.39	77.41	200.00	-122.59	Average	110	68	P
2	7115.00	10.02	81.17	91.19	200.00	-108.81	Peak	110	68	P
3	7125.00	10.05	54.04	64.09	68.20	-4.11	Average	110	68	P
4	7125.00	10.05	67.07	77.12	88.20	-11.08	Peak	110	68	P
5	14230.00	23.94	29.44	53.38	68.20	-14.82	Average	100	312	P
6	14230.00	23.94	42.49	66.43	88.20	-21.77	Peak	100	312	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

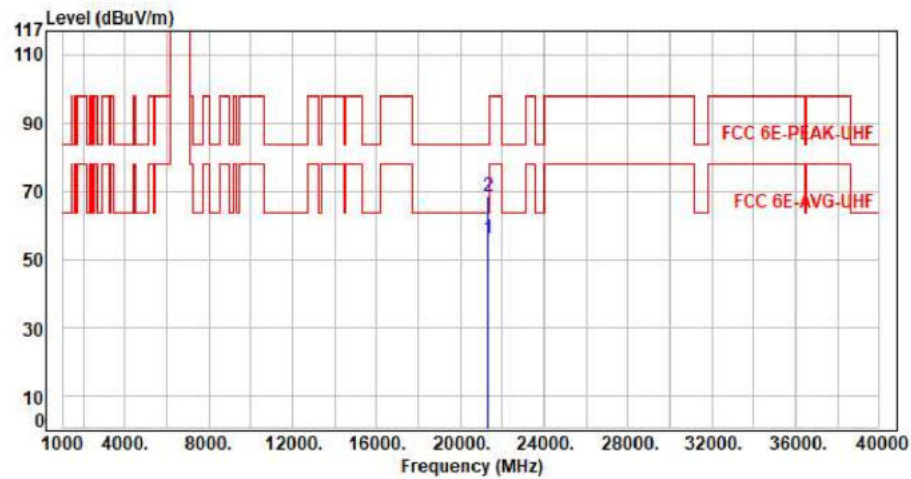


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	44.72	56.08	63.54	-7.46	Average	150	360	P
2	21345.00	11.36	57.04	68.40	83.54	-15.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

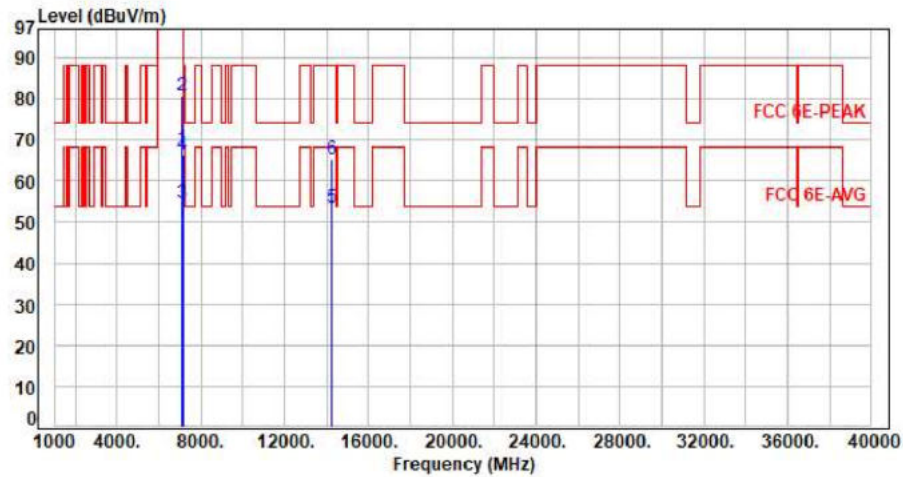


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	58.02	68.04	200.00	-131.96	Average	100	184	P
2	7115.00	10.02	70.91	80.93	200.00	-119.07	Peak	100	184	P
3	7125.00	10.05	44.49	54.54	68.20	-13.66	Average	100	184	P
4	7125.00	10.05	56.43	66.48	88.20	-21.72	Peak	100	184	P
5	14230.00	23.94	29.67	53.61	68.20	-14.59	Average	100	152	P
6	14230.00	23.94	41.29	65.23	88.20	-22.97	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

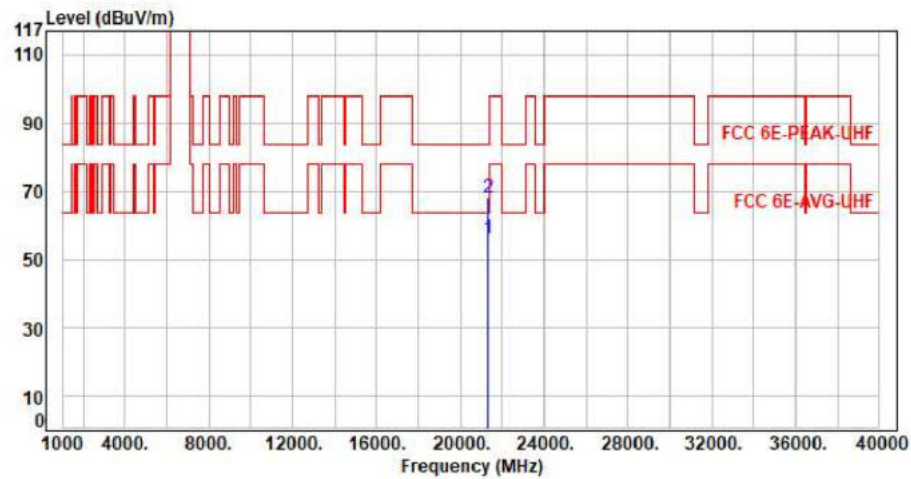


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	44.62	55.98	63.54	-7.56	Average	150	360	P
2	21345.00	11.36	56.73	68.09	83.54	-15.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

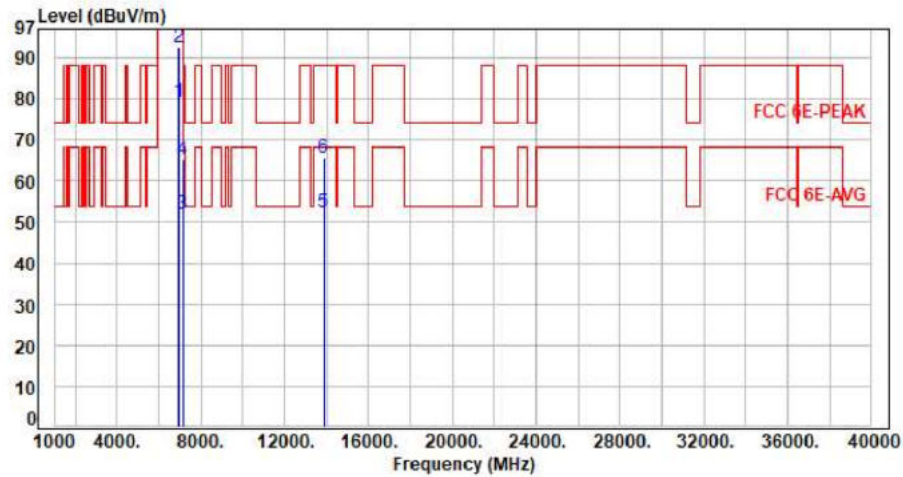


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	69.66	79.27	200.00	-120.73	Average	242	293	P
2	6925.00	9.61	82.96	92.57	200.00	-107.43	Peak	242	293	P
3	7125.00	10.05	41.85	51.90	68.20	-16.30	Average	242	293	P
4	7125.00	10.05	55.28	65.33	88.20	-22.87	Peak	242	293	P
5	13850.00	22.86	29.44	52.30	68.20	-15.90	Average	100	264	P
6	13850.00	22.86	42.67	65.53	88.20	-22.67	Peak	100	264	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

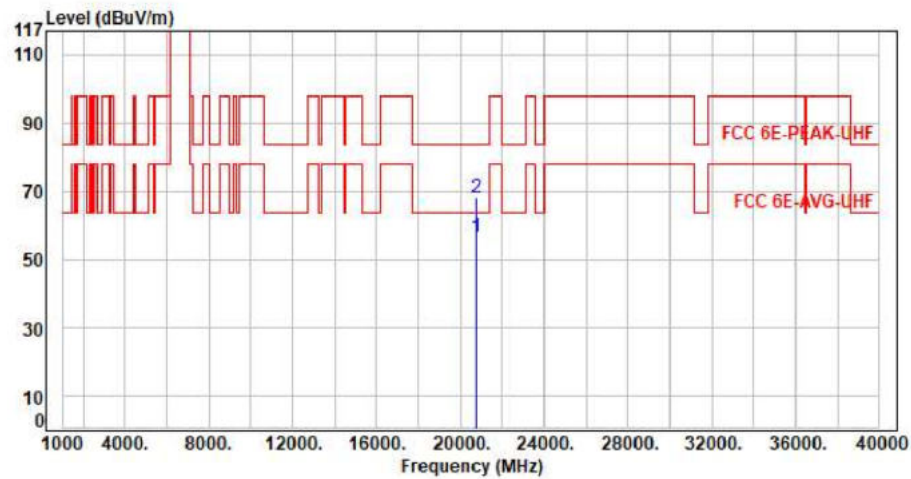

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	45.25	56.64	63.54	-6.90	Average	150	360	P
2	20775.00	11.39	56.61	68.00	83.54	-15.54	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

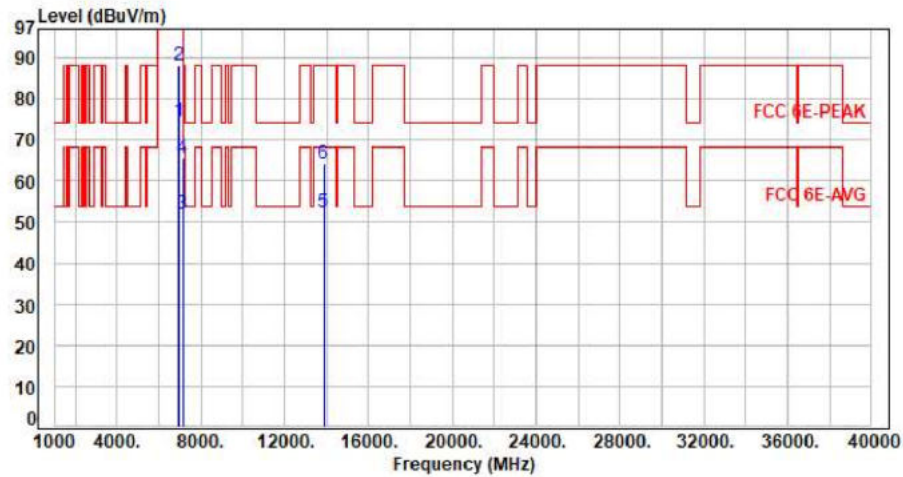


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	64.85	74.46	200.00	-125.54	Average	130	105	P
2	6925.00	9.61	78.42	88.03	200.00	-111.97	Peak	130	105	P
3	7125.00	10.05	42.02	52.07	68.20	-16.13	Average	130	105	P
4	7125.00	10.05	55.53	65.58	88.20	-22.62	Peak	130	105	P
5	13850.00	22.86	29.44	52.30	68.20	-15.90	Average	100	314	P
6	13850.00	22.86	41.33	64.19	88.20	-24.01	Peak	100	314	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

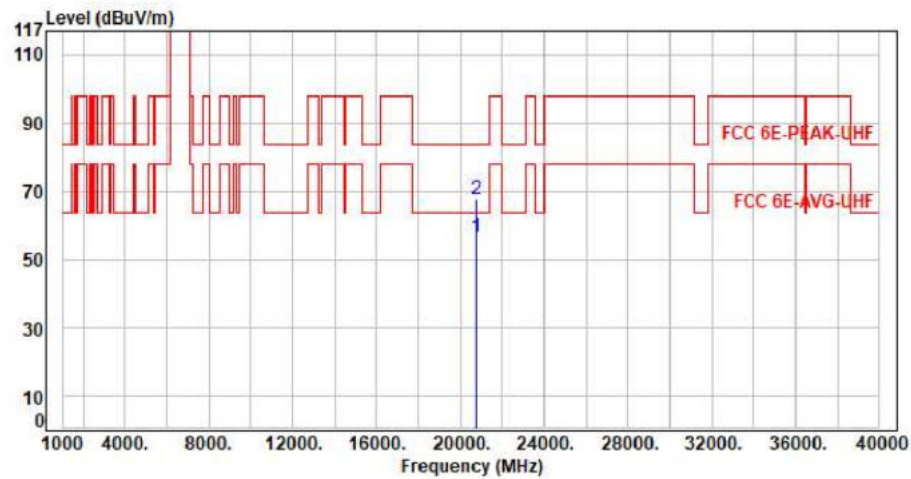


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	45.07	56.46	63.54	-7.08	Average	150	360	P
2	20775.00	11.39	56.41	67.80	83.54	-15.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

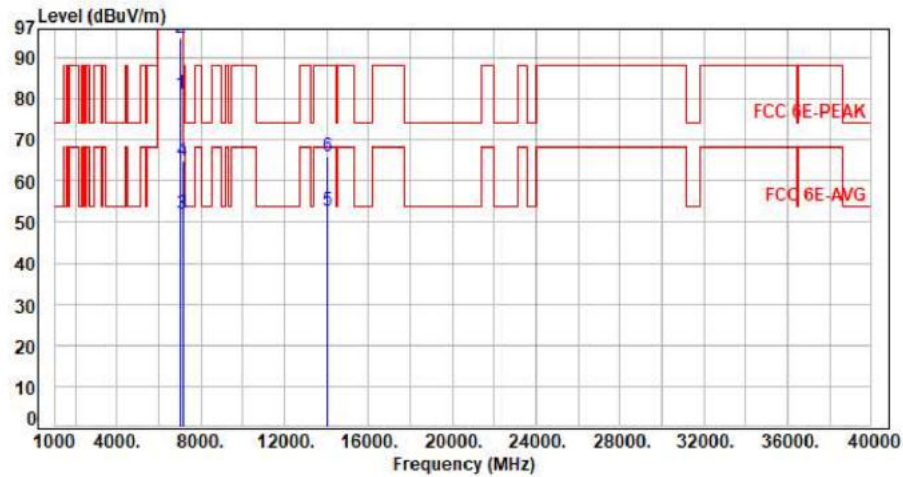


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	71.65	81.30	200.00	-118.70	Average	255	295	P
2	7005.00	9.65	85.22	94.87	200.00	-105.13	Peak	255	295	P
3	7125.00	10.05	41.89	51.94	68.20	-16.26	Average	255	295	P
4	7125.00	10.05	54.88	64.93	88.20	-23.27	Peak	255	295	P
5	14010.00	23.32	29.44	52.76	68.20	-15.44	Average	100	316	P
6	14010.00	23.32	42.67	65.99	88.20	-22.21	Peak	100	316	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

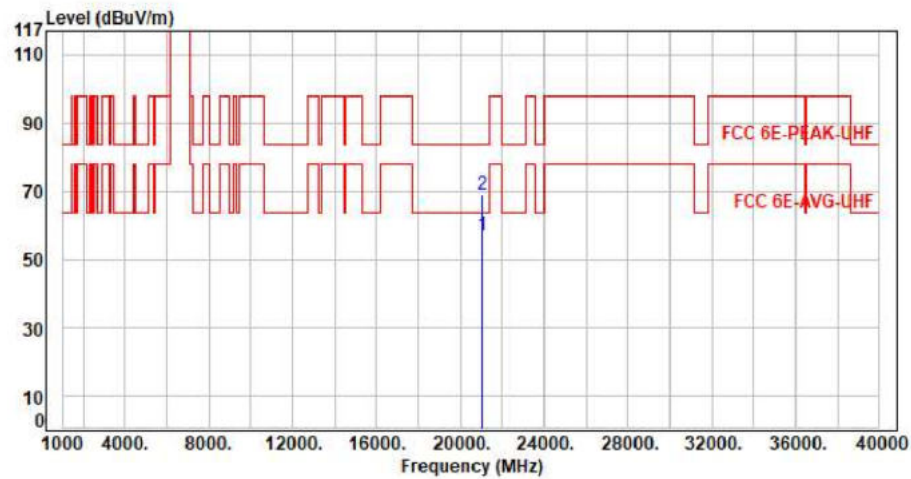

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	45.42	56.90	63.54	-6.64	Average	150	360	P
2	21015.00	11.48	57.60	69.08	83.54	-14.46	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor