




For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

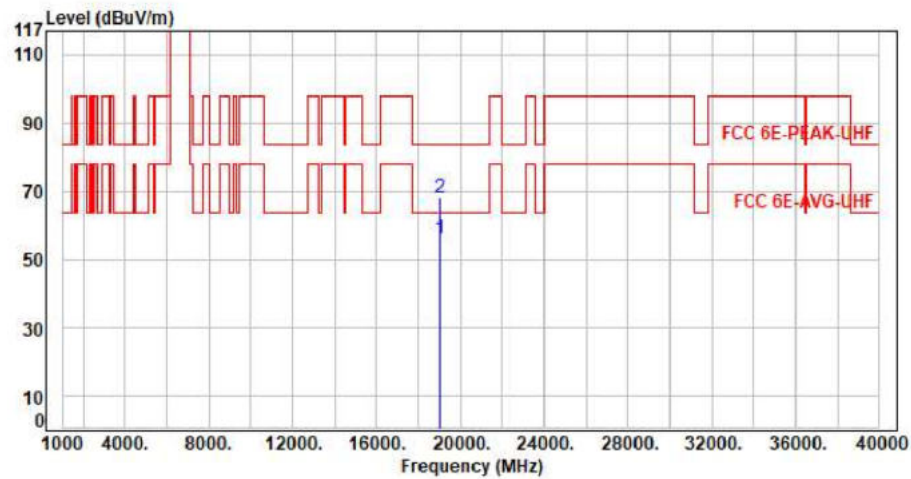


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	44.43	55.84	63.54	-7.70	Average	150	360	P
2	19035.00	11.41	56.47	67.88	83.54	-15.66	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

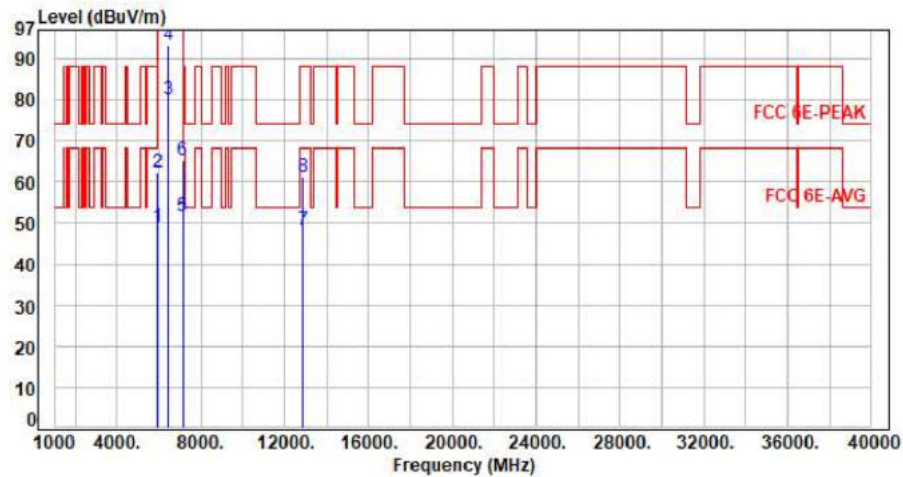


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.25	48.91	68.20	-19.29	Average	100	45	P
2	5925.00	7.66	54.60	62.26	88.20	-25.94	Peak	100	45	P
3	6435.00	8.32	71.88	80.20	200.00	-119.80	Average	100	45	P
4	6435.00	8.32	84.85	93.17	200.00	-106.83	Peak	100	45	P
5	7125.00	10.05	41.59	51.64	68.20	-16.56	Average	100	45	P
6	7125.00	10.05	55.27	65.32	88.20	-22.88	Peak	100	45	P
7	12870.00	19.02	29.17	48.19	68.20	-20.01	Average	100	254	P
8	12870.00	19.02	42.37	61.39	88.20	-26.81	Peak	100	254	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

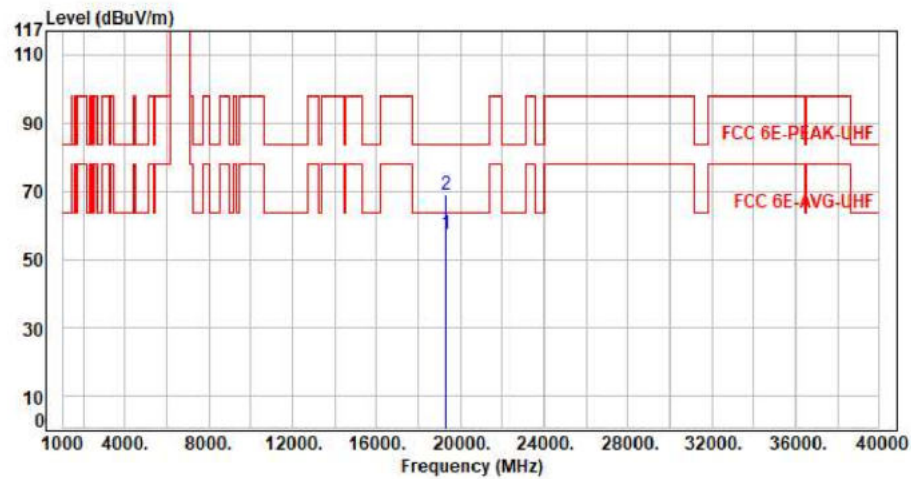


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	45.56	57.17	63.54	-6.37	Average	150	360	P
2	19305.00	11.61	57.18	68.79	83.54	-14.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

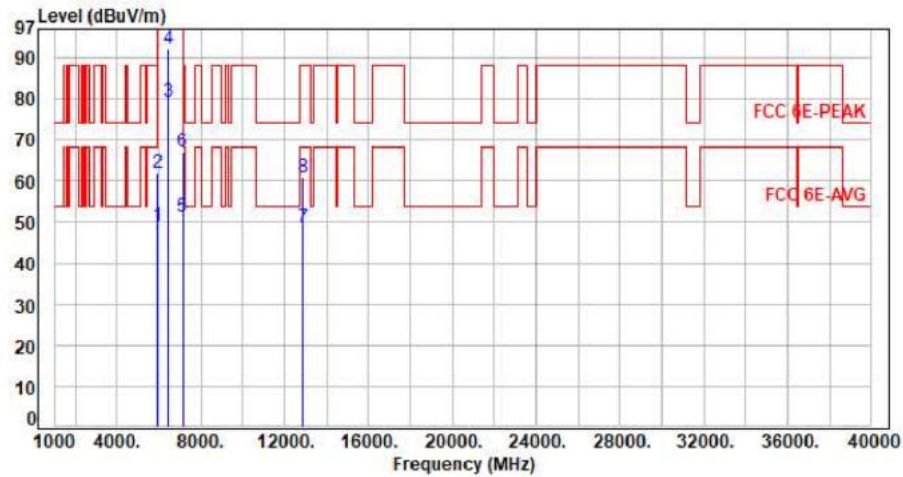

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.25	48.91	68.20	-19.29	Average	391	81	P
2	5925.00	7.66	54.18	61.84	88.20	-26.36	Peak	391	81	P
3	6435.00	8.32	71.15	79.47	200.00	-120.53	Average	391	81	P
4	6435.00	8.32	83.85	92.17	200.00	-107.83	Peak	391	81	P
5	7125.00	10.05	41.05	51.10	68.20	-17.10	Average	391	81	P
6	7125.00	10.05	56.89	66.94	88.20	-21.26	Peak	391	81	P
7	12870.00	19.02	29.65	48.67	68.20	-19.53	Average	100	124	P
8	12870.00	19.02	41.67	60.69	88.20	-27.51	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

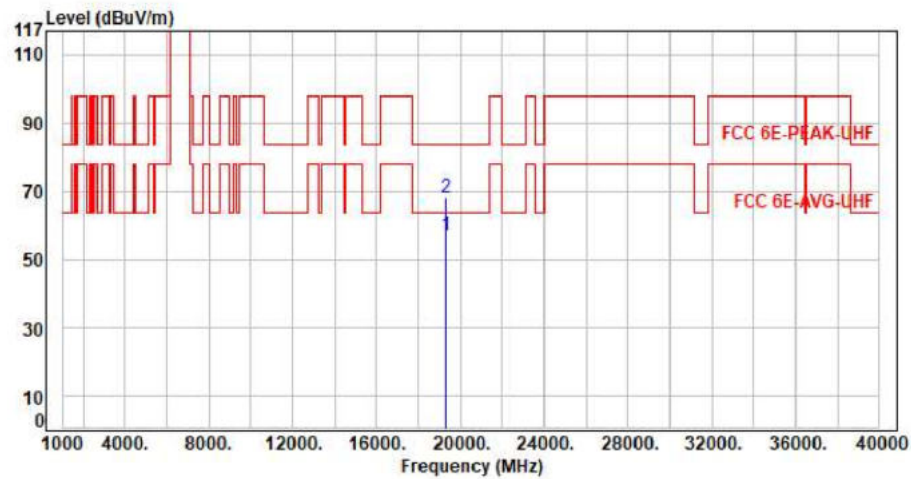


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	45.19	56.80	63.54	-6.74	Average	150	360	P
2	19305.00	11.61	56.46	68.07	83.54	-15.47	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

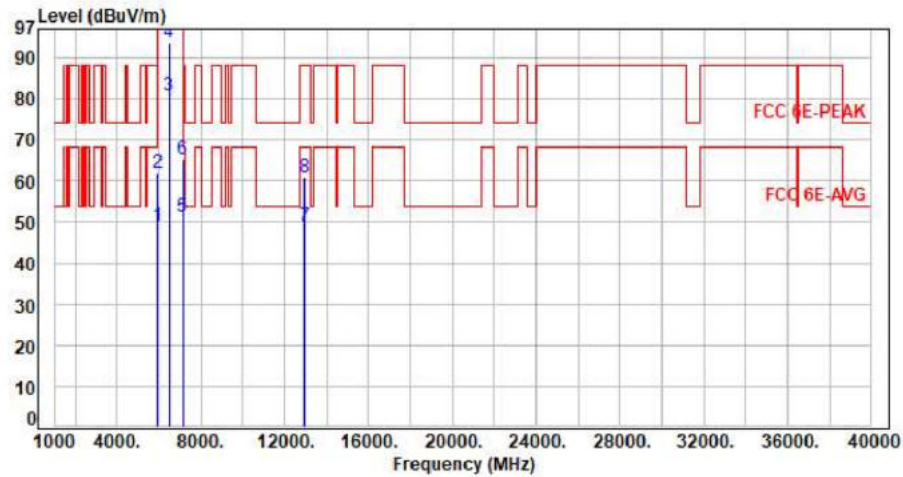


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.28	48.94	68.20	-19.26	Average	100	49	P
2	5925.00	7.66	54.30	61.96	88.20	-26.24	Peak	100	49	P
3	6475.00	8.33	72.54	80.87	200.00	-119.13	Average	100	49	P
4	6475.00	8.33	85.41	93.74	200.00	-106.26	Peak	100	49	P
5	7125.00	10.05	41.21	51.26	68.20	-16.94	Average	100	49	P
6	7125.00	10.05	55.27	65.32	88.20	-22.88	Peak	100	49	P
7	12950.00	19.39	29.64	49.03	68.20	-19.17	Average	100	241	P
8	12950.00	19.39	41.36	60.75	88.20	-27.45	Peak	100	241	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

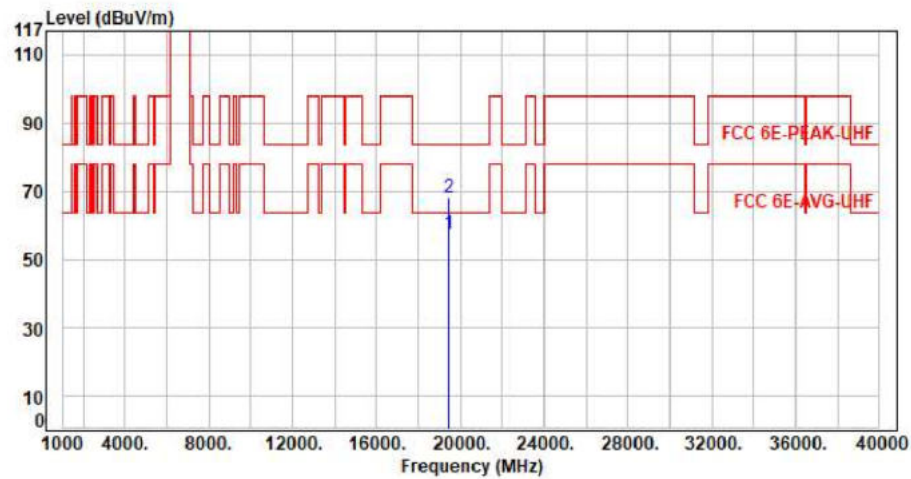


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	45.42	57.17	63.54	-6.37	Average	150	360	P
2	19425.00	11.75	56.12	67.87	83.54	-15.67	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

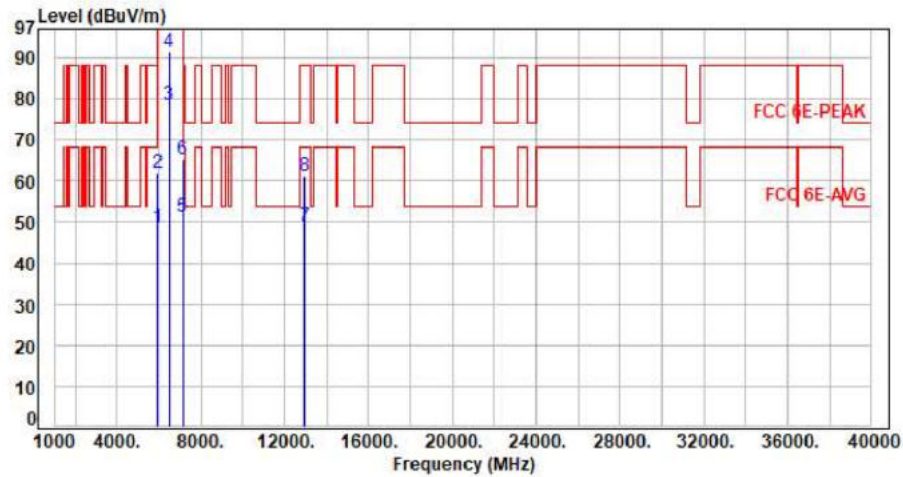

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.09	48.75	68.20	-19.45	Average	400	86	P
2	5925.00	7.66	54.33	61.99	88.20	-26.21	Peak	400	86	P
3	6475.00	8.33	70.25	78.58	200.00	-121.42	Average	400	86	P
4	6475.00	8.33	83.08	91.41	200.00	-108.59	Peak	400	86	P
5	7125.00	10.05	41.29	51.34	68.20	-16.86	Average	400	86	P
6	7125.00	10.05	55.05	65.10	88.20	-23.10	Peak	400	86	P
7	12950.00	19.39	29.76	49.15	68.20	-19.05	Average	100	114	P
8	12950.00	19.39	41.68	61.07	88.20	-27.13	Peak	100	114	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

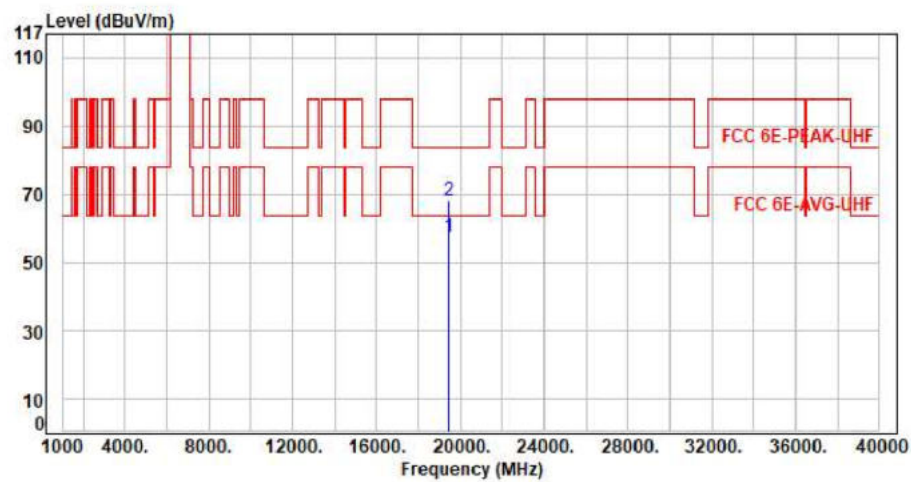

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	45.75	57.50	63.54	-6.04	Average	150	360	P
2	19425.00	11.75	56.28	68.03	83.54	-15.51	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

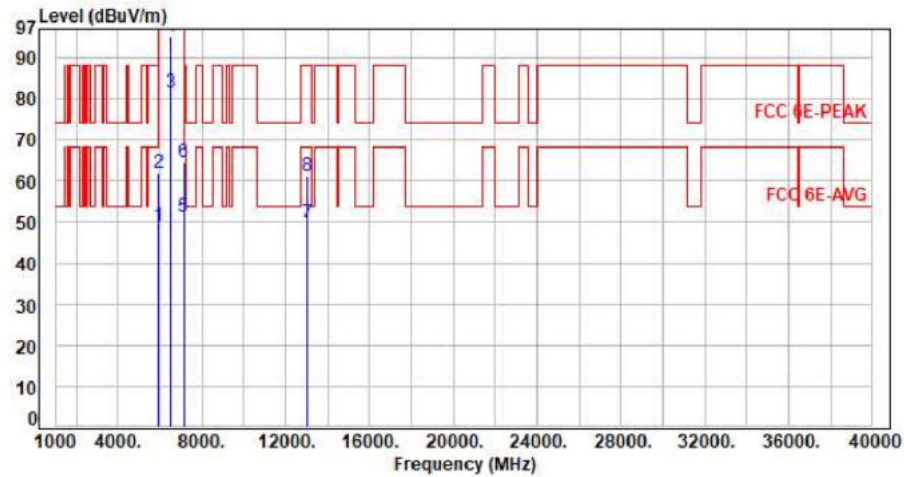

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.56	49.22	68.20	-18.98	Average	100	45	P
2	5925.00	7.66	54.30	61.96	88.20	-26.24	Peak	100	45	P
3	6515.00	8.42	73.16	81.58	200.00	-118.42	Average	100	45	P
4	6515.00	8.42	86.76	95.18	200.00	-104.82	Peak	100	45	P
5	7125.00	10.05	41.29	51.34	68.20	-16.86	Average	100	45	P
6	7125.00	10.05	54.66	64.71	88.20	-23.49	Peak	100	45	P
7	13030.00	19.86	29.80	49.66	68.20	-18.54	Average	100	226	P
8	13030.00	19.86	41.37	61.23	88.20	-26.97	Peak	100	226	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

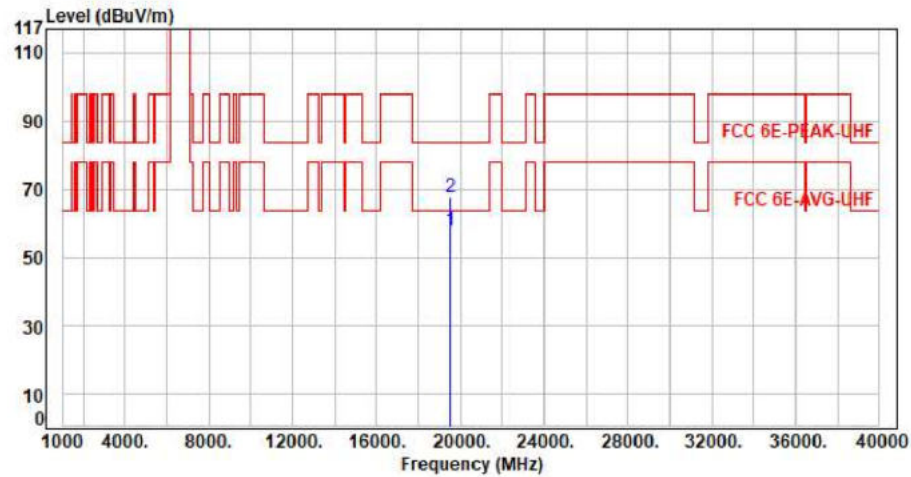


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	45.72	57.91	63.54	-5.63	Average	150	360	P
2	19545.00	12.19	55.51	67.70	83.54	-15.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

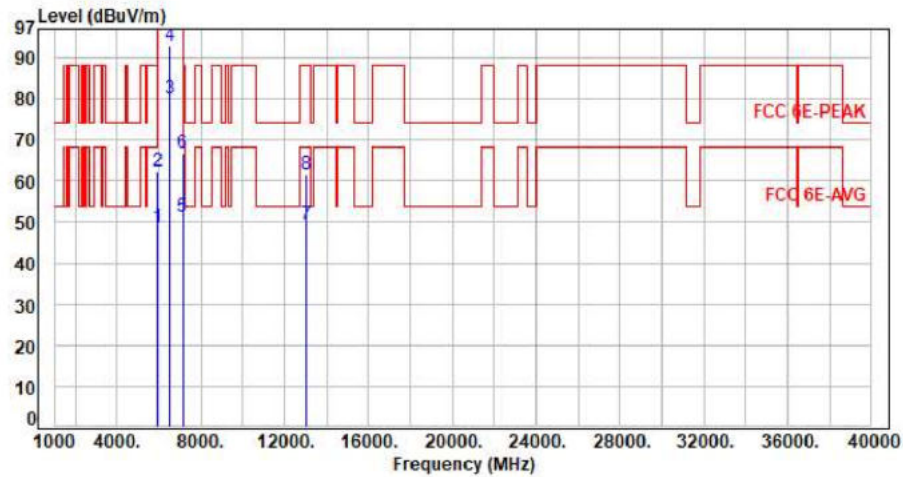


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.20	48.86	68.20	-19.34	Average	383	79	P
2	5925.00	7.66	54.68	62.34	88.20	-25.86	Peak	383	79	P
3	6515.00	8.42	71.50	79.92	200.00	-120.08	Average	383	79	P
4	6515.00	8.42	84.40	92.82	200.00	-107.18	Peak	383	79	P
5	7125.00	10.05	41.21	51.26	68.20	-16.94	Average	383	79	P
6	7125.00	10.05	56.67	66.72	88.20	-21.48	Peak	383	79	P
7	13030.00	19.86	29.65	49.51	68.20	-18.69	Average	100	116	P
8	13030.00	19.86	41.61	61.47	88.20	-26.73	Peak	100	116	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

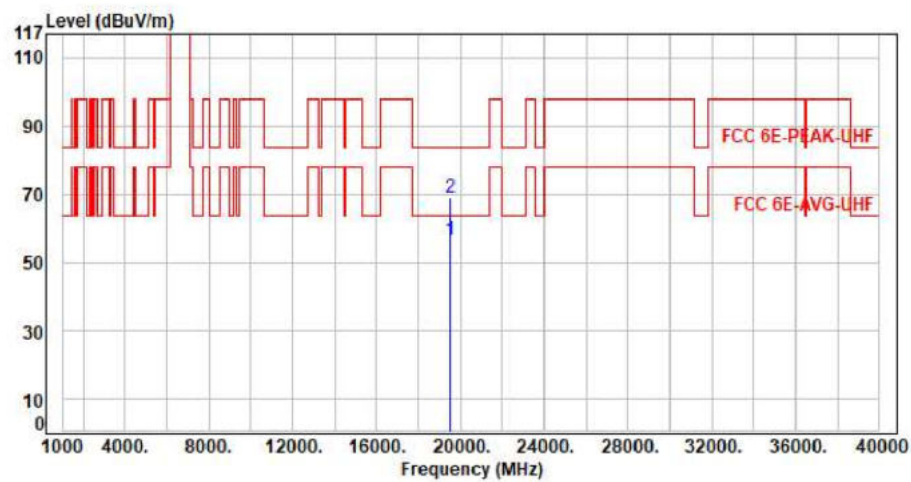


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	44.44	56.63	63.54	-6.91	Average	150	360	P
2	19545.00	12.19	56.83	69.02	83.54	-14.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

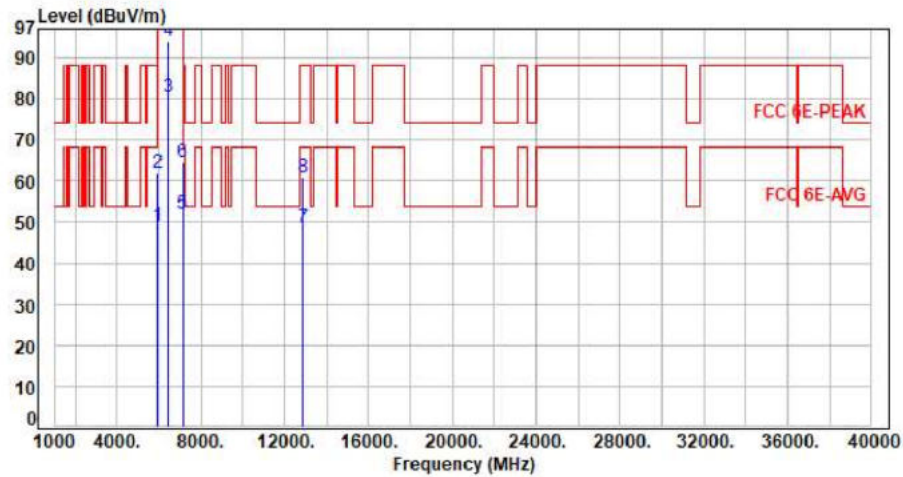

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.35	49.01	68.20	-19.19	Average	100	47	P
2	5925.00	7.66	54.18	61.84	88.20	-26.36	Peak	100	47	P
3	6445.00	8.31	71.96	80.27	200.00	-119.73	Average	100	47	P
4	6445.00	8.31	85.59	93.90	200.00	-106.10	Peak	100	47	P
5	7125.00	10.05	41.99	52.04	68.20	-16.16	Average	100	47	P
6	7125.00	10.05	54.37	64.42	88.20	-23.78	Peak	100	47	P
7	12890.00	19.05	29.75	48.80	68.20	-19.40	Average	100	163	P
8	12890.00	19.05	41.69	60.74	88.20	-27.46	Peak	100	163	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

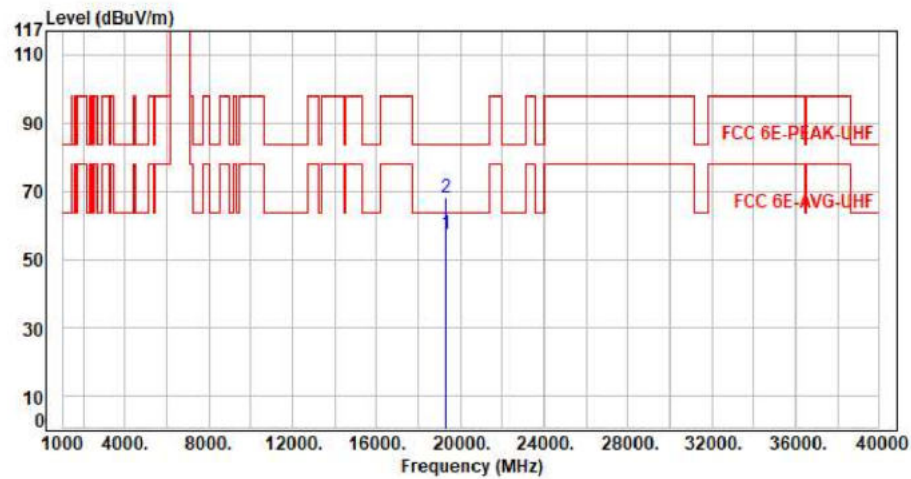


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	45.68	57.30	63.54	-6.24	Average	150	360	P
2	19335.00	11.62	56.46	68.08	83.54	-15.46	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

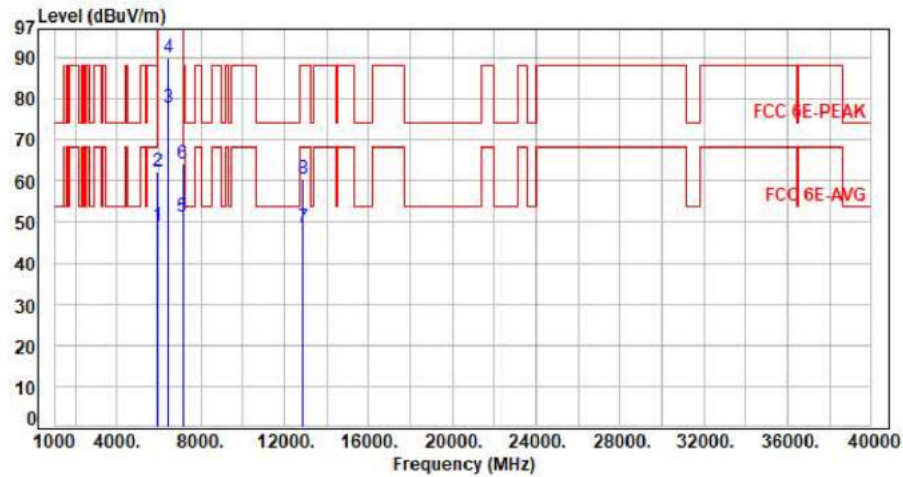

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.22	48.88	68.20	-19.32	Average	400	84	P
2	5925.00	7.66	54.73	62.39	88.20	-25.81	Peak	400	84	P
3	6445.00	8.31	69.66	77.97	200.00	-122.03	Average	400	84	P
4	6445.00	8.31	81.81	90.12	200.00	-109.88	Peak	400	84	P
5	7125.00	10.05	41.32	51.37	68.20	-16.83	Average	400	84	P
6	7125.00	10.05	54.28	64.33	88.20	-23.87	Peak	400	84	P
7	12890.00	19.05	29.77	48.82	68.20	-19.38	Average	100	225	P
8	12890.00	19.05	41.37	60.42	88.20	-27.78	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

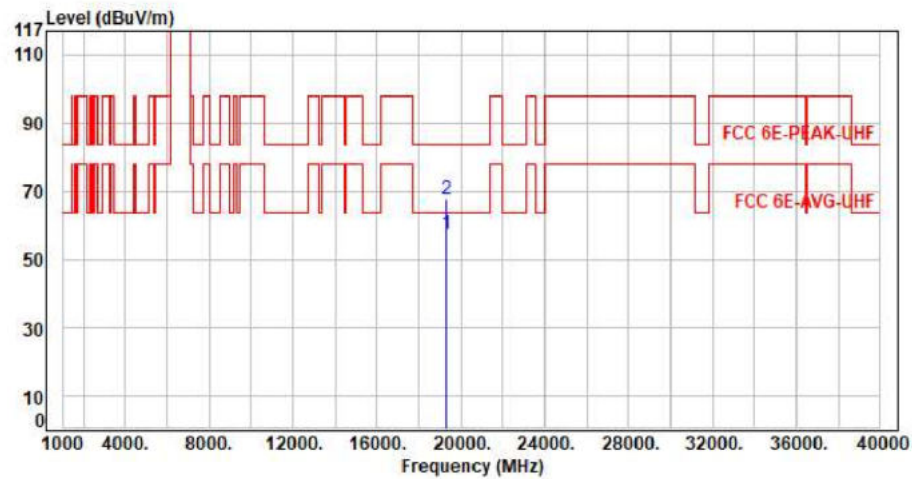

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	45.63	57.25	63.54	-6.29	Average	150	360	P
2	19335.00	11.62	55.92	67.54	83.54	-16.00	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

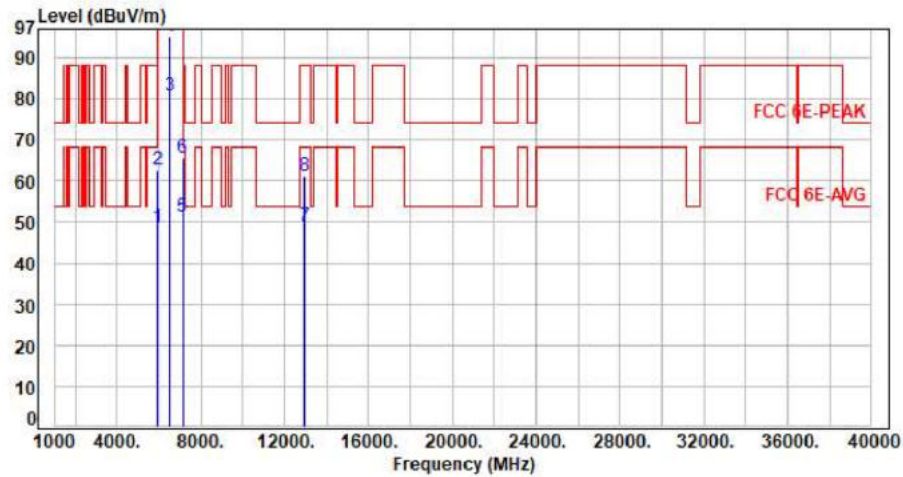

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.08	48.74	68.20	-19.46	Average	100	45	P
2	5925.00	7.66	54.90	62.56	88.20	-25.64	Peak	100	45	P
3	6485.00	8.34	72.45	80.79	200.00	-119.21	Average	100	45	P
4	6485.00	8.34	86.68	95.02	200.00	-104.98	Peak	100	45	P
5	7125.00	10.05	41.22	51.27	68.20	-16.93	Average	100	45	P
6	7125.00	10.05	55.59	65.64	88.20	-22.56	Peak	100	45	P
7	12970.00	19.47	29.71	49.18	68.20	-19.02	Average	100	138	P
8	12970.00	19.47	41.68	61.15	88.20	-27.05	Peak	100	138	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

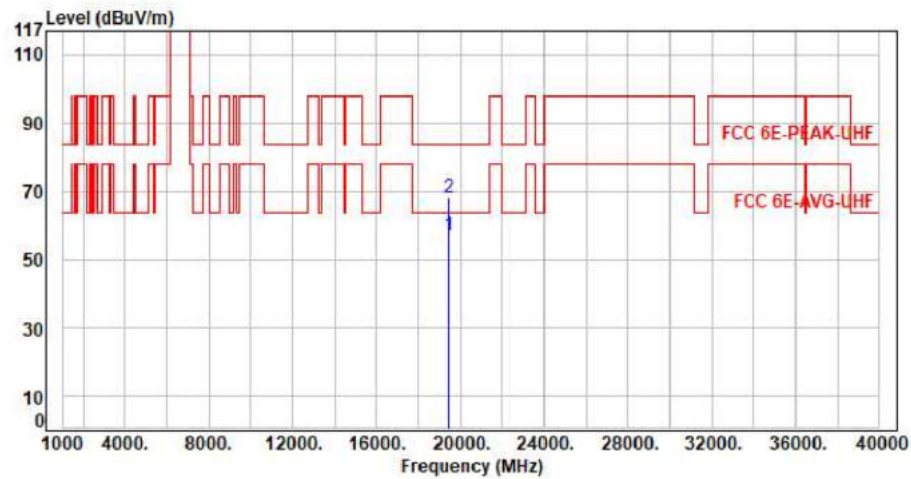


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	45.58	57.15	63.54	-6.39	Average	150	360	P
2	19455.00	11.57	56.65	68.22	83.54	-15.32	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

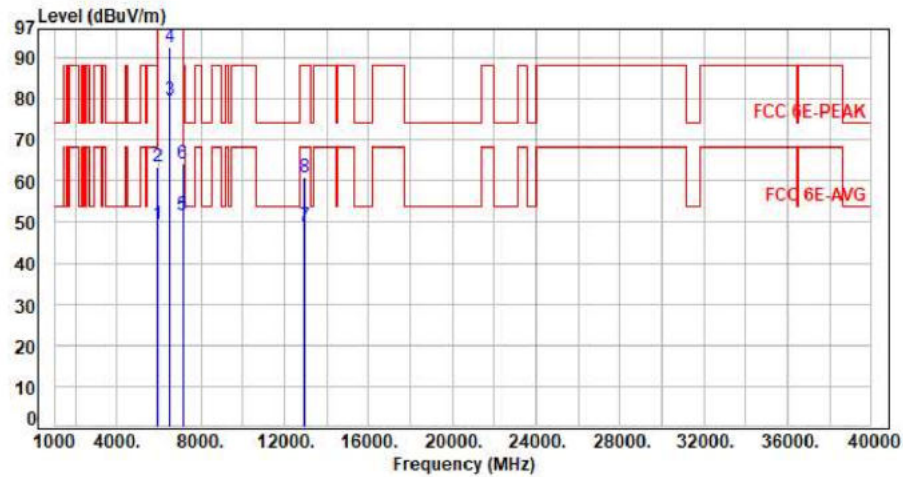

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.78	49.44	68.20	-18.76	Average	385	83	P
2	5925.00	7.66	55.63	63.29	88.20	-24.91	Peak	385	83	P
3	6485.00	8.34	71.18	79.52	200.00	-120.48	Average	385	83	P
4	6485.00	8.34	84.33	92.67	200.00	-107.33	Peak	385	83	P
5	7125.00	10.05	41.65	51.70	68.20	-16.50	Average	385	83	P
6	7125.00	10.05	54.27	64.32	88.20	-23.88	Peak	385	83	P
7	12970.00	19.47	29.64	49.11	68.20	-19.09	Average	100	143	P
8	12970.00	19.47	41.53	61.00	88.20	-27.20	Peak	100	143	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

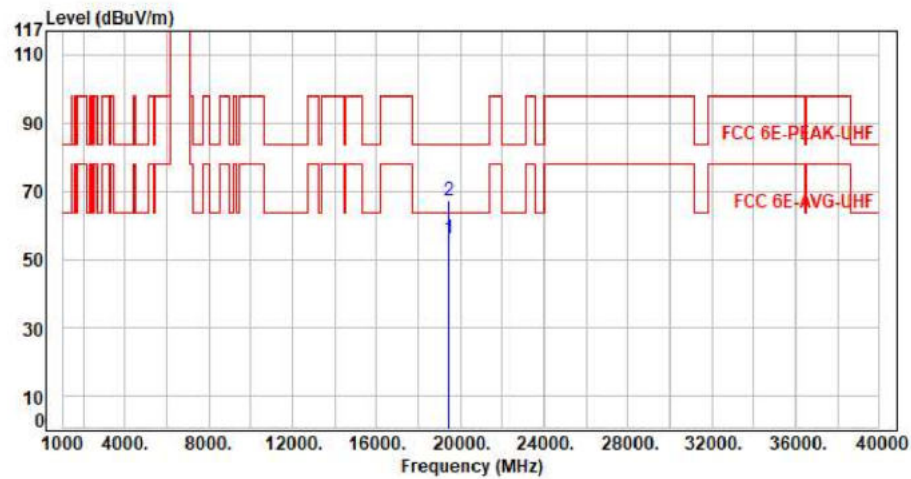


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	44.27	55.84	63.54	-7.70	Average	150	360	P
2	19455.00	11.57	55.63	67.20	83.54	-16.34	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

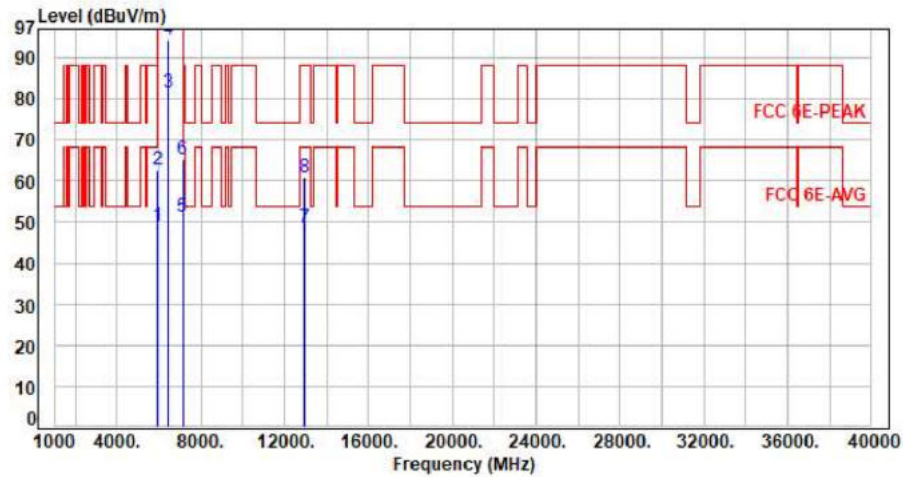


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.28	48.94	68.20	-19.26	Average	100	47	P
2	5925.00	7.66	54.88	62.54	88.20	-25.66	Peak	100	47	P
3	6465.00	8.32	73.12	81.44	200.00	-118.56	Average	100	47	P
4	6465.00	8.32	85.98	94.30	200.00	-105.70	Peak	100	47	P
5	7125.00	10.05	41.05	51.10	68.20	-17.10	Average	100	47	P
6	7125.00	10.05	55.36	65.41	88.20	-22.79	Peak	100	47	P
7	12930.00	19.27	29.53	48.80	68.20	-19.40	Average	100	138	P
8	12930.00	19.27	41.61	60.88	88.20	-27.32	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

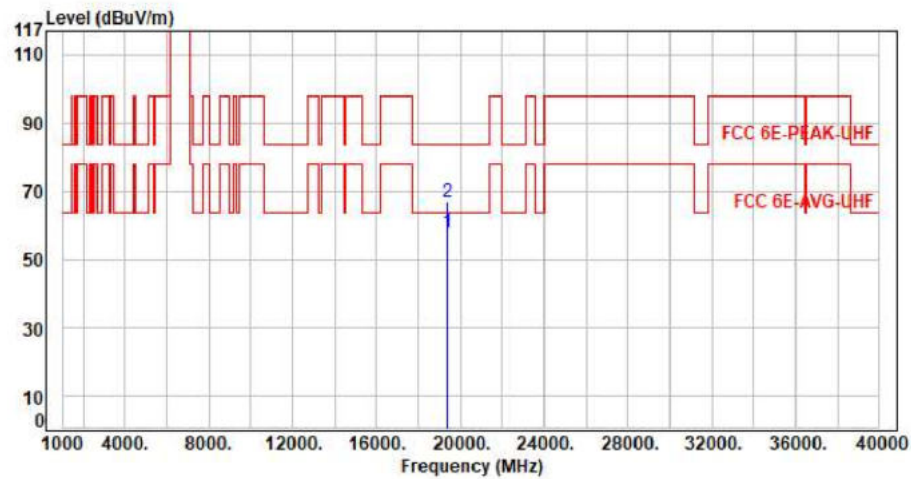


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	45.77	57.68	63.54	-5.86	Average	150	360	P
2	19395.00	11.91	54.98	66.89	83.54	-16.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

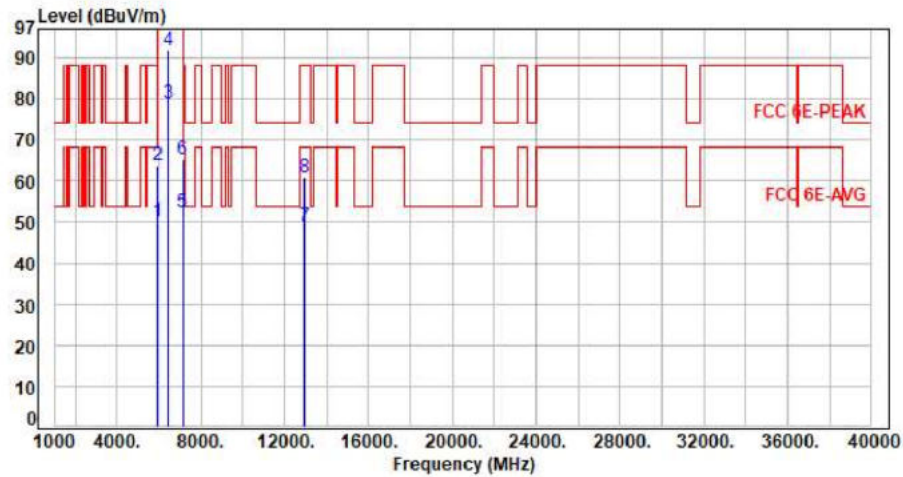


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.44	50.10	68.20	-18.10	Average	400	85	P
2	5925.00	7.66	55.98	63.64	88.20	-24.56	Peak	400	85	P
3	6465.00	8.32	70.78	79.10	200.00	-120.90	Average	400	85	P
4	6465.00	8.32	83.34	91.66	200.00	-108.34	Peak	400	85	P
5	7125.00	10.05	42.49	52.54	68.20	-15.66	Average	400	85	P
6	7125.00	10.05	55.41	65.46	88.20	-22.74	Peak	400	85	P
7	12930.00	19.27	29.60	48.87	68.20	-19.33	Average	100	150	P
8	12930.00	19.27	41.51	60.78	88.20	-27.42	Peak	100	150	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

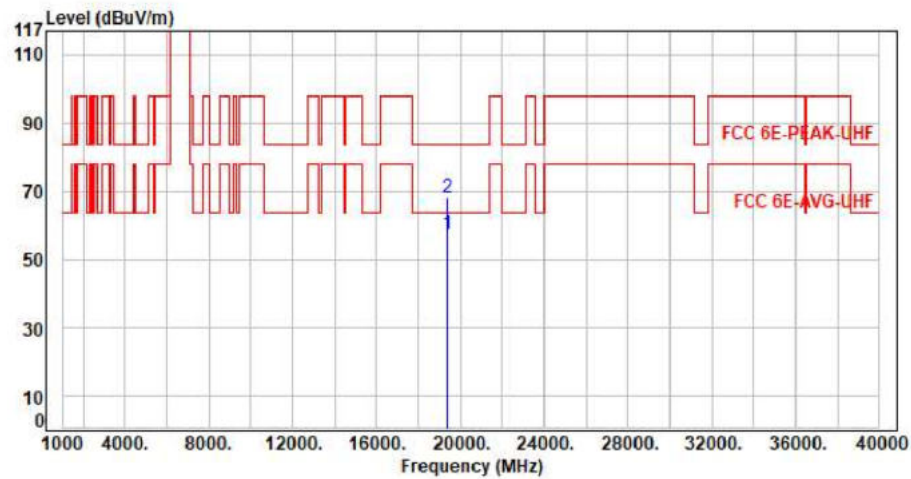


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	45.62	57.53	63.54	-6.01	Average	150	360	P
2	19395.00	11.91	56.37	68.28	83.54	-15.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

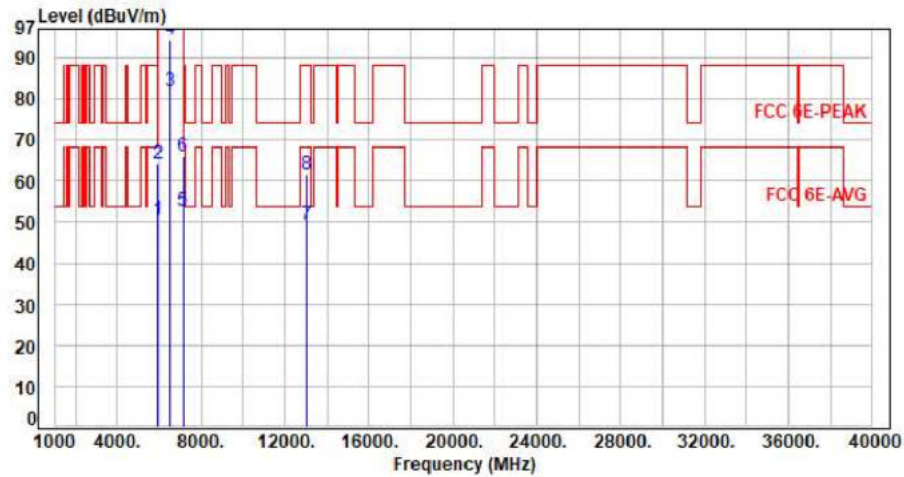


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.97	50.63	68.20	-17.57	Average	100	46	P
2	5925.00	7.66	56.59	64.25	88.20	-23.95	Peak	100	46	P
3	6525.00	8.45	73.37	81.82	200.00	-118.18	Average	100	46	P
4	6525.00	8.45	85.82	94.27	200.00	-105.73	Peak	100	46	P
5	7125.00	10.05	42.79	52.84	68.20	-15.36	Average	100	46	P
6	7125.00	10.05	55.88	65.93	88.20	-22.27	Peak	100	46	P
7	13050.00	20.02	29.25	49.27	68.20	-18.93	Average	100	138	P
8	13050.00	20.02	41.60	61.62	88.20	-26.58	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

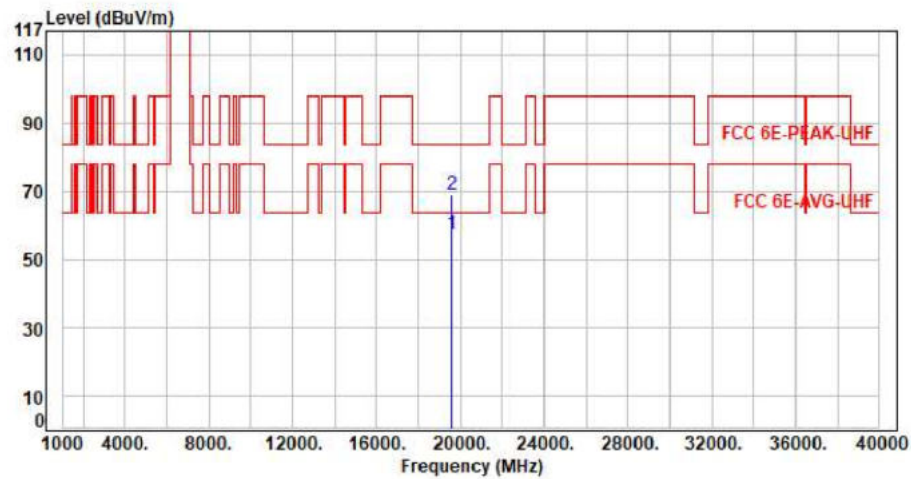


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	45.29	57.31	63.54	-6.23	Average	150	360	P
2	19575.00	12.02	57.08	69.10	83.54	-14.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

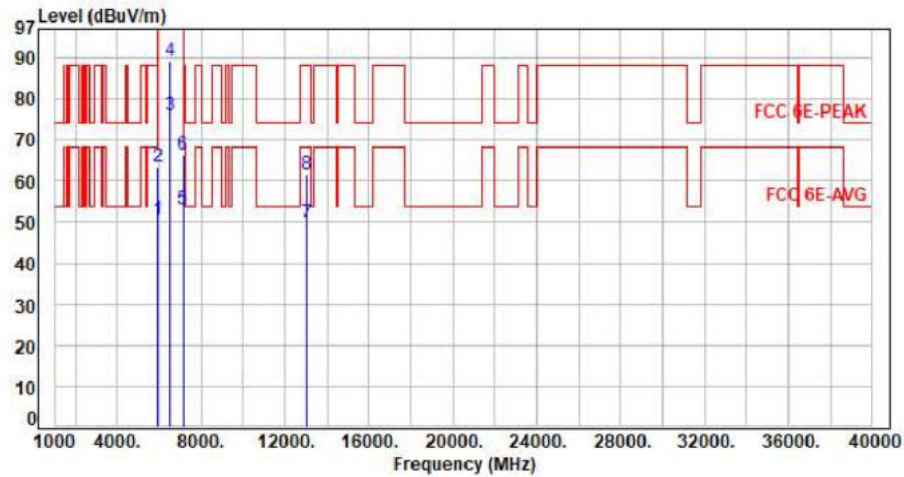

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.92	50.58	68.20	-17.62	Average	119	107	P
2	5925.00	7.66	55.63	63.29	88.20	-24.91	Peak	119	107	P
3	6525.00	8.45	67.62	76.07	200.00	-123.93	Average	119	107	P
4	6525.00	8.45	80.91	89.36	200.00	-110.64	Peak	119	107	P
5	7125.00	10.05	42.89	52.94	68.20	-15.26	Average	119	107	P
6	7125.00	10.05	56.48	66.53	88.20	-21.67	Peak	119	107	P
7	13050.00	20.02	29.61	49.63	68.20	-18.57	Average	100	142	P
8	13050.00	20.02	41.68	61.70	88.20	-26.50	Peak	100	142	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

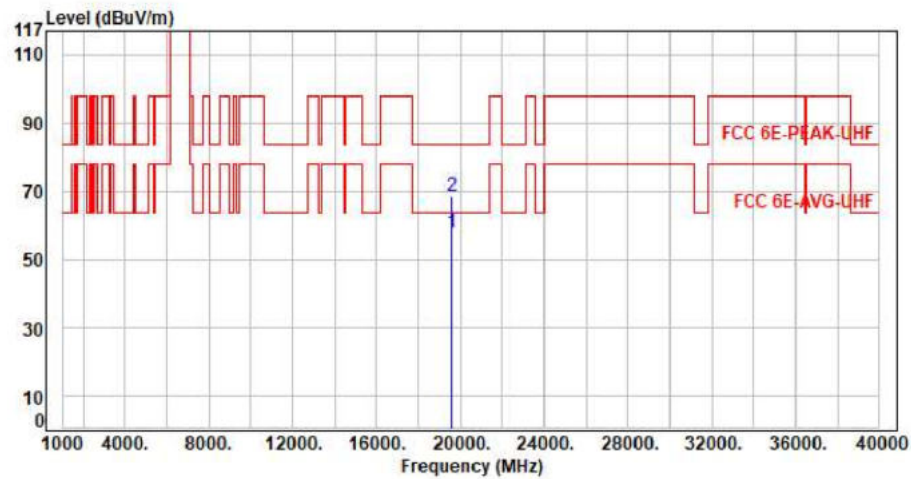


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	45.62	57.64	63.54	-5.90	Average	150	360	P
2	19575.00	12.02	56.52	68.54	83.54	-15.00	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

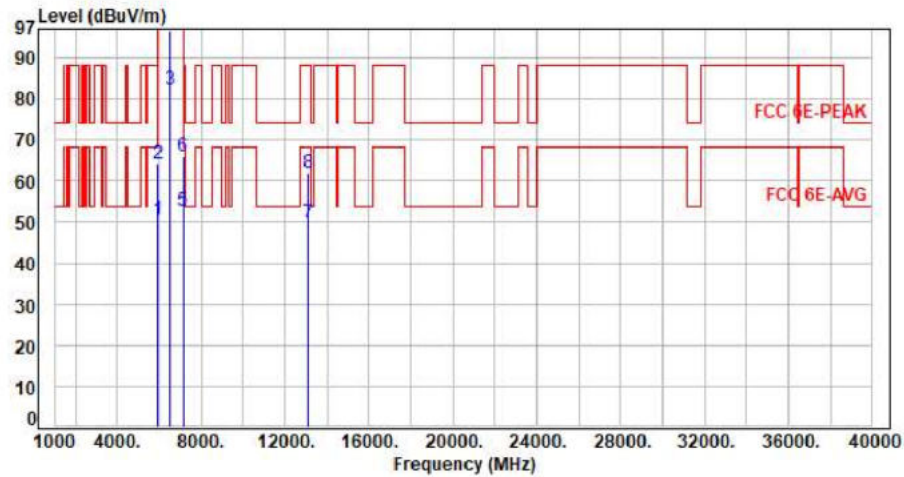


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.96	50.62	68.20	-17.58	Average	100	44	P
2	5925.00	7.66	56.41	64.07	88.20	-24.13	Peak	100	44	P
3	6545.00	8.55	73.84	82.39	200.00	-117.61	Average	100	44	P
4	6545.00	8.55	87.96	96.51	200.00	-103.49	Peak	100	44	P
5	7125.00	10.05	42.70	52.75	68.20	-15.45	Average	100	44	P
6	7125.00	10.05	55.95	66.00	88.20	-22.20	Peak	100	44	P
7	13090.00	20.20	29.71	49.91	68.20	-18.29	Average	100	225	P
8	13090.00	20.20	41.69	61.89	88.20	-26.31	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

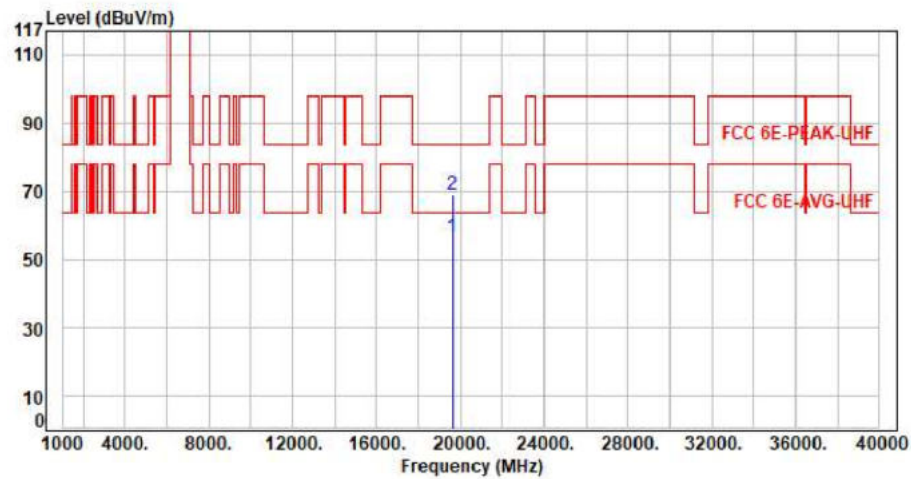


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	44.92	56.50	63.54	-7.04	Average	150	360	P
2	19635.00	11.58	57.19	68.77	83.54	-14.77	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

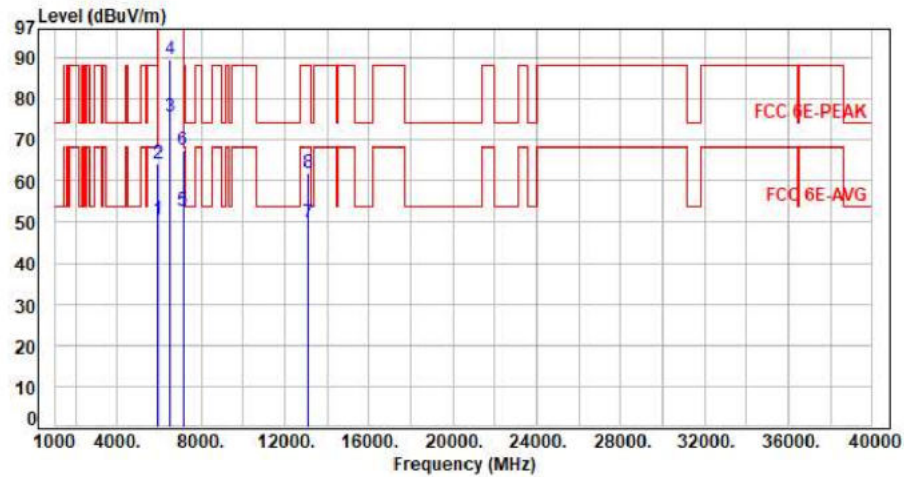

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.89	50.55	68.20	-17.65	Average	100	103	P
2	5925.00	7.66	56.47	64.13	88.20	-24.07	Peak	100	103	P
3	6545.00	8.55	67.13	75.68	200.00	-124.32	Average	100	103	P
4	6545.00	8.55	81.24	89.79	200.00	-110.21	Peak	100	103	P
5	7125.00	10.05	42.72	52.77	68.20	-15.43	Average	100	103	P
6	7125.00	10.05	57.39	67.44	88.20	-20.76	Peak	100	103	P
7	13090.00	20.20	29.47	49.67	68.20	-18.53	Average	100	142	P
8	13090.00	20.20	41.85	62.05	88.20	-26.15	Peak	100	142	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

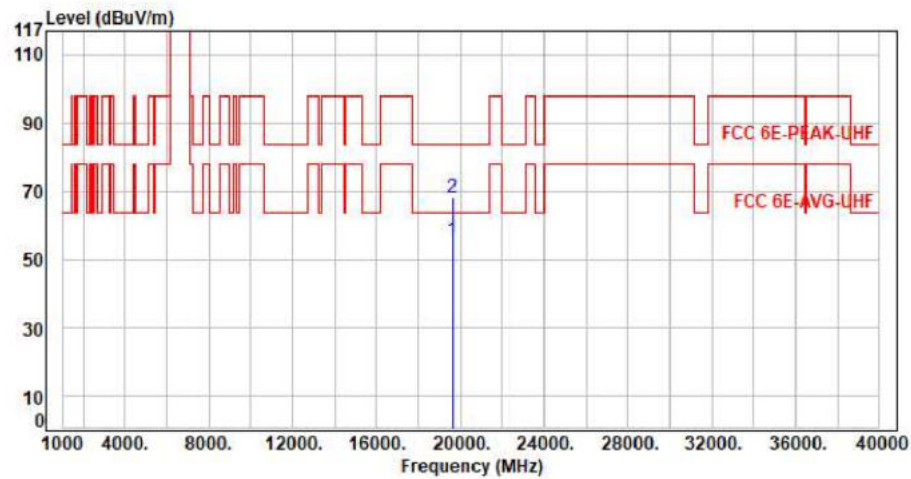


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	44.10	55.68	63.54	-7.86	Average	150	360	P
2	19635.00	11.58	56.39	67.97	83.54	-15.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

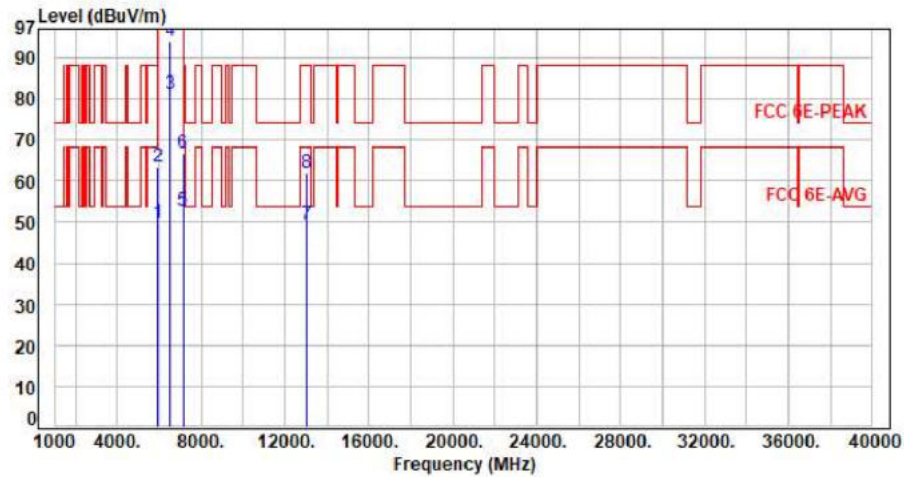

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.21	49.87	68.20	-18.33	Average	100	44	P
2	5925.00	7.66	55.67	63.33	88.20	-24.87	Peak	100	44	P
3	6505.00	8.37	72.84	81.21	200.00	-118.79	Average	100	44	P
4	6505.00	8.37	85.58	93.95	200.00	-106.05	Peak	100	44	P
5	7125.00	10.05	42.60	52.65	68.20	-15.55	Average	100	44	P
6	7125.00	10.05	56.67	66.72	88.20	-21.48	Peak	100	44	P
7	13010.00	19.69	29.75	49.44	68.20	-18.76	Average	100	147	P
8	13010.00	19.69	42.17	61.86	88.20	-26.34	Peak	100	147	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

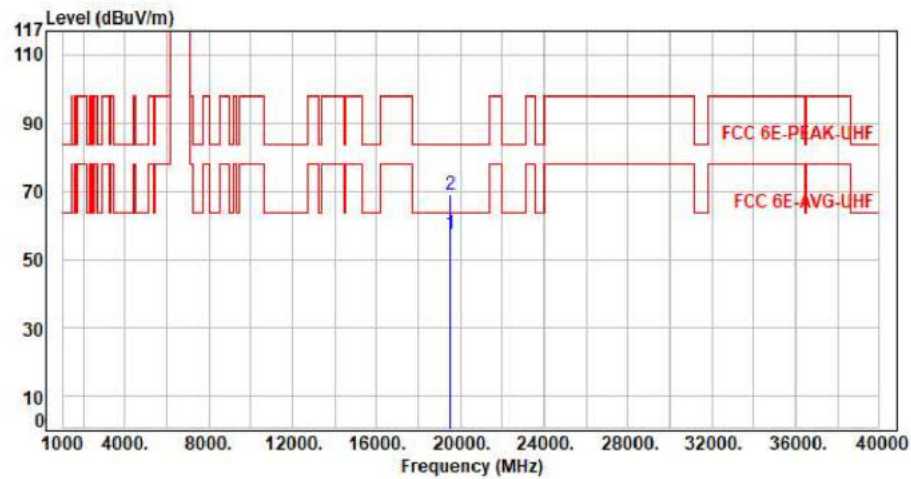


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.58	57.49	63.54	-6.05	Average	150	360	P
2	19515.00	11.91	57.01	68.92	83.54	-14.62	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

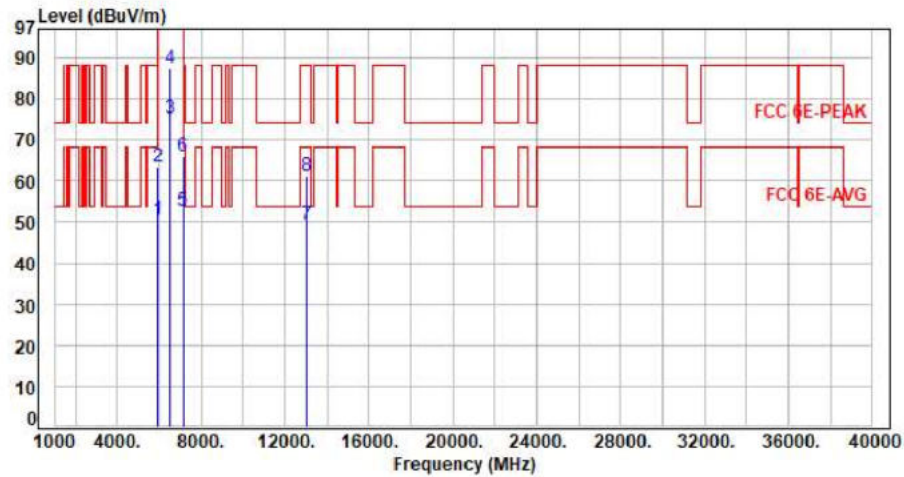

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.85	50.51	68.20	-17.69	Average	131	109	P
2	5925.00	7.66	55.80	63.46	88.20	-24.74	Peak	131	109	P
3	6505.00	8.37	66.92	75.29	200.00	-124.71	Average	131	109	P
4	6505.00	8.37	79.13	87.50	200.00	-112.50	Peak	131	109	P
5	7125.00	10.05	42.70	52.75	68.20	-15.45	Average	131	109	P
6	7125.00	10.05	56.07	66.12	88.20	-22.08	Peak	131	109	P
7	13010.00	19.69	29.73	49.42	68.20	-18.78	Average	100	124	P
8	13010.00	19.69	41.67	61.36	88.20	-26.84	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

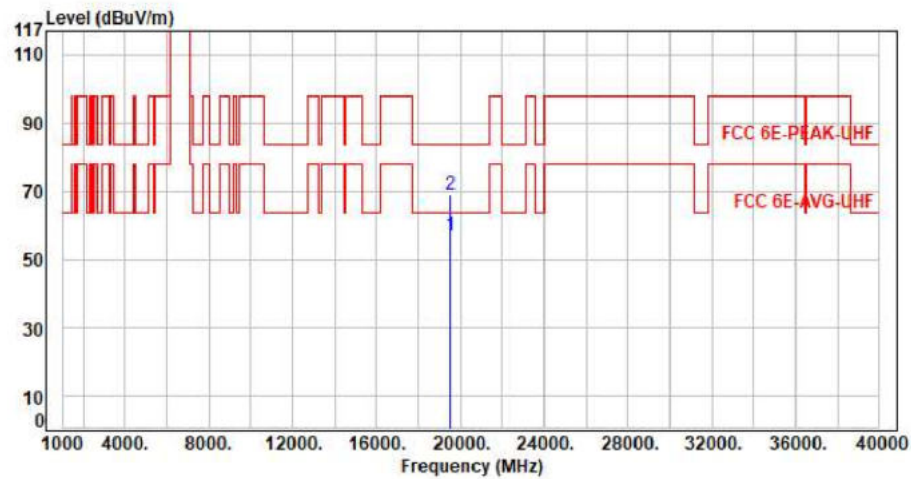


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.18	57.09	63.54	-6.45	Average	150	360	P
2	19515.00	11.91	57.12	69.03	83.54	-14.51	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

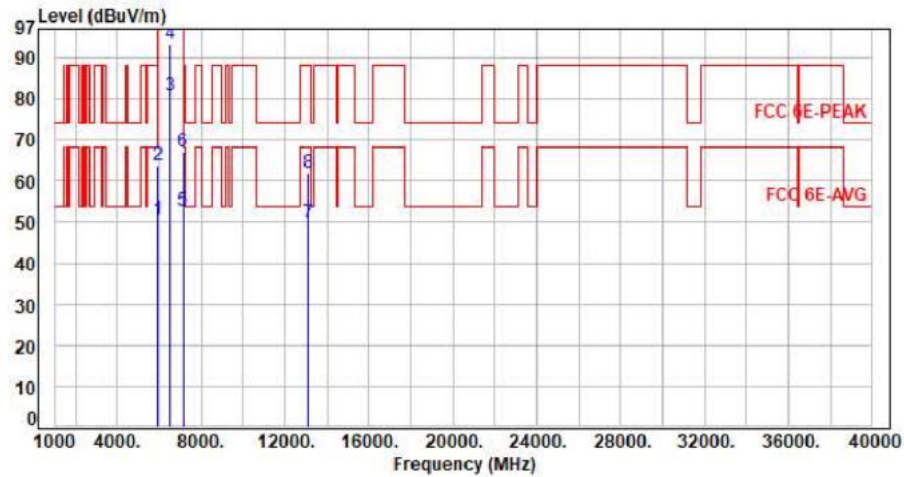

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.72	50.38	68.20	-17.82	Average	100	45	P
2	5925.00	7.66	56.02	63.68	88.20	-24.52	Peak	100	45	P
3	6535.00	8.50	72.14	80.64	200.00	-119.36	Average	100	45	P
4	6535.00	8.50	84.68	93.18	200.00	-106.82	Peak	100	45	P
5	7125.00	10.05	42.60	52.65	68.20	-15.55	Average	100	45	P
6	7125.00	10.05	56.89	66.94	88.20	-21.26	Peak	100	45	P
7	13070.00	20.11	29.68	49.79	68.20	-18.41	Average	100	134	P
8	13070.00	20.11	41.82	61.93	88.20	-26.27	Peak	100	134	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

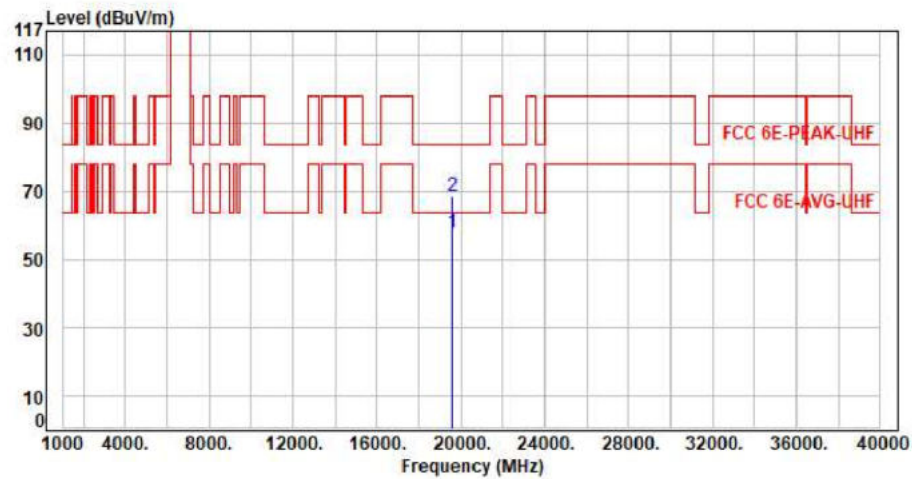


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	45.85	57.63	63.54	-5.91	Average	150	360	P
2	19605.00	11.78	56.95	68.73	83.54	-14.81	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

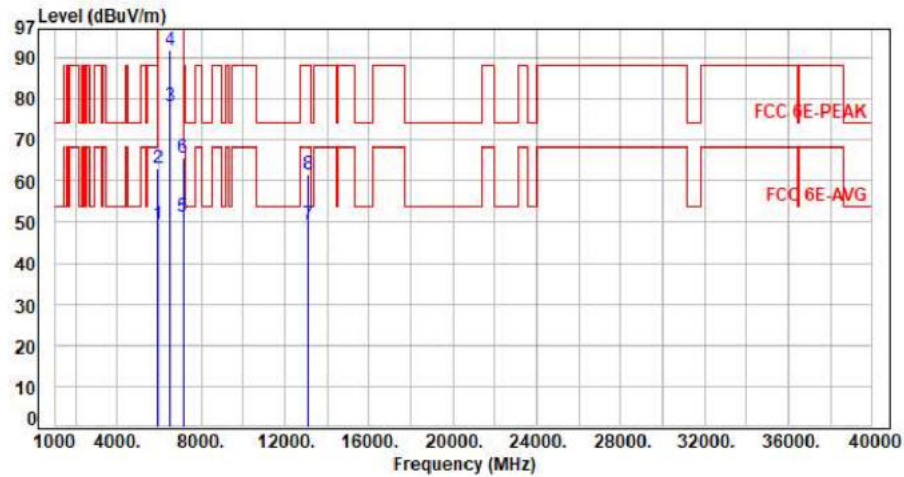


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.75	49.41	68.20	-18.79	Average	356	86	P
2	5925.00	7.66	55.31	62.97	88.20	-25.23	Peak	356	86	P
3	6535.00	8.50	69.77	78.27	200.00	-121.73	Average	356	86	P
4	6535.00	8.50	83.20	91.70	200.00	-108.30	Peak	356	86	P
5	7125.00	10.05	41.05	51.10	68.20	-17.10	Average	356	86	P
6	7125.00	10.05	55.74	65.79	88.20	-22.41	Peak	356	86	P
7	13070.00	20.11	29.41	49.52	68.20	-18.68	Average	100	145	P
8	13070.00	20.11	41.62	61.73	88.20	-26.47	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

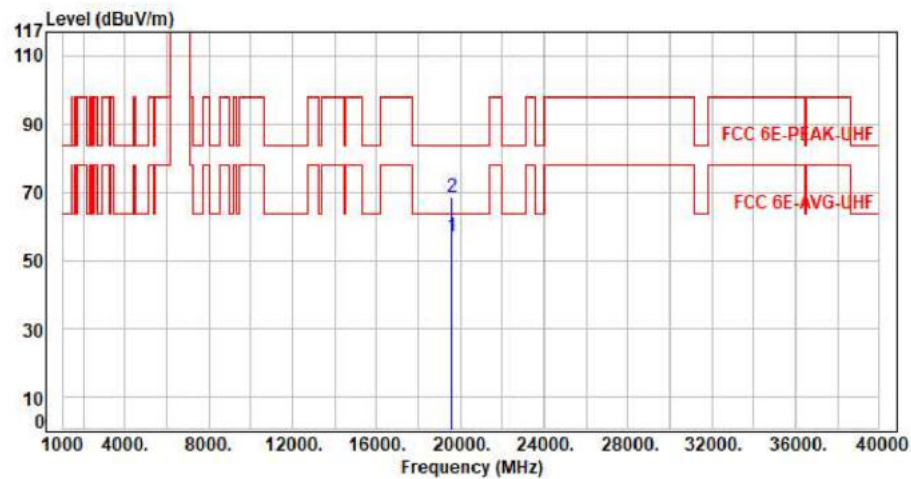


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	45.02	56.80	63.54	-6.74	Average	150	360	P
2	19605.00	11.78	56.59	68.37	83.54	-15.17	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

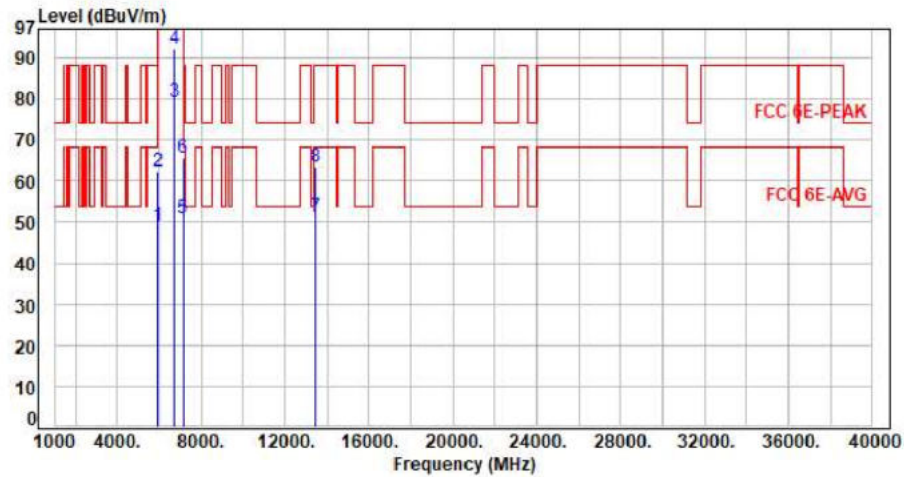


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.30	48.96	68.20	-19.24	Average	100	349	P
2	5925.00	7.66	54.60	62.26	88.20	-25.94	Peak	100	349	P
3	6715.00	9.29	69.91	79.20	200.00	-120.80	Average	100	349	P
4	6715.00	9.29	82.86	92.15	200.00	-107.85	Peak	100	349	P
5	7125.00	10.05	41.01	51.06	68.20	-17.14	Average	100	349	P
6	7125.00	10.05	55.70	65.75	88.20	-22.45	Peak	100	349	P
7	13430.00	21.71	29.41	51.12	68.20	-17.08	Average	100	146	P
8	13430.00	21.71	41.68	63.39	88.20	-24.81	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

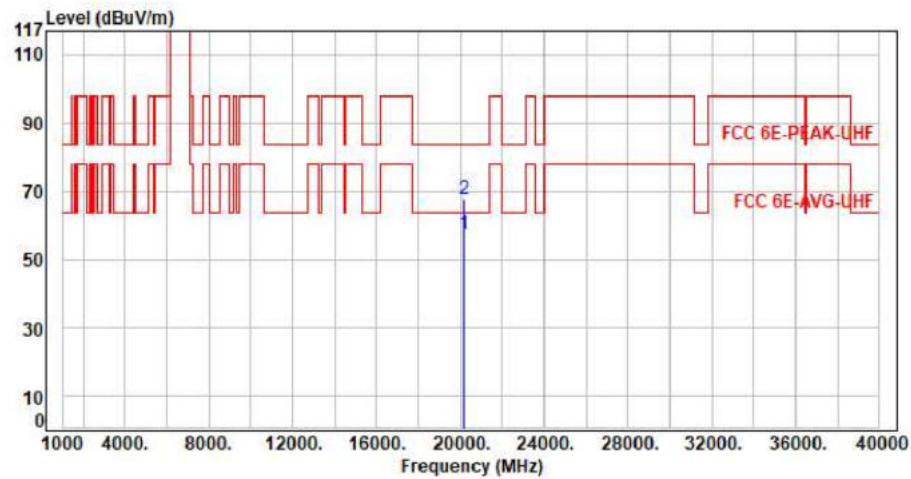


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	45.84	57.27	63.54	-6.27	Average	150	360	P
2	20145.00	11.43	56.10	67.53	83.54	-16.01	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

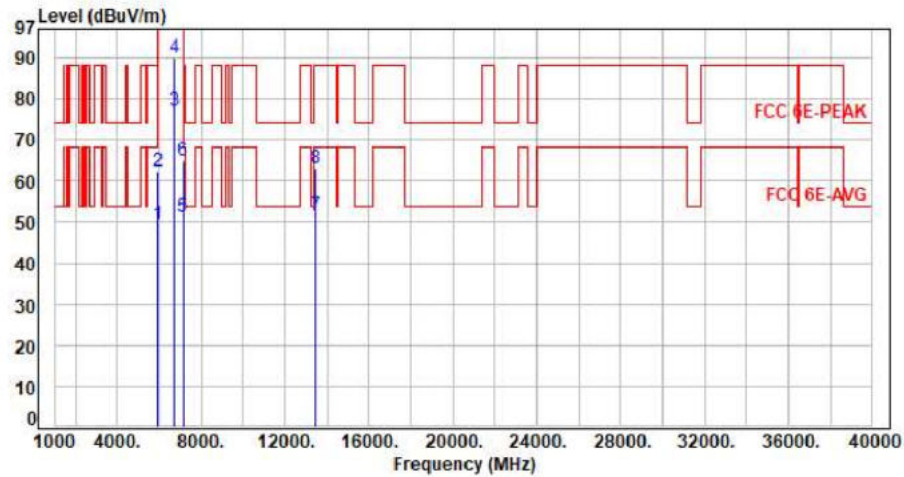

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.82	49.48	68.20	-18.72	Average	374	56	P
2	5925.00	7.66	54.66	62.32	88.20	-25.88	Peak	374	56	P
3	6715.00	9.29	67.85	77.14	200.00	-122.86	Average	374	56	P
4	6715.00	9.29	80.85	90.14	200.00	-109.86	Peak	374	56	P
5	7125.00	10.05	41.05	51.10	68.20	-17.10	Average	374	56	P
6	7125.00	10.05	55.03	65.08	88.20	-23.12	Peak	374	56	P
7	13430.00	21.71	29.76	51.47	68.20	-16.73	Average	100	138	P
8	13430.00	21.71	41.52	63.23	88.20	-24.97	Peak	100	138	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

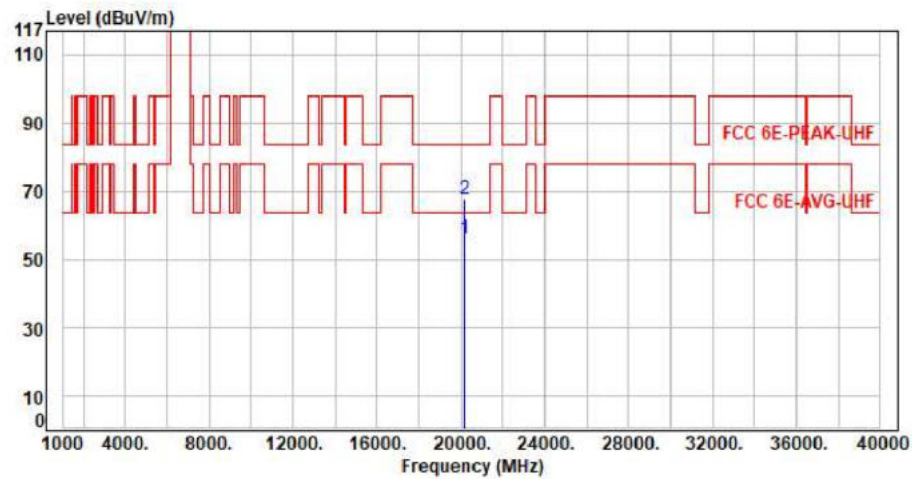


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	44.67	56.10	63.54	-7.44	Average	150	360	P
2	20145.00	11.43	56.11	67.54	83.54	-16.00	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

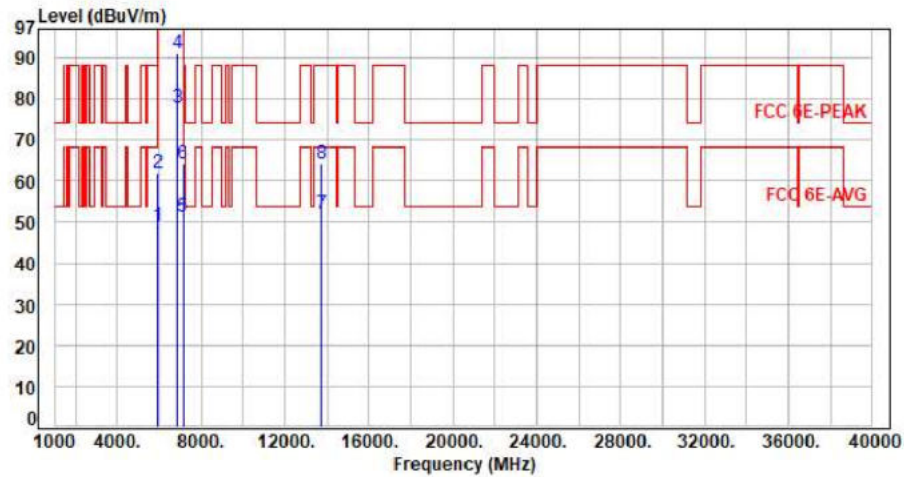

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.36	49.02	68.20	-19.18	Average	100	314	P
2	5925.00	7.66	54.26	61.92	88.20	-26.28	Peak	100	314	P
3	6855.00	9.50	68.38	77.88	200.00	-122.12	Average	100	314	P
4	6855.00	9.50	81.49	90.99	200.00	-109.01	Peak	100	314	P
5	7125.00	10.05	41.32	51.37	68.20	-16.83	Average	100	314	P
6	7125.00	10.05	54.29	64.34	88.20	-23.86	Peak	100	314	P
7	13710.00	22.48	29.68	52.16	68.20	-16.04	Average	100	225	P
8	13710.00	22.48	41.63	64.11	88.20	-24.09	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

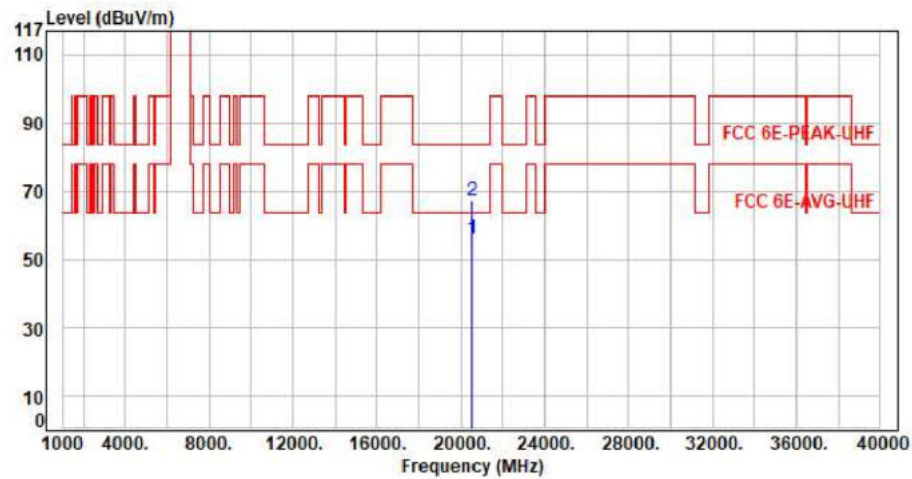


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	44.48	55.86	63.54	-7.68	Average	150	360	P
2	20565.00	11.38	55.99	67.37	83.54	-16.17	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

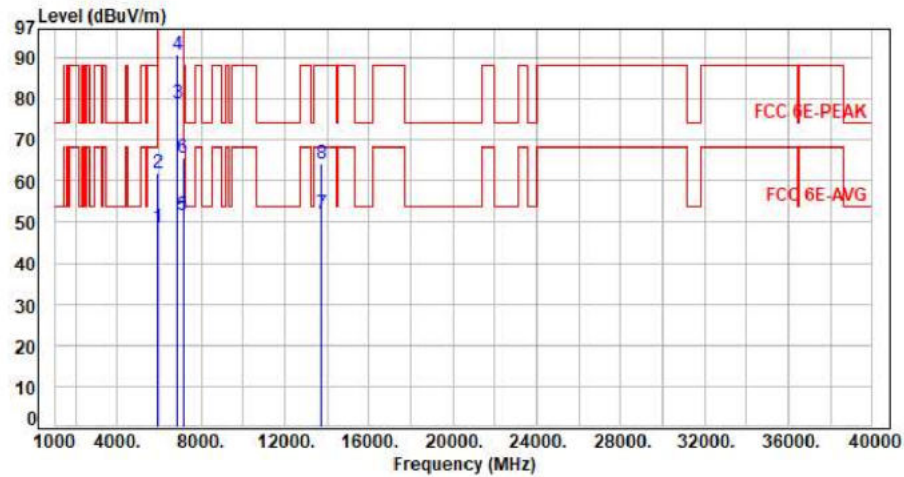


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.05	48.71	68.20	-19.49	Average	315	85	P
2	5925.00	7.66	54.30	61.96	88.20	-26.24	Peak	315	85	P
3	6855.00	9.50	69.41	78.91	200.00	-121.09	Average	315	85	P
4	6855.00	9.50	81.29	90.79	200.00	-109.21	Peak	315	85	P
5	7125.00	10.05	41.49	51.54	68.20	-16.66	Average	315	85	P
6	7125.00	10.05	55.59	65.64	88.20	-22.56	Peak	315	85	P
7	13710.00	22.48	29.65	52.13	68.20	-16.07	Average	100	138	P
8	13710.00	22.48	41.67	64.15	88.20	-24.05	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

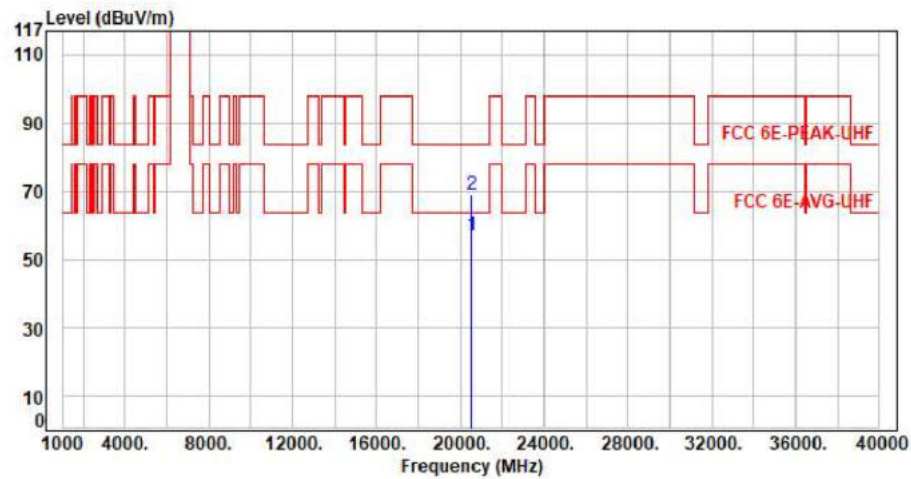

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	45.69	57.07	63.54	-6.47	Average	150	360	P
2	20565.00	11.38	57.41	68.79	83.54	-14.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor