




For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

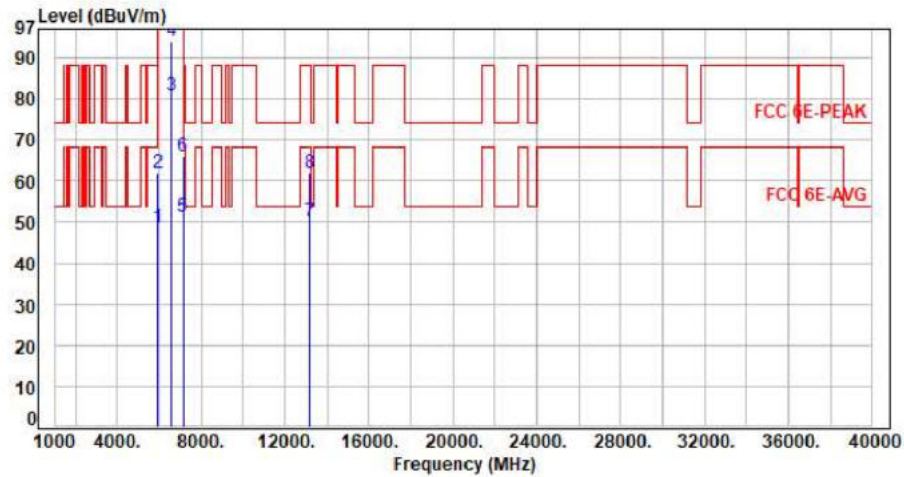

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.20	48.86	68.20	-19.34	Average	100	44	P
2	5925.00	7.66	54.30	61.96	88.20	-26.24	Peak	100	44	P
3	6565.00	8.67	72.26	80.93	200.00	-119.07	Average	100	44	P
4	6565.00	8.67	85.27	93.94	200.00	-106.06	Peak	100	44	P
5	7125.00	10.05	41.07	51.12	68.20	-17.08	Average	100	44	P
6	7125.00	10.05	55.99	66.04	88.20	-22.16	Peak	100	44	P
7	13130.00	20.32	29.81	50.13	68.20	-18.07	Average	100	164	P
8	13130.00	20.32	41.55	61.87	88.20	-26.33	Peak	100	164	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

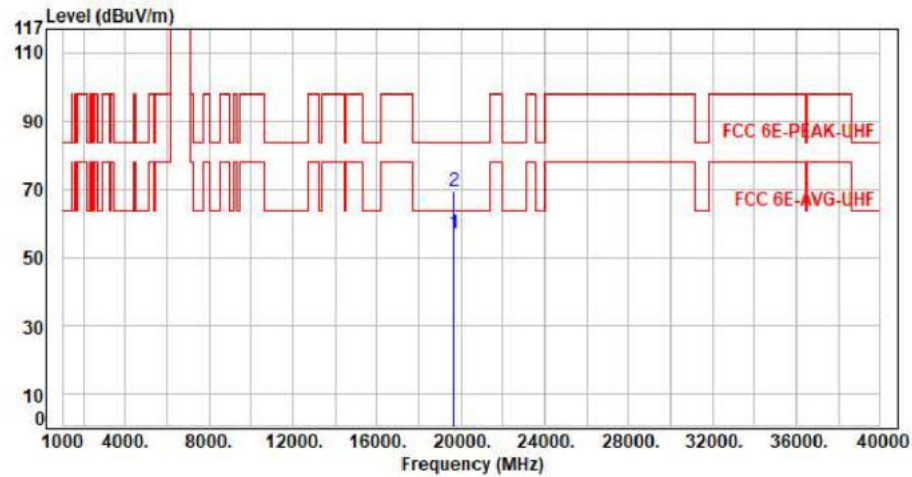


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	45.45	56.90	63.54	-6.64	Average	150	360	P
2	19695.00	11.45	57.74	69.19	83.54	-14.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

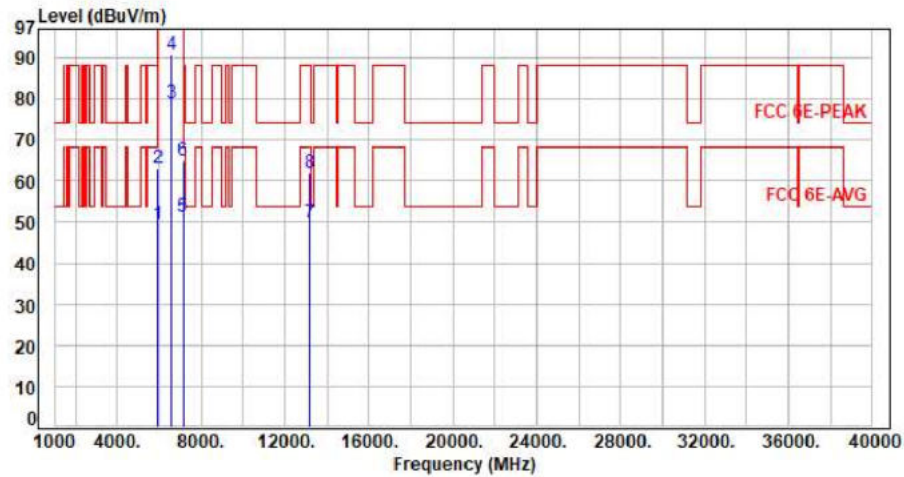


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.60	49.26	68.20	-18.94	Average	355	87	P
2	5925.00	7.66	55.30	62.96	88.20	-25.24	Peak	355	87	P
3	6565.00	8.67	70.07	78.74	200.00	-121.26	Average	355	87	P
4	6565.00	8.67	82.20	90.87	200.00	-109.13	Peak	355	87	P
5	7125.00	10.05	41.05	51.10	68.20	-17.10	Average	355	87	P
6	7125.00	10.05	54.79	64.84	88.20	-23.36	Peak	355	87	P
7	13130.00	20.32	29.54	49.86	68.20	-18.34	Average	100	164	P
8	13130.00	20.32	41.52	61.84	88.20	-26.36	Peak	100	164	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

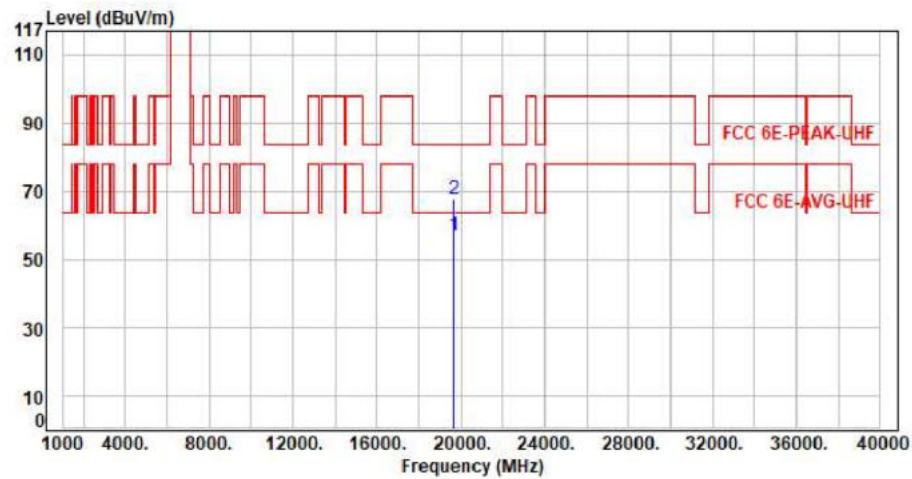


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	45.42	56.87	63.54	-6.67	Average	150	360	P
2	19695.00	11.45	56.31	67.76	83.54	-15.78	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

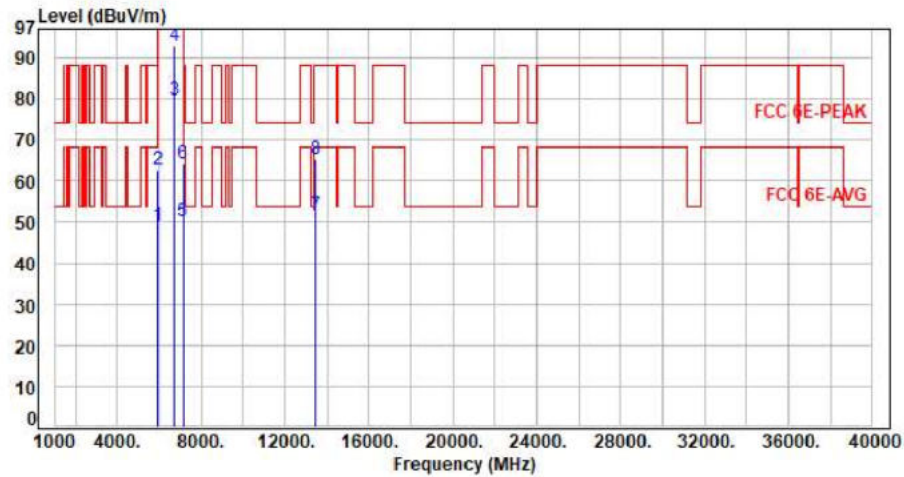

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.22	48.88	68.20	-19.32	Average	100	350	P
2	5925.00	7.66	54.86	62.52	88.20	-25.68	Peak	100	350	P
3	6725.00	9.33	70.39	79.72	200.00	-120.28	Average	100	350	P
4	6725.00	9.33	83.55	92.88	200.00	-107.12	Peak	100	350	P
5	7125.00	10.05	40.29	50.34	68.20	-17.86	Average	100	350	P
6	7125.00	10.05	54.07	64.12	88.20	-24.08	Peak	100	350	P
7	13450.00	21.80	29.72	51.52	68.20	-16.68	Average	100	175	P
8	13450.00	21.80	43.52	65.32	88.20	-22.88	Peak	100	175	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

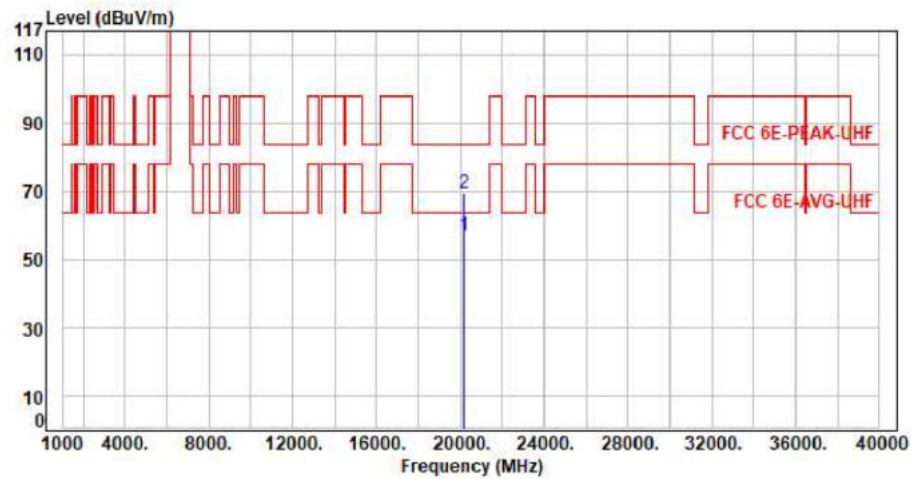


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	45.43	56.89	63.54	-6.65	Average	150	360	P
2	20175.00	11.46	57.86	69.32	83.54	-14.22	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

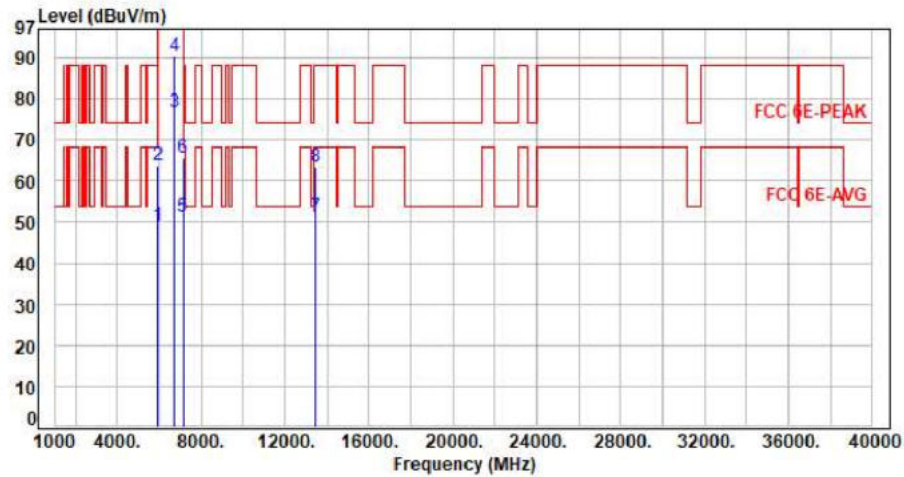

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.28	48.94	68.20	-19.26	Average	400	90	P
2	5925.00	7.66	56.18	63.84	88.20	-24.36	Peak	400	90	P
3	6725.00	9.33	67.28	76.61	200.00	-123.39	Average	400	90	P
4	6725.00	9.33	81.18	90.51	200.00	-109.49	Peak	400	90	P
5	7125.00	10.05	41.29	51.34	68.20	-16.86	Average	400	90	P
6	7125.00	10.05	55.67	65.72	88.20	-22.48	Peak	400	90	P
7	13450.00	21.80	29.63	51.43	68.20	-16.77	Average	100	200	P
8	13450.00	21.80	41.69	63.49	88.20	-24.71	Peak	100	200	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

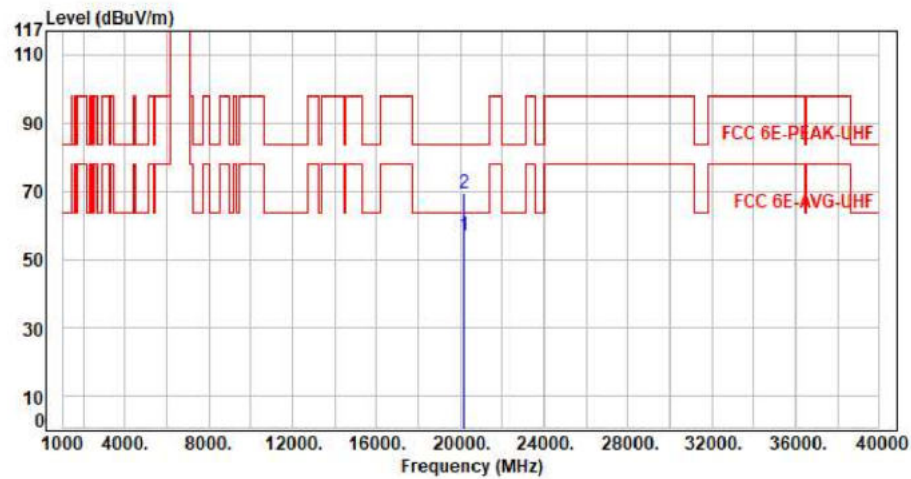


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	45.56	57.02	63.54	-6.52	Average	150	360	P
2	20175.00	11.46	57.76	69.22	83.54	-14.32	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

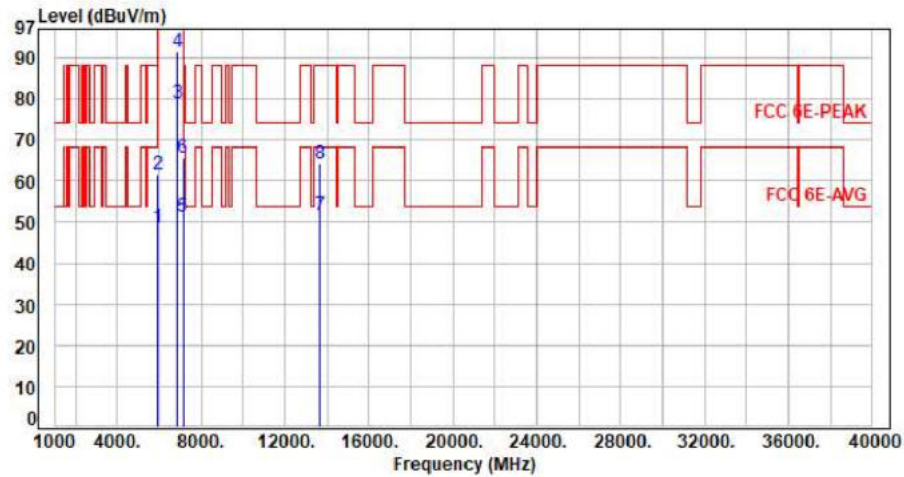

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.02	48.68	68.20	-19.52	Average	100	348	P
2	5925.00	7.66	54.06	61.72	88.20	-26.48	Peak	100	348	P
3	6845.00	9.48	69.52	79.00	200.00	-121.00	Average	100	348	P
4	6845.00	9.48	82.02	91.50	200.00	-108.50	Peak	100	348	P
5	7125.00	10.05	41.28	51.33	68.20	-16.87	Average	100	348	P
6	7125.00	10.05	55.68	65.73	88.20	-22.47	Peak	100	348	P
7	13690.00	22.40	29.18	51.58	68.20	-16.62	Average	100	164	P
8	13690.00	22.40	41.62	64.02	88.20	-24.18	Peak	100	164	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

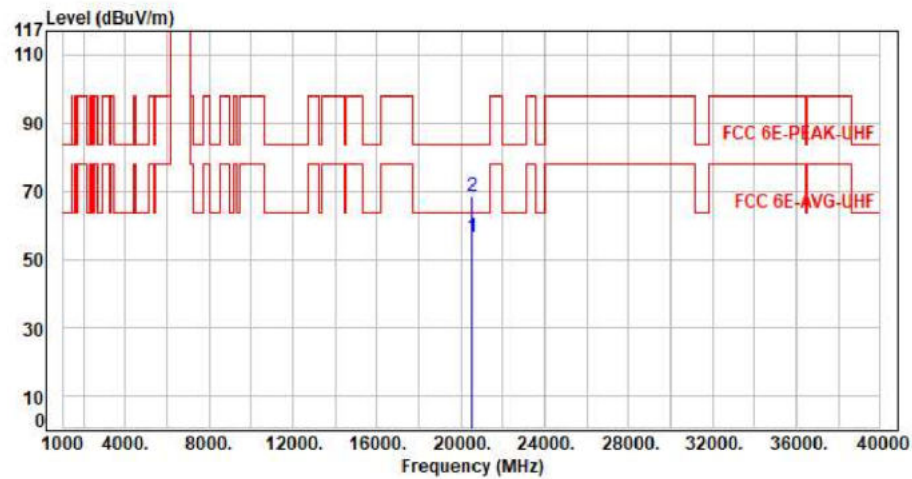


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	44.99	56.43	63.54	-7.11	Average	150	360	P
2	20535.00	11.44	56.99	68.43	83.54	-15.11	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

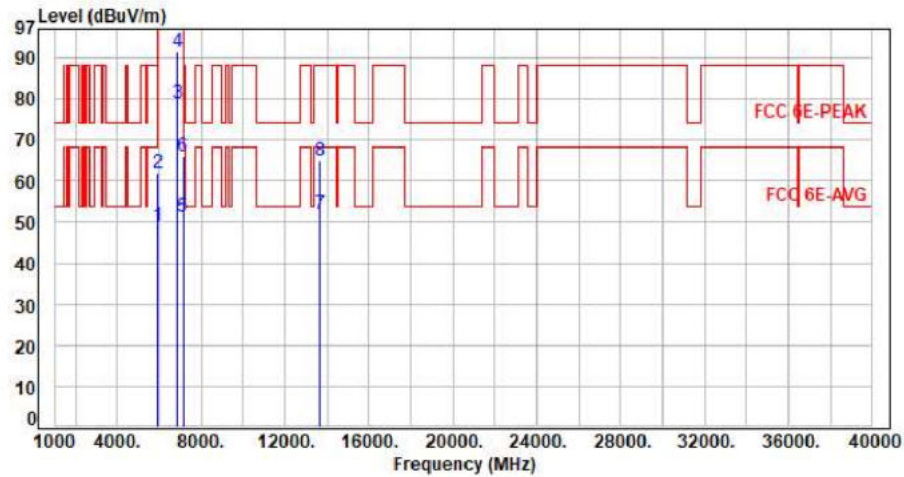


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.33	48.99	68.20	-19.21	Average	315	0	P
2	5925.00	7.66	54.38	62.04	88.20	-26.16	Peak	315	0	P
3	6845.00	9.48	69.55	79.03	200.00	-120.97	Average	315	0	P
4	6845.00	9.48	81.83	91.31	200.00	-108.69	Peak	315	0	P
5	7125.00	10.05	41.24	51.29	68.20	-16.91	Average	315	0	P
6	7125.00	10.05	56.05	66.10	88.20	-22.10	Peak	315	0	P
7	13690.00	22.40	29.64	52.04	68.20	-16.16	Average	100	196	P
8	13690.00	22.40	42.51	64.91	88.20	-23.29	Peak	100	196	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

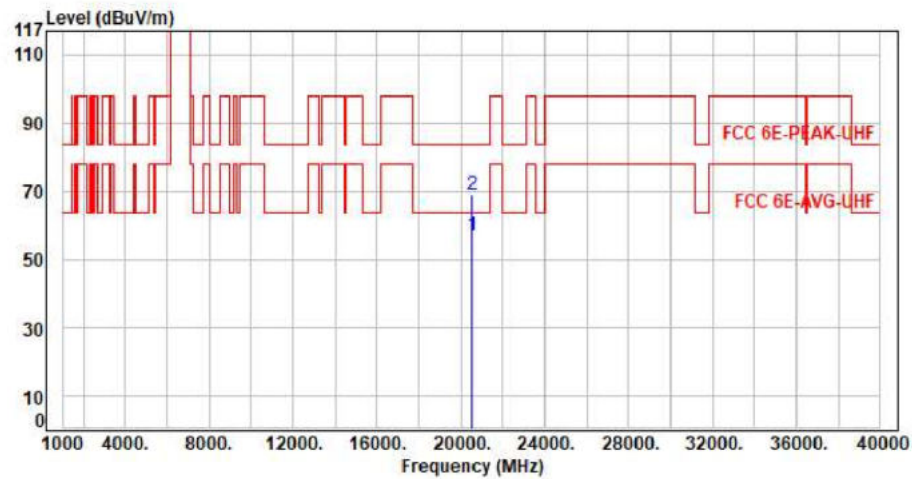


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	45.32	56.76	63.54	-6.78	Average	150	360	P
2	20535.00	11.44	57.53	68.97	83.54	-14.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

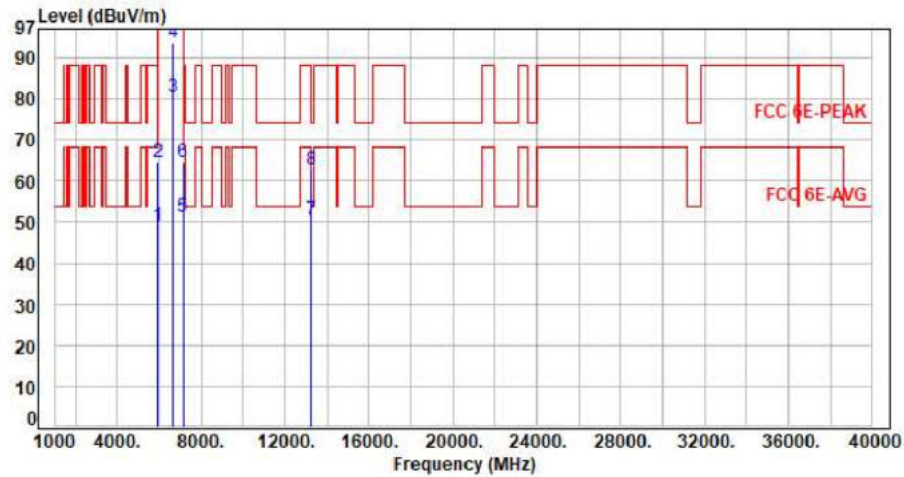

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.33	48.99	68.20	-19.21	Average	100	44	P
2	5925.00	7.66	56.72	64.38	88.20	-23.82	Peak	100	44	P
3	6625.00	8.94	71.40	80.34	200.00	-119.66	Average	100	44	P
4	6625.00	8.94	84.87	93.81	200.00	-106.19	Peak	100	44	P
5	7125.00	10.05	41.19	51.24	68.20	-16.96	Average	100	44	P
6	7125.00	10.05	54.67	64.72	88.20	-23.48	Peak	100	44	P
7	13250.00	21.00	29.61	50.61	54.00	-3.39	Average	100	189	P
8	13250.00	21.00	41.69	62.69	74.00	-11.31	Peak	100	189	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

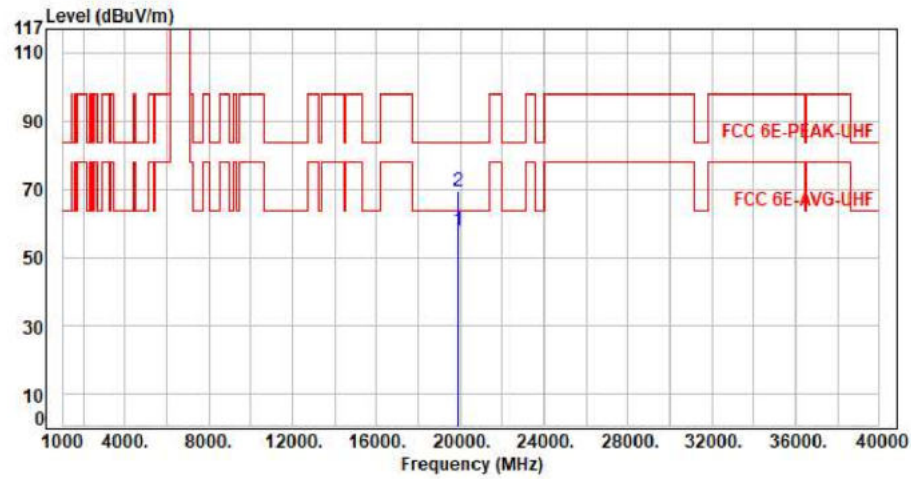


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	45.82	57.72	63.54	-5.82	Average	150	360	P
2	19875.00	11.90	57.41	69.31	83.54	-14.23	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

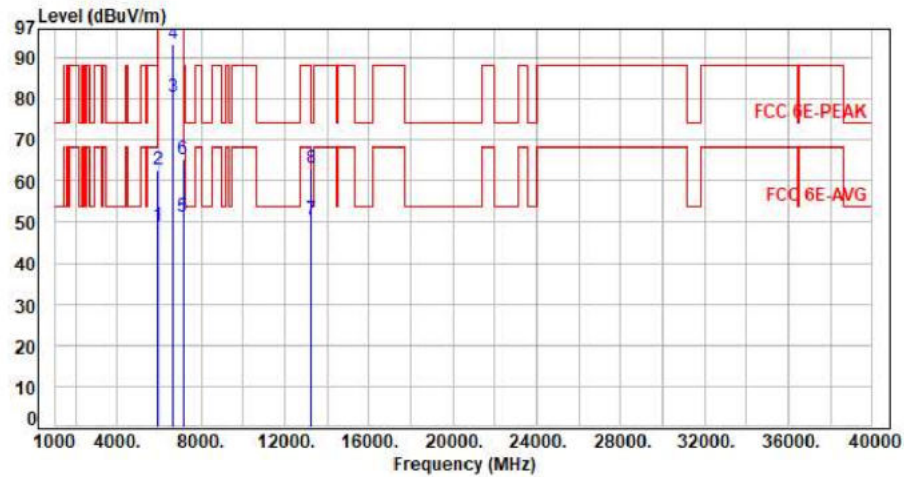

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.23	48.89	68.20	-19.31	Average	350	87	P
2	5925.00	7.66	54.86	62.52	88.20	-25.68	Peak	350	87	P
3	6625.00	8.94	71.58	80.52	200.00	-119.48	Average	350	87	P
4	6625.00	8.94	84.49	93.43	200.00	-106.57	Peak	350	87	P
5	7125.00	10.05	41.04	51.09	68.20	-17.11	Average	350	87	P
6	7125.00	10.05	55.26	65.31	88.20	-22.89	Peak	350	87	P
7	13250.00	21.00	29.64	50.64	54.00	-3.36	Average	100	164	P
8	13250.00	21.00	42.22	63.22	74.00	-10.78	Peak	100	164	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

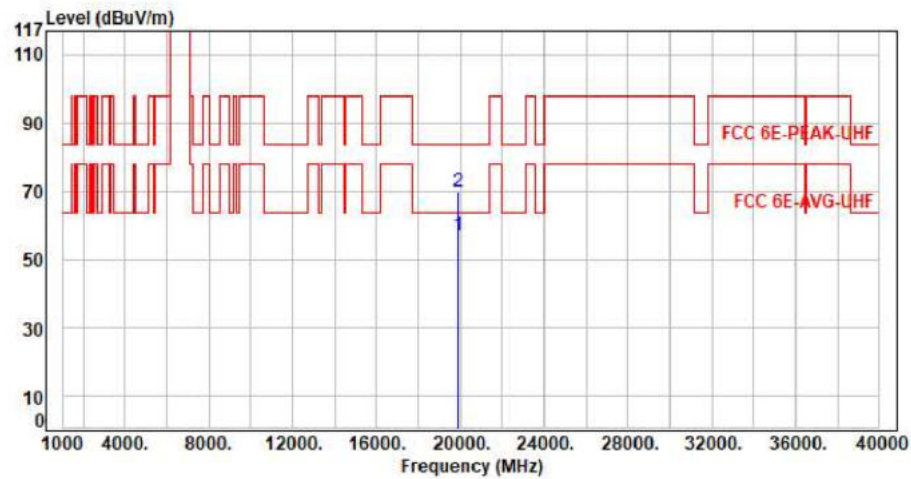


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	45.18	57.08	63.54	-6.46	Average	150	360	P
2	19875.00	11.90	57.94	69.84	83.54	-13.70	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

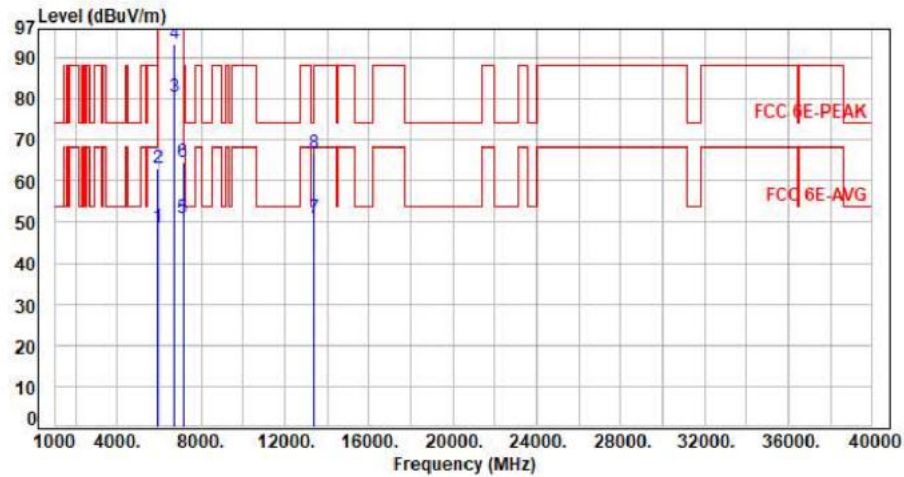


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.11	48.77	68.20	-19.43	Average	100	350	P
2	5925.00	7.66	55.36	63.02	88.20	-25.18	Peak	100	350	P
3	6705.00	9.25	71.30	80.55	200.00	-119.45	Average	100	350	P
4	6705.00	9.25	83.96	93.21	200.00	-106.79	Peak	100	350	P
5	7125.00	10.05	41.01	51.06	68.20	-17.14	Average	100	350	P
6	7125.00	10.05	54.67	64.72	88.20	-23.48	Peak	100	350	P
7	13410.00	21.62	29.42	51.04	68.20	-17.16	Average	100	173	P
8	13410.00	21.62	45.11	66.73	88.20	-21.47	Peak	100	173	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

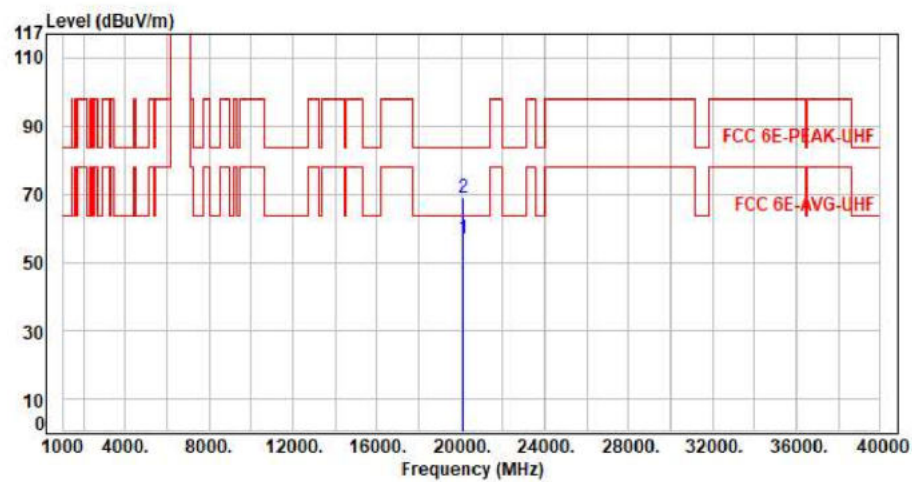

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	45.66	57.06	63.54	-6.48	Average	150	360	P
2	20115.00	11.40	57.76	69.16	83.54	-14.38	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

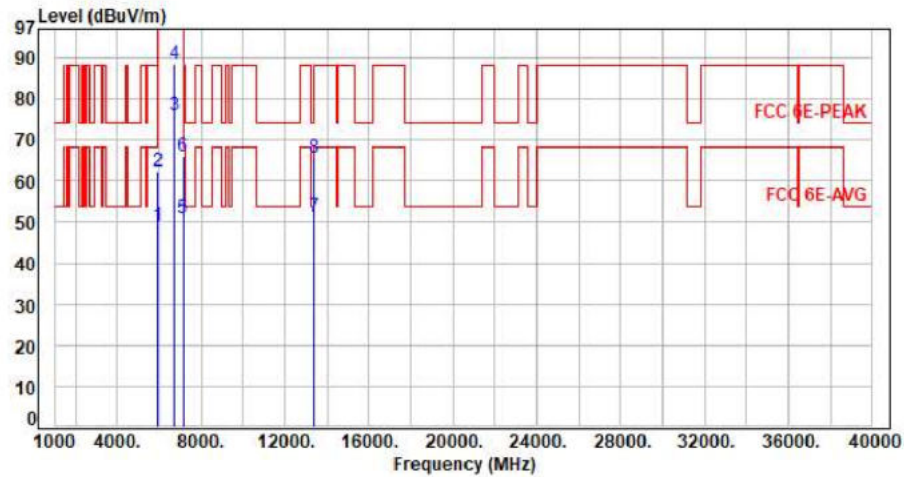


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.52	49.18	68.20	-19.02	Average	131	108	P
2	5925.00	7.66	54.69	62.35	88.20	-25.85	Peak	131	108	P
3	6705.00	9.25	66.85	76.10	200.00	-123.90	Average	131	108	P
4	6705.00	9.25	79.36	88.61	200.00	-111.39	Peak	131	108	P
5	7125.00	10.05	41.02	51.07	68.20	-17.13	Average	131	108	P
6	7125.00	10.05	56.07	66.12	88.20	-22.08	Peak	131	108	P
7	13410.00	21.62	29.61	51.23	68.20	-16.97	Average	100	192	P
8	13410.00	21.62	44.08	65.70	88.20	-22.50	Peak	100	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

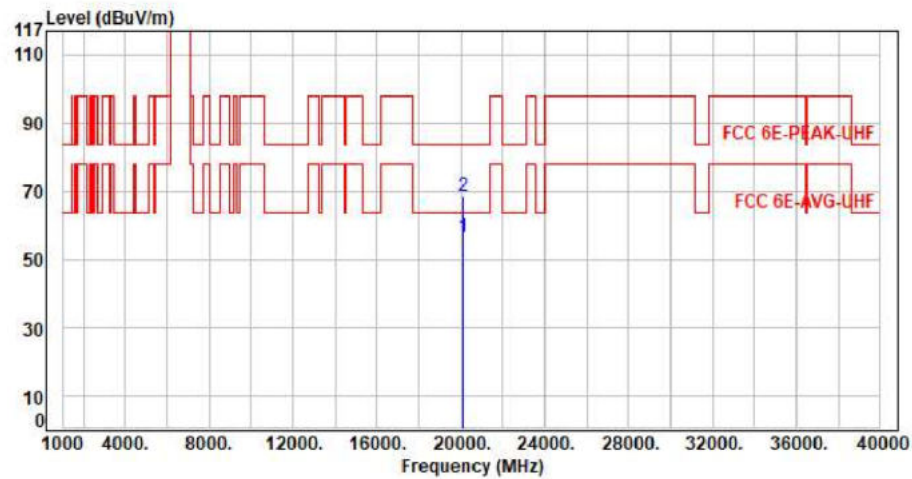


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	45.27	56.67	63.54	-6.87	Average	150	360	P
2	20115.00	11.40	57.13	68.53	83.54	-15.01	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

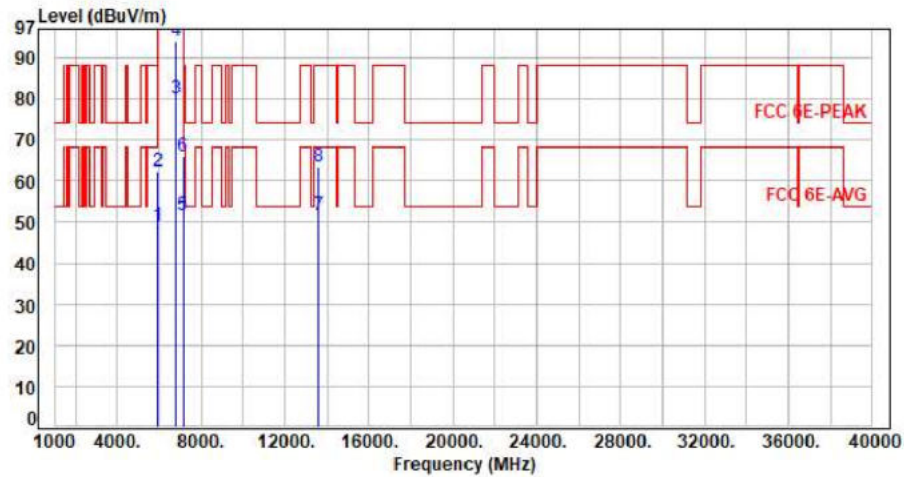

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.42	49.08	68.20	-19.12	Average	100	351	P
2	5925.00	7.66	54.67	62.33	88.20	-25.87	Peak	100	351	P
3	6785.00	9.46	70.72	80.18	200.00	-119.82	Average	100	351	P
4	6785.00	9.46	84.64	94.10	200.00	-105.90	Peak	100	351	P
5	7125.00	10.05	41.75	51.80	68.20	-16.40	Average	100	351	P
6	7125.00	10.05	55.83	65.88	88.20	-22.32	Peak	100	351	P
7	13570.00	22.06	29.46	51.52	68.20	-16.68	Average	100	228	P
8	13570.00	22.06	41.30	63.36	88.20	-24.84	Peak	100	228	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

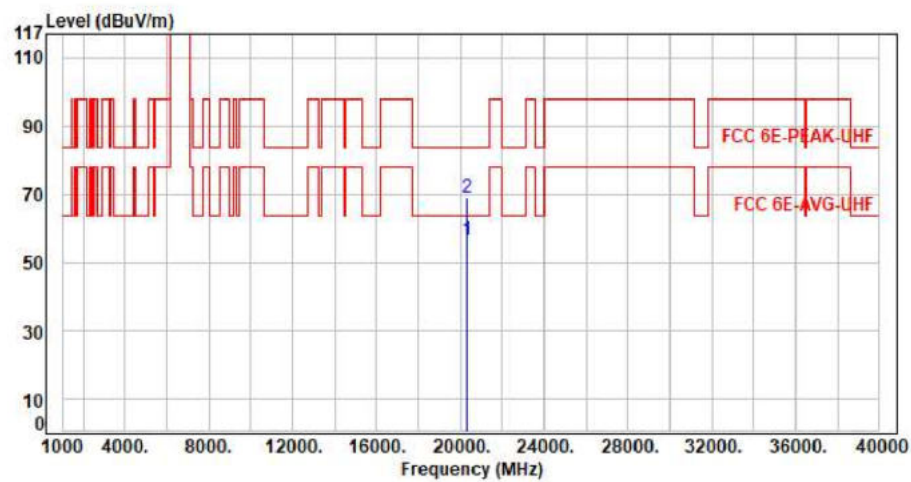

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	45.55	56.61	63.54	-6.93	Average	150	360	P
2	20355.00	11.06	57.85	68.91	83.54	-14.63	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

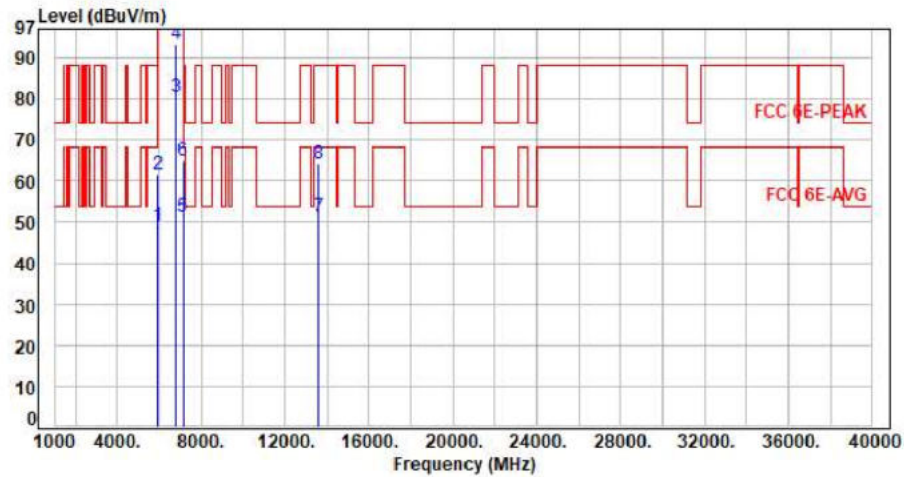

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.28	48.94	68.20	-19.26	Average	301	84	P
2	5925.00	7.66	54.04	61.70	88.20	-26.50	Peak	301	84	P
3	6785.00	9.46	70.89	80.35	200.00	-119.65	Average	301	84	P
4	6785.00	9.46	83.83	93.29	200.00	-106.71	Peak	301	84	P
5	7125.00	10.05	41.21	51.26	68.20	-16.94	Average	301	84	P
6	7125.00	10.05	54.68	64.73	88.20	-23.47	Peak	301	84	P
7	13570.00	22.06	29.11	51.17	68.20	-17.03	Average	100	135	P
8	13570.00	22.06	42.09	64.15	88.20	-24.05	Peak	100	135	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

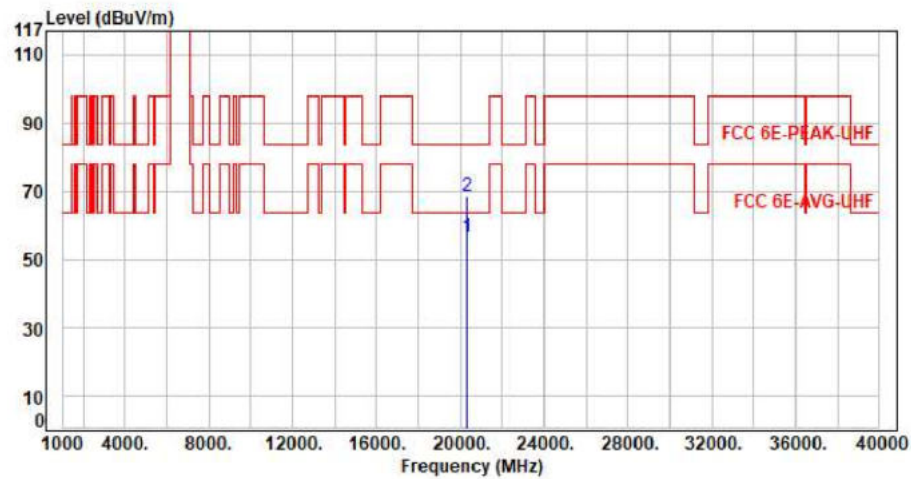


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	45.31	56.37	63.54	-7.17	Average	150	360	P
2	20355.00	11.06	57.45	68.51	83.54	-15.03	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

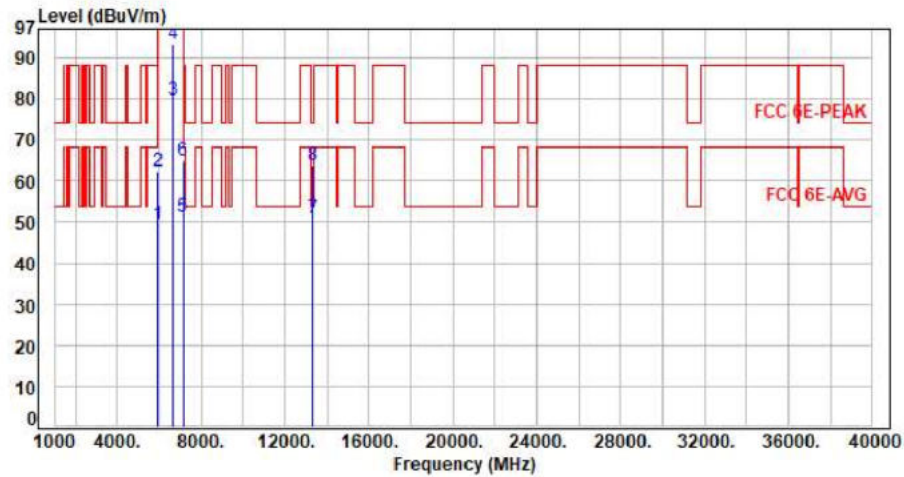

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.85	49.51	68.20	-18.69	Average	100	43	P
2	5925.00	7.66	54.56	62.22	88.20	-25.98	Peak	100	43	P
3	6665.00	9.08	70.58	79.66	200.00	-120.34	Average	100	43	P
4	6665.00	9.08	84.35	93.43	200.00	-106.57	Peak	100	43	P
5	7125.00	10.05	41.21	51.26	68.20	-16.94	Average	100	43	P
6	7125.00	10.05	54.95	65.00	88.20	-23.20	Peak	100	43	P
7	13330.00	21.30	29.62	50.92	54.00	-3.08	Average	100	158	P
8	13330.00	21.30	42.37	63.67	74.00	-10.33	Peak	100	158	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

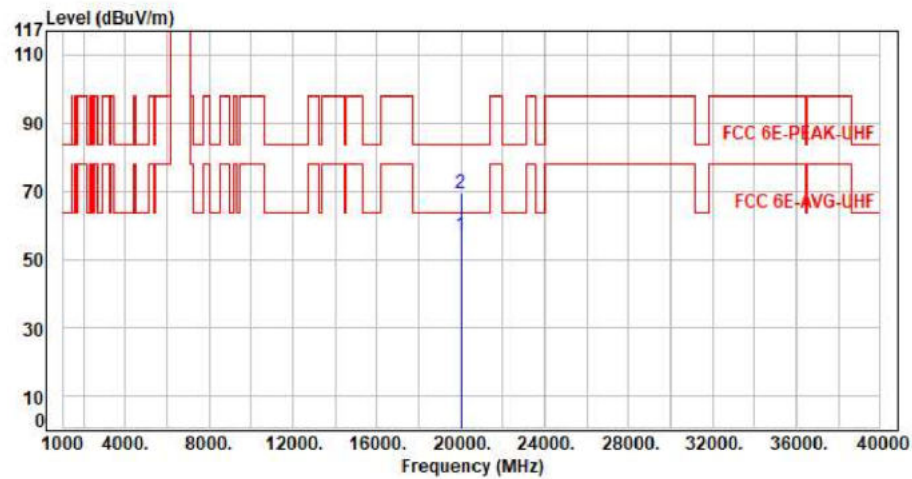


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	45.28	56.98	63.54	-6.56	Average	150	360	P
2	19995.00	11.70	57.49	69.19	83.54	-14.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

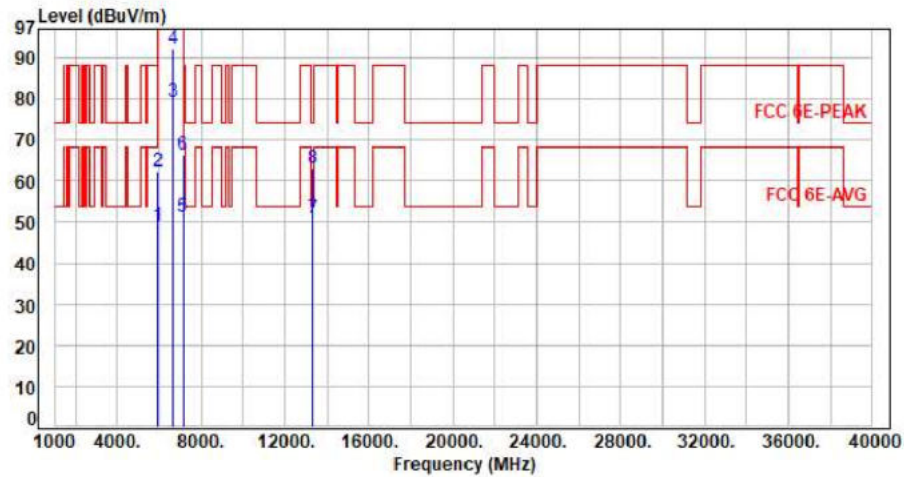

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.28	48.94	68.20	-19.26	Average	344	92	P
2	5925.00	7.66	54.56	62.22	88.20	-25.98	Peak	344	92	P
3	6665.00	9.08	70.17	79.25	200.00	-120.75	Average	344	92	P
4	6665.00	9.08	83.10	92.18	200.00	-107.82	Peak	344	92	P
5	7125.00	10.05	41.31	51.36	68.20	-16.84	Average	344	92	P
6	7125.00	10.05	56.27	66.32	88.20	-21.88	Peak	344	92	P
7	13330.00	21.30	29.62	50.92	54.00	-3.08	Average	100	112	P
8	13330.00	21.30	41.62	62.92	74.00	-11.08	Peak	100	112	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

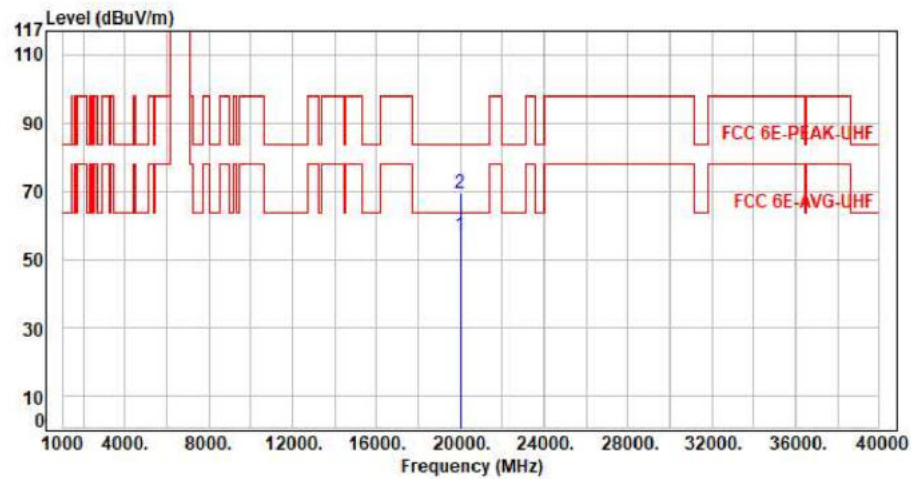


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	45.35	57.05	63.54	-6.49	Average	150	360	P
2	19995.00	11.70	57.81	69.51	83.54	-14.03	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

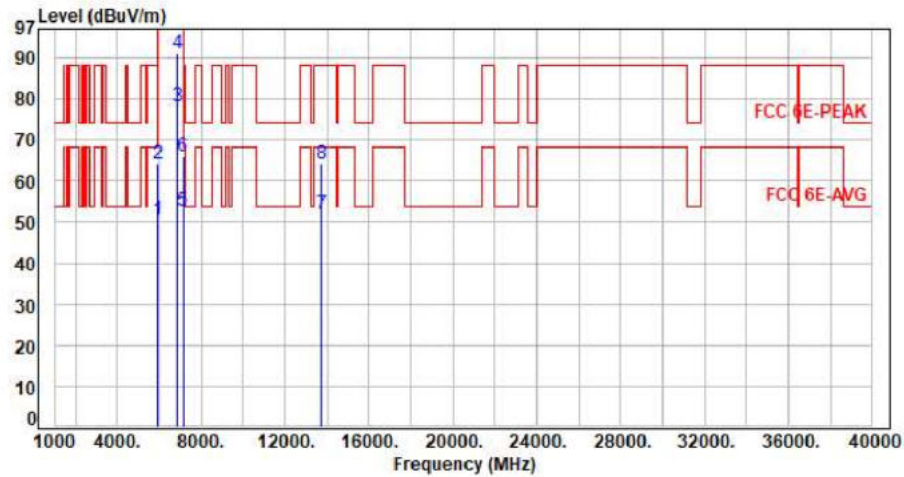

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.93	50.59	68.20	-17.61	Average	105	348	P
2	5925.00	7.66	56.38	64.04	88.20	-24.16	Peak	105	348	P
3	6875.00	9.55	68.79	78.34	200.00	-121.66	Average	105	348	P
4	6875.00	9.55	81.60	91.15	200.00	-108.85	Peak	105	348	P
5	7125.00	10.05	42.63	52.68	68.20	-15.52	Average	105	348	P
6	7125.00	10.05	55.94	65.99	88.20	-22.21	Peak	105	348	P
7	13750.00	22.65	29.50	52.15	68.20	-16.05	Average	100	225	P
8	13750.00	22.65	41.69	64.34	88.20	-23.86	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

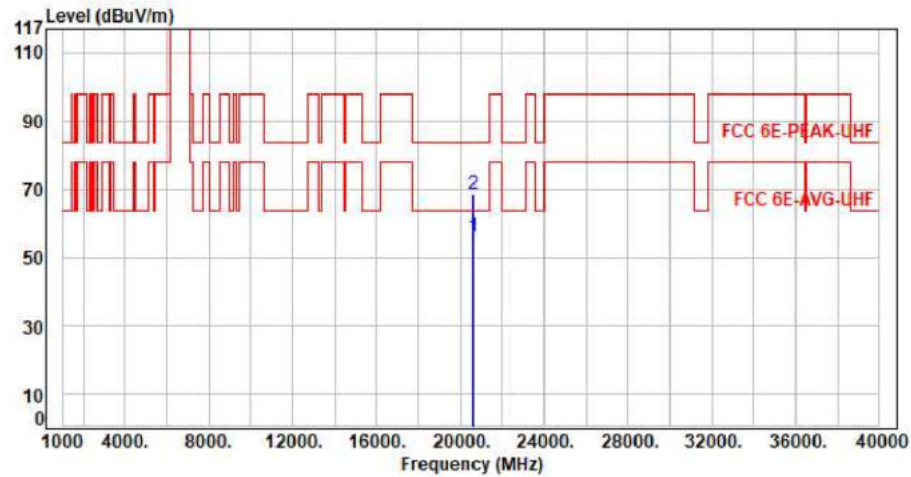


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	45.03	56.17	63.54	-7.37	Average	150	360	P
2	20625.00	11.14	57.19	68.33	83.54	-15.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

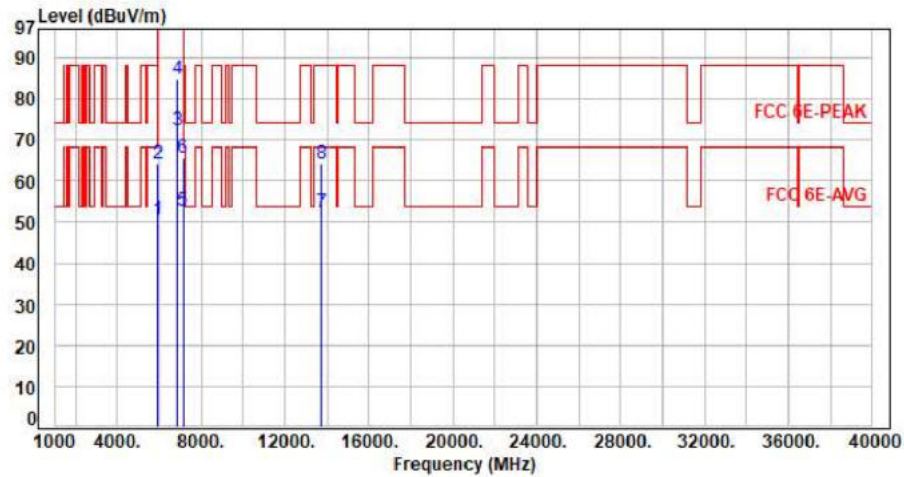


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.80	50.46	68.20	-17.74	Average	100	270	P
2	5925.00	7.66	56.45	64.11	88.20	-24.09	Peak	100	270	P
3	6875.00	9.55	62.61	72.16	200.00	-127.84	Average	100	270	P
4	6875.00	9.55	75.23	84.78	200.00	-115.22	Peak	100	270	P
5	7125.00	10.05	42.68	52.73	68.20	-15.47	Average	100	270	P
6	7125.00	10.05	55.68	65.73	88.20	-22.47	Peak	100	270	P
7	13750.00	22.65	29.61	52.26	68.20	-15.94	Average	100	142	P
8	13750.00	22.65	41.68	64.33	88.20	-23.87	Peak	100	142	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

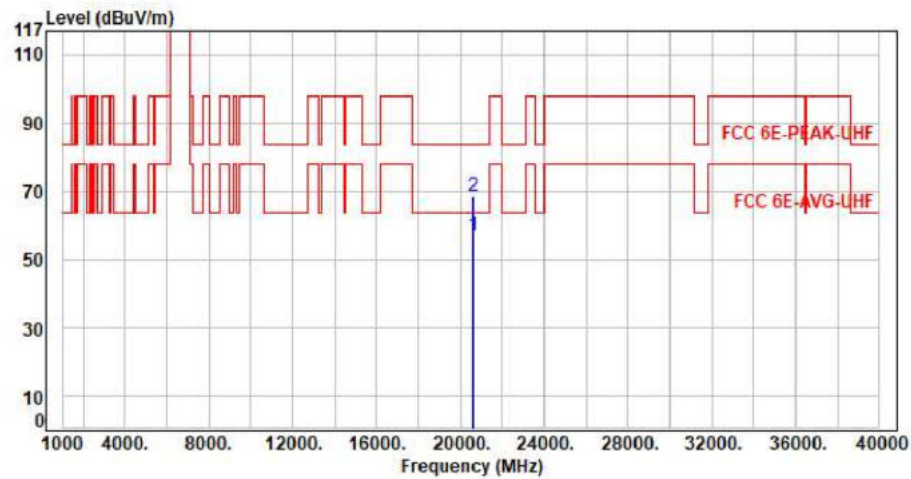


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	45.95	57.09	63.54	-6.45	Average	150	360	P
2	20625.00	11.14	57.38	68.52	83.54	-15.02	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

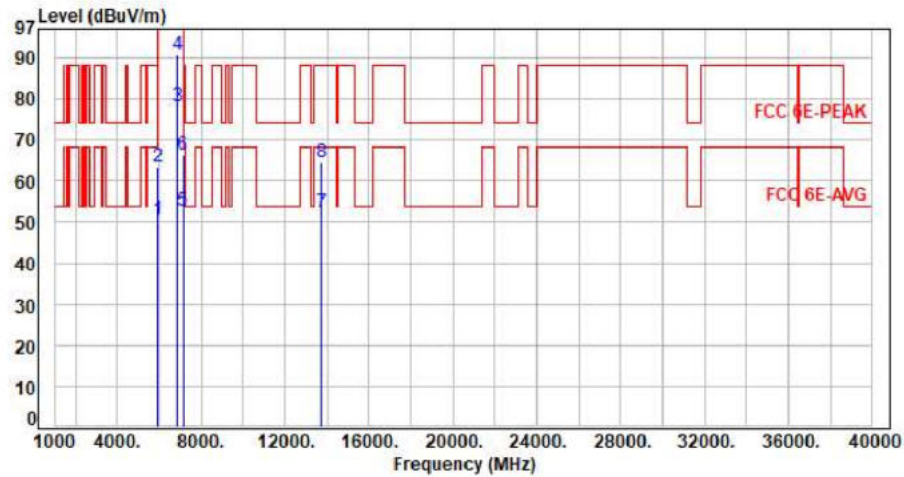

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.75	50.41	68.20	-17.79	Average	100	347	P
2	5925.00	7.66	55.64	63.30	88.20	-24.90	Peak	100	347	P
3	6885.00	9.56	68.66	78.22	200.00	-121.78	Average	100	347	P
4	6885.00	9.56	81.26	90.82	200.00	-109.18	Peak	100	347	P
5	7125.00	10.05	42.75	52.80	68.20	-15.40	Average	100	347	P
6	7125.00	10.05	56.50	66.55	88.20	-21.65	Peak	100	347	P
7	13770.00	22.69	29.66	52.35	68.20	-15.85	Average	100	142	P
8	13770.00	22.69	41.67	64.36	88.20	-23.84	Peak	100	142	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

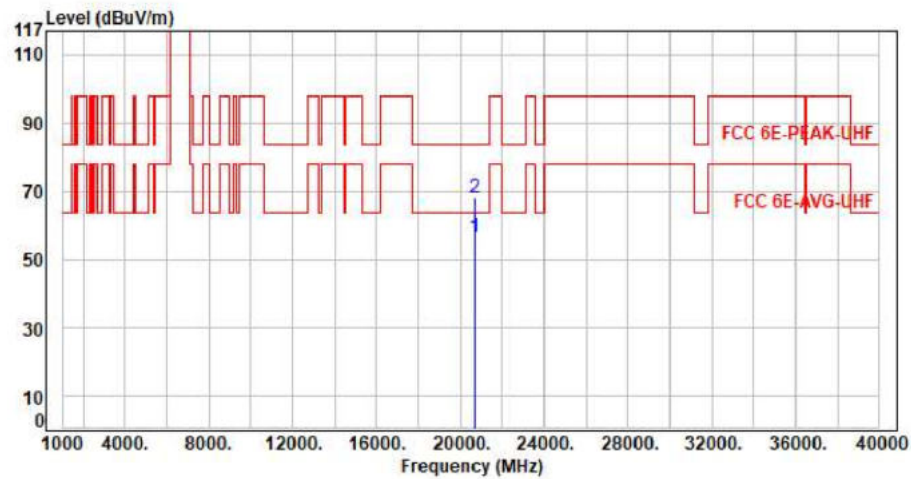


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.31	56.30	63.54	-7.24	Average	150	360	P
2	20655.00	10.99	57.22	68.21	83.54	-15.33	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

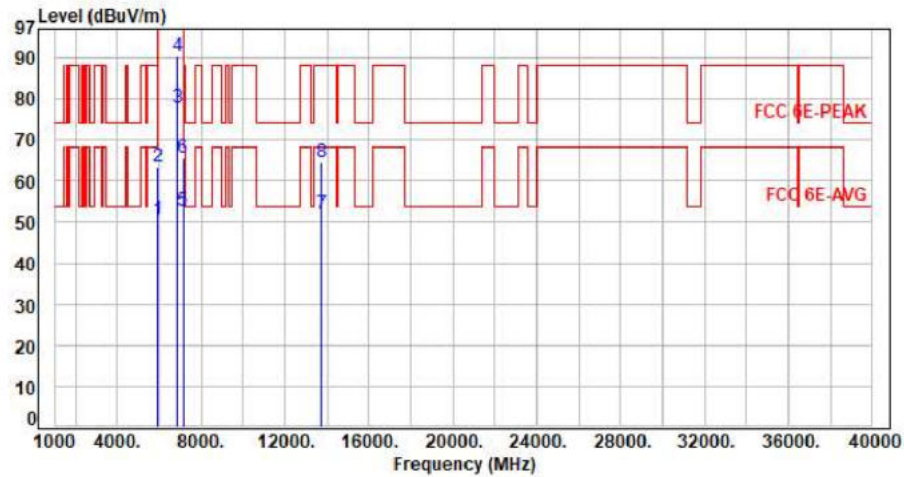


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.87	50.53	68.20	-17.67	Average	400	270	P
2	5925.00	7.66	55.79	63.45	88.20	-24.75	Peak	400	270	P
3	6885.00	9.56	68.27	77.83	200.00	-122.17	Average	400	270	P
4	6885.00	9.56	80.84	90.40	200.00	-109.60	Peak	400	270	P
5	7125.00	10.05	42.64	52.69	68.20	-15.51	Average	400	270	P
6	7125.00	10.05	55.76	65.81	88.20	-22.39	Peak	400	270	P
7	13770.00	22.69	29.44	52.13	68.20	-16.07	Average	100	134	P
8	13770.00	22.69	41.68	64.37	88.20	-23.83	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

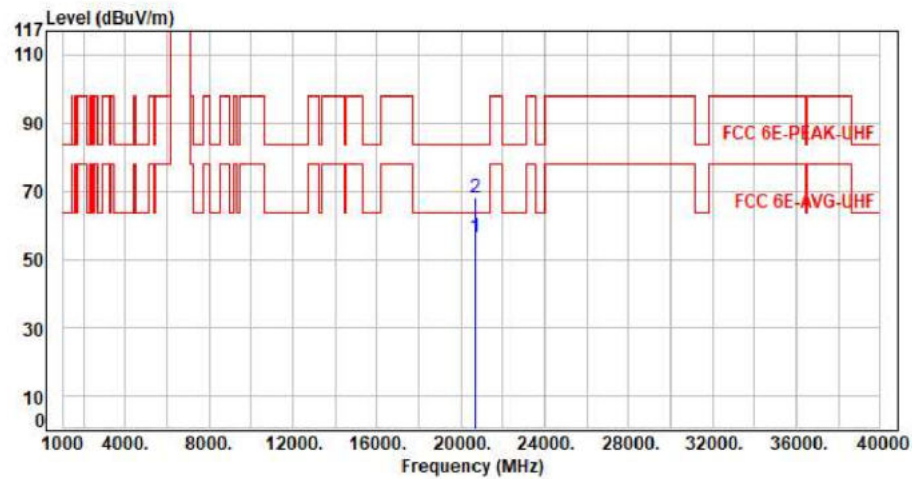


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.48	56.47	63.54	-7.07	Average	150	360	P
2	20655.00	10.99	57.11	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

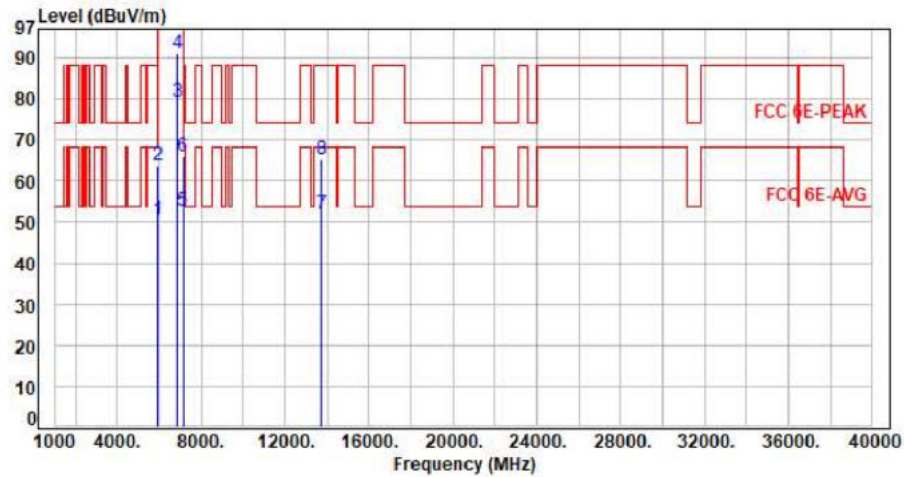


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.81	50.47	68.20	-17.73	Average	100	314	P
2	5925.00	7.66	56.17	63.83	88.20	-24.37	Peak	100	314	P
3	6865.00	9.52	69.60	79.12	200.00	-120.88	Average	100	314	P
4	6865.00	9.52	81.74	91.26	200.00	-108.74	Peak	100	314	P
5	7125.00	10.05	42.63	52.68	68.20	-15.52	Average	100	314	P
6	7125.00	10.05	55.94	65.99	88.20	-22.21	Peak	100	314	P
7	13730.00	22.57	29.61	52.18	68.20	-16.02	Average	100	158	P
8	13730.00	22.57	42.77	65.34	88.20	-22.86	Peak	100	158	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

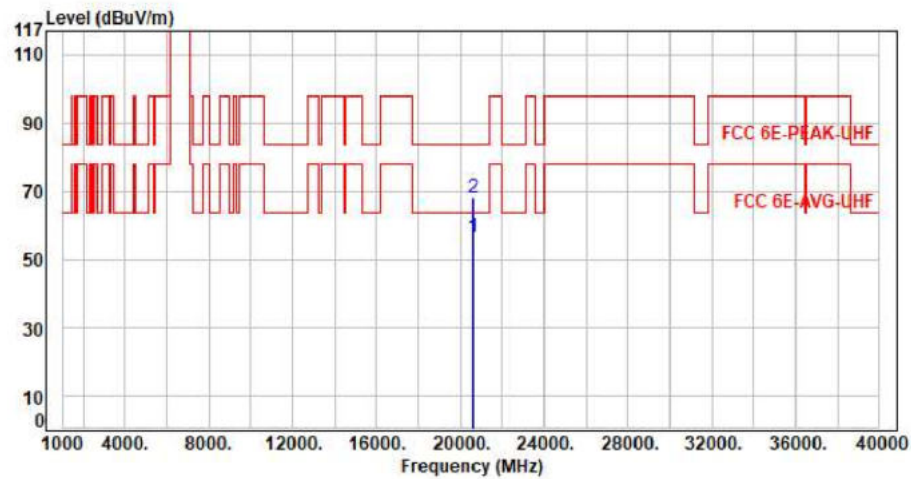


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	45.18	56.49	63.54	-7.05	Average	150	360	P
2	20595.00	11.31	56.59	67.90	83.54	-15.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

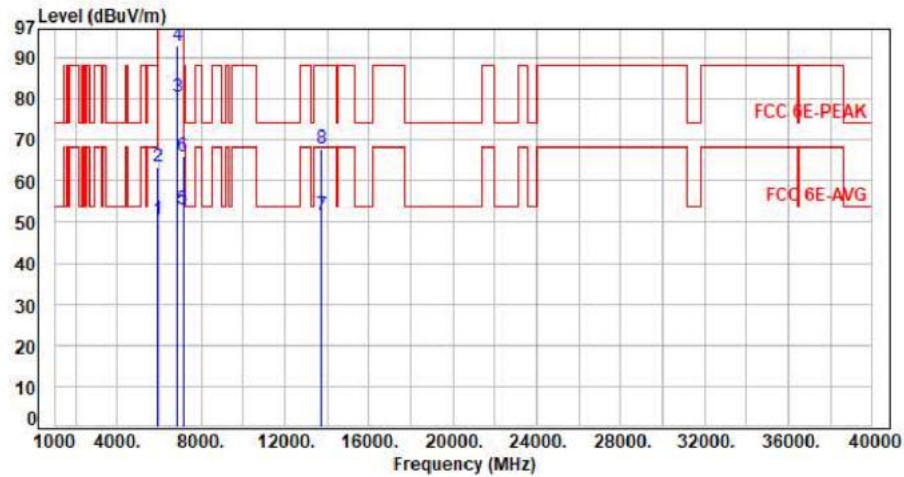

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.89	50.55	68.20	-17.65	Average	315	84	P
2	5925.00	7.66	55.77	63.43	88.20	-24.77	Peak	315	84	P
3	6865.00	9.52	70.86	80.38	200.00	-119.62	Average	315	84	P
4	6865.00	9.52	83.26	92.78	200.00	-107.22	Peak	315	84	P
5	7125.00	10.05	42.93	52.98	68.20	-15.22	Average	315	84	P
6	7125.00	10.05	56.09	66.14	88.20	-22.06	Peak	315	84	P
7	13730.00	22.57	28.99	51.56	68.20	-16.64	Average	100	314	P
8	13730.00	22.57	45.17	67.74	88.20	-20.46	Peak	100	314	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

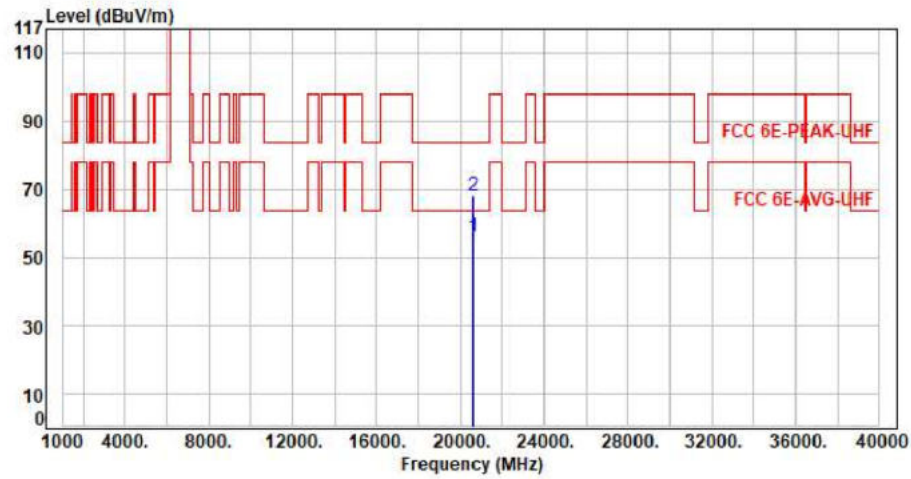


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	44.88	56.19	63.54	-7.35	Average	150	360	P
2	20595.00	11.31	56.67	67.98	83.54	-15.56	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

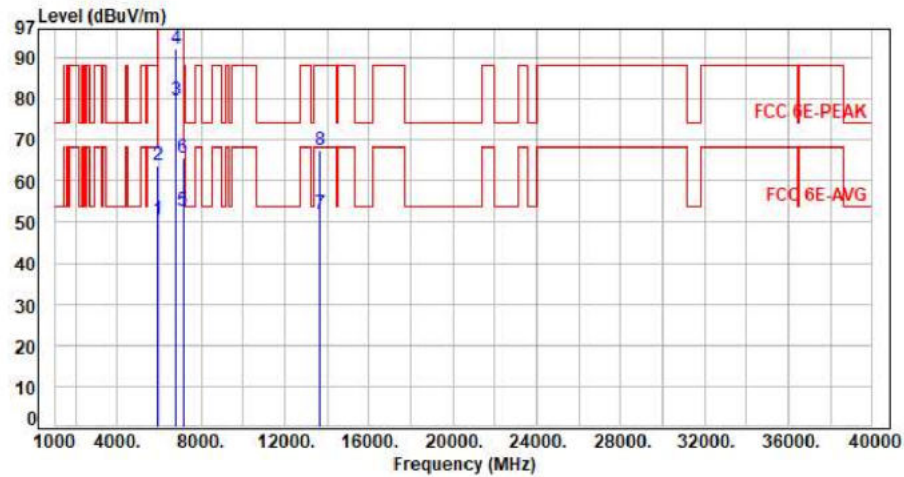


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.82	50.48	68.20	-17.72	Average	104	350	P
2	5925.00	7.66	56.01	63.67	88.20	-24.53	Peak	104	350	P
3	6825.00	9.47	70.12	79.59	200.00	-120.41	Average	104	350	P
4	6825.00	9.47	82.55	92.02	200.00	-107.98	Peak	104	350	P
5	7125.00	10.05	42.69	52.74	68.20	-15.46	Average	104	350	P
6	7125.00	10.05	55.66	65.71	88.20	-22.49	Peak	104	350	P
7	13650.00	22.24	29.66	51.90	68.20	-16.30	Average	100	147	P
8	13650.00	22.24	45.17	67.41	88.20	-20.79	Peak	100	147	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

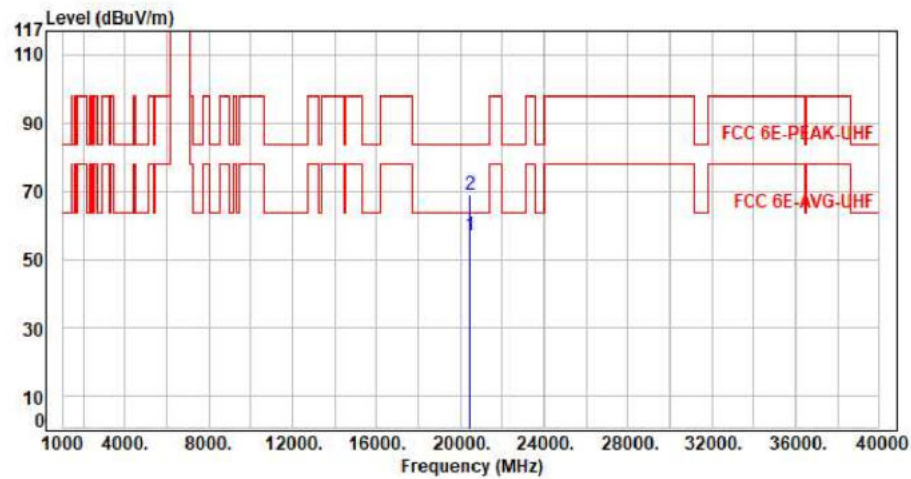

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	45.67	57.12	63.54	-6.42	Average	150	360	P
2	20475.00	11.45	57.57	69.02	83.54	-14.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.77	50.43	68.20	-17.77	Average	100	134	P
2	5925.00	7.66	55.60	63.26	88.20	-24.94	Peak	100	134	P
3	6825.00	9.47	63.67	73.14	200.00	-126.86	Average	100	134	P
4	6825.00	9.47	75.55	85.02	200.00	-114.98	Peak	100	134	P
5	7125.00	10.05	42.73	52.78	68.20	-15.42	Average	100	134	P
6	7125.00	10.05	55.59	65.64	88.20	-22.56	Peak	100	134	P
7	13650.00	22.24	29.31	51.55	68.20	-16.65	Average	100	161	P
8	13650.00	22.24	41.68	63.92	88.20	-24.28	Peak	100	161	P

$$\text{Factor} = \text{Antenna Factor} + \text{cable loss} - \text{Amplifier Factor}$$



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

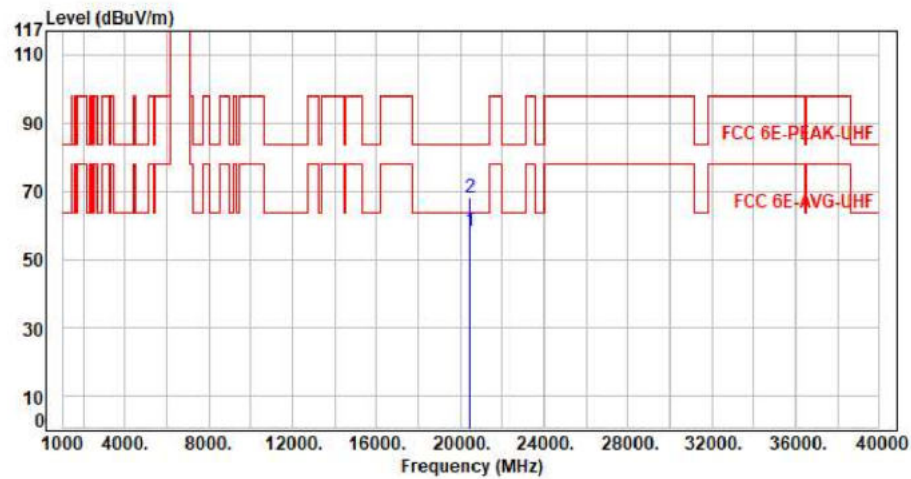


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	46.68	58.13	63.54	-5.41	Average	150	360	P
2	20475.00	11.45	56.77	68.22	83.54	-15.32	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

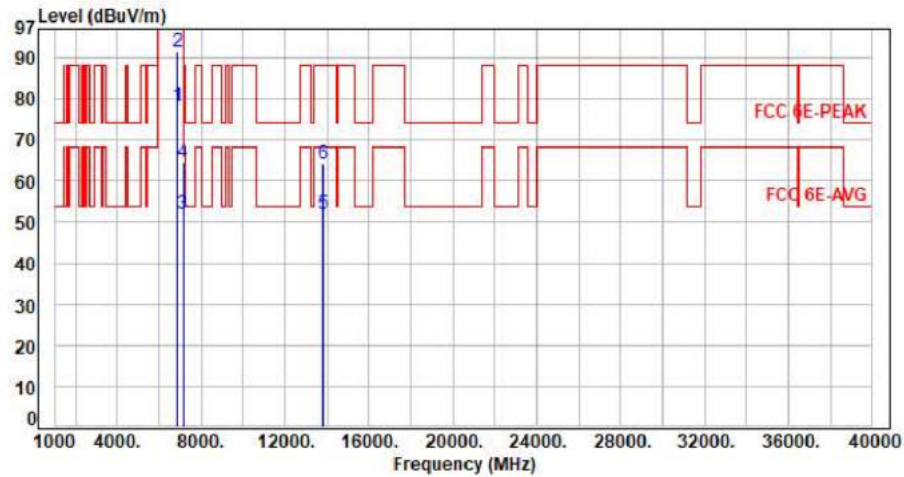


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	68.68	78.27	200.00	-121.73	Average	100	347	P
2	6895.00	9.59	81.79	91.38	200.00	-108.62	Peak	100	347	P
3	7125.00	10.05	41.94	51.99	68.20	-16.21	Average	100	347	P
4	7125.00	10.05	54.32	64.37	88.20	-23.83	Peak	100	347	P
5	13790.00	22.74	29.17	51.91	68.20	-16.29	Average	100	224	P
6	13790.00	22.74	41.37	64.11	88.20	-24.09	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

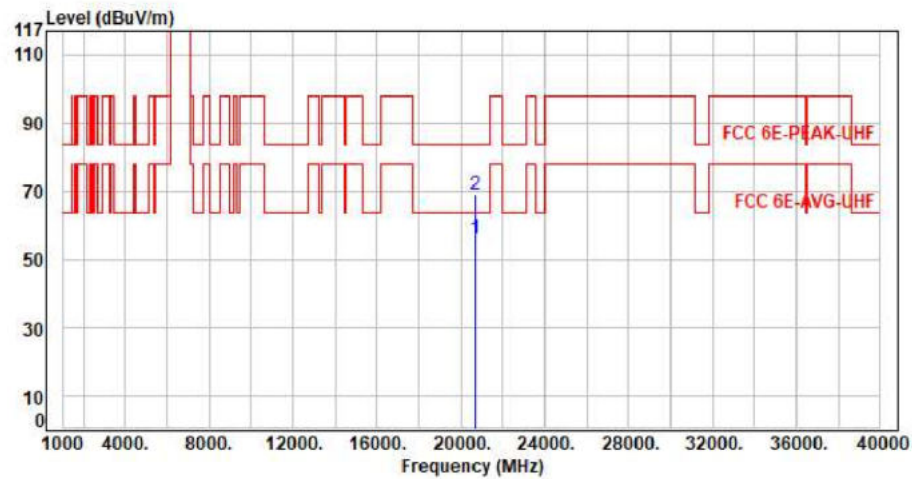


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	45.21	56.25	63.54	-7.29	Average	150	360	P
2	20685.00	11.04	57.76	68.80	83.54	-14.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

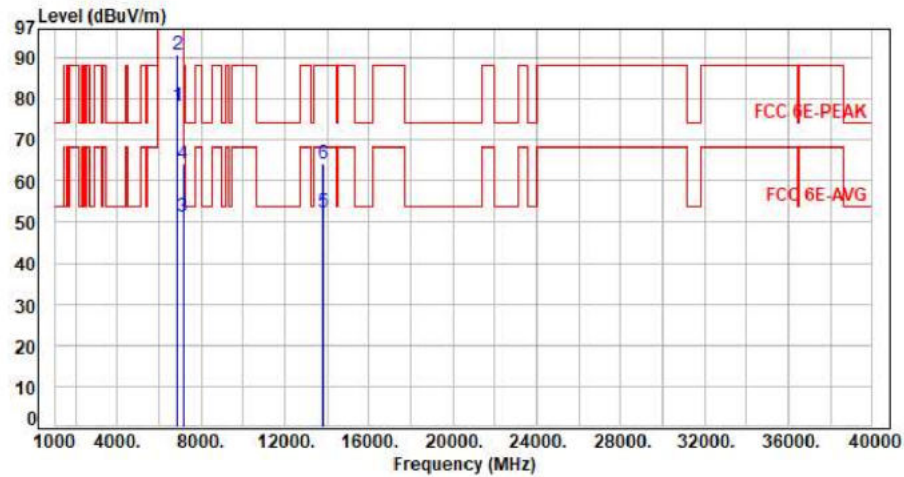


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	68.68	78.27	200.00	-121.73	Average	297	82	P
2	6895.00	9.59	80.99	90.58	200.00	-109.42	Peak	297	82	P
3	7125.00	10.05	41.09	51.14	68.20	-17.06	Average	297	82	P
4	7125.00	10.05	54.19	64.24	88.20	-23.96	Peak	297	82	P
5	13790.00	22.74	29.60	52.34	68.20	-15.86	Average	100	139	P
6	13790.00	22.74	41.27	64.01	88.20	-24.19	Peak	100	139	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

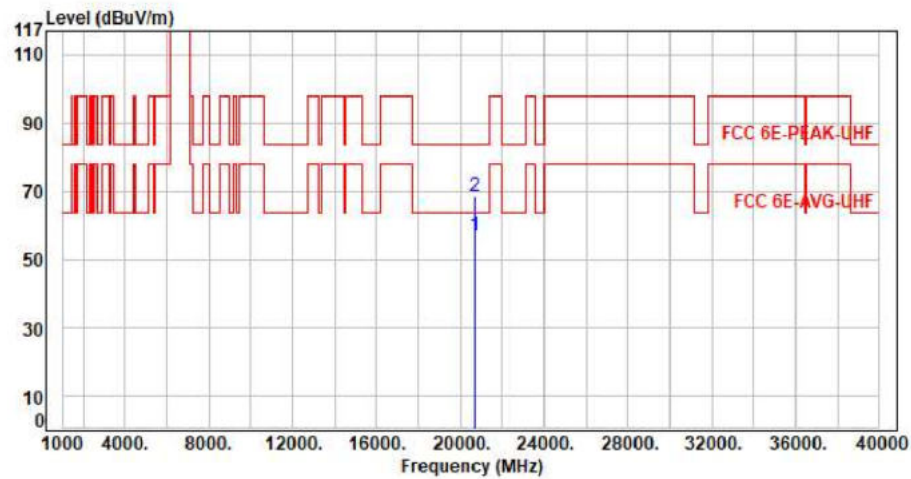


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	45.75	56.79	63.54	-6.75	Average	150	360	P
2	20685.00	11.04	57.56	68.60	83.54	-14.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

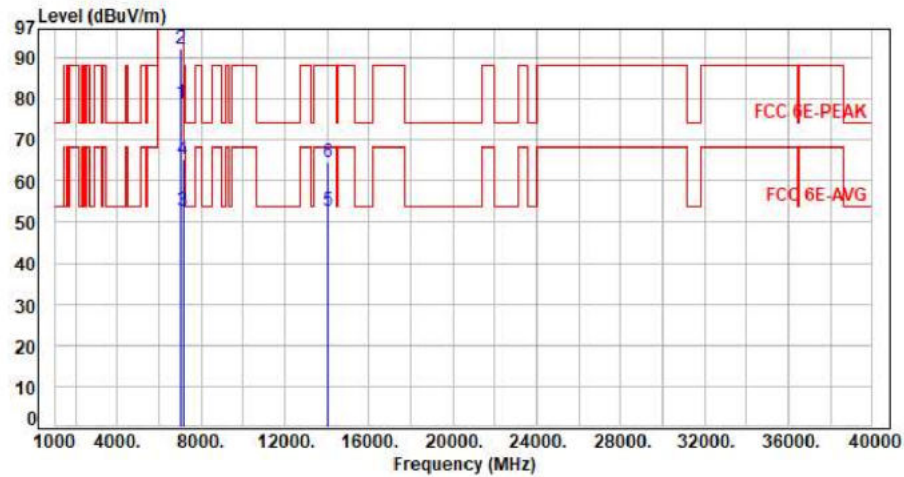

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	69.42	79.10	200.00	-120.90	Average	118	346	P
2	7015.00	9.68	82.46	92.14	200.00	-107.86	Peak	118	346	P
3	7125.00	10.05	42.66	52.71	68.20	-15.49	Average	118	346	P
4	7125.00	10.05	55.36	65.41	88.20	-22.79	Peak	118	346	P
5	14030.00	23.39	29.29	52.68	68.20	-15.52	Average	100	138	P
6	14030.00	23.39	41.31	64.70	88.20	-23.50	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor